

Carrier for street light ø60mm tube

Product code 14456

Installation opening diameter 60mm



LED street light PROLUMEN ADELA (MW + Lux) black 230V 100W 13400lm 60x140° IP66 830

Product code 17094

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.95
Output 100W
Luminous flux 13400lumens
Luminaire's efficiency lm79 134W
Correlated colour temperature warm
white 3000K
Lens angle 60x140
Source of light [LUMILEDS](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 205.0mm
Width 272.0mm
Length 508.0mm
Casing colour black
Casing material aluminum
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40 °C ...
+50°C
Certificates CE
Warranty 5 years



A stylish street and outdoor light
fixture.

LED street light PROLUMEN ADELA (MW + Lux) black 230V 30W 4100lm 60x140° IP66 830

Product code 17045

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.95

Output 30W

Luminous flux 4100lumens

Luminaire's efficiency lm79 137W

Correlated colour temperature warm white 3000K

Lens angle 60x140

Source of light [LUMILEDS](#)

Cri 80

Sdcm - macadam ellipses 2

Protection class IP66

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 201.2mm

Width 269.8mm

Length 479.7mm

Casing colour black

Casing material aluminum

Polishing matt

Power supply [INVENTRONICS](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 °C ... +50°C

Certificates CE

Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

LED street light PROLUMEN ADELA (MW + Lux) black 230V 50W 6500lm 60x140° IP66 830

Product code 17049

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.95
 Output 50W
 Luminous flux 6500lumens
 Luminaire's efficiency lm79 130W
 Correlated colour temperature warm white 3000K
 Lens angle 60x140
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 100000h
 Llmf tm21 L80B10 @25°C 100.000h
 Height 201.2mm
 Width 269.8mm
 Length 479.7mm
 Casing colour black
 Casing material aluminum
 Polishing matt
 Power supply [INVENTRONICS](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ... +50°C
 Certificates CE
 Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

LED street light PROLUMEN Hermoso black 230V 30W 4000lm 90° IP66 730

Product code 17590

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.95
Output 30W
Luminous flux 4000lumens
Luminaire's efficiency lm79 133W
Correlated colour temperature warm
white 3000K
Lens angle 90
Source of light [PHILIPS LED](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
In package 1pc
Casing colour black
Casing material aluminum
Polishing matt
Power supply [SOSEN](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40 °C ...
+50°C
Certificates CE
Warranty 5 years



An elegant style outdoor light.
Available options: 30W, 40W, 60W,
90W.

LED street light PROLUMEN Hermoso black 230V 40W 6000lm 90° IP66 830

Product code 17044

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.95
Output 40W
Luminous flux 6000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature warm white 3000K
Lens angle 90
Source of light [LUMILEDS](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 539.0mm
Diameter 422.0mm
Weight 5700g
In package 1pc
Casing colour black
Casing material aluminum
Polishing matt
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40 °C ... +50°C
Certificates CE
Warranty 5 years



An elegant style outdoor light.
Available options: 30W, 40W, 60W, 90W.

LED street light PROLUMEN Slim silvery 230V 40W 4800lm 70x140° IP66 840

Product code 15837

Brand [PROLUMEN](#)

Supply voltage 230V

Output 40W

Luminous flux 4800lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature pure white 4000K

Lens angle 70x140

Source of light [LUMILEDS](#)

Cri 80

Protection class IP66

Lifespan 50000h

Installation opening diameter 60mm

Weight 2100g

In package 1pc

Casing colour silvery

Casing material aluminum



Polishing matt

Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40° -+50°C

Certificates CE, RoHS, ENEC

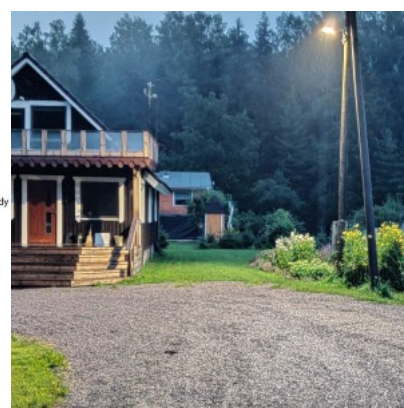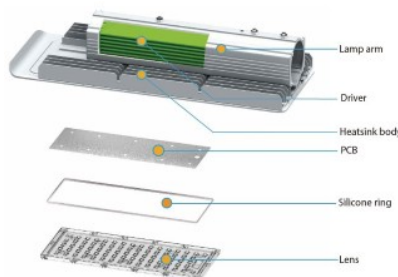

LED street light PROLUMEN Slim silvery 230V 60W 7200lm 70x140° IP66 840

Product code 13957

Brand [PROLUMEN](#)

Supply voltage 230V

Output 60W

Luminous flux 7200lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature pure white 4000K

Lens angle 70x140

Source of light [LUMILEDS](#)

Cri 80

Protection class IP66

Lifespan 50000h

Installation opening diameter 60mm

Weight 2100g

In package 1pc

Casing colour silvery

Casing material aluminum



Polishing matt

Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40° -+50°C

Certificates CE, RoHS, ENEC

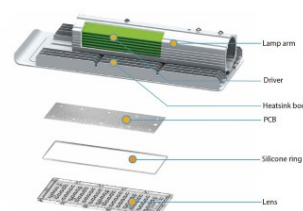

LED street light Slim Adaptor 60

Product code 14528

Installation opening diameter 60mm

