

## Regulator LEDVANCE MCU DALI-2 EXC TW white 230V IP20 DALI

**Product code 18112 DALI dimmable**

Brand LEDVANCE  
Supply voltage 230V  
Dimmable DALI  
Protection class IP20  
Height 51.0mm  
Width 71.0mm  
Length 71.0mm  
Weight 22 g  
In package 1pc  
Casing colour white  
Work environment indoor use  
Operation temperature 0 - +35°C  
Certificates CE, RoHS



## Dimmer LTECH EBOX-TD 230V

**Product code 15120**

Brand LTECH  
Supply voltage 230V  
Maximum output 200W/1m  
Rated current 1200mA  
Height 21.0mm  
Width 55.0mm  
Length 55.0mm  
Weight 70 g  
Work environment indoor use  
Operation temperature -30°C~55°C  
Certificates CE, RoHS



## Dimmer rotary switch IP20 DALI

**Product code 20104 DALI dimmable**

Dimmable DALI  
Protection class IP20  
Height 26.0mm  
Width 71.0mm  
Length 71.0mm



Rotary light dimmer for DALI systems, allowing you to adjust both brightness and the color temperature from warm to cool. The built-in power supply makes installation easy, and the device is suitable for home or office, where you want to conveniently control lighting according to mood.



## Switch SIEMENS 5TC8211-0 4-100 W 230V 100W TRIAC / PUSH

**Product code 14444 TRIAC / PUSH dimmable**

Brand SIEMENS  
Supply voltage 230V  
Dimmable TRIAC / PUSH  
Output voltage 230V  
Output 100W  
Maximum output 100W/1m  
Height 12.0mm  
Width 45.0mm  
Length 45.0mm  
Weight 23 g  
Operation temperature 0°C~40°C  
Certificates CE, RoHS

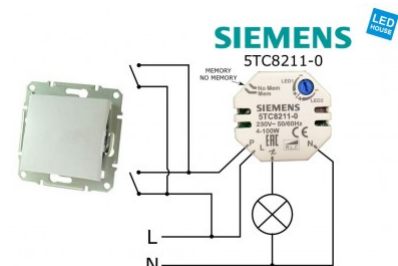

LED House CODE: 14444

## Dimmer SIEMENS 5TC8212-0 for led strip 12-48V 96-384W

**Product code 14441**

Brand SIEMENS  
 Supply voltage 12-48V  
 Output 96-384W  
 Maximum output 384W/1m  
 Rated current 8000mA  
 Height 12.0mm  
 Width 45.0mm  
 Length 45.0mm  
 Weight 23 g  
 In package 1pc  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 0o C~40o C°C  
 Certificates CE, RoHS  
 Warranty 2 years



## Dimmer SIEMENS Dimmer switch insert for LED, 3-85W IP20

**Product code 19376**

Brand SIEMENS  
 Protection class IP20

Rotary dimmer with pushbutton on/off  
 for LED lamps 3-85W and  
 incandescent and halogen lamps with  
 magnetic trafo 20-250W/VA



## Dimmer SKYDANCE DA-4S Push to DALI (4 address) IP20 PUSH

**Product code 19403 PUSH dimmable**

Brand [SKYDANCE](#)

Dimmable PUSH

Protection class IP20

Height 25.0mm

Width 52.0mm

Length 52.0mm

Weight 46 g

In package 1pc

In box 100pcs

Casing material plastic

Work environment indoor use

Operation temperature -20 - +50°C

Certificates CE, RoHS

Warranty 5 years



## Dimmer SKYDANCE DA-M RF to DALI 24V IP20 RF

**Product code 17471 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 24V

Dimmable RF

Rated current 15mA

Protection class IP20

Height 27.0mm

Width 52.0mm

Length 52.0mm

In package 1pc

In box 100pcs

Work environment indoor use

Operation temperature -20 - +50°C

Certificates CE, RoHS

Warranty 5 years



Through this device, you can control DALI devices with the SKYDANCE remote.

## Dimmer SKYDANCE DA-P Push to DALI 230V IP20 PUSH

**Product code 19402 PUSH dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable PUSH

Protection class IP20

Height 25.0mm

Width 52.0mm

Length 52.0mm

Weight 61 g

In package 1pc

In box 100pcs

Casing material plastic

Work environment indoor use

Operation temperature -20 - +50°C

Certificates CE, RoHS

Warranty 5 years



## Dimmer SKYDANCE DT-C DALI-TRIAC 100-240V IP20 DALI

**Product code 19395 DALI dimmable**

Brand [SKYDANCE](#)

Supply voltage 100-240V

Dimmable DALI

Maximum output 360W/1m

Rated current 1500mA

Protection class IP20

Height 25.0mm

Width 52.0mm

Length 52.0mm

Weight 59 g

In package 1pc

In box 100pcs

Work environment indoor use

Operation temperature -20 - +50°C

Certificates CE, RoHS

Warranty 5 years



## Regulator SKYDANCE KL V + RF2.4G 100-240V IP20 0-10V / RF

**Product code 15715 0-10V / RF  
dimmable**


Brand [SKYDANCE](#)  
Supply voltage 100-240V  
Dimmable 0-10V / RF  
Protection class IP20  
Weight 100 g  
Package weight 160 g  
Work environment indoor use  
Certificates CE  
Warranty 5 years



## Regulator SKYDANCE KS white 100-240V IP20 TRIAC

**Product code 15483 TRIAC dimmable**

Brand [SKYDANCE](#)  
Supply voltage 100-240V  
Dimmable TRIAC  
Maximum output 240W/1m  
Rated current 1000mA  
Protection class IP20  
Height 48.0mm  
Width 86.0mm  
Length 86.0mm  
Installation opening diameter 51mm  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years

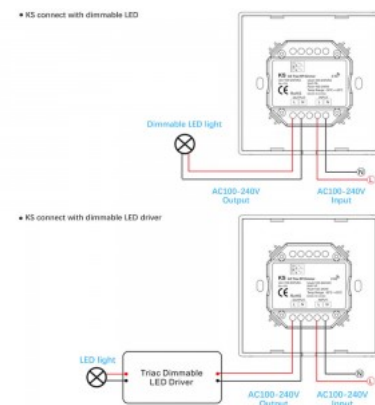

## Dimmer SKYDANCE L1 230V IP20 0-10V / PUSH / RF

**Product code 16651 0-10V / PUSH / RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 230V  
 Dimmable 0-10V / PUSH / RF  
 Maximum output 200W/1m  
 Rated current 1500mA  
 Protection class IP20  
 Height 26.0mm  
 Width 52.0mm  
 Length 52.0mm  
 Weight 48 g  
 Package weight 61 g  
 Work environment indoor use  
 Operation temperature -30°C~55°C°C  
 Certificates CE, RoHS  
 Warranty 5 years



## Dimmer SKYDANCE L1(WZ) 230V IP20 0-10V / PUSH / RF

**Product code 17929 0-10V / PUSH / RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 230V  
 Dimmable 0-10V / PUSH / RF  
 Protection class IP20  
 Height 26.0mm  
 Width 52.0mm  
 Length 52.0mm  
 Weight 48 g  
 Package weight 60 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature -30°C~55°C°C  
 Certificates CE, RED  
 Warranty 5 years



The L1(WZ) dimmer allows you to control the lighting by adjusting its brightness and turning it on/off. This can be done through the Tuya app on your smartphone, or it can be controlled with the Philips HUE system or voice commands (Amazon Alexa, Google Assistant, Tmall Genie, Xiaodu). The dimmer supports two different outputs (0-10V or 1-10V), which can be selected using a simple switch. It allows smooth brightness adjustment without flickering.

## Regulator SKYDANCE PK1 RF2.4G battery powered IP20 RF

**Product code 15719 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 23.0mm

Width 86.0mm

Length 86.0mm

In package 1pc

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Dimmer SKYDANCE S1-B RF/ PUSH 230V IP20 TRIAC / PUSH / RF

**Product code 15734 TRIAC / PUSH / RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable TRIAC / PUSH / RF

Maximum output 200W/1m

Rated current 1500mA

Protection class IP20

Height 26.0mm

Width 52.0mm

Length 52.0mm

Weight 48 g

Package weight 61 g

Work environment indoor use

Operation temperature -30°C~55°C

Certificates CE, RoHS

Warranty 5 years



## Dimmer SKYDANCE S1-B(WT) Wifi/RF/ PUSH 230V IP20 TRIAC / PUSH / RF

**Product code 17763 TRIAC / PUSH / RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 230V  
 Dimmable TRIAC / PUSH / RF  
 Maximum output 200W/1m  
 Rated current 1500mA  
 Protection class IP20  
 Height 40.0mm  
 Width 60.0mm  
 Length 60.0mm  
 Package weight 61 g  
 In box 100pcs  
 Work environment indoor use  
 Operation temperature -30°C~55°C  
 Certificates CE, RoHS  
 Warranty 5 years



Wifi + RF Push dimmer, 1-channel output for single-color dimmable LED lamps. Connectable to the Tuya smart app.

## Dimmer SKYDANCE S1-B(WZ) RF/ PUSH/ZIGBEE 230V IP20 TRIAC / PUSH / RF

**Product code 16434 TRIAC / PUSH / RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 230V  
 Dimmable TRIAC / PUSH / RF  
 Maximum output 200W/1m  
 Rated current 1500mA  
 Protection class IP20  
 Height 26.0mm  
 Width 52.0mm  
 Length 52.0mm  
 Weight 48 g  
 Package weight 61 g  
 Work environment indoor use  
 Operation temperature -30°C~55°C  
 Certificates CE, RoHS  
 Warranty 5 years



## Dimmer SKYDANCE S1-L 100-240V IP20 0-10V / RF

**Product code 20123 0-10V / RF  
dimmable**

Brand [SKYDANCE](#)  
Supply voltage 100-240V  
Dimmable 0-10V / RF  
Rated current 2000mA  
Protection class IP20  
Height 27.0mm  
Width 45.0mm  
Length 175.0mm  
Casing material plastic  
Operation temperature -20~55°C  
Certificates CE, EMC, LVD, RED  
Warranty 5 years



## Dimmer SKYDANCE SS-A (2 Switch → RF Converter) 230V IP20 RF

**Product code 19978 RF dimmable**

Brand [SKYDANCE](#)  
Supply voltage 230V  
Dimmable RF  
Rated current 10mA  
Protection class IP20  
Height 26.0mm  
Width 52.0mm  
Length 52.0mm  
Weight 62 g  
Work environment indoor use  
Operation temperature -30°C~55°C°C  
Certificates CE, RoHS  
Warranty 5 years



The SS-A is a smart AC power supply (100-240 VAC) with a 2-switch input RF signal converter, allowing traditional switches to control smart LED lighting systems. This device converts switch signals into a 2.4 GHz radio frequency control signal, which can be used to control one or two zones via RF controllers or dimmers.

## Dimmer SKYDANCE SS-B(WT) 230V IP20 PUSH / RF

**Product code 22025 PUSH / RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 230V  
 Dimmable PUSH / RF  
 Maximum output 360W/1m  
 Rated current 1500mA  
 Protection class IP20  
 Height 26.0mm  
 Width 52.0mm  
 Length 52.0mm  
 Package weight 51 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature -30°C~55°C  
 Certificates CE, RoHS  
 Warranty 5 years



## Dimmer SKYDANCE V1-K 12-48V IP20 RF

**Product code 17849 RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 12-48V  
 Dimmable RF  
 Output voltage 12-48V  
 Rated current 20000mA  
 Protection class IP20  
 Height 38.0mm  
 Width 75.0mm  
 Length 107.0mm  
 Weight 165 g  
 In package 1pc  
 Work environment indoor use  
 Operation temperature -30° - +55°C  
 Certificates CE, EMC  
 Warranty 5 years



Create ambiance and perfect lighting in your space with a LED dimmer that offers various features and an excellent user experience! The dimmer features a rotary knob allowing you to dim the light beam from 0-100%. Dimming is smooth, without flickering. Light up your world just the way you want it!

## Dimmer SKYDANCE V1-KS 12-48V IP20 RF

**Product code 17297 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 12-48V

Dimmable RF

Output voltage 12-48V

Rated current 8000mA

Protection class IP20

Height 32.0mm

Width 55.0mm

Length 66.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -20 ~55°C

Certificates CE, EMC

Warranty 5 years



Create ambiance and perfect lighting in your space with a LED dimmer that offers various features and an excellent user experience! The dimmer features a rotary knob allowing you to dim the light beam from 0-100%. Dimming is smooth, without flickering. Light up your world just the way you want it!

## Dimmer SKYDANCE V4-S RF/ PUSH 12-24V IP20 PUSH / RF

**Product code 17960 PUSH / RF**  
**dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 12-24V  
 Dimmable PUSH / RF  
 Maximum output 288W/1m  
 Rated current 12000mA  
 Protection class IP20  
 Height 26.0mm  
 Width 52.0mm  
 Length 52.0mm  
 Work environment indoor use  
 Operation temperature -30°C~55°C  
 Certificates CE, RoHS  
 Warranty 5 years



A versatile and convenient LED controller suitable for single-color, dual-color, RGB, and RGBW lighting. Compatible with various remote controls, it allows smooth dimming and dynamic lighting modes. The device supports signal transmission to other controllers and synchronizes multiple lighting systems. It can easily connect to an external switch for on/off control and brightness adjustment. Designed for easy installation in standard wall boxes, it offers a practical and reliable lighting solution.

## Dimmer THPG Bakelite 3-100 W black

**Product code 22662**

Brand THPG  
Diameter 70.0mm  
Casing colour black  
Casing material bakelite  
Work environment indoor use

Universal dimmer for the switch system Bakelite. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-220 W or 3-100 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Bakelite.



## Dimmer THPG Bakelite 3-100 WPRO LED black

**Product code 22663**

Brand THPG  
Diameter 70.0mm  
Casing colour black  
Casing material bakelite  
Work environment indoor use

Universal dimmer for the switch system Bakelite. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-350 W or 3-130 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Bakelite.



## Dimmer THPG Bakelite 3-35 W black

### Product code 22486

Brand THPG  
Diameter 70.0mm  
Casing colour black  
Casing material bakelite  
Work environment indoor use

- Central insert and dimmer head made of porcelain - AC 230V, 50Hz - suitable for LED lamps, incandescent, HV and LV halogen lamps with magnetic transformer - 7-110 W/VA output. 3-35 W LED power - Rotary dimmer with pressure switch and soft grid - Optimisation option for flicker-free dimming of LED lamps - No standby consumption thanks to genuine on/off switch Short-circuit/overload protection thanks to fine-wire fuse - Overheating protection thanks to thermal fuse



## Dimmer THPG Duroplast 3-100W 7-220W/VA white

### Product code 22667

Brand THPG  
Diameter 70.0mm  
Casing colour white  
Casing material porcelain  
Work environment indoor use

Universal dimmer for the switch system Duroplast. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-220 W or 3-100 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Duroplast.



## Dimmer THPG Duroplast 3-130W 7-350 W/VA white

**Product code 22668**

Brand THPG  
 Diameter 70.0mm  
 Casing colour white  
 Casing material porcelain  
 Work environment indoor use

Universal dimmer for the switch system Duroplast. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-350 W or 3-130 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Duroplast.



## Dimmer THPG Duroplast 3-35W 7-110W/VA white

**Product code 22666**

Brand THPG  
 Diameter 70.0mm  
 Casing colour white  
 Casing material porcelain  
 Work environment indoor use

Dimmer for the switch system Duroplast. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with a power of 7-110 W or 3-35 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Duroplast.



## Dimmer THPG Porcelain 3-35 W 7-110 W/VA white

### Product code 22513

Brand THPG  
Diameter 70.0mm  
Casing colour white  
Casing material porcelain  
Work environment indoor use

Rotary dimmer for the switch system  
Porcelain white. For flicker-free  
dimming of LED, incandescent, HV  
and LV halogen lamps with a power of  
7-110 W or 3-35 W (LED). Thanks to  
the real on/off switch, there is no  
standby consumption. The central  
insert and push-button are made of  
transparent glazed porcelain. - Central  
insert and dimmer head made of  
porcelain - AC 230V, 50Hz - suitable  
for LED lamps, incandescent, HV and  
LV halogen lamps with magnetic  
transformer - 7-110 W/VA output. 3-35  
W LED power - Rotary dimmer with  
pressure switch and soft grid -  
Optimisation option for flicker-free  
dimming of LED lamps - No standby  
consumption thanks to genuine on/off  
switch Short-circuit/overload  
protection thanks to fine-wire fuse -  
Overheating protection thanks to  
thermal fuse



## Dimmer THPG Porcelain 3-130W 7-350W/VA white

**Product code 22515**

Brand THPG  
Diameter 70.0mm  
Casing colour white  
Casing material porcelain  
Work environment indoor use

Universal dimmer for the switch system Porcelain white. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-350 W or 3-130 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of transparent glazed porcelain.

- AC 230V, 50Hz - Central insert and dimmer head made of porcelain
- Phase control or trailing edge phase control selectable
- Suitable for LED lamps, incandescent, HV and LV halogen lamps - 7-350 W/VA output. 3-130 W LED power
- Rotary dimmer with pressure switch and soft grid
- Optimisation option for flicker-free dimming of LED lamps
- No standby consumption thanks to genuine on/off switch
- Short-circuit/overload protection thanks to fine-wire fuse
- Overheating protection thanks to thermal fuse



## Dimmer THPG Portselan 3-100W 7-200W/VA white

**Product code 22485**

Brand THPG  
Diameter 70.0mm  
Casing colour white  
Casing material porcelain  
Work environment indoor use



