

LED floodlight PROLUMEN TGD black 560W 62720lm IP66 cold white 5000K (LH4375)

Product code: LH4375
brand: [PROLUMEN](#)
input voltage: 230V
power: 560W
current: 700mA
luminous flux: 62720lumens
luminaire efficacy: 112lm/W
colour temperature (CCT): 5000K
light source: [LUMILEDS](#)
CRI: 70
IP rating: IP66
service life of LED: 75000h
LLMF - Lamp Lumen Maintenance Factor:
L70 @25°C 100.000h
height: 384mm
width: 634mm
length: 339mm
weight: 26000g
casing colour: black
casing material: aluminum
power supply unit: [INVENTRONICS](#)
working temperature: -40° -+50°C
certifications: CE, RoHS, ENEC
energy class: A+
warranty: 5 years



Optic 30°, 45°, 60°

LED floodlight PROLUMEN X 400W 56000lm IP65 (LH4457)




Product code: LH4457
brand: [PROLUMEN](#)
input voltage: 230V
power: 400W
luminous flux: 56000lumens
luminaire efficacy: 140lm/W
light source: [NICHIA LED](#)
CRI: 80
IP rating: IP65
certifications: CE, ROHS, ENEC
energy class: A+
warranty: 5 years



10KV Surge Protection, Standard with
10kV for protection in areas prone to
surges.

LED floodlight PROLUMEN X Stadium F6 black 900W 117000lm cold white 5000K (LH4458)

Product code: LH4458
brand: [PROLUMEN](#)
input voltage: 230V
power: 900W
luminous flux: 117000lumens
luminaire efficacy: 130lm/W
colour temperature (CCT): 5000K
light source: [NICHIA LED](#)
CRI: 80
height: 401mm
width: 598mm
length: 792mm
casing colour: black
casing material: Die-cast aluminum +
Tempered Glass
working environment: outdoor use
certifications: CE, ROHS, ENEC
energy class: A+
warranty: 5 years

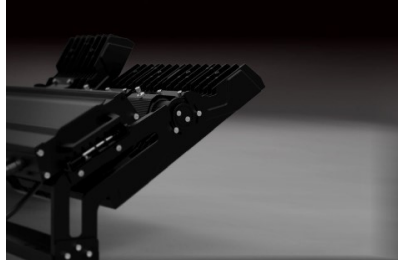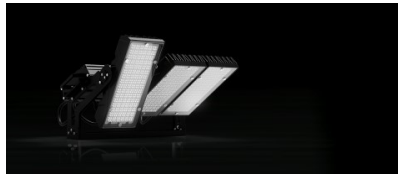

Beam angel for option: 15°, 65°x120°,
30°, 30°x60°, 65°x120°

LED floodlight PROLUMEN X Stadium F6 black 300W 39000lm cold white 5000K (LH4632)

Product code: LH4632
brand: [PROLUMEN](#)
input voltage: 230V
power: 300W
luminous flux: 39000lumens
luminaire efficacy: 130lm/W
colour temperature (CCT): 5000K
light source: [NICHIA LED](#)
CRI: 80
service life of LED: 50000h
height: 173mm
width: 288mm
length: 525mm
casing colour: black
casing material: Die-cast aluminum +
Tempered Glass
power supply unit: [MEAN WELL](#)
working environment: outdoor use
certifications: CE, ROHS, ENEC
energy class: A+
warranty: 5 years



Beam angel for option: 15°, 65°x120°,
30°, 30°x60°, 65°x120°

LED floodlight PROLUMEN X Stadium F6 black 600W 78084lm cold white 5000K (LH4647)

Product code: LH4647
brand: [PROLUMEN](#)
input voltage: 230V
power: 600W
luminous flux: 78084lumens
luminaire efficacy: 130lm/W
colour temperature (CCT): 5000K
light source: [NICHIA LED](#)
CRI: 80
height: 401mm
width: 598mm
length: 564mm
casing colour: black
casing material: Die-cast aluminum +
Tempered Glass
power supply unit: [MEAN WELL](#)
working environment: outdoor use
certifications: CE, ROHS, ENEC
energy class: A+
warranty: 5 years



Beam angle for option: 15°, 65°x120°,
30°, 30°x60°, 65°x120°

LED floodlight PROLUMEN X36 1000W 130000lm IP67 (LH4484)

Product code: LH4484
brand: [PROLUMEN](#)
input voltage: 230V
power: 1000W
luminous flux: 130000lumens
luminaire efficacy: 130lm/W
CRI: 70
UGR: 27
IP rating: IP67
service life of LED: 50000h
height: 522mm
width: 768mm
length: 840mm
weight: 38500g
switching frequency: 100000pcs
power supply unit: TOMCARLINE
certifications: CE, RoHS, F, D
energy class: A++
warranty: 5 years

