



Dome light Prolumen AL08 D300 with motion sensor white 230V 25W 2550lm 120° IP54 940

Product code 15302

Premium-class LED ceiling light. With a classic round design.

This surface-mounted luminaire can be installed on both ceilings and walls.

Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses.

The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction.

AL08 models can be ordered with the following features:


Power: 12W, 15W, 25W


Color: black, white

Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K.

With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours).

Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

| | |
|-------------------------------|---|
| Correlated colour temperature | pure white 4000K |
| Luminous flux | 2550lumens |
| Luminaire's efficiency lm79 | 102lm/W |
| Warranty | 5 years |
| Brand | Prolumen |
| Supply voltage | 230V |
| Power factor | 0.90 |
| Output | 25W |
| Maximum output | 25W |
| Lens angle | 120° |
| Cri | 90 |
| Sdcm - macadam ellipses | 6 |
| Protection class | IP54 |
| Lifespan | 50000h |
| Lmf tm21 | L80B10 @25°C 50.000h |
| Height | 40.0mm |
| Diameter | 300.0mm |
| Weight | 800 g |
| Package weight | 930 g |
| In box | 10pcs |
| Casing colour | white |
| Casing material | plastic |
| Impact resistance | IK08 |
| Operation temperature | -20 ~ 45°C |
| Certificates | CE, RoHS |
| Eprel | 1442973 |
| Energy class |  |

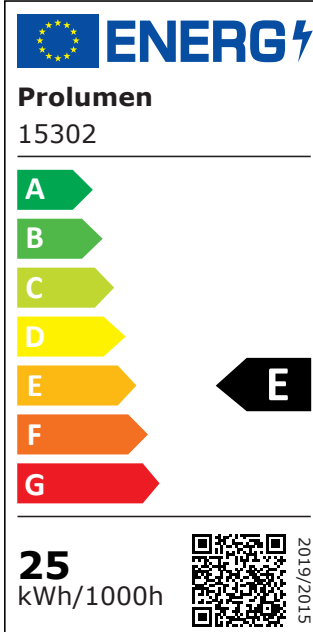

ENERGY

Prolumen
15302

A
B
C
D
E
F
G

25
kWh/1000h

2019/2015

