



Recessed light Prolumen Angers D145 white 230V 15W 1350lm 95° IP20 DALI 930

Product code 16286

Recessed LED ceiling light, ideal for commercial space lighting.


A higher than usual indicator, CRI90, ensures excellent color rendition and reflection of light colors. This luminaire model is available in both warm white (3000K) and daylight (4000K) options.

The luminaire is designed for indoor use only, with an IP20 protection class.

In LED House's selection, this model also comes with DALI and TRIAC dimming options!

Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

| | |
|-------------------------------|---|
| Correlated colour temperature | warm white 3000K |
| Luminous flux | 1350lumens |
| Luminaire's efficiency lm79 | 90lm/W |
| Warranty | 5 years |
| Source of light | OSRAM LED |
| Brand | Prolumen |
| Supply voltage | 230V |
| Power factor | 0.80 |
| Dimmable | DALI |
| Output | 15W |
| Maximum output | 15W |
| Lens angle | 95° |
| Cri | 90 |
| Sdcm - macadam ellipses | 3 |
| Protection class | IP20 |
| Lifespan | 50000h |
| Lmf tm21 | L80B10 @25°C 50.000h |
| Height | 49.0mm |
| Diameter | 145.0mm |
| Installation opening diameter | 125-130mm |
| In box | 30pcs |
| Casing colour | white |
| Casing material | aluminium |
| Work environment | indoor use |
| Certificates | CE |
| Eprel | 1247042 |
| Energy class |  |

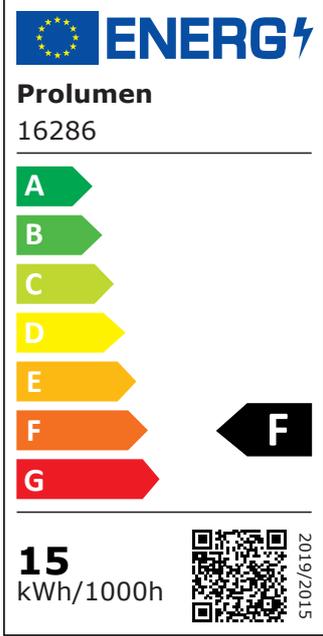

ENERGY

Prolumen
16286

A
B
C
D
E
F
G

15
kWh/1000h

2019/2015

