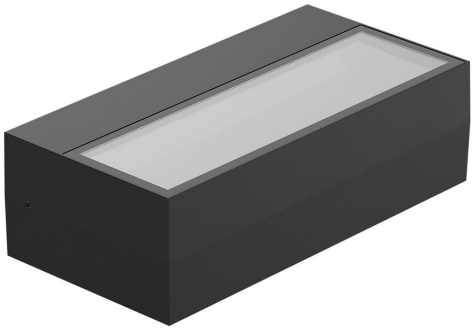


# Facade luminaire Prolumen Gradon up-down light black 230V 15W 1050lm CRI90 IP65 TRIAC 3000K, 4000K, 5700K 3CCT

Product code 17376

Modern wall light with light beam on both sides.

The protection class of the luminaire is determined as IP65, which means it is protected against fine dust and splashes. In addition, the materials of the housing are chosen and prepared to ensure a long lifespan, even in outdoor conditions.

The light temperature of the luminaire can be adjusted according to personal preferences. Options include 3000K (warm white), 4000K (daylight), and 5700K (cool white).

WL88 is equipped with TRIAC technology, allowing the light to be dimmed and brightened. Additionally, this wall light has a colour rendering index (CRI) of 90, ensuring that the colours under the light remain natural and true.

With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours).

Illuminate your world with LED House professionals - check out our project portfolio here!

© LED House OÜ, tel: (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

| | |
|---|---|
| Correlated colour temperature | 3CCT 3000K, 4000K, 5700K |
| Luminous flux | 1050lumens |
| Luminaire’s efficiency | 70lm/W |
| Warranty | 5 years |
| Brand | Prolumen |
| Supply voltage | 230V |
| Power factor | 0.90 |
| Dimmable | TRIAC |
| Output | 15W |
| Maximum output | 15W |
| Cri | 90 |
| Sdcm - macadam ellipses | 6 |
| Protection class | IP65 |
| Lifespan | 50000h |
| Length | 300.0mm |
| Width | 100.0mm |
| Height | 60.0mm |
| Weight | 710 g |
| In package | 1pc |
| In box | 12pcs |
| Casing colour | black |
| Casing material | aluminium |
| Work environment | outdoor use |
| Operation temperature | -20 ~ 45°C |
| Certificates | CE, RoHS |
| Energy class |  |





© LED House OÜ, tel: (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee