# Facade luminaire Prolumen Gradon down light white 230V 10W 850lm 80x110° IP65 930

Product code 20186

Modern wall light with light beam on both sides.

The protection class of the luminaire is determined as IP65, which means it is protected against fine dust and splashes. In addition, the materials of the housing are chosen and prepared to ensure a long lifespan, even in outdoor conditions.

The light temperature of the luminaire can be adjusted according to personal preferences. Options include 3000K (warm white), 4000K (daylight), and 5700K (cool white).


WL88 is equipped with TRIAC technology, allowing the light to be dimmed and brightened. Additionally, this wall light has a colour rendering index (CRI) of 90, ensuring that the colours under the light remain natural and true.

With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours).

Illuminate your world with LED House professionals - check out our project portfolio here!

© LED House OÜ, tel: (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

| | |
|---|---|
| Correlated colour temperature | warm white 3000K |
| Luminous flux | 850lumens |
| Luminaire’s efficiency | 85lm/W |
| Warranty | 5 years |
| Brand | Prolumen |
| Supply voltage | 230V |
| Power factor | 0.90 |
| Output | 10W |
| Maximum output | 10W |
| Lens angle | 80x110° |
| CRI | 90 |
| SDCM - MacAdam Ellipses | 6 |
| Protection class | IP65 |
| Lifespan | 50000h |
| LLMF TM21 | L80B50 @25°C 50.000h |
| Length | 200.0mm |
| Width | 100.0mm |
| Height | 60.0mm |
| Weight | 710 g |
| In package | 1pc |
| In box | 12pcs |
| Casing colour | white |
| Casing material | aluminium |
| Work environment | outdoor use |
| Operation temperature | -20 ~ 45°C |
| Certificates | CE, RoHS |
| EPREL | 2654369 |
| Energy class | F (A ↑ G) |

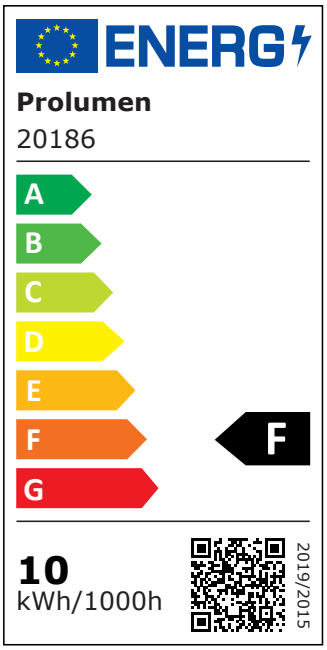


© LED House OÜ, tel: (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee