


## Solar panel AIKO Neostar 2S MAH60MB-G2 1954x1134x30mm 500W IP68

**Product code 22323**


Brand [AIKO](#)  
Output 500W  
Protection class IP68  
Height 30.0mm  
Width 1134.0mm  
Length 1954.0mm  
Solar efficiency 22.6%  
Cell type N-type ABC, 120(6\*20)  
Vmp stc 37.9V  
Imp stc 13.2A  
Voc stc 45.02V  
Isc stc 14.05A

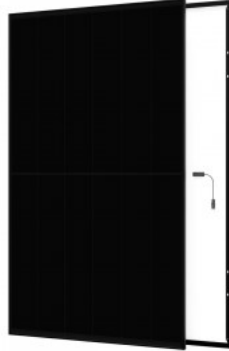

## Solar panel AIKO Neostar 2S MAH60MB-G2 1954x1134x30mm 510W IP68

**Product code 22294**


Brand [AIKO](#)  
Output 510W  
Protection class IP68  
Height 30.0mm  
Width 1134.0mm  
Length 1954.0mm  
Weight 24 kg  
In box 36pcs  
Work environment outdoor use  
Solar efficiency 23%  
Cell type N-type ABC, 120(6\*20)  
Vmp stc 38.1V  
Imp stc 13.39A  
Voc stc 45.22V  
Isc stc 14.17A

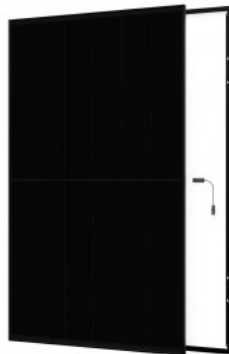

## Solar panel AIKO Neostar 2S MAH60MB-G2 1954x1134x30mm 515W IP68

**Product code 22376**

Brand [AIKO](#)  
Output 515W  
Protection class IP68  
Height 30.0mm  
Width 1134.0mm  
Length 1954.0mm  
Weight 24 kg  
In box 36pcs  
Work environment outdoor use  
Solar efficiency 23.2%  
Cell type N-type ABC, 120(6\*20)  
Vmp stc 38.2V  
Imp stc 13.49A  
Voc stc 45.32V  
Isc stc 14.23A

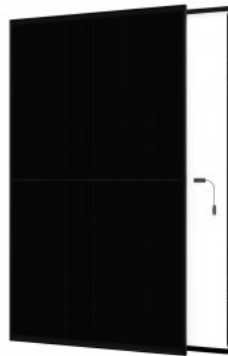

## Solar panel AIKO Neostar 2S+ MAH60DB N-TYPE TOPCON 1954x1134x30mm 500W IP68

**Product code 17085**

Brand [AIKO](#)  
Output 500W  
Protection class IP68  
Height 30.0mm  
Width 1134.0mm  
Length 1954.0mm  
Weight 27.2 kg  
In box 37pcs  
Work environment outdoor use  
Operation temperature -40C- +85°C  
Certificates CE, IEC standard IEC  
61215 / IEC 61730 / ISO 9001: 2015  
Solar efficiency 22.6%  
Cell type N-type ABC, 120(6\*20)  
Vmp stc 37.9V  
Imp stc 13.21A  
Voc stc 45.02V  
Isc stc 14.05A  
Bifacial Yes



## Solar panel AIKO Neostar 2S+ MAH60DB N-TYPE TOPCON Bifacial 1954x1134x30mm 515W IP68

**Product code 22369**


Brand [AIKO](#)  
Output 515W  
Protection class IP68  
Height 30.0mm  
Width 1134.0mm  
Length 1954.0mm  
Weight 27.2 kg  
In box 37pcs  
Work environment outdoor use  
Operation temperature -40C- +85°C  
Certificates CE, IEC standard IEC  
61215 / IEC 61730 / ISO 9001: 2015  
Solar efficiency 23.2%  
Cell type N-type ABC, 120(6\*20)  
Vmp stc 38.2V  
Imp stc 13.49A  
Voc stc 45.32V  
Isc stc 14.23A  
Bifacial Yes



## Solar panel AIKO Polaris 1N+ G645-MCH72DW 2382x1134x30mm 645W IP68

**Product code 22372**

Brand [AIKO](#)  
Output 645W  
Protection class IP68  
Height 30.0mm  
Width 1134.0mm  
Length 2382.0mm  
In box 36pcs  
Solar efficiency 23.9%  
Cell type N-Type ABC, 144(6\*24)  
Vmp stc 45.2V  
Imp stc 14.27A  
Voc stc 53.9V  
Isc stc 15A  
Bifacial Yes



## Installation plekk-katusele

**Product code 16472**

Warranty 3 years



## Solar panel Trinasolar Trina Vertex S 1961x1134x30mm 515W IP68

**Product code 22514**

Brand [Trinasolar](#)  
Output 515W  
Protection class IP68  
Height 30.0mm  
Width 1134.0mm  
Length 1961.0mm  
Weight 23.5 kg  
In box 36pcs  
Work environment outdoor use  
Solar efficiency 23.2%  
Cell type N type i-TOPCon  
Vmp stc 33.9V  
Imp stc 15.2A  
Voc stc 40.9V  
Isc stc 15.96A

