

## Regulator Casambi RW2EBTW anthracite IP20 CASAMBI

**Product code 17920 CASAMBI**  
**dimmable**

Brand Casambi  
Dimmable CASAMBI  
Protection class IP20  
Height 14.0mm  
Width 81.0mm  
Length 81.0mm  
Casing colour anthracite  
Work environment indoor use  
Operation temperature -20° - + 65°C  
Certificates CE  
Warranty 2 years



## Regulator Casambi RW4EBTW anthracite IP20 CASAMBI

**Product code 17921 CASAMBI**  
**dimmable**



Brand Casambi  
Dimmable CASAMBI  
Protection class IP20  
Height 14.0mm  
Width 81.0mm  
Length 81.0mm  
Casing colour anthracite  
Work environment indoor use  
Operation temperature -20° - + 65°C  
Certificates CE  
Warranty 2 years



## Motion sensor Casambi SEMLBT black 230V IP44/20 CASAMBI

**Product code 18086 CASAMBI**  
**dimmable**


Brand Casambi  
Supply voltage 230V  
Dimmable CASAMBI  
Protection class IP44/20  
Height 14.0mm  
Width 81.0mm  
Length 81.0mm  
Casing colour black  
Work environment indoor use  
Operation temperature -20° - + 50°C  
Certificates CE  
Warranty 2 years

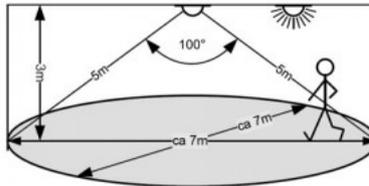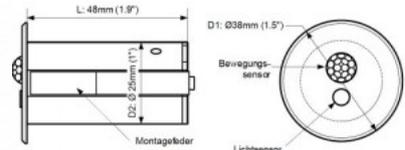

## Motion sensor Casambi SEMLBT white 230V IP44/20 CASAMBI

**Product code 18085 CASAMBI**  
**dimmable**

Brand Casambi  
Supply voltage 230V  
Dimmable CASAMBI  
Protection class IP44/20  
Height 14.0mm  
Width 81.0mm  
Length 81.0mm  
Casing colour white  
Work environment indoor use  
Operation temperature -20° - + 50°C  
Certificates CE  
Warranty 2 years

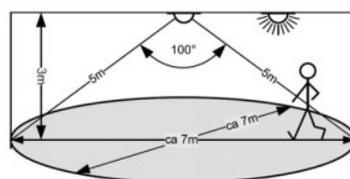

## Regulator Casambi Xpress black IP20 CASAMBI

**Product code 16786 CASAMBI**  
**dimmable**

Brand Casambi  
Dimmable CASAMBI  
Protection class IP20  
Height 12.0mm  
Width 90.0mm  
Length 90.0mm  
Casing colour black  
Work environment indoor use  
Certificates CE



## Regulator Casambi Xpress white IP20 CASAMBI

**Product code 20413 CASAMBI**  
**dimmable**

Brand Casambi  
Dimmable CASAMBI  
Protection class IP20  
Height 12.0mm  
Width 90.0mm  
Length 90.0mm  
Casing colour white  
Work environment indoor use  
Certificates CE



## Dimmer CBU-PWM4 12-24V IP20 CASAMBI

**Product code 18312 CASAMBI**  
**dimmable**

Supply voltage 12-24V  
Dimmable CASAMBI  
Maximum output 144W/1m  
Rated current 6000mA  
Protection class IP20  
Height 18.0mm  
Width 30.0mm  
Length 72.6mm  
Operation temperature -20..+45 °C  
Certificates RoHS  
Warranty 2 years



## Dimmer DENBT230-380 230V 380W IP20 CASAMBI

**Product code 19628 CASAMBI**  
dimmable

Supply voltage 230V  
Dimmable CASAMBI  
Output 380W  
Maximum output 380W/1m  
Rated current 1652mA  
Protection class IP20  
Operation temperature -20..+45 °C  
Certificates RoHS  
Warranty 2 years



## Dimmer DUBT230-100 IP30 CASAMBI / TRIAC

**Product code 18076 CASAMBI /**  
TRIAC dimmable

Dimmable CASAMBI / TRIAC  
Maximum output 100W/1m  
Protection class IP30  
Height 22.0mm  
Width 38.0mm  
Length 75.0mm  
Operation temperature -20..+45 °C  
Certificates RoHS  
Warranty 2 years



## Receiver Entity EN1728 Casambi Daligate CASAMBI



**Product code 16751 CASAMBI**  
dimmable

Brand Entity  
Dimmable CASAMBI  
Certificates CE, RoHS



CASAMBI

## Controller PWM2 PRO 12-24V IP20 CASAMBI

**Product code 18197 CASAMBI**  
**dimmable**

Supply voltage 12-24V  
 Dimmable CASAMBI  
 Output voltage 12-24V  
 Maximum output 120W/1m  
 Rated current 5000mA  
 Protection class IP20  
 Height 18.0mm  
 Width 40.0mm  
 Length 40.0mm  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature -20~40°C  
 Certificates CE  
 Warranty 2 years



## Controller PWM5 PRO 12-24V IP20 CASAMBI

**Product code 18156 CASAMBI**  
**dimmable**

Supply voltage 12-24V  
 Dimmable CASAMBI  
 Output voltage 12-24V  
 Maximum output 240W/1m  
 Rated current 10000mA  
 Protection class IP20  
 Height 22.5mm  
 Width 47.0mm  
 Length 100.0mm  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature -20~40°C  
 Certificates CE  
 Warranty 2 years



## Regulator RW4EBTW black IP20 CASAMBI

**Product code 18020 CASAMBI**  
**dimmable**

Dimmable CASAMBI  
Protection class IP20  
Height 14.0mm  
Width 81.0mm  
Length 81.0mm  
Casing colour black  
Work environment indoor use  
Operation temperature -20° - + 65°C  
Certificates CE  
Warranty 2 years

