

Street light Auva gray 230V 51W 7716lm IP66 DALI 730

Product code 20679 DALI dimmable


Supply voltage 230V
 Dimmable DALI
 Output 51W
 Maximum output 51W/1m
 Luminous flux 7716lumens
 Luminaire's efficiency lm79 151W
 Correlated colour temperature warm white 3000K
 Cri 70
 Protection class IP66
 Lifespan 100000h
 Llmf tm21 L90B10 @25°C 100.000h
 Height 102.0mm
 Width 250.0mm
 Length 525.0mm
 Weight 49 g
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Impact resistance IK09
 Work environment outdoor use
 Operation temperature -40°C - +70°C
 Certificates CE, ENEC



Carrier for street light ø60mm tube

Product code 14456

Installation opening diameter 60mm

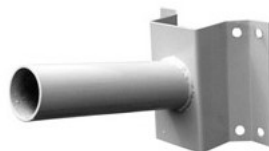

Street light Liralighting FAT 4000 black 230V 17W 2008lm IP65 DALI 830

Product code 19696 DALI dimmable

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 17W

Maximum output 17W/1m

Luminous flux 2008lumens

Luminaire's efficiency lm79 118W

Correlated colour temperature warm white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 4000.0mm

Width 150.0mm

Length 800.0mm

Package weight 3.5 kg

In package 1pc

Casing colour black

Casing material aluminium + plastic

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



Street light Liralighting FAT DOUBLE 4000 black 230V 34W 4016lm IP65 DALI 830

Product code 19698 DALI dimmable

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 34W

Maximum output 17W/1m

Luminous flux 4016lumens

Luminaire's efficiency lm79 118W

Correlated colour temperature warm
white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 4000.0mm

Width 150.0mm

Length 1450.0mm

Package weight 40 g

In package 1pc

Casing colour black

Casing material aluminium + plastic

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



Street light Liralighting LT H gray 230V 33W 3898lm IP65 DALI 830

Product code 19111 DALI dimmable

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 33W

Maximum output 33W/1m

Luminous flux 3898lumens

Luminaire's efficiency lm79 118W

Correlated colour temperature warm white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 195.0mm

Width 150.0mm

Length 550.0mm

In package 1pc

Casing colour gray

Casing material aluminium + plastic

Polishing matt

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



Street light Liralighting REET AR 400 black 230V 20W 2171lm IP65 DALI 830

Product code 19701 DALI dimmable

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2171lumens

Luminaire's efficiency lm79 109W

Correlated colour temperature warm
white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 491.0mm

Diameter 400.0mm

Package weight 9 kg

In package 1pc

Casing colour black

Casing material aluminium + plastic

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



Street light Liralighting REET AR 400 black 230V 26W 2919lm IP65 830

Product code 22312

Brand [Liralighting](#)
Supply voltage 230V
Power factor 0.90
Output 26W
Maximum output 26W/1m
Luminous flux 2919lumens
Luminaire's efficiency lm79 112W
Correlated colour temperature warm white 3000K
Cri 80
Sdcm - macadam ellipses 3
Protection class IP65
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 491.0mm
Diameter 400.0mm
Package weight 9 kg
In package 1pc
Casing colour black
Casing material aluminium + plastic
Polishing matt
Impact resistance IK06
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Street light Prolumen ADELA black 230V 30W 4500lm 60° IP66 DALI 830

Product code 19705 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 4500lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature warm white 3000K

Lens angle 60

Source of light [LUMILEDS](#)

Cri 80

Sdcm - macadam ellipses 2

Protection class IP66

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 120.0mm

Width 270.0mm

Length 474.0mm

Weight 3.8 kg

Casing colour black

Casing material aluminium

Polishing matt

Power supply OSRAM

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 °C ... +50°C

Certificates CE

Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

Street light Prolumen ADELA black 230V 70W 9100lm 60x140° IP66 DALI 830

Product code 18152 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Dimmable DALI
 Output 70W
 Maximum output 70W/1m
 Luminous flux 9100lumens
 Luminaire's efficiency lm79 130W
 Correlated colour temperature warm white 3000K
 Lens angle 60x140
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 100000h
 Llmf tm21 L80B10 @25°C 100.000h
 Height 205.0mm
 Width 272.0mm
 Length 508.0mm
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ... +50°C
 Certificates CE
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen ADELA MW + Lux black 230V 100W 13400lm 60x140° IP66 1-10V 830

Product code 17094 1-10V dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Dimmable 1-10V
 Output 100W
 Maximum output 100W/1m
 Luminous flux 13400lumens
 Luminaire's efficiency lm79 134W
 Correlated colour temperature warm white 3000K
 Lens angle 60x140
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 100000h
 Llmf tm21 L80B10 @25°C 100.000h
 Height 205.0mm
 Width 272.0mm
 Length 508.0mm
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [INVENTRONICS](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ... +50°C
 Certificates CE
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen ADELA MW + Lux black 230V 30W 4100lm 60x140° IP66 1-10V 830

Product code 17045 1-10V dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable 1-10V

Output 30W

Maximum output 30W/1m

Luminous flux 4100lumens

Luminaire's efficiency lm79 137W

Correlated colour temperature warm white 3000K

Lens angle 60x140

Source of light [LUMILEDS](#)

Cri 80

Sdcm - macadam ellipses 2

Protection class IP66

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 201.2mm

Width 269.8mm

Length 479.7mm

Casing colour black

Casing material aluminium

Polishing matt

Power supply [INVENTRONICS](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 °C ...
+50°C

Certificates CE

Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

Street light Prolumen ADELA MW + Lux black 230V 50W 6500lm 60x140° IP66 0-10V 830

Product code 17049 0-10V dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable 0-10V

Output 50W

Maximum output 50W/1m

Luminous flux 6500lumens

Luminaire's efficiency lm79 130W

Correlated colour temperature warm white 3000K

Lens angle 60x140

Source of light [LUMILEDS](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 201.2mm

Width 269.8mm

Length 479.7mm

Casing colour black

Casing material aluminium

Polishing matt

Power supply [INVENTRONICS](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 °C ... +50°C

Certificates CE

Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

Street light Prolumen Avarta 40W 5600lm 120° No dim 740

Product code 19056 No dim
dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 40W
Maximum output 40W/1m
Luminous flux 5600lumens
Luminaire's efficiency lm79 140W
Correlated colour temperature pure
white 4000K
Lens angle 120
Cri 70
Power supply [SOSEN](#)
Warranty 5 years



Street light Prolumen BEAST SF bracket black 230V 100W 16400lm 130x60° IP66 1-10V 730

Product code 22314 1-10V dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable 1-10V

Output 100W

Maximum output 100W/1m

Luminous flux 16400lumens

Luminaire's efficiency lm79 164W

Correlated colour temperature warm white 3000K

Lens angle 130x60

Source of light [LUMILEDS](#)

Cri 70

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 105.0mm

Width 304.0mm

Length 428.0mm

Weight 3.82 kg

Casing colour black

Casing material aluminium + plastic

Polishing matt

Power supply [INVENTRONICS](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40° - +50°C

Certificates CE, ENEC, CB

Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST SF bracket black 230V 100W 16500lm 130x60° IP66 1-10V 740

Product code 18226 1-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 1-10V
Output 100W
Maximum output 100W/1m
Luminous flux 16500lumens
Luminaire's efficiency lm79 165W
Correlated colour temperature pure white 4000K
Lens angle 130x60
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 105.0mm
Width 304.0mm
Length 428.0mm
Weight 3.82 kg
Casing colour black
Casing material aluminium + plastic
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST SF bracket black 230V 200W 30000lm 130x60° IP66 1-10V 740

Product code 17903 1-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 1-10V
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 4000K
Lens angle 130x60
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 105.0mm
Width 304.0mm
Length 428.0mm
Weight 3.82 kg
Casing colour black
Casing material aluminium + plastic
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST TR bracket black 230V 100W 16500lm 130x60° IP66 1-10V 740

Product code 17862 1-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 1-10V
Output 100W
Maximum output 100W/1m
Luminous flux 16500lumens
Luminaire's efficiency lm79 165W
Correlated colour temperature pure white 4000K
Lens angle 130x60
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 88.0mm
Width 304.0mm
Length 428.0mm
Casing colour black
Casing material aluminium + plastic
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST TR bracket black 230V 240W 40947lm 100x140° IP66 0-10V 740

Product code 17802 0-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 240W
Maximum output 240W/1m
Luminous flux 40947lumens
Luminaire's efficiency lm79 171W
Correlated colour temperature pure white 4000K
Lens angle 100x140
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Height 184.2mm
Width 304.0mm
Length 595.4mm
Weight 7.03 kg
Casing colour black
Casing material aluminium
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST TR bracket black 230V 400W 66419lm 100x140° IP66 1-10V 750

Product code 17803 1-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 1-10V
Output 400W
Maximum output 400W/1m
Luminous flux 66419lumens
Luminaire's efficiency lm79 166W
Correlated colour temperature pure white 5000K
Lens angle 100x140
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Height 199.6mm
Width 339.6mm
Length 767.5mm
Weight 1.1 kg
Casing colour black
Casing material aluminium
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST U bracket black 230V 400W 66419lm 100x140° IP66 1-10V 750

Product code 17804 1-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 1-10V
Output 400W
Maximum output 400W/1m
Luminous flux 66419lumens
Luminaire's efficiency lm79 166W
Correlated colour temperature pure white 5000K
Lens angle 100x140
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Height 199.6mm
Width 339.6mm
Length 767.5mm
Weight 1.1 kg
Casing colour black
Casing material aluminium
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST YK bracket black 230V 200W 30000lm 130x60° IP66 1-10V 740

Product code 17861 1-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 1-10V
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 4000K
Lens angle 130x60
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 105.0mm
Width 304.0mm
Length 428.0mm
Weight 3.82 kg
Casing colour black
Casing material aluminium + plastic
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen BEAST YK bracket black 230V 300W 48900lm 130x60° IP66 1-10V 740

Product code 17863 1-10V dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Dimmable 1-10V
Output 300W
Maximum output 300W/1m
Luminous flux 48900lumens
Luminaire's efficiency lm79 163W
Correlated colour temperature pure white 4000K
Lens angle 130x60
Source of light [LUMILEDS](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 100000h
Llmf tm21 L70 @25°C 100.000h
Height 88.0mm
Width 304.0mm
Length 428.0mm
Casing colour black
Casing material aluminium + plastic
Polishing matt
Power supply [INVENTRONICS](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates CE, ENEC, CB
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen Hermoso 30/ 40/ 60W 9600lm CRI70 TP III° No dim 2200K, 3000K, 4000K 3CCT

Product code 19054 No dim dimmable

Brand [Prolumen](#)
 Dimmable No dim
 Output 30/ 40/ 60W
 Maximum output 30/ 40W/1m
 Luminous flux 9600lumens
 Correlated colour temperature 3CCT
 2200K, 3000K, 4000K
 Lens angle TP III
 Cri 70
 Power supply [SOSEN](#)
 Warranty 5 years
 Cable 60-80mm

Outdoor light with an elegant style.
 Available options: 30W, 40W, 60W, 90W. This light is suitable for poles with a diameter of 60-80mm. It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting.



Street light Prolumen Hermoso black 230V 30W 4000lm 90° IP66 730

Product code 17590

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 30W
 Maximum output 30W/1m
 Luminous flux 4000lumens
 Luminaire's efficiency lm79 133W
 Correlated colour temperature warm
 white 3000K
 Lens angle 90
 Source of light [PHILIPS LED](#)
 Cri 70
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 539.0mm
 Diameter 422.0mm
 Weight 27.5 kg
 In package 1pc
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ...
 +50°C
 Certificates CE
 Warranty 5 years



Outdoor light with an elegant style.
 Available options: 30W, 40W, 60W,
 90W. This light is suitable for poles
 with a diameter of 60-80mm. It is
 perfect for driveways, streets, parking
 lots, and all other outdoor areas that
 need safe, affordable, and efficient
 lighting.

Street light Prolumen Hermoso black 230V 40W 6000lm 90° IP66 830

Product code 17044

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 40W
 Maximum output 40W/1m
 Luminous flux 6000lumens
 Luminaire's efficiency lm79 150W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 539.0mm
 Diameter 422.0mm
 Weight 5.7 kg
 In package 1pc
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [MEAN WELL](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ...
 +50°C
 Certificates CE
 Warranty 5 years



Outdoor light with an elegant style.
 Available options: 30W, 40W, 60W,
 90W. This light is suitable for poles
 with a diameter of 60-80mm. It is
 perfect for driveways, streets, parking
 lots, and all other outdoor areas that
 need safe, affordable, and efficient
 lighting.

Street light Prolumen Hermoso black 230V 60W 8400lm 90° IP66 730

Product code 19419

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 60W
 Maximum output 60W/1m
 Luminous flux 8400lumens
 Luminaire's efficiency lm79 140W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Source of light [PHILIPS LED](#)
 Cri 70
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 539.0mm
 Diameter 422.0mm
 In package 1pc
 In box 2pcs
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ...
 +50°C
 Certificates CE
 Warranty 5 years



Outdoor light with an elegant style.
 Available options: 30W, 40W, 60W, 90W. This light is suitable for poles with a diameter of 60-80mm. It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting.

Street light Prolumen Hermoso black 230V 60W 8400lm 90° IP66 830

Product code 17844

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 60W
 Maximum output 60W/1m
 Luminous flux 8400lumens
 Luminaire's efficiency lm79 140W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Source of light [PHILIPS LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 539.0mm
 Diameter 422.0mm
 Weight 5.7 kg
 In package 1pc
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [MEAN WELL](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ...
 +50°C
 Certificates CE
 Warranty 5 years



Outdoor light with an elegant style.
 Available options: 30W, 40W, 60W,
 90W. This light is suitable for poles
 with a diameter of 60-80mm. It is
 perfect for driveways, streets, parking
 lots, and all other outdoor areas that
 need safe, affordable, and efficient
 lighting.

Street light Prolumen Hermoso black 230V 90W 13500lm 90° IP66 830

Product code 17845

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 90W
 Maximum output 90W/1m
 Luminous flux 13500lumens
 Luminaire's efficiency lm79 150W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 539.0mm
 Diameter 422.0mm
 Weight 5.7 kg
 In package 1pc
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [MEAN WELL](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ... +50°C
 Certificates CE
 Warranty 5 years



Outdoor light with an elegant style.
 Available options: 30W, 40W, 60W, 90W. This light is suitable for poles with a diameter of 60-80mm. It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting.

Street light Prolumen Meta 100W 13500lm TP II° No dim 727

Product code 19038 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 100W
Maximum output 100W/1m
Luminous flux 13500lumens
Luminaire's efficiency lm79 135W
Correlated colour temperature warm white 2700K
Lens angle TP II
Cri 70
Power supply [MEAN WELL](#)
Warranty 5 years
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Meta 20-50W 6750lm TP II° No dim 727

Product code 19039 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 20-50W
Maximum output 20-50W/1m
Luminous flux 6750lumens
Correlated colour temperature warm white 2700K
Lens angle TP II
Cri 70
Power supply [SOSEN](#)
Warranty 5 years
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Meta 20-50W 7500lm TP II° No dim 740

Product code 19041 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 20-50W
Maximum output 20-50W/1m
Luminous flux 7500lumens
Correlated colour temperature pure white 4000K
Lens angle TP II
Cri 70
Power supply [SOSEN](#)
Warranty 5 years
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Meta 40-100W 13500lm TP II° No dim 727

Product code 19040 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 40-100W
Maximum output 40-100W/1m
Luminous flux 13500lumens
Correlated colour temperature warm white 2700K
Lens angle TP II
Cri 70
Power supply [SOSEN](#)
Warranty 5 years
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Poseidon 230V 80W 14400lm 115x155° 740

Product code 19045

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 80W
 Maximum output 80W/1m
 Luminous flux 14400lumens
 Luminaire's efficiency lm79 180W
 Correlated colour temperature pure white 4000K
 Lens angle 115x155
 Cri 70
 Sdcm - macadam ellipses 6
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 108.0mm
 Width 200.0mm
 Length 562.0mm
 In box 6pcs
 Power supply Without driver
 Warranty 5 years



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Poseidon 40W 6400lm TP III° 727

Product code 19042

Brand [Prolumen](#)
 Output 40W
 Maximum output 40W/1m
 Luminous flux 6400lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature warm white 2700K
 Lens angle TP III
 Cri 70
 Power supply Without driver
 Warranty 5 years



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Poseidon 40W 7200lm TP III° 740

Product code 19044

Brand [Prolumen](#)

Output 40W

Maximum output 40W/1m

Luminous flux 7200lumens

Luminaire's efficiency lm79 180W

Correlated colour temperature pure white 4000K

Lens angle TP III

Cri 70

In box 8pcs

Power supply Without driver

Warranty 5 years

LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.



Street light Prolumen Poseidon 75W 13500lm TP III° 740

Product code 19377

Brand [Prolumen](#)

Output 75W

Maximum output 75W/1m

Luminous flux 13500lumens

Luminaire's efficiency lm79 180W

Correlated colour temperature pure white 4000K

Lens angle TP III

Cri 70

Power supply Without driver

Warranty 5 years

LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.



Street light Prolumen Poseidon 80W 12800lm TP III° 727

Product code 19043

Brand [Prolumen](#)

Output 80W

Maximum output 80W/1m

Luminous flux 12800lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature warm white 2700K

Lens angle TP III

Cri 70

Power supply Without driver

Warranty 5 years

LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.



Street light Prolumen Poseidon gray 230V 100W 13000lm 60x140° IP66 740

Product code 14977

Brand [Prolumen](#)

Supply voltage 230V

Output 100W

Maximum output 100W/1m

Luminous flux 13000lumens

Luminaire's efficiency lm79 130W

Correlated colour temperature pure white 4000K

Lens angle 60x140

Source of light [CREE LED](#)

Cri 70

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 100.0mm

Width 235.0mm

Length 610.0mm

Installation opening diameter 60mm

Casing colour gray

Casing material aluminium

Polishing matt

Power supply [MEAN WELL](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40°C - +70°C

Certificates CE, ENEC



Street light Prolumen Poseidon gray 230V 100W 15000lm IP66 DALI 840

Product code 16972 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 100W

Maximum output 100W/1m

Luminous flux 15000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Source of light [CREE LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 109.0mm

Width 240.0mm

Length 613.0mm

Installation opening diameter 60mm

Weight 4.57 kg

Package weight 5.27 kg

In package 1pc

Casing colour gray

Casing material aluminium

Polishing matt

Impact resistance IK08

Work environment outdoor use

Operation temperature -40°C - +70°C

Certificates CE, ENEC



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Poseidon gray 230V 24W 3600lm 150x150° IP66 830

Product code 16250

Brand [Prolumen](#)
Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 3600lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature warm
white 3000K
Lens angle 150x150
Source of light [CREE LED](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 100.0mm
Width 200.0mm
Length 570.0mm
Installation opening diameter 60mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40°C - +70°C
Certificates CE, ENEC

LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.



Street light Prolumen Poseidon gray 230V 40W 6400lm 150x150° IP66 830

Product code 16249

Brand [Prolumen](#)
Supply voltage 230V
Output 40W
Maximum output 40W/1m
Luminous flux 6400lumens
Luminaire's efficiency lm79 160W
Correlated colour temperature warm white 3000K
Lens angle 150x150
Source of light [CREE LED](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 100.0mm
Width 235.0mm
Length 610.0mm
Installation opening diameter 60mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40°C - +70°C
Certificates CE, ENEC



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

Street light Prolumen Ryder black 230V 70W 7700lm IP66 DALI 830

Product code 18154 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Dimmable DALI
 Output 70W
 Maximum output 70W/1m
 Luminous flux 7700lumens
 Luminaire's efficiency lm79 110W
 Correlated colour temperature warm white 3000K
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP66
 Lifespan 100000h
 Llmf tm21 L80B10 @25°C 100.000h
 Height 282.0mm
 Diameter 610.0mm
 Casing colour black
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment outdoor use
 Operation temperature -40 °C ... +50°C
 Certificates CE
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

Street light Prolumen ST57+30W Monocrystalline Solar Panel 20W 4000lm 120x50° IP66 740

Product code 17957

Brand [Prolumen](#)

Output 20W

Maximum output 20W/1m

Luminous flux 4000lumens

Luminaire's efficiency lm79 200W

Correlated colour temperature pure white 4000K

Lens angle 120x50

Cri 70

Protection class IP66

Lifespan 80000h

Llmf tm21 L80B10 @25°C 80.000h

Height 140.0mm

Width 345.0mm

Length 570.0mm

Weight 3.9 kg


Casing material aluminium

Work environment outdoor use

Certificates CE, RoHS

Warranty 5 years

ST57 Solar-Powered Streetlight - And no cables are needed! ST57 is a full-range solar streetlight offering six different sizes: 10W, 20W, 30W, 40W, 50W, and 60W, making it ideal for various applications. Smart control features, such as a built-in microwave sensor and timer dimming, ensure longer discharge times. The adjustable mounting angle improves charging efficiency, and the removable battery makes maintenance simple. Key Features: MPPT controller and mono-crystalline solar panels: Maximum charging capability. LiFePO4 battery: Reliable and long-lasting energy storage. Aluminum alloy casing and polycarbonate optical lens: Durable and weather-resistant design. Easy to clean and maintain with a shell design allowing for quick battery replacement. Efficient heat dissipation. Smart control options, including a built-in microwave sensor and timer dimming, ensure energy efficiency. 360° adjustable connection and ±40° tilt angle adjustment. Quick and easy installation with a plug-and-play system. Applications: Rural roads, urban roads, walkways, parking lots, courtyards, plazas, and parks. NB! The product is available for pre-order, with a minimum order quantity of 10 units. Battery warranty 3 years, other parts of the light 5 years.

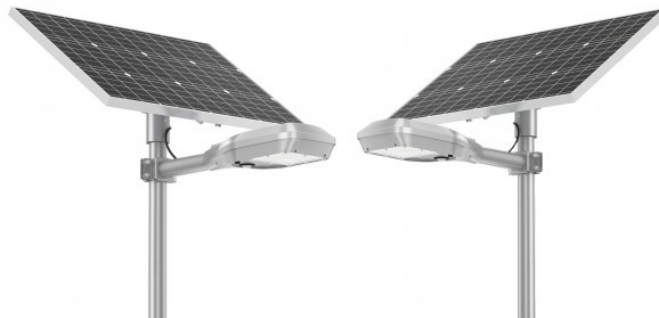

Street light Street Master gray 230V 35W 5950lm 155x80° IP66 DALI 740

Product code 17782 DALI dimmable

Supply voltage 230V
 Power factor 0.98
 Dimmable DALI
 Output 35W
 Maximum output 35W/1m
 Luminous flux 5950lumens
 Luminaire's efficiency lm79 170W
 Correlated colour temperature pure white 4000K
 Lens angle 155x80
 Cri 70
 Protection class IP66
 Lifespan 80000h
 Height 102.0mm
 Width 209.0mm
 Length 507.0mm
 Weight 3.3 kg
 In package 1pc
 Casing colour gray
 Casing material aluminium
 Polishing matt
 No. of switches 30000pcs
 Impact resistance IK09
 Work environment outdoor use
 Operation temperature -30° - +45°C
 Certificates CE, ENEC
 Warranty 5 years

