

## Street light Auva gray 230V 51W 7716lm IP66 DALI 730

**Product code 20679 DALI dimmable**

Supply voltage 230V  
Dimmable DALI  
Output 51W  
Maximum output 51W/1m  
Luminous flux 7716lumens  
Luminaire's efficiency lm79 151W  
Correlated colour temperature warm white 3000K  
Cri 70  
Protection class IP66  
Lifespan 100000h  
Llmf tm21 L90B10 @25°C 100.000h  
Height 102.0mm  
Width 250.0mm  
Length 525.0mm  
Weight 49 g  
Casing colour gray  
Casing material aluminium  
Polishing matt  
Impact resistance IK09  
Work environment outdoor use  
Operation temperature -40°C - +70°C  
Certificates CE, ENEC



## Carrier for street light ø60mm tube

**Product code 14456**

Installation opening diameter 60mm



## Street light Liralighting FAT 4000 black 230V 17W 2008lm IP65 DALI 830

**Product code 19696 DALI dimmable**

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 17W

Maximum output 17W/1m

Luminous flux 2008lumens

Luminaire's efficiency lm79 118W

Correlated colour temperature warm white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 4000.0mm

Width 150.0mm

Length 800.0mm

Package weight 3.5 kg

In package 1pc

Casing colour black

Casing material aluminium + plastic

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



## Street light Liralighting FAT DOUBLE 4000 black 230V 34W 4016lm IP65 DALI 830

**Product code 19698 DALI dimmable**

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 34W

Maximum output 17W/1m

Luminous flux 4016lumens

Luminaire's efficiency lm79 118W

Correlated colour temperature warm  
white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 4000.0mm

Width 150.0mm

Length 1450.0mm

Package weight 40 g

In package 1pc

Casing colour black

Casing material aluminium + plastic

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



## Street light Liralighting LT H gray 230V 33W 3898lm IP65 DALI 830

**Product code 19111 DALI dimmable**

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 33W

Maximum output 33W/1m

Luminous flux 3898lumens

Luminaire's efficiency lm79 118W

Correlated colour temperature warm white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 195.0mm

Width 150.0mm

Length 550.0mm

In package 1pc

Casing colour gray

Casing material aluminium + plastic

Polishing matt

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



## Street light Liralighting REET AR 400 black 230V 20W 2171lm IP65 DALI 830

**Product code 19701 DALI dimmable**

Brand [Liralighting](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2171lumens

Luminaire's efficiency lm79 109W

Correlated colour temperature warm white 3000K

Cri 80

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 491.0mm

Diameter 400.0mm

Package weight 9 kg

In package 1pc

Casing colour black

Casing material aluminium + plastic

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -40 ~ 45°C

Certificates CE

Warranty 5 years



## Street light Liralighting REET AR 400 black 230V 26W 2919lm IP65 830

**Product code 22312**

Brand [Liralighting](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 26W  
 Maximum output 26W/1m  
 Luminous flux 2919lumens  
 Luminaire's efficiency lm79 112W  
 Correlated colour temperature warm white 3000K  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP65  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 491.0mm  
 Diameter 400.0mm  
 Package weight 9 kg  
 In package 1pc  
 Casing colour black  
 Casing material aluminium + plastic  
 Polishing matt  
 Impact resistance IK06  
 Work environment outdoor use  
 Operation temperature -40 ~ 45°C  
 Certificates CE  
 Warranty 5 years



## Remote Power/CCT remote

**Product code 22949**



## Street light Prolumen ADELA black 230V 120W 19200lm 60x140° IP66 740

### Product code 22738

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 120W  
 Maximum output 120W/1m  
 Luminous flux 19200lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 201.2mm  
 Width 269.8mm  
 Length 479.7mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen ADELA black 230V 30W 4500lm 60x140° IP66 730

**Product code 22733**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 4500lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature warm white 3000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 2  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 120.0mm  
 Width 270.0mm  
 Length 474.0mm  
 Weight 3.8 kg  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

## Street light Prolumen ADELA black 230V 30W 4500lm 60° IP66 DALI 730

**Product code 19705 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable DALI  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 4500lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature warm white 3000K  
 Lens angle 60  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 2  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 120.0mm  
 Width 270.0mm  
 Length 474.0mm  
 Weight 3.8 kg  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

## Street light Prolumen ADELA black 230V 50W 6500lm 60x140° IP66 730

### Product code 22734

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 50W  
 Maximum output 50W/1m  
 Luminous flux 6500lumens  
 Luminaire's efficiency lm79 130W  
 Correlated colour temperature warm white 3000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 201.2mm  
 Width 269.8mm  
 Length 479.7mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen ADELA black 230V 50W 7500lm 60x140° IP66 740

### Product code 22735

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 50W  
 Maximum output 50W/1m  
 Luminous flux 7500lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature pure white 4000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 201.2mm  
 Width 269.8mm  
 Length 479.7mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen ADELA black 230V 70W 9100lm 60x140° IP66 DALI 730

**Product code 18152 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable DALI  
 Output 70W  
 Maximum output 70W/1m  
 Luminous flux 9100lumens  
 Luminaire's efficiency lm79 130W  
 Correlated colour temperature warm white 3000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 205.0mm  
 Width 272.0mm  
 Length 508.0mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen ADELA black 230V 90W 12500lm 60x140° IP66 730

**Product code 22736**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 90W  
 Maximum output 90W/1m  
 Luminous flux 12500lumens  
 Luminaire's efficiency lm79 139W  
 Correlated colour temperature warm white 3000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 201.2mm  
 Width 269.8mm  
 Length 479.7mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen ADELA black 230V 90W 13500lm 60x140° IP66 740

### Product code 22737

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 90W  
 Maximum output 90W/1m  
 Luminous flux 13500lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature pure white 4000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 201.2mm  
 Width 269.8mm  
 Length 479.7mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen ADELA MW + Lux black 230V 100W 13400lm 60x140° IP66 1-10V 730

**Product code 17094 1-10V dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable 1-10V  
 Output 100W  
 Maximum output 100W/1m  
 Luminous flux 13400lumens  
 Luminaire's efficiency lm79 134W  
 Correlated colour temperature warm white 3000K  
 Lens angle 60x140  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 205.0mm  
 Width 272.0mm  
 Length 508.0mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen ADELA MW + Lux black 230V 30W 4100lm 60x140° IP66 1-10V 730

**Product code 17045 1-10V dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable 1-10V

Output 30W

Maximum output 30W/1m

Luminous flux 4100lumens

Luminaire's efficiency lm79 137W

Correlated colour temperature warm white 3000K

Lens angle 60x140

Source of light [LUMILEDS](#)

Cri 70

Sdcm - macadam ellipses 2

Protection class IP66

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 201.2mm

Width 269.8mm

Length 479.7mm

Casing colour black

Casing material aluminium

Polishing matt

Power supply [INVENTRONICS](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 °C ...  
+50°C

Certificates CE

Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

## Street light Prolumen ADELA MW + Lux black 230V 50W 6500lm 60x140° IP66 0-10V 730

**Product code 17049 0-10V dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable 0-10V

Output 50W

Maximum output 50W/1m

Luminous flux 6500lumens

Luminaire's efficiency lm79 130W

Correlated colour temperature warm white 3000K

Lens angle 60x140

Source of light [LUMILEDS](#)

Cri 70

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 201.2mm

Width 269.8mm

Length 479.7mm

Casing colour black

Casing material aluminium

Polishing matt

Power supply [INVENTRONICS](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 °C ...  
+50°C

Certificates CE

Warranty 5 years



Smart streetlight that makes moving in urban spaces safe even in the darkness of the night! Ideal for driveways, streets, parking lots, and all other outdoor areas requiring safe and efficient lighting. The luminaire is perfectly suited for integration with security cameras (see additional details in the product specifications). Additionally, the luminaire's maintenance process has been made particularly easy - saving on labor and time! This feature is provided by a removable electrical board, making wiring connections exceptionally convenient during installation.

## Street light Prolumen Avarta 40W 5600lm 120° No dim 740

Product code 19056 No dim  
dimmable

Brand [Prolumen](#)  
Dimmable No dim  
Output 40W  
Maximum output 40W/1m  
Luminous flux 5600lumens  
Luminaire's efficiency lm79 140W  
Correlated colour temperature pure  
white 4000K  
Lens angle 120  
Cri 70  
Power supply [SOSEN](#)  
Warranty 5 years



## Street light Prolumen BEAST SF bracket black 230V 100W 16400lm 130x60° IP66 1-10V 730

**Product code 22314 1-10V dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable 1-10V  
Output 100W  
Maximum output 100W/1m  
Luminous flux 16400lumens  
Luminaire's efficiency lm79 164W  
Correlated colour temperature warm white 3000K  
Lens angle 130x60  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Llmf tm21 L80B10 @25°C 100.000h  
Height 105.0mm  
Width 304.0mm  
Length 428.0mm  
Weight 3.82 kg  
Casing colour black  
Casing material aluminium + plastic  
Polishing matt  
Power supply [INVENTRONICS](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST SF bracket black 230V 100W 16500lm 130x60° IP66 1-10V 740

**Product code 18226 1-10V dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable 1-10V  
 Output 100W  
 Maximum output 100W/1m  
 Luminous flux 16500lumens  
 Luminaire's efficiency lm79 165W  
 Correlated colour temperature pure white 4000K  
 Lens angle 130x60  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 105.0mm  
 Width 304.0mm  
 Length 428.0mm  
 Weight 3.82 kg  
 Casing colour black  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40° - +50°C  
 Certificates CE, ENEC, CB  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST SF bracket black 230V 150W 21000lm 130x60° IP66 DALI 730

**Product code 22732 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable DALI  
 Output 150W  
 Maximum output 150W/1m  
 Luminous flux 21000lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature warm white 3000K  
 Lens angle 130x60  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 105.0mm  
 Width 304.0mm  
 Length 428.0mm  
 Weight 3.82 kg  
 Casing colour black  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40° - +50°C  
 Certificates CE, ENEC, CB  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST SF bracket black 230V 200W 28800lm 130x60° IP66 DALI 730

**Product code 22731 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable DALI  
Output 200W  
Maximum output 200W/1m  
Luminous flux 28800lumens  
Luminaire's efficiency lm79 144W  
Correlated colour temperature warm white 3000K  
Lens angle 130x60  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Llmf tm21 L80B10 @25°C 100.000h  
Height 105.0mm  
Width 304.0mm  
Length 428.0mm  
Weight 3.82 kg  
Casing colour black  
Casing material aluminium + plastic  
Polishing matt  
Power supply [SOSEN](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST SF bracket black 230V 200W 30000lm 130x60° IP66 1-10V 740

**Product code 17903 1-10V dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable 1-10V  
Output 200W  
Maximum output 200W/1m  
Luminous flux 30000lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature pure white 4000K  
Lens angle 130x60  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Llmf tm21 L80B10 @25°C 100.000h  
Height 105.0mm  
Width 304.0mm  
Length 428.0mm  
Weight 3.82 kg  
Casing colour black  
Casing material aluminium + plastic  
Polishing matt  
Power supply [INVENTRONICS](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST TR bracket black 230V 100W 16500lm 130x60° IP66 1-10V 740

**Product code 17862 1-10V dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable 1-10V  
 Output 100W  
 Maximum output 100W/1m  
 Luminous flux 16500lumens  
 Luminaire's efficiency lm79 165W  
 Correlated colour temperature pure white 4000K  
 Lens angle 130x60  
 Source of light [LUMILEDS](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 88.0mm  
 Width 304.0mm  
 Length 428.0mm  
 Casing colour black  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [INVENTRONICS](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40° - +50°C  
 Certificates CE, ENEC, CB  
 Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST TR bracket black 230V 240W 40947lm 100x140° IP66 0-10V 740

**Product code 17802 0-10V dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable 0-10V  
Output 240W  
Maximum output 240W/1m  
Luminous flux 40947lumens  
Luminaire's efficiency lm79 171W  
Correlated colour temperature pure white 4000K  
Lens angle 100x140  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Height 184.2mm  
Width 304.0mm  
Length 595.4mm  
Weight 7.03 kg  
Casing colour black  
Casing material aluminium  
Polishing matt  
Power supply [INVENTRONICS](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST TR bracket black 230V 400W 66419lm 100x140° IP66 1-10V 750

**Product code 17803 1-10V dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable 1-10V  
Output 400W  
Maximum output 400W/1m  
Luminous flux 66419lumens  
Luminaire's efficiency lm79 166W  
Correlated colour temperature pure white 5000K  
Lens angle 100x140  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Height 199.6mm  
Width 339.6mm  
Length 767.5mm  
Weight 1.1 kg  
Casing colour black  
Casing material aluminium  
Polishing matt  
Power supply [INVENTRONICS](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST U bracket black 230V 400W 66419lm 100x140° IP66 1-10V 750

**Product code 17804 1-10V dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable 1-10V  
Output 400W  
Maximum output 400W/1m  
Luminous flux 66419lumens  
Luminaire's efficiency lm79 166W  
Correlated colour temperature pure white 5000K  
Lens angle 100x140  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Height 199.6mm  
Width 339.6mm  
Length 767.5mm  
Weight 1.1 kg  
Casing colour black  
Casing material aluminium  
Polishing matt  
Power supply [INVENTRONICS](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST YK bracket black 230V 200W 30000lm 130x60° IP66 1-10V 740

**Product code 17861 1-10V dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable 1-10V  
Output 200W  
Maximum output 200W/1m  
Luminous flux 30000lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature pure white 4000K  
Lens angle 130x60  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Llmf tm21 L80B10 @25°C 100.000h  
Height 105.0mm  
Width 304.0mm  
Length 428.0mm  
Weight 3.82 kg  
Casing colour black  
Casing material aluminium + plastic  
Polishing matt  
Power supply [INVENTRONICS](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen BEAST YK bracket black 230V 300W 48900lm 130x60° IP66 1-10V 740

**Product code 17863 1-10V dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable 1-10V  
Output 300W  
Maximum output 300W/1m  
Luminous flux 48900lumens  
Luminaire's efficiency lm79 163W  
Correlated colour temperature pure white 4000K  
Lens angle 130x60  
Source of light [LUMILEDS](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 100000h  
Llmf tm21 L70 @25°C 100.000h  
Height 88.0mm  
Width 304.0mm  
Length 428.0mm  
Casing colour black  
Casing material aluminium + plastic  
Polishing matt  
Power supply [INVENTRONICS](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40° - +50°C  
Certificates CE, ENEC, CB  
Warranty 5 years



A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

## Street light Prolumen Hermoso 30/ 40/ 60W 9600lm CRI70 TP III° No dim 2200K, 3000K, 4000K 3CCT

**Product code 19054 No dim dimmable**

Brand [Prolumen](#)  
Dimmable No dim  
Output 30/ 40/ 60W  
Maximum output 30/ 40W/1m  
Luminous flux 9600lumens  
Correlated colour temperature 3CCT 2200K, 3000K, 4000K  
Lens angle TP III  
Cri 70  
Power supply [SOSEN](#)  
Warranty 5 years  
Cable 60-80mm

Outdoor light with an elegant style. Available options: 30W, 40W, 60W, 90W. This light is suitable for poles with a diameter of 60-80mm. It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting.



## Street light Prolumen Hermoso black 230V 30W 4000lm 90° IP66 730

**Product code 17590**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 4000lumens  
 Luminaire's efficiency lm79 133W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 90  
 Source of light [PHILIPS LED](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 539.0mm  
 Diameter 422.0mm  
 Weight 27.5 kg  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ...  
 +50°C  
 Certificates CE  
 Warranty 5 years



Outdoor light with an elegant style.  
 Available options: 30W, 40W, 60W,  
 90W. This light is suitable for poles  
 with a diameter of 60-80mm. It is  
 perfect for driveways, streets, parking  
 lots, and all other outdoor areas that  
 need safe, affordable, and efficient  
 lighting.

## Street light Prolumen Hermoso black 230V 40W 6000lm 90° IP66 830

**Product code 17044**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 6000lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 90  
 Source of light [LUMILEDS](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 539.0mm  
 Diameter 422.0mm  
 Weight 5.7 kg  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [MEAN WELL](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ...  
 +50°C  
 Certificates CE  
 Warranty 5 years



Outdoor light with an elegant style.  
 Available options: 30W, 40W, 60W,  
 90W. This light is suitable for poles  
 with a diameter of 60-80mm. It is  
 perfect for driveways, streets, parking  
 lots, and all other outdoor areas that  
 need safe, affordable, and efficient  
 lighting.

## Street light Prolumen Hermoso black 230V 60/40/30W 9600lm CRI70 90° IP66 2200K, 3000K, 4000K 3CCT

**Product code 22948**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Output 60/40/30W

Maximum output 60W/1m

Luminous flux 9600lumens

Correlated colour temperature 3CCT

2200K, 3000K, 4000K

Lens angle 90

Source of light [PHILIPS LED](#)

Cri 70

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 539.0mm

Diameter 422.0mm

Weight 5.7 kg

In package 1pc

Casing colour black

Casing material aluminium

Polishing matt

Power supply [SOSEN](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40 °C ...

+50°C

Certificates CE

Warranty 5 years



Outdoor light with an elegant style. Available options: 30W, 40W, 60W, 90W. This light is suitable for poles with a diameter of 60-80mm. It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting.

## Street light Prolumen Hermoso black 230V 60W 8400lm 90° IP66 730

**Product code 19419**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 8400lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature warm white 3000K  
 Lens angle 90  
 Source of light [PHILIPS LED](#)  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 539.0mm  
 Diameter 422.0mm  
 In package 1pc  
 In box 2pcs  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ...  
 +50°C  
 Certificates CE  
 Warranty 5 years



Outdoor light with an elegant style.  
 Available options: 30W, 40W, 60W,  
 90W. This light is suitable for poles  
 with a diameter of 60-80mm. It is  
 perfect for driveways, streets, parking  
 lots, and all other outdoor areas that  
 need safe, affordable, and efficient  
 lighting.

## Street light Prolumen Hermoso black 230V 60W 8400lm 90° IP66 830

**Product code 17844**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 8400lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 90  
 Source of light [PHILIPS LED](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 539.0mm  
 Diameter 422.0mm  
 Weight 5.7 kg  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [MEAN WELL](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ...  
 +50°C  
 Certificates CE  
 Warranty 5 years



Outdoor light with an elegant style.  
 Available options: 30W, 40W, 60W,  
 90W. This light is suitable for poles  
 with a diameter of 60-80mm. It is  
 perfect for driveways, streets, parking  
 lots, and all other outdoor areas that  
 need safe, affordable, and efficient  
 lighting.

## Street light Prolumen Hermoso black 230V 90W 13500lm 90° IP66 830

**Product code 17845**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 90W  
 Maximum output 90W/1m  
 Luminous flux 13500lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 90  
 Source of light [LUMILEDS](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 539.0mm  
 Diameter 422.0mm  
 Weight 5.7 kg  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [MEAN WELL](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ...  
 +50°C  
 Certificates CE  
 Warranty 5 years



Outdoor light with an elegant style.  
 Available options: 30W, 40W, 60W,  
 90W. This light is suitable for poles  
 with a diameter of 60-80mm. It is  
 perfect for driveways, streets, parking  
 lots, and all other outdoor areas that  
 need safe, affordable, and efficient  
 lighting.

## Street light Prolumen Meta 100W 13500lm TP II° No dim 727

**Product code 19038 No dim dimmable**

Brand [Prolumen](#)  
Dimmable No dim  
Output 100W  
Maximum output 100W/1m  
Luminous flux 13500lumens  
Luminaire's efficiency lm79 135W  
Correlated colour temperature warm white 2700K  
Lens angle TP II  
Cri 70  
Power supply [MEAN WELL](#)  
Warranty 5 years  
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Meta 20-50W 6750lm TP II° No dim 727

**Product code 19039 No dim dimmable**

Brand [Prolumen](#)  
Dimmable No dim  
Output 20-50W  
Maximum output 20-50W/1m  
Luminous flux 6750lumens  
Correlated colour temperature warm white 2700K  
Lens angle TP II  
Cri 70  
Power supply [SOSEN](#)  
Warranty 5 years  
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Meta 20-50W 7500lm TP II° No dim 740

**Product code 19041 No dim dimmable**

Brand [Prolumen](#)  
Dimmable No dim  
Output 20-50W  
Maximum output 20-50W/1m  
Luminous flux 7500lumens  
Correlated colour temperature pure white 4000K  
Lens angle TP II  
Cri 70  
Power supply [SOSEN](#)  
Warranty 5 years  
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Meta 40-100W 13500lm TP II° No dim 727

**Product code 19040 No dim dimmable**

Brand [Prolumen](#)  
Dimmable No dim  
Output 40-100W  
Maximum output 40-100W/1m  
Luminous flux 13500lumens  
Correlated colour temperature warm white 2700K  
Lens angle TP II  
Cri 70  
Power supply [SOSEN](#)  
Warranty 5 years  
Cable 60mm



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Poseidon 230V 40W 7200lm 115x155° 740

**Product code 19044**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Output 40W

Maximum output 40W/1m

Luminous flux 7200lumens

Luminaire's efficiency lm79 180W

Correlated colour temperature pure white 4000K

Lens angle 115x155

Cri 70

Height 108.0mm

Width 174.0mm

Length 493.0mm

In box 8pcs

Power supply Without driver

Impact resistance IK08

Warranty 5 years



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Poseidon 230V 80W 14400lm 115x155° 740

**Product code 19045**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 80W  
 Maximum output 80W/1m  
 Luminous flux 14400lumens  
 Luminaire's efficiency lm79 180W  
 Correlated colour temperature pure white 4000K  
 Lens angle 115x155  
 Cri 70  
 Sdcm - macadam ellipses 6  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 108.0mm  
 Width 200.0mm  
 Length 562.0mm  
 In box 6pcs  
 Power supply Without driver  
 Warranty 5 years



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Poseidon 40W 6400lm TP III° 727

**Product code 19042**

Brand [Prolumen](#)  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 6400lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature warm white 2700K  
 Lens angle TP III  
 Cri 70  
 Power supply Without driver  
 Warranty 5 years



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Poseidon 75W 13500lm TP III° 740

**Product code 19377**

Brand [Prolumen](#)

Output 75W

Maximum output 75W/1m

Luminous flux 13500lumens

Luminaire's efficiency lm79 180W

Correlated colour temperature pure white 4000K

Lens angle TP III

Cri 70

Power supply Without driver

Warranty 5 years

LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.



## Street light Prolumen Poseidon 80W 12800lm TP III° 727

**Product code 19043**

Brand [Prolumen](#)

Output 80W

Maximum output 80W/1m

Luminous flux 12800lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature warm white 2700K

Lens angle TP III

Cri 70

Power supply Without driver

Warranty 5 years

LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.



## Street light Prolumen Poseidon gray 230V 100W 13000lm 60x140° IP66 740

Product code 14977

Brand [Prolumen](#)  
Supply voltage 230V  
Output 100W  
Maximum output 100W/1m  
Luminous flux 13000lumens  
Luminaire's efficiency lm79 130W  
Correlated colour temperature pure white 4000K  
Lens angle 60x140  
Source of light [CREE LED](#)  
Cri 70  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 50000h  
Llmf tm21 L90B10 @25°C 50.000h  
Height 100.0mm  
Width 235.0mm  
Length 610.0mm  
Installation opening diameter 60mm  
Casing colour gray  
Casing material aluminium  
Polishing matt  
Power supply [MEAN WELL](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40°C - +70°C  
Certificates CE, ENEC



## Street light Prolumen Poseidon gray 230V 100W 15000lm IP66 DALI 840

**Product code 16972 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 100W

Maximum output 100W/1m

Luminous flux 15000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Source of light [CREE LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 109.0mm

Width 240.0mm

Length 613.0mm

Installation opening diameter 60mm

Weight 4.57 kg

Package weight 5.27 kg

In package 1pc

Casing colour gray

Casing material aluminium

Polishing matt

Impact resistance IK08

Work environment outdoor use

Operation temperature -40°C - +70°C

Certificates CE, ENEC



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Poseidon gray 230V 24W 3600lm 150x150° IP66 830

**Product code 16250**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 24W  
Maximum output 24W/1m  
Luminous flux 3600lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature warm white 3000K  
Lens angle 150x150  
Source of light [CREE LED](#)  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 50000h  
Llmf tm21 L90B10 @25°C 50.000h  
Height 100.0mm  
Width 200.0mm  
Length 570.0mm  
Installation opening diameter 60mm  
Casing colour gray  
Casing material aluminium  
Polishing matt  
Power supply [MEAN WELL](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40°C - +70°C  
Certificates CE, ENEC



LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.

## Street light Prolumen Poseidon gray 230V 40W 6400lm 150x150° IP66 830

**Product code 16249**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 40W  
Maximum output 40W/1m  
Luminous flux 6400lumens  
Luminaire's efficiency lm79 160W  
Correlated colour temperature warm  
white 3000K  
Lens angle 150x150  
Source of light [CREE LED](#)  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP66  
Lifespan 50000h  
Llmf tm21 L90B10 @25°C 50.000h  
Height 100.0mm  
Width 235.0mm  
Length 610.0mm  
Installation opening diameter 60mm  
Casing colour gray  
Casing material aluminium  
Polishing matt  
Power supply [MEAN WELL](#)  
Impact resistance IK08  
Work environment outdoor use  
Operation temperature -40°C - +70°C  
Certificates CE, ENEC


LED Street Light for illuminating streets and parking lots. Tube mounting for 60mm tube. This is a project sales product, please inquire about the delivery time and availability from our customer service.



## Street light Prolumen Ryder black 230V 70W 7700lm IP66 DALI 830

**Product code 18154 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable DALI  
 Output 70W  
 Maximum output 70W/1m  
 Luminous flux 7700lumens  
 Luminaire's efficiency lm79 110W  
 Correlated colour temperature warm white 3000K  
 Source of light [LUMILEDS](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 282.0mm  
 Diameter 610.0mm  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment outdoor use  
 Operation temperature -40 °C ... +50°C  
 Certificates CE  
 Warranty 5 years

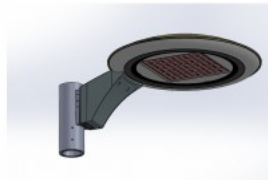

A street light that makes moving in urban spaces safe even in the dark of night! It is perfect for driveways, streets, parking lots, and all other outdoor areas that need safe, affordable, and efficient lighting. Protection classes IP66 and IK08 ensure the fixture's durability and long life in outdoor conditions. Additionally, the light is ideal for collaboration with security cameras - see the product specifications for more details. Furthermore, the maintenance process of the light has been made exceptionally easy - allowing you to save on labor and time! This feature is ensured by the removable electric plate, which makes connecting wires during installation particularly convenient.

# Street light Prolumen ST57+30W Monocrystalline Solar Panel 20W 4000lm 120x50° IP66 740

**Product code 17957**

Brand [Prolumen](#)

Output 20W

Maximum output 20W/1m

Luminous flux 4000lumens

Luminaire's efficiency lm79 200W

Correlated colour temperature pure white 4000K

Lens angle 120x50

Cri 70

Protection class IP66

Lifespan 80000h

Llmf tm21 L80B10 @25°C 80.000h

Height 140.0mm

Width 345.0mm

Length 570.0mm

Weight 3.9 kg


Casing material aluminium

Work environment outdoor use

Certificates CE, RoHS

Warranty 5 years

ST57 Solar-Powered Streetlight - And no cables are needed! ST57 is a full-range solar streetlight offering six different sizes: 10W, 20W, 30W, 40W, 50W, and 60W, making it ideal for various applications. Smart control features, such as a built-in microwave sensor and timer dimming, ensure longer discharge times. The adjustable mounting angle improves charging efficiency, and the removable battery makes maintenance simple. Key Features: MPPT controller and mono-crystalline solar panels: Maximum charging capability. LiFePO4 battery: Reliable and long-lasting energy storage. Aluminum alloy casing and polycarbonate optical lens: Durable and weather-resistant design. Easy to clean and maintain with a shell design allowing for quick battery replacement. Efficient heat dissipation. Smart control options, including a built-in microwave sensor and timer dimming, ensure energy efficiency. 360° adjustable connection and ±40° tilt angle adjustment. Quick and easy installation with a plug-and-play system. Applications: Rural roads, urban roads, walkways, parking lots, courtyards, plazas, and parks. NB! The product is available for pre-order, with a minimum order quantity of 10 units. Battery warranty 3 years, other parts of the light 5 years.

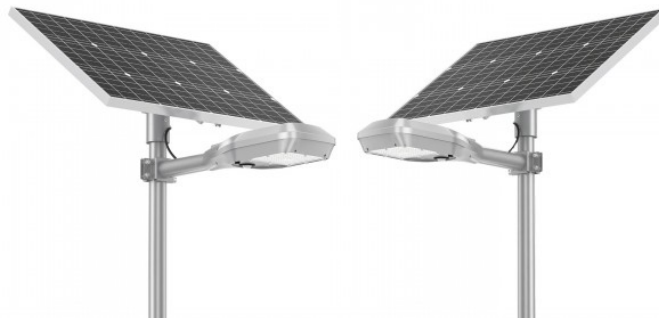

## Street light Street Master gray 230V 35W 5950lm 155x80° IP66 DALI 740

**Product code 17782 DALI dimmable**

Supply voltage 230V  
 Power factor 0.98  
 Dimmable DALI  
 Output 35W  
 Maximum output 35W/1m  
 Luminous flux 5950lumens  
 Luminaire's efficiency lm79 170W  
 Correlated colour temperature pure white 4000K  
 Lens angle 155x80  
 Cri 70  
 Protection class IP66  
 Lifespan 80000h  
 Height 102.0mm  
 Width 209.0mm  
 Length 507.0mm  
 Weight 3.3 kg  
 In package 1pc  
 Casing colour gray  
 Casing material aluminium  
 Polishing matt  
 No. of switches 30000pcs  
 Impact resistance IK09  
 Work environment outdoor use  
 Operation temperature -30° - +45°C  
 Certificates CE, ENEC  
 Warranty 5 years

