

Carrier for street light ø60mm tube

Product code 14456

Price 26,25+VAT

Installation opening diameter 60mm



LED street light PROLUMEN Poseidon G2 gray 230V 24W 3600lm CRI80 60x140° IP66 3000K warm white

Product code 16302

Brand [PROLUMEN](#)

Supply voltage 230V

Output 24W

Luminous flux 3600lumens

Luminaire's efficiency 150W

Correlated colour temperature (cct)

warm white 3000K

Lens angle 60x140

Source of light [CREE LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP66

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 100.0mm

Width 200.0mm

Length 570.0mm

Installation opening diameter 60mm

Casing colour gray

Casing material aluminum

Polishing matt

Power supply [MEAN WELL](#)

Impact resistance IK08

Work environment outdoor use

Operation temperature -40°C - +70°C

Certificates CE, ENEC

Warranty 5 years



LED street light PROLUMEN Poseidon gray 230V 24W 3600lm CRI80 150x150° IP66 3000K warm white

Product code 16250

Brand [PROLUMEN](#)
Supply voltage 230V
Output 24W
Luminous flux 3600lumens
Luminaire's efficiency 150W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 150x150
Source of light [CREE LED](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf L90B10 @25°C 50.000h
Height 100.0mm
Width 200.0mm
Length 570.0mm
Installation opening diameter 60mm
Casing colour gray
Casing material aluminum
Polishing matt
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40°C - +70°C
Certificates CE, ENEC
Warranty 5 years



LED street light PROLUMEN Poseidon gray 230V 40W 6400lm CRI80 150x150° IP66 3000K warm white

Product code 16249

Brand [PROLUMEN](#)
Supply voltage 230V
Output 40W
Luminous flux 6400lumens
Luminaire's efficiency 160W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 150x150
Source of light [CREE LED](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf L90B10 @25°C 50.000h
Height 100.0mm
Width 235.0mm
Length 610.0mm
Installation opening diameter 60mm
Casing colour gray
Casing material aluminum
Polishing matt
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40°C - +70°C
Certificates CE, ENEC
Warranty 5 years



LED street light PROLUMEN Poseidon gray 230V 40W 6400lm CRI80 65x145° IP66 3000K warm white

Product code 16226

Brand [PROLUMEN](#)
Supply voltage 230V
Output 40W
Luminous flux 6400lumens
Luminaire's efficiency 160W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 65x145
Source of light [CREE LED](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf L90B10 @25°C 50.000h
Height 109.0mm
Width 200.0mm
Length 568.0mm
Installation opening diameter 60mm
Weight 3500g
Package weight 4570g
In package 1pc
Casing colour gray
Casing material aluminum
Polishing matt
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40°C - +70°C
Certificates CE, ENEC
Warranty 5 years



LED street light PROLUMEN Slim silvery 230V 120W 14400lm CRI80 70x140° IP66 4000K pure white

Product code 14317

Price 118,36+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 120W

Luminous flux 14400lumens

Luminaire's efficiency 120W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 70x140

Source of light [LUMILEDS](#)

Cri 80

Protection class IP66

Lifespan 50000h

Installation opening diameter 60mm

Weight 2100g

In package 1pc

Casing colour silvery

Casing material aluminum

Polishing matt


Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40° -+50°C

Certificates CE, RoHS, ENEC

Warranty 5 years

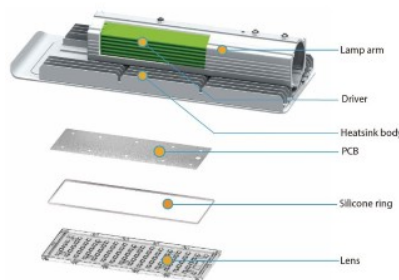

LED street light PROLUMEN Slim silvery 230V 150W 18000lm CRI80 70x140° IP66 4000K pure white

Product code 14326

Price 195,20+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 150W

Luminous flux 18000lumens

Luminaire's efficiency 120W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 70x140

Source of light [LUMILEDS](#)

Cri 80

Protection class IP66

Lifespan 50000h

Installation opening diameter 60mm

Weight 2100g

In package 1pc

Casing colour silvery

Casing material aluminum

Polishing matt


Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40° -+50°C

Certificates CE, RoHS, ENEC

Warranty 5 years

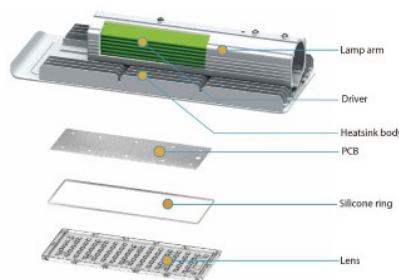

LED street light PROLUMEN Slim silvery 230V 40W 4800lm CRI80 70x140° IP66 4000K pure white

Product code 15837

Price 91,46+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 40W

Luminous flux 4800lumens

Luminaire's efficiency 120W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 70x140

Source of light [LUMILEDS](#)

Cri 80

Protection class IP66

Lifespan 50000h

Installation opening diameter 60mm

Weight 2100g

In package 1pc

Casing colour silvery

Casing material aluminum

Polishing matt


Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40° -+50°C

Certificates CE, RoHS, ENEC

Warranty 5 years

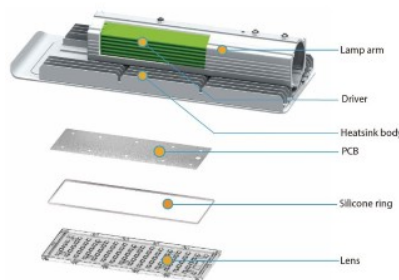

LED street light PROLUMEN Slim silvery 230V 60W 7200lm CRI80 70x140° IP66 4000K pure white

Product code 13957

Price 114,32+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 60W

Luminous flux 7200lumens

Luminaire's efficiency 120W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 70x140

Source of light [LUMILEDS](#)

Cri 80

Protection class IP66

Lifespan 50000h

Installation opening diameter 60mm

Weight 2100g

In package 1pc

Casing colour silvery

Casing material aluminum

Polishing matt


Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40° -+50°C

Certificates CE, RoHS, ENEC

Warranty 5 years

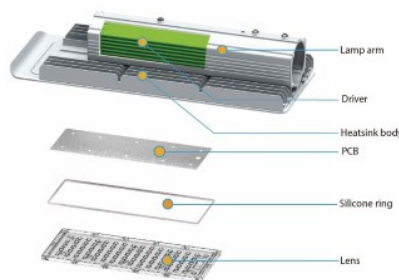

LED street light PROLUMEN Slim silvery 230V 90W 10800lm CRI80 70x140° IP66 4000K pure white

Product code 14327

Price 150,79+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 90W

Luminous flux 10800lumens

Luminaire's efficiency 120W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 70x140

Source of light [LUMILEDS](#)

Cri 80

Protection class IP66

Lifespan 50000h

Installation opening diameter 60mm

Weight 2100g

In package 1pc

Casing colour silvery

Casing material aluminum

Polishing matt


Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40° -+50°C

Certificates CE, RoHS, ENEC

Warranty 5 years

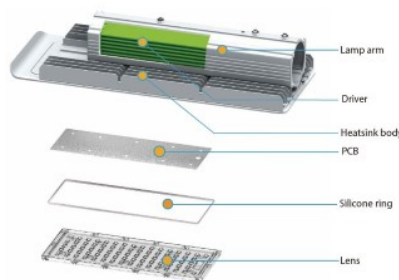

LED street light PROLUMEN T68 (0-10V DIM) + motion sensor 230V 150W 19500lm CRI80 140x70° IP66 4000K pure white

Product code 15287 0-10V dimmable

Price 312,88+VAT

Promotional price 199,00+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable 0-10V

Output 150W

Luminous flux 19500lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 140x70

Cri 80

Ugr 27

Sdcm - macadam ellipses 5

Protection class IP66

Lifespan 100000h

Llmf L80B10 @25°C 50.000h

Weight 5000g

Casing material aluminum

Work environment outdoor use

Certificates CE, RoHS, ENEC

Warranty 5 years



LED park light PROLUMEN Ulite 100-277V 30W 4200lm CRI70 90° IP65 4000K pure white

Product code 16215

Brand [PROLUMEN](#)
Supply voltage 100-277V
Output 30W
Luminous flux 4200lumens
Luminaire's efficiency 140W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 90
Source of light [CREE LED](#)
Cri 70
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf L90B10 @25°C 50.000h
Height 542.0mm
Diameter 452.0mm
Weight 5100g
Package weight 6200g
Casing material Die-cast aluminum +
Tempered Glass
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment outdoor use
Operation temperature -40~50°C
Certificates CE
Warranty 5 years



LED street light Slim Adaptor 60

Product code 14528

Price 23,94+VAT

Installation opening diameter 60mm

