

Track light Maytoni Flarity brass 24V 12W 400lm 120° IP20 927

Product code 20543

Brand Maytoni
 Supply voltage 24V
 Output 12W
 Luminous flux 400lumens
 Luminaire's efficiency lm79 33W
 Correlated colour temperature warm white 2700K
 Lens angle 120
 Cri 90
 Protection class IP20
 Height 49.0mm
 Width 232.0mm
 Length 24.0mm
 Diameter 29.0mm
 Weight 300 g
 Package weight 370 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)




Track light Maytoni Flarity brass 24V 3W 60lm 120° IP20 927

Product code 20544

Brand Maytoni
 Supply voltage 24V
 Output 3W
 Luminous flux 60lumens
 Luminaire's efficiency lm79 20W
 Correlated colour temperature warm white 2700K
 Lens angle 120
 Cri 90
 Protection class IP20
 Height 112.0mm
 Diameter 90.0mm
 Weight 150 g
 Package weight 320 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes

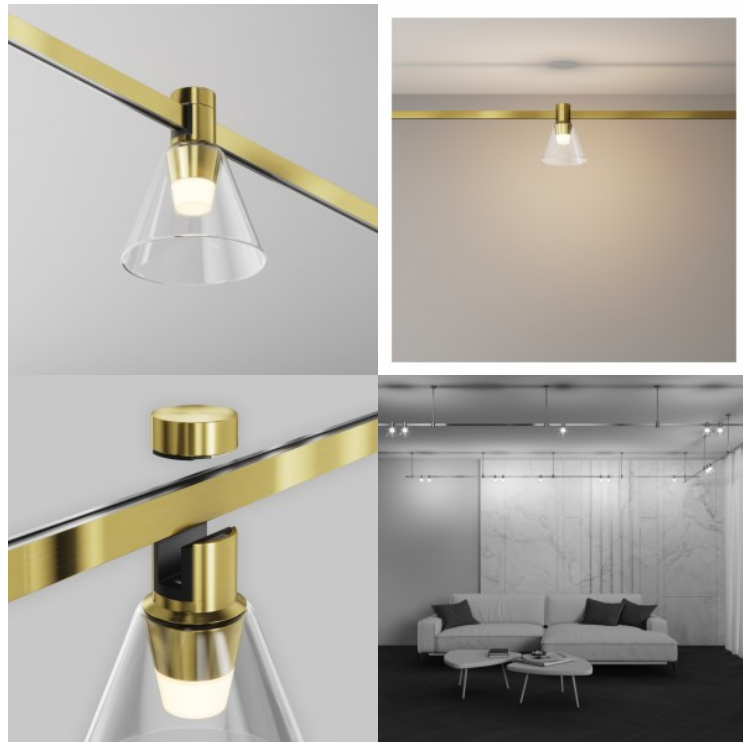

Track light Maytoni Flarity brass 24V 3W 60lm 120° IP20 927

Product code 20545

Brand Maytoni
 Supply voltage 24V
 Output 3W
 Luminous flux 60lumens
 Luminaire's efficiency lm79 20W
 Correlated colour temperature warm white 2700K
 Lens angle 120
 Cri 90
 Protection class IP20
 Height 115.0mm
 Diameter 85.0mm
 Weight 160 g
 Package weight 350 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)



Track light Maytoni Flarity Focus brass 24V 5W 150lm 60° IP20 927

Product code 20547

Brand Maytoni
 Supply voltage 24V
 Output 5W
 Luminous flux 150lumens
 Luminaire's efficiency lm79 30W
 Correlated colour temperature warm white 2700K
 Lens angle 60
 Cri 90
 Protection class IP20
 Height 165.0mm
 Diameter 35.0mm
 Weight 220 g
 Package weight 260 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)




Track light Maytoni Flarity Focus brass 24V 5W 200lm 60° IP20 927

Product code 20546

Brand Maytoni
 Supply voltage 24V
 Output 5W
 Luminous flux 200lumens
 Luminaire's efficiency lm79 40W
 Correlated colour temperature warm white 2700K
 Lens angle 60
 Cri 90
 Protection class IP20
 Height 113.0mm
 Diameter 35.0mm
 Weight 180 g
 Package weight 210 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

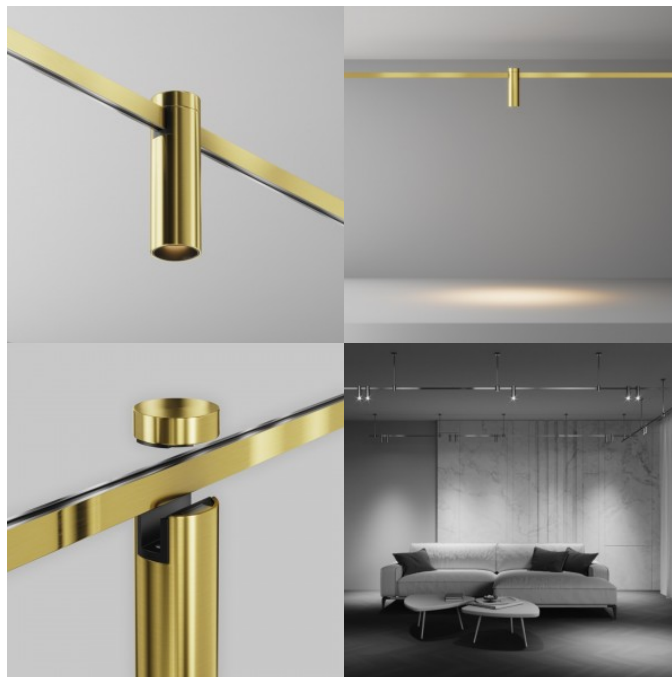

Track light Maytoni Flarity Keila brass 24V 5W 250lm 120° IP20 927

Product code 20549

Brand Maytoni
 Supply voltage 24V
 Output 5W
 Luminous flux 250lumens
 Luminaire's efficiency lm79 50W
 Correlated colour temperature warm white 2700K
 Lens angle 120
 Cri 90
 Protection class IP20
 Height 115.0mm
 Diameter 70.0mm
 Weight 200 g
 Package weight 280 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)



Track light Maytoni Flarity Luna brass 24V 5W 250lm 120° IP20 927

Product code 20550

Brand Maytoni
Supply voltage 24V
Output 5W
Luminous flux 250lumens
Luminaire's efficiency lm79 50W
Correlated colour temperature warm
white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 108.0mm
Diameter 75.0mm
Weight 290 g
Package weight 370 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)



Track light Maytoni Flarity Plato brass 24V 10W 400lm 120° IP20 927

Product code 20552

Brand Maytoni
 Supply voltage 24V
 Output 10W
 Luminous flux 400lumens
 Luminaire's efficiency lm79 40W
 Correlated colour temperature warm white 2700K
 Lens angle 120
 Cri 90
 Protection class IP20
 Height 60.0mm
 Diameter 168.0mm
 Weight 390 g
 Package weight 520 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes)



Track light Maytoni Flarity Plato brass 24V 5W 250lm 120° IP20 927

Product code 20551

Brand Maytoni
 Supply voltage 24V
 Output 5W
 Luminous flux 250lumens
 Luminaire's efficiency lm79 50W
 Correlated colour temperature warm white 2700K
 Lens angle 120
 Cri 90
 Protection class IP20
 Height 60.0mm
 Diameter 120.0mm
 Weight 260 g
 Package weight 350 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)



Track light Maytoni Flarity Points brass 24V 12W 400lm 40° IP20 927

Product code 20553

Brand Maytoni
 Supply voltage 24V
 Output 12W
 Luminous flux 400lumens
 Luminaire's efficiency lm79 33W
 Correlated colour temperature warm white 2700K
 Lens angle 40
 Cri 90
 Protection class IP20
 Height 49.0mm
 Width 232.0mm
 Length 24.0mm
 Weight 320 g
 Package weight 380 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)



Track light Maytoni Flarity Skim brass 24V 3W 100lm 60° IP20 927

Product code 20554

Brand Maytoni
 Supply voltage 24V
 Output 3W
 Luminous flux 100lumens
 Luminaire's efficiency lm79 33W
 Correlated colour temperature warm white 2700K
 Lens angle 60
 Cri 90
 Protection class IP20
 Height 90.0mm
 Diameter 290.0mm
 Weight 110 g
 Package weight 170 g
 In package 1pc
 Casing colour brass
 Casing material aluminium
 Work environment indoor use
 Warranty 3 years

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)



