Track light Maytoni Flarity black 24V 12W 460lm 110° IP20 930

Product code 23872

Brand Maytoni
Supply voltage 24V
Output 12W
Luminous flux 460lumens
Luminaire’s efficiency 38W
Correlated colour temperature warm white 3000K
Lens angle 110
Cri 90
Protection class IP20
Height 49.0mm
Width 232.0mm
Length 24.0mm
Diameter 29.0mm
Weight 300 g
Package weight 370 g
In package 1pc
Casing colour black
Casing material aluminium
Work environment indoor use
Warranty 3 years



Track light Maytoni Flarity brass 24V 12W 400lm 120° IP20 927

Product code 20543

Brand Maytoni
Supply voltage 24V
Output 12W
Luminous flux 400lumens
Luminaire’s efficiency 33W
Correlated colour temperature warm white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 49.0mm
Width 232.0mm
Length 24.0mm
Diameter 29.0mm
Weight 300 g
Package weight 370 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years





1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity brass 24V 3W 60lm 120° IP20 927

Product code 20544

Brand Maytoni
Supply voltage 24V
Output 3W
Luminous flux 60lumens
Luminaire’s efficiency 20W
Correlated colour temperature warm white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 112.0mm
Diameter 90.0mm
Weight 150 g
Package weight 320 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years

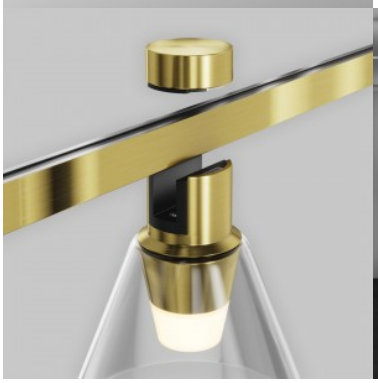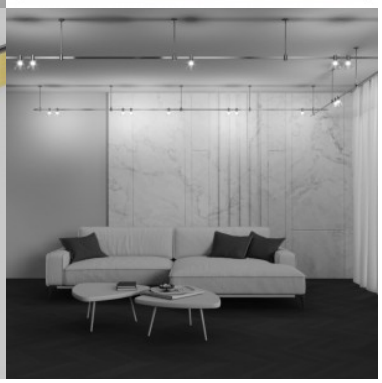

1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes

Track light Maytoni Flarity brass 24V 3W 60lm 120° IP20 927

Product code 20545

Brand Maytoni
Supply voltage 24V
Output 3W
Luminous flux 60lumens
Luminaire’s efficiency 20W
Correlated colour temperature warm white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 115.0mm
Diameter 85.0mm
Weight 160 g
Package weight 350 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years



1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity Focus black 24V 5W 200lm 30° IP20 930

Product code 23873

Brand Maytoni
Supply voltage 24V
Output 5W
Maximum output 5W/1m
Luminous flux 200lumens
Luminaire’s efficiency 40W
Correlated colour temperature warm white 3000K
Lens angle 30
Cri 90
Protection class IP20
Height 158.0mm
Diameter 35.0mm
Weight 220 g
Package weight 260 g
In package 1pc
Casing colour black
Casing material aluminium
Work environment indoor use
Warranty 5 years



Track light Maytoni Flarity Focus black 24V 5W 200lm 30° IP20 930

Product code 23875

Brand Maytoni
Supply voltage 24V
Output 5W
Luminous flux 200lumens
Luminaire’s efficiency 40W
Correlated colour temperature warm white 3000K
Lens angle 30
Cri 90
Protection class IP20
Lifespan 50000h
Height 113.0mm
Diameter 35.0mm
Weight 180 g
Package weight 210 g
In package 1pc
Casing colour black
Casing material aluminium
Work environment indoor use
Warranty 5 years



Track light Maytoni Flarity Focus brass 24V 5W 150lm 60° IP20 927

Product code 20547

Brand Maytoni
Supply voltage 24V
Output 5W
Luminous flux 150lumens
Luminaire’s efficiency 30W
Correlated colour temperature warm white 2700K
Lens angle 60
Cri 90
Protection class IP20
Height 165.0mm
Diameter 35.0mm
Weight 220 g
Package weight 260 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years



1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity Focus brass 24V 5W 200lm 60° IP20 927

Product code 20546

Brand Maytoni
Supply voltage 24V
Output 5W
Luminous flux 200lumens
Luminaire’s efficiency 40W
Correlated colour temperature warm white 2700K
Lens angle 60
Cri 90
Protection class IP20
Height 113.0mm
Diameter 35.0mm
Weight 180 g
Package weight 210 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years



1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity Keila brass 24V 5W 250lm 120° IP20 927

Product code 20549

Brand Maytoni
Supply voltage 24V
Output 5W
Luminous flux 250lumens
Luminaire’s efficiency 50W
Correlated colour temperature warm white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 115.0mm
Diameter 70.0mm
Weight 200 g
Package weight 280 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years



1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity Luna brass 24V 5W 250lm 120° IP20 927

Product code 20550

Brand Maytoni
Supply voltage 24V
Output 5W
Luminous flux 250lumens
Luminaire’s efficiency 50W
Correlated colour temperature warm white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 108.0mm
Diameter 75.0mm
Weight 290 g
Package weight 370 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years



1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity Plato brass 24V 10W 400lm 120° IP20 927

Product code 20552

Brand Maytoni
Supply voltage 24V
Output 10W
Luminous flux 400lumens
Luminaire’s efficiency 40W
Correlated colour temperature warm white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 60.0mm
Diameter 168.0mm
Weight 390 g
Package weight 520 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years



1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes

Track light Maytoni Flarity Plato brass 24V 5W 250lm 120° IP20 927

Product code 20551

Brand Maytoni
Supply voltage 24V
Output 5W
Luminous flux 250lumens
Luminaire’s efficiency 50W
Correlated colour temperature warm white 2700K
Lens angle 120
Cri 90
Protection class IP20
Height 60.0mm
Diameter 120.0mm
Weight 260 g
Package weight 350 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years





1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity Points brass 24V 12W 400lm 40° IP20 927

Product code 20553

Brand Maytoni
Supply voltage 24V
Output 12W
Luminous flux 400lumens
Luminaire’s efficiency 33W
Correlated colour temperature warm white 2700K
Lens angle 40
Cri 90
Protection class IP20
Height 49.0mm
Width 232.0mm
Length 24.0mm
Weight 320 g
Package weight 380 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years

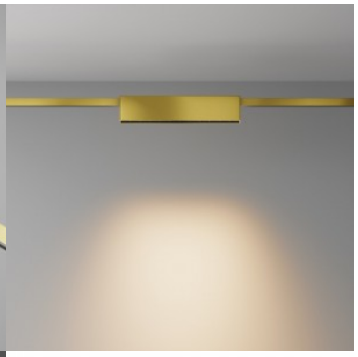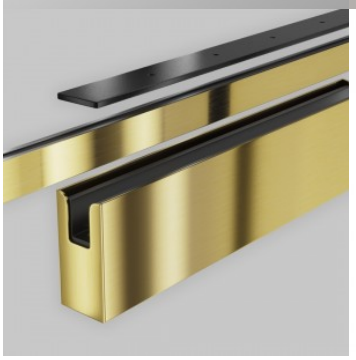
1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

Track light Maytoni Flarity Skim brass 24V 3W 100lm 60° IP20 927

Product code 20554

Brand Maytoni
Supply voltage 24V
Output 3W
Luminous flux 100lumens
Luminaire’s efficiency 33W
Correlated colour temperature warm white 2700K
Lens angle 60
Cri 90
Protection class IP20
Height 90.0mm
Diameter 290.0mm
Weight 110 g
Package weight 170 g
In package 1pc
Casing colour brass
Casing material aluminium
Work environment indoor use
Warranty 3 years



1. DESCRIPTION AND INTENDED USE OF THE DEVICE The Flarity Magnetic Modular Track System serves as the foundation for constructing track lighting systems. It is designed to mount and supply power to Flarity track luminaires in a DC network with a nominal voltage of 24V. The system supports both wall and ceiling mounting options and is compatible with materials that are normally flammable. Mounting can be achieved using either rigid fixtures or cable hanger. Track is available in the following color: Brass with electroplated finish. Comes in three configurations: Straight segments: 1 meter and 2 meters in length. Circular tracks: 650 mm and 800 mm in diameter. Semi-circular cross-section tracks: 650 mm and 800 mm in diameter. The segments can be cut at any point using specialized equipment, allowing for the creation of various configurations, ranging from simple to multi-level light installations. The Flarity system supports group dimming functions when used with appropriate power supplies that operate on the DALI protocol. Additionally, it supports dimming methods such as 0/1-10V, Triac, and PWM (using dimmers, controllers, and remotes for LED strips)

© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee