Industrial light ECO TP-12 230V 36W 5760lm 120° IP66 840

Product code 17459

Brand ECO
Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 5760lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light PHILIPS LED
Cri 80
Ugr 25
Sdcm - macadam ellipses 3
Protection class IP66
Lifespan 50000h
Height 70.0mm
Width 75.0mm
Length 1207.0mm
In package 1pc
In box 6pcs
Casing material polycarbonate
Polishing matt
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20 - +45°C
Certificates ENEC, CB, CE, RoHS
Warranty 3 years



An industrial luminaire with adjustable power, suitable for both warehouse and car park. In industrial spaces, there is a higher risk of light fixtures getting damaged. To prevent this, this light fixture has an IK10 protection rating. This means that it is difficult to cause mechanical damage to the fixture. A light fixture with an IK10 rating can withstand hammer impacts of up to 20 joules. The user can choose between power settings of which also determines the number of lumens. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Farm 2 230V 40W 5400lm IP67 840

Product code 14658

Supply voltage 230V
Output 40W
Maximum output 40W/1m
Luminous flux 5400lumens
Luminaire’s efficiency 135W
Correlated colour temperature pure white 4000K
Cri 80
Protection class IP67
Lifespan 100000h
Height 115.0mm
Width 75.0mm
Length 1210.0mm
Weight 1.7 kg
Package weight 1.85 kg
In package 1pc
Impact resistance IK10



Industrial light Hermetic 1200 230V 21-40W 7200lm 120° IP65 840

Product code 22339

Supply voltage 230V
Output 21-40W
Maximum output 40W/1m
Rated current 260mA
Luminous flux 7200lumens
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 50000h
Height 72.0mm
Width 79.0mm
Length 1200.0mm
Weight 1.63 kg
In box 9pcs
Casing material plastic
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light NEXUS PRO LIGHT NEXFORCE N 2 1500 230V 70 / 60 / 50 / 40 WW 12000lm 120° IP66 840

Product code 23628

Brand NEXUS PRO LIGHT
Supply voltage 230V
Output 70 / 60 / 50 / 40 WW
Maximum output 70W/1m
Luminous flux 12000lumens
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP66
Lifespan 50000h
Height 80.0mm
Width 85.0mm
Length 1500.0mm
Weight 1.63 kg
In box 9pcs
Casing material plastic
No. of switches 30000pcs
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light NEXUS PRO LIGHT NEXFORCE N 2 1500 230V 70W 12000lm 120° IP66 840

Product code 18129

Brand NEXUS PRO LIGHT
Supply voltage 230V
Output 70W
Maximum output 70W/1m
Luminous flux 12000lumens
Luminaire’s efficiency 171W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP66
Lifespan 50000h
Height 80.0mm
Width 85.0mm
Length 1500.0mm
Weight 1.63 kg
In box 8pcs
Casing material plastic
No. of switches 30000pcs
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light NEXUS PRO LIGHT NEXFORCE1 1200 230V 36W 6300lm 120° IP66 840

Product code 17934

Brand NEXUS PRO LIGHT
Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 6300lumens
Luminaire’s efficiency 175W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP66
Lifespan 50000h
Height 80.0mm
Width 85.0mm
Length 1200.0mm
Weight 1.29 kg
In box 9pcs
Casing material plastic
No. of switches 30000pcs
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light NEXUS PRO LIGHT NEXFORCE1 1500 230V 52W 9000lm 120° IP66 840

Product code 17898

Brand NEXUS PRO LIGHT
Supply voltage 230V
Output 52W
Maximum output 52W/1m
Luminous flux 9000lumens
Luminaire’s efficiency 173W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP66
Lifespan 50000h
Height 80.0mm
Width 85.0mm
Length 1500.0mm
Weight 1.63 kg
In box 9pcs
Casing material plastic
No. of switches 30000pcs
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light NEXUS PRO LIGHT NEXFORCE1 600 230V 20W 3000lm 120° IP65 840

Product code 16982

Brand NEXUS PRO LIGHT
Supply voltage 230V
Output 20W
Maximum output 20W/1m
Luminous flux 3000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 50000h
Height 76.0mm
Width 95.0mm
Length 600.0mm
Weight 780 g
In box 8pcs
Casing material plastic
No. of switches 30000pcs
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light NEXUS PRO LIGHT NEXFORCE1 600 230V 20W 3500lm 120° IP65 840

Product code 23279

Brand NEXUS PRO LIGHT
Supply voltage 230V
Output 20W
Maximum output 20W/1m
Luminous flux 3500lumens
Luminaire’s efficiency 175W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 50000h
Height 76.0mm
Width 95.0mm
Length 600.0mm
Weight 780 g
In box 8pcs
Casing material plastic
No. of switches 30000pcs
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light Prolumen DB236-1200 white 230V 15,25,30W

4300lm CRI80 110° IP66 3000K, 4000K, 5700K 3CCT

Product code 23914

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 15,25,30W
Maximum output 30W/1m
Luminous flux 4300lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 110
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 45.0mm
Width 73.8mm
Length 1297.0mm
Weight 1 g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply PHILIPS
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years





LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Warehouse light Prolumen Harrow 1500 white 230V 25-75W 12000lm 90° IP65 DALI 840

Product code 17554 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 25-75W
Maximum output 75W/1m
Luminous flux 12000lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light PHILIPS LED
Cri 80
Ugr 25
Sdcm - macadam ellipses 5
Protection class IP65
Lifespan 54000h
Llmf tm21 L90B50 @25°C 50.000h
Height 80.0mm
Width 76.0mm
Length 1540.0mm
In package 1pc
In box 9pcs
Casing colour white
Casing material aluminium
Power supply ENEC certified
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20° - +45°C
Certificates TUV CE, CB, RoHS
Warranty 5 years



Harrow - an innovative industrial and warehouse luminaire that meets a wide range of expectations, boasting an unusually long lifespan and high quality. The Dreamboat luminaire meets various demands: 1. It can be installed either surface-mounted or suspended. 2. DALI dimming technology allows adjusting light intensity according to needs. 3. Power can be changed with a button press, making it possible to install the luminaire at different heights. The luminaire has end caps at both ends, making wiring and maintenance exceptionally easy. Additionally, maintenance costs are lower than usual because individual components of the luminaire can be replaced separately, eliminating the need to replace the entire luminaire in case of a malfunction. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen Hemera 1200 white 230V 200W 32000lm 30x90° IP66 0-10V 840

Product code 17823 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 30x90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 59.0mm
Width 105.0mm
Length 1207.0mm
In package 1pc
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +65°C
Certificates CE, RoHS, D
Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Industrial light Prolumen Hemera 1200 white 230V 200W 32000lm 30x90° IP66 DALI 840

Product code 19323 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 30x90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 59.0mm
Width 105.0mm
Length 1207.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium
Polishing matt
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +65°C
Certificates CE, RoHS, D
Warranty 5 years




A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Industrial light Prolumen Hemera 230V 100W 16000lm 30x90° IP65 No dim 850

Product code 18936

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 30x90
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 79.0mm
Width 105.4mm
Length 592.0mm
Power supply SOSEN
Warranty 5 years

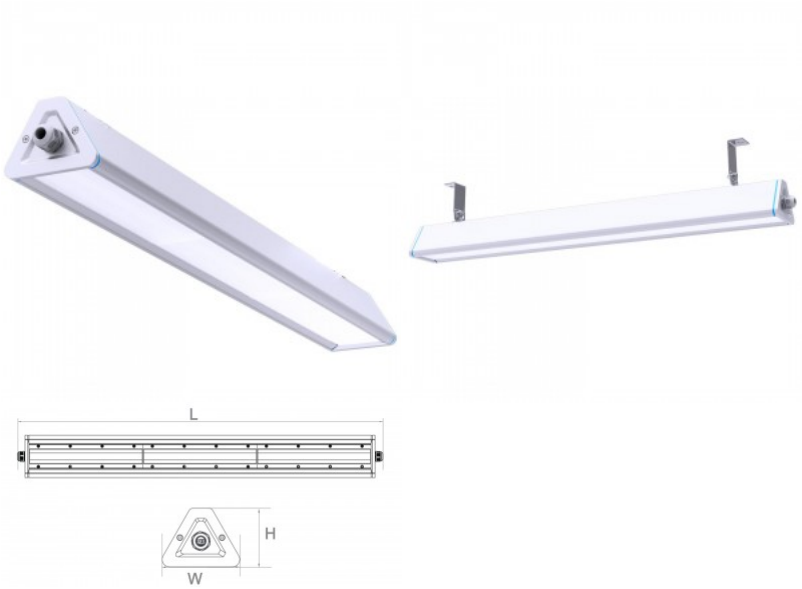

A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Industrial light Prolumen Hemera 230V 150W 24000lm 30x90° No dim 850

Product code 18937

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 150W
Maximum output 150W/1m
Luminous flux 24000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 30x90
Cri 80
Sdcm - macadam ellipses 6
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 59.0mm
Width 105.0mm
Length 918.0mm
Power supply SOSEN
Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Industrial light Prolumen Hemera 230V 200W 32000lm 30x90° No dim 850

Product code 18938

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 30x90
Cri 80
Sdcm - macadam ellipses 6
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 59.0mm
Width 105.0mm
Length 1207.0mm
Power supply SOSEN
Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Industrial light Prolumen Hemera 600 white 230V 100W 16000lm 30x90° IP66 0-10V 840

Product code 17822 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 30x90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 79.0mm
Width 105.4mm
Length 592.0mm
In package 1pc
In box 4pcs
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40° - +65°C
Certificates CE, RoHS, D
Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Industrial light Prolumen Hemera 900 white 230V 150W 24000lm 30x90° IP66 0-10V 840

Product code 17821 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 150W
Maximum output 150W/1m
Luminous flux 24000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 30x90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 59.0mm
Width 105.0mm
Length 918.0mm
In package 1pc
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +65°C
Certificates CE, RoHS, D
Warranty 5 years




A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Industrial light Prolumen Padel 2000 DALI aluminum 230V 40W 7600lm IP65 DALI 850

Product code 23513 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 40W
Maximum output 40W/1m
Luminous flux 7600lumens
Luminaire’s efficiency 190W
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP65
Lifespan 50000h
Llmf tm21 L70B10 @25°C 100.000h
Height 35.0mm
Width 49.0mm
Length 1989.0mm
Casing colour aluminum
Casing material aluminium
Polishing matt
Power supply INVENTRONICS
Impact resistance IK10
Work environment indoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years

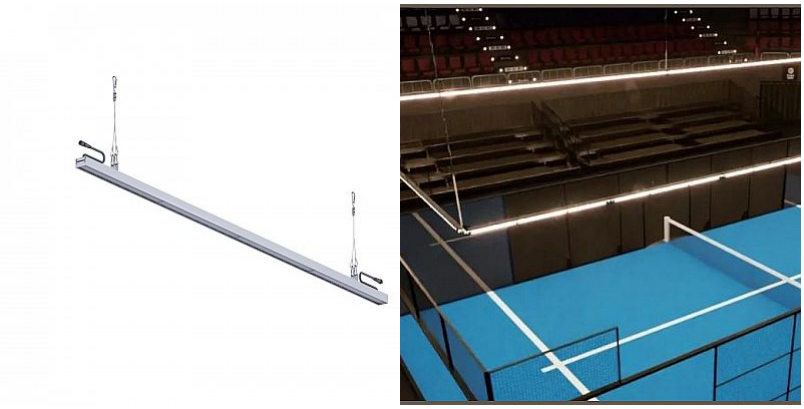

Industrial light Prolumen Parkade white 230V 30W 4000lm 120° IP66 840

Product code 22858

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 4000lumens
Luminaire’s efficiency 133W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 69.0mm
Width 94.0mm
Length 600.0mm
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20° +50°C
Certificates CE, D, F
Warranty 5 years





LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen Parkade white 230V 30W 4000lm 120° IP66 DALI 840

Product code 22861 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 30W
Maximum output 30W/1m
Luminous flux 4000lumens
Luminaire’s efficiency 133W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 69.0mm
Width 94.0mm
Length 600.0mm
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20° +50°C
Certificates CE, D, F
Warranty 5 years






LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen QUATTRO 1200 gray 230V 40W 6400lm 120° IP66 840

Product code 17638

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 40W
Maximum output 40W/1m
Luminous flux 6400lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Protection class IP66
Lifespan 50000h
Height 102.0mm
Width 122.0mm
Length 1200.0mm
In package 1pc
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor / outdoor use
Certificates CE, ENEC, SAA
Warranty 5 years

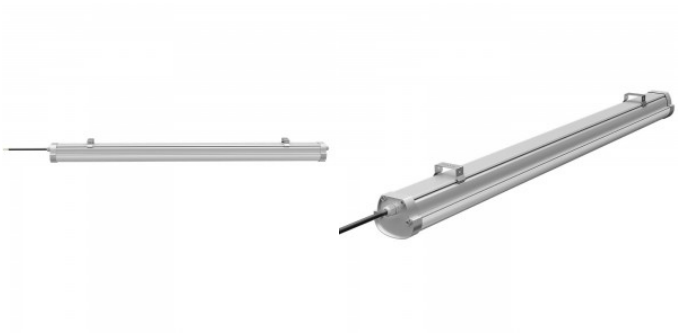


PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen QUATTRO 1200 gray 230V 60W 9600lm 120° IP66 840

Product code 17019

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 60W
Maximum output 60W/1m
Luminous flux 9600lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 102.0mm
Width 122.0mm
Length 1200.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor / outdoor use
Certificates CE, D, F
Warranty 5 years

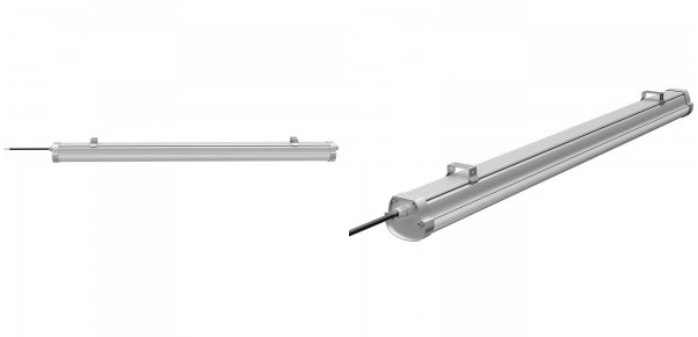


PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen QUATTRO 1200 gray 230V 80W 12800lm 120° IP66 840

Product code 17020

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 80W
Maximum output 80W/1m
Luminous flux 12800lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 102.0mm
Width 122.0mm
Length 1200.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor / outdoor use
Certificates CE, D, F
Warranty 5 years

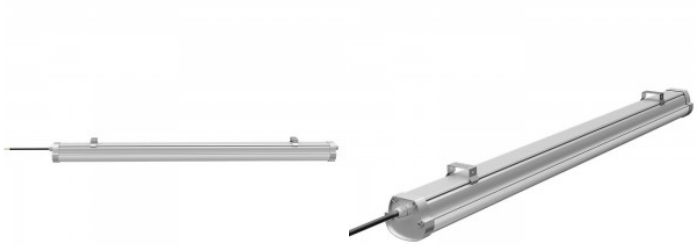


PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen QUATTRO 1500 gray 230V 150W 24000lm 120° IP66 840

Product code 17018

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 150W
Maximum output 150W/1m
Luminous flux 24000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 102.0mm
Width 122.0mm
Length 1500.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Power supply SOSEN
Impact resistance IK10
Work environment indoor / outdoor use
Certificates CE, D, F
Warranty 5 years

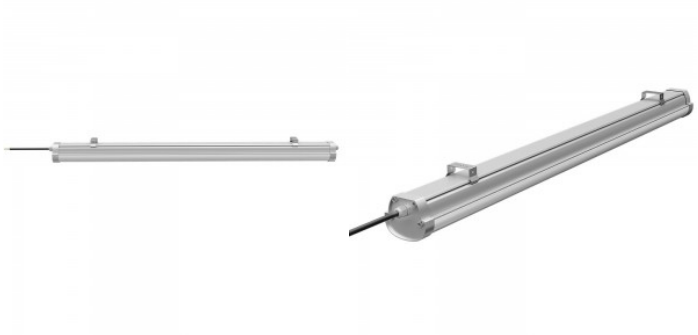


PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen QUATTRO 600 gray 230V 30W 4800lm 120° IP66 840

Product code 17637

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 30W
Maximum output 30W/1m
Luminous flux 4800lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 102.0mm
Width 122.0mm
Length 600.0mm
In package 1pc
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor / outdoor use
Certificates CE, ENEC, SAA
Warranty 5 years

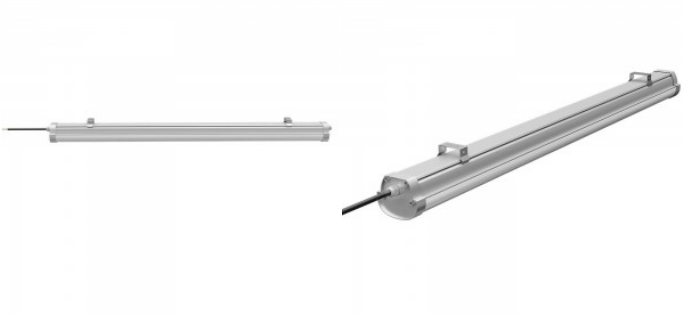

PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen Torque 230V 40W 4800lm 120° IP66 DALI 840

Product code 20634 **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 40W
Maximum output 40W/1m
Luminous flux 4800lumens
Luminaire’s efficiency 120W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP66
Lifespan 50000h
Height 61.0mm
Width 72.0mm
Length 1480.0mm
Impact resistance IK08
Work environment indoor use
Certificates CE




Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from LED house product range!

Industrial light Prolumen TP LINK 1200 white 230V 40W 5600lm 120° IP65 840

Product code 15705

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 40W
Maximum output 40W/1m
Luminous flux 5600lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1221.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply TRIDONIC
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

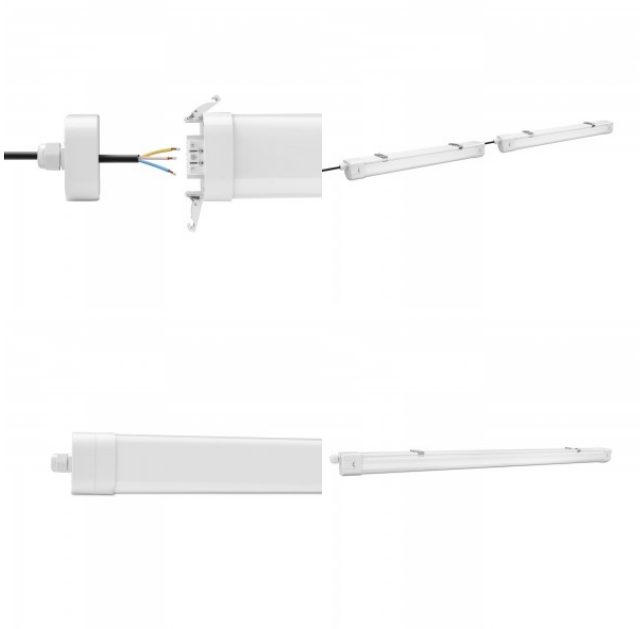


Industrial light Prolumen TP LINK 1200 white 230V 40W

5600lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

Product code 17603

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 40W
Maximum output 40W/1m
Luminous flux 5600lumens
Luminaire’s efficiency 140W
Correlated colour temperature 3CCT
3000K, 4000K, 5000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1221.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply TRIDONIC
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years

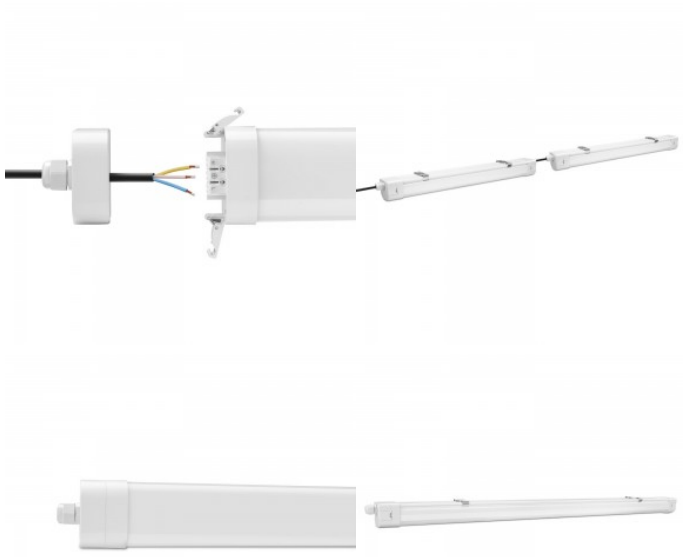

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1200 white 230V 40W 6400lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

Product code 22850

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 40W
Maximum output 40W/1m
Luminous flux 6400lumens
Luminaire’s efficiency 160W
Correlated colour temperature 3CCT
3000K, 4000K, 5000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1221.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply PHILIPS
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years





LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1200 with motion sensor white 230V 40W 5600lm 120° IP65 840

Product code 18310

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 40W
Maximum output 40W/1m
Luminous flux 5600lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1221.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years




LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1500 +MW white 230V 60W 8400lm 120° IP65 840

Product code 18348

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 60W
Maximum output 60W/1m
Luminous flux 8400lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1502.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years

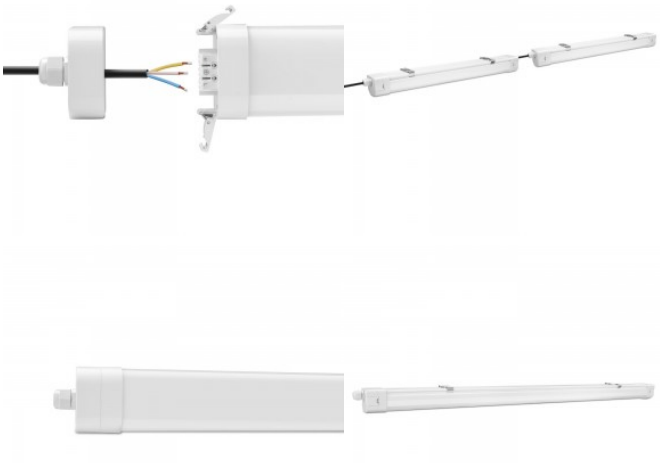

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1500 230V 45W 6300lm 120° IP65 840

Product code 18150

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 45W
Maximum output 45W/1m
Luminous flux 6300lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1502.0mm
In package 1pc
In box 6pcs
Casing material aluminium + plastic
Polishing matt
Power supply TRIDONIC
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years






LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1500 30-60W 230V 60W 8400lm 120° IP65 840

Product code 15735

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 60W
Maximum output 60W/1m
Luminous flux 8400lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1502.0mm
In package 1pc
In box 6pcs
Casing material aluminium + plastic
Polishing matt
Power supply OSRAM
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years

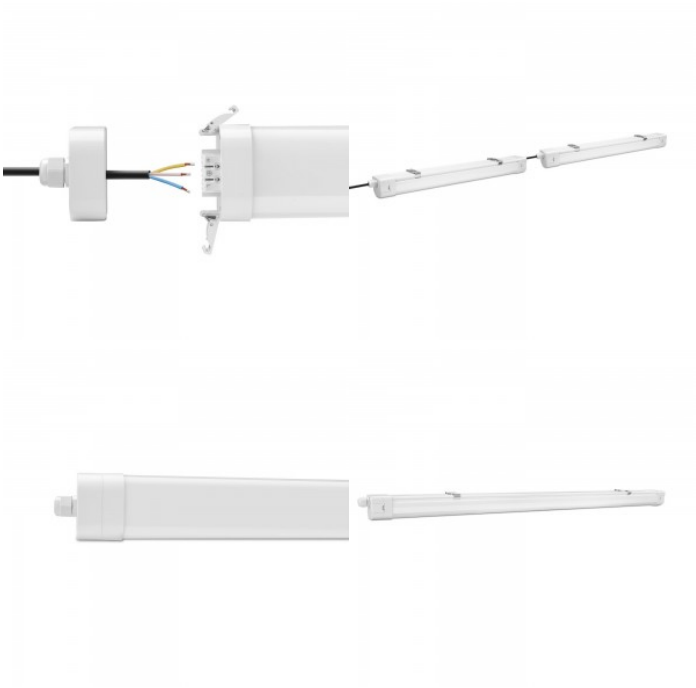

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1500 white 230V 60W 8400lm 120° IP65 840

Product code 23085

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 60W
Maximum output 60W/1m
Luminous flux 8400lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1500.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply LIFUD
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1500 white 230V 60W 8400lm 120° IP65 840

Product code 15706

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 60W
Maximum output 60W/1m
Luminous flux 8400lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1502.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply TRIDONIC
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 1500 white 230V 60W 8400lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

Product code 17602

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 60W
Maximum output 60W/1m
Luminous flux 8400lumens
Luminaire’s efficiency 140W
Correlated colour temperature 3CCT
3000K, 4000K, 5000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Width 74.0mm
Length 1502.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply TRIDONIC
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 600 white 230V 20W 2800lm 120° IP65 840

Product code 14717

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 20W
Maximum output 20W/1m
Luminous flux 2800lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 64.0mm
Width 74.0mm
Length 659.0mm
Weight 800 g
Package weight 132 g
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply OSRAM
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years




LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen TP LINK 600 white 230V 20W 2800lm 120° IP65 DALI 840

Product code 18169 **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 20W
Maximum output 20W/1m
Luminous flux 2800lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light BRIDGELUX LED
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 64.0mm
Width 74.0mm
Length 659.0mm
Weight 800 g
Package weight 132 g
Casing colour white
Casing material aluminium + plastic
Polishing matt
Power supply OSRAM
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -20° +40°C
Certificates CE, D, F
Warranty 5 years

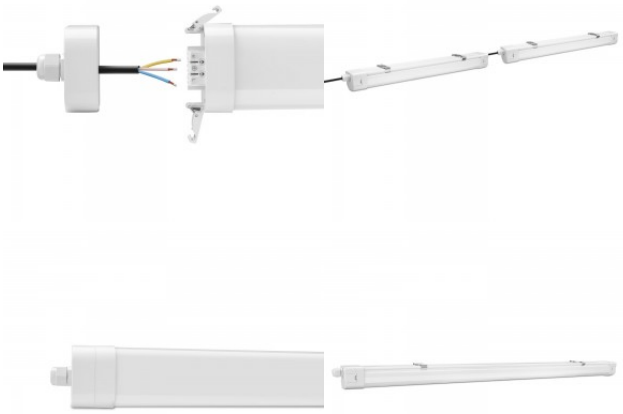

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Industrial light Prolumen Tubular 1500 230V 60W 9000lm 180° IP69 840

Product code 17604

Brand Prolumen
Supply voltage 230V
Output 60W
Maximum output 60W/1m
Luminous flux 9000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 180
Source of light BRIDGELUX LED
Cri 80
Protection class IP69
Lifespan 100000h
Llmf tm21 L80B50 @25°C 50.000h
Length 1500.0mm
Diameter 80.0mm
Weight 1.3 kg
In box 6pcs
No. of switches 30000pcs
Power supply TRIDONIC
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -10 ~ 40°C
Warranty 5 years





Durable linear LED industrial light industrial light that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.

Industrial light Tubular 1200 230V 40W 6000lm 120° IP69 DALI 840

Product code 22511 DALI dimmable

Supply voltage 230V
Dimmable DALI
Output 40W
Maximum output 40W/1m
Luminous flux 6000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP69
Lifespan 100000h
Llmf tm21 L80B50 @25°C 50.000h
Length 1200.0mm
Diameter 80.0mm
Weight 1.3 kg
In box 6pcs
No. of switches 30000pcs
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -10 ~ 40°C
Warranty 5 years





Durable linear LED industrial light industrial light that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.

Industrial light Tubular 1200 230V 40W 6000lm 180° IP69 840

Product code 17605

Supply voltage 230V
Output 40W
Maximum output 40W/1m
Luminous flux 6000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 180
Source of light BRIDGELUX LED
Cri 80
Protection class IP69
Lifespan 100000h
Llmf tm21 L80B50 @25°C 50.000h
Length 1200.0mm
Diameter 80.0mm
Weight 1.3 kg
In box 6pcs
No. of switches 30000pcs
Power supply TRIDONIC
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -10 ~ 40°C
Warranty 5 years





Durable linear LED industrial light industrial light that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.