

# Industrial light ECO TP-12 230V 36W 5760lm 120° IP66 840

## Product code 17459

Brand ECO  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 5760lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [PHILIPS LED](#)  
 Cri 80  
 Ugr 25  
 Sdcm - macadam ellipses 3  
 Protection class IP66  
 Lifespan 50000h  
 Height 70.0mm  
 Width 75.0mm  
 Length 1207.0mm  
 In package 1pc  
 In box 6pcs  
 Casing material polycarbonate  
 Polishing matt  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Operation temperature -20 - +45°C  
 Certificates ENEC, CB, CE, RoHS  
 Warranty 3 years



An industrial luminaire with adjustable power, suitable for both warehouse and car park. In industrial spaces, there is a higher risk of light fixtures getting damaged. To prevent this, this light fixture has an IK10 protection rating. This means that it is difficult to cause mechanical damage to the fixture. A light fixture with an IK10 rating can withstand hammer impacts of up to 20 joules. The user can choose between power settings of which also determines the number of lumens. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Industrial light Farm 2 230V 40W 5400lm IP67 840

### Product code 14658

Supply voltage 230V  
Output 40W  
Maximum output 40W/1m  
Luminous flux 5400lumens  
Luminaire's efficiency lm79 135W  
Correlated colour temperature pure white 4000K  
Cri 80  
Protection class IP67  
Lifespan 100000h  
Height 115.0mm  
Width 75.0mm  
Length 1210.0mm  
Weight 1.7 kg  
Package weight 1.85 kg  
In package 1pc  
Impact resistance IK10



## Industrial light Hermetic 1200 230V 21-40W 7200lm 120° IP65 840

**Product code 22339**

---

Supply voltage 230V  
Output 21-40W  
Maximum output 40W/1m  
Rated current 260mA  
Luminous flux 7200lumens  
Correlated colour temperature pure  
white 4000K  
Lens angle 120  
Cri 80  
Protection class IP65  
Lifespan 50000h  
Height 72.0mm  
Width 79.0mm  
Length 1200.0mm  
Weight 1.63 kg  
In box 9pcs  
Casing material plastic  
Impact resistance IK08  
Work environment indoor / outdoor  
use  
Operation temperature -20 - +40°C  
Certificates CE  
Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from [LED house product range!](#)

**Industrial light NEXUS PRO LIGHT NEXFORCE N 2 1500 230V  
70W 12000lm 120° IP66 840**

## Product code 18129

---

Brand [NEXUS PRO LIGHT](#)

Supply voltage 230V

Output 70W

Maximum output 70W/1m

Luminous flux 12000lumens

Luminaire's efficiency lm79 171W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP66

Lifespan 50000h

Height 80.0mm

Width 85.0mm

Length 1500.0mm

Weight 1.63 kg

In box 8pcs

Casing material plastic

No. of switches 30000pcs

Power supply [LIFUD](#)

Impact resistance IK08

Work environment indoor / outdoor use

Operation temperature -20 - +40°C

Certificates CE

Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from [LED house product range!](#)

## Industrial light NEXUS PRO LIGHT NEXFORCE1 1200 230V 36W 6300lm 120° IP66 840

**Product code 17934**

Brand [NEXUS PRO LIGHT](#)

Supply voltage 230V

Output 36W

Maximum output 36W/1m

Luminous flux 6300lumens

Luminaire's efficiency lm79 175W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP66

Lifespan 50000h

Height 80.0mm

Width 85.0mm

Length 1200.0mm

Weight 1.29 kg

In box 9pcs

Casing material plastic

No. of switches 30000pcs

Power supply [LIFUD](#)

Impact resistance IK08

Work environment indoor / outdoor use

Operation temperature -20 - +40°C

Certificates CE

Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from [LED house product range!](#)

## Industrial light NEXUS PRO LIGHT NEXFORCE1 1500 230V 52W 9000lm 120° IP66 840

**Product code 17898**

Brand [NEXUS PRO LIGHT](#)

Supply voltage 230V

Output 52W

Maximum output 52W/1m

Luminous flux 9000lumens

Luminaire's efficiency lm79 173W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP66

Lifespan 50000h

Height 80.0mm

Width 85.0mm

Length 1500.0mm

Weight 1.63 kg

In box 9pcs

Casing material plastic

No. of switches 30000pcs

Power supply [LIFUD](#)

Impact resistance IK08

Work environment indoor / outdoor use

Operation temperature -20 - +40°C

Certificates CE

Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from [LED house product range!](#)

## Industrial light NEXUS PRO LIGHT NEXFORCE1 600 230V 20W 3000lm 120° IP65 840

**Product code 16982**

Brand [NEXUS PRO LIGHT](#)

Supply voltage 230V

Output 20W

Maximum output 20W/1m

Luminous flux 3000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 50000h

Height 76.0mm

Width 95.0mm

Length 600.0mm

Weight 780 g

In box 8pcs

Casing material plastic

No. of switches 30000pcs

Power supply [LIFUD](#)

Impact resistance IK08

Work environment indoor / outdoor use

Operation temperature -20 - +40°C

Certificates CE

Warranty 5 years



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from [LED house product range!](#)

## Warehouse light Prolumen Harrow 1500 white 230V 25-75W

## 12000lm 90° IP65 DALI 840

**Product code 17554 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 25-75W  
 Maximum output 75W/1m  
 Luminous flux 12000lumens  
 Correlated colour temperature pure white 4000K  
 Lens angle 90  
 Source of light [PHILIPS LED](#)  
 Cri 80  
 Ugr 25  
 Sdcm - macadam ellipses 5  
 Protection class IP65  
 Lifespan 54000h  
 Llmf tm21 L90B50 @25°C 50.000h  
 Height 80.0mm  
 Width 76.0mm  
 Length 1540.0mm  
 In package 1pc  
 In box 9pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply ENEC certified  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Operation temperature -20° - +45°C  
 Certificates TUV CE, CB, RoHS  
 Warranty 5 years



Harrow - an innovative [industrial and warehouse luminaire](#) that meets a wide range of expectations, boasting an unusually long lifespan and high quality. The Dreamboat luminaire meets various demands: 1. It can be installed either surface-mounted or suspended. 2. DALI dimming technology allows adjusting light intensity according to needs. 3. Power can be changed with a button press, making it possible to install the luminaire at different heights. The luminaire has end caps at both ends, making wiring and maintenance exceptionally easy. Additionally, maintenance costs are lower than usual because individual components of the luminaire can be replaced separately, eliminating the need to replace the entire luminaire in case of a malfunction. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

# Industrial light Prolumen Hemera 1200 white 230V 200W 32000lm 30x90° IP66 0-10V 840

**Product code 17823 0-10V dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable 0-10V  
 Output 200W  
 Maximum output 200W/1m  
 Luminous flux 32000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 30x90  
 Source of light [PHILIPS LED](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 59.0mm  
 Width 105.0mm  
 Length 1207.0mm  
 In package 1pc  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment indoor use  
 Operation temperature -40 - +65°C  
 Certificates CE, RoHS, D  
 Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

# Industrial light Prolumen Hemera 1200 white 230V 200W 32000lm 30x90° IP66 DALI 840

**Product code 19323 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable DALI  
 Output 200W  
 Maximum output 200W/1m  
 Luminous flux 32000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 30x90  
 Source of light [PHILIPS LED](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 59.0mm  
 Width 105.0mm  
 Length 1207.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Impact resistance IK08  
 Work environment indoor use  
 Operation temperature -40 - +65°C  
 Certificates CE, RoHS, D  
 Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

## Industrial light Prolumen Hemera 230V 100W 16000lm 30x90° IP65 No dim 850

**Product code 18936 No dim  
dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable No dim  
Output 100W  
Maximum output 100W/1m  
Luminous flux 16000lumens  
Luminaire's efficiency lm79 160W  
Correlated colour temperature pure  
white 5000K  
Lens angle 30x90  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP65  
Lifespan 50000h  
Llmf tm21 L90B10 @25°C 50.000h  
Height 79.0mm  
Width 105.4mm  
Length 592.0mm  
Power supply [SOSEN](#)  
Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

# Industrial light Prolumen Hemera 230V 150W 24000lm 30x90° No dim 850

**Product code 18937 No dim  
dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable No dim  
 Output 150W  
 Maximum output 150W/1m  
 Luminous flux 24000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 5000K  
 Lens angle 30x90  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 59.0mm  
 Width 105.0mm  
 Length 918.0mm  
 Power supply [SOSEN](#)  
 Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

## Industrial light Prolumen Hemera 230V 200W 32000lm 30x90° No dim 850

**Product code 18938 No dim  
dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable No dim  
 Output 200W  
 Maximum output 200W/1m  
 Luminous flux 32000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 5000K  
 Lens angle 30x90  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 59.0mm  
 Width 105.0mm  
 Length 1207.0mm  
 Power supply [SOSEN](#)  
 Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

## Industrial light Prolumen Hemera 600 white 230V 100W 16000lm 30x90° IP66 0-10V 840

**Product code 17822 0-10V dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable 0-10V  
 Output 100W  
 Maximum output 100W/1m  
 Luminous flux 16000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 30x90  
 Source of light [PHILIPS LED](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 79.0mm  
 Width 105.4mm  
 Length 592.0mm  
 In package 1pc  
 In box 4pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment indoor use  
 Operation temperature -40° - +65°C  
 Certificates CE, RoHS, D  
 Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

# Industrial light Prolumen Hemera 900 white 230V 150W 24000lm 30x90° IP66 0-10V 840

**Product code 17821 0-10V dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable 0-10V  
 Output 150W  
 Maximum output 150W/1m  
 Luminous flux 24000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 30x90  
 Source of light [PHILIPS LED](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 59.0mm  
 Width 105.0mm  
 Length 918.0mm  
 In package 1pc  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Power supply [SOSEN](#)  
 Impact resistance IK08  
 Work environment indoor use  
 Operation temperature -40 - +65°C  
 Certificates CE, RoHS, D  
 Warranty 5 years



A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

# Industrial light Prolumen Parkade white 230V 30W 4000lm 120° IP66 840

**Product code 22858**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 4000lumens  
 Luminaire's efficiency lm79 133W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 69.0mm  
 Width 94.0mm  
 Length 600.0mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Operation temperature -20° +50°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen Parkade white 230V 30W 4000lm 120° IP66 DALI 840

**Product code 22861 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 4000lumens  
 Luminaire's efficiency lm79 133W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 69.0mm  
 Width 94.0mm  
 Length 600.0mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Operation temperature -20° +50°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen QUATTRO 1200 gray 230V 40W 6400lm 120° IP66 840

**Product code 17638**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 6400lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Protection class IP66  
 Lifespan 50000h  
 Height 102.0mm  
 Width 122.0mm  
 Length 1200.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material aluminium  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Certificates CE, ENEC, SAA  
 Warranty 5 years



PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

# Industrial light Prolumen QUATTRO 1200 gray 230V 60W 9600lm 120° IP66 840

**Product code 17019**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 9600lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 102.0mm  
 Width 122.0mm  
 Length 1200.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Certificates CE, D, F  
 Warranty 5 years



PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

# Industrial light Prolumen QUATTRO 1200 gray 230V 80W 12800lm 120° IP66 840

**Product code 17020**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 80W  
 Maximum output 80W/1m  
 Luminous flux 12800lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 102.0mm  
 Width 122.0mm  
 Length 1200.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Certificates CE, D, F  
 Warranty 5 years



PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

# Industrial light Prolumen QUATTRO 1500 gray 230V 150W 24000lm 120° IP66 840

**Product code 17018**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 150W  
Maximum output 150W/1m  
Luminous flux 24000lumens  
Luminaire's efficiency lm79 160W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light [BRIDGELUX LED](#)  
Cri 80  
Protection class IP66  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 102.0mm  
Width 122.0mm  
Length 1500.0mm  
In package 1pc  
Casing colour gray  
Casing material aluminium + plastic  
Polishing matt  
Power supply [SOSEN](#)  
Impact resistance IK10  
Work environment indoor / outdoor use  
Certificates CE, D, F  
Warranty 5 years



PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

# Industrial light Prolumen QUATTRO 600 gray 230V 30W 4800lm 120° IP66 840

**Product code 17637**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 4800lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Sdcm - macadam ellipses 6  
 Protection class IP66  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 102.0mm  
 Width 122.0mm  
 Length 600.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material aluminium  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Certificates CE, ENEC, SAA  
 Warranty 5 years



PROLUMEN QUATTRO series lights are high-quality and powerful lighting solutions for various needs. These LED lights are equipped with quality components and provide excellent illumination both indoors and outdoors. The QUATTRO series lights have several features: 1. Various power options ranging from 60W to 150W, suitable for different applications. 2. High luminous intensity provides sufficient illumination for larger areas. 3. Wide beam angle of 120° ensures uniform illumination. 4. High IP66 protection class ensures durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) provides clear and ergonomic lighting for daily activities. PROLUMEN QUATTRO series lights are ideal choices for both industrial and commercial lighting, offering energy efficiency and durability in various conditions. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Industrial light Prolumen Torque 230V 40W 4800lm 120° IP65 DALI 840

**Product code 20634 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 40W

Maximum output 40W/1m

Luminous flux 4800lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP65

Height 61.0mm

Width 72.0mm

Length 1480.0mm

Impact resistance IK08

Work environment indoor use

Certificates CE



Quality LED ceiling light for garage, workshop, warehouse, production space. In case of a malfunction within 5 years, the defective light will be replaced with a new one. Protection class IP65 ensures strong water resistance for the light, allowing it to be used in outdoor conditions, even under direct water pressure. 4000K LED lights provide clear and sharp daylight. Find the highest quality lighting solutions from [LED house product range!](#)

## Industrial light Prolumen TP LINK 1200 white 230V 40W 5600lm 120° IP65 840

**Product code 15705**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 5600lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Lmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1221.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years




LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

**Industrial light Prolumen TP LINK 1200 white 230V 40W**

## 5600lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

### Product code 17603

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 5600lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1221.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor  
 use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years

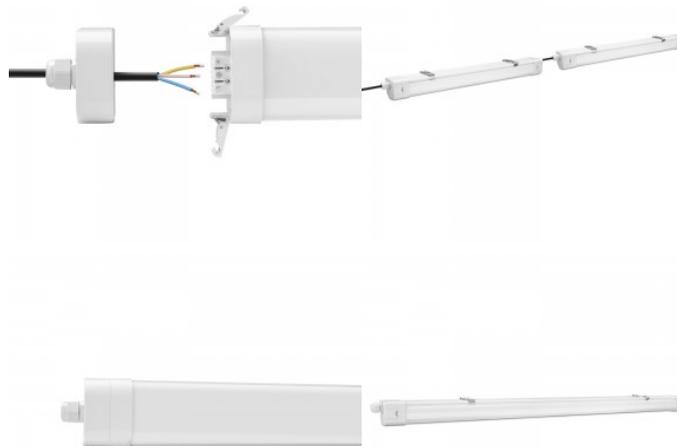

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1200 white 230V 40W 6400lm 120° IP65 840

**Product code 22850**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 6400lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1221.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [PHILIPS](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1200 with motion sensor white 230V 40W 5600lm 120° IP65 840

## Product code 18310

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 5600lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1221.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [LIFUD](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years




LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1500 +MW white 230V 60W 8400lm 120° IP65 840

**Product code 18348**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 8400lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1502.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [LIFUD](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years

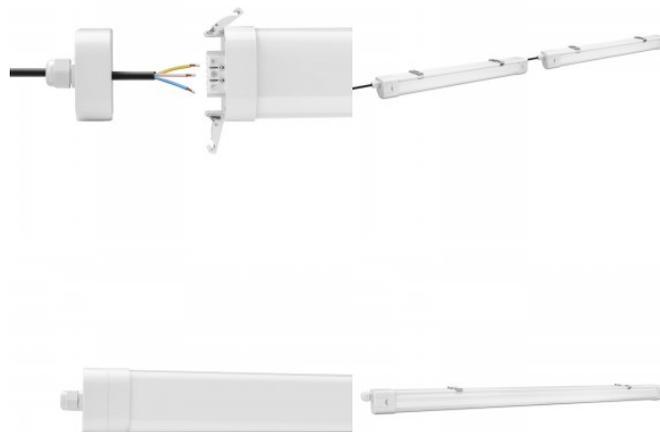

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1500 230V 45W 6300lm 120° IP65 840

**Product code 18150**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 45W  
 Maximum output 45W/1m  
 Luminous flux 6300lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1502.0mm  
 In package 1pc  
 In box 6pcs  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1500 30-60W 230V 60W 8400lm 120° IP65 840

**Product code 15735**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 8400lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1502.0mm  
 In package 1pc  
 In box 6pcs  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1500 white 230V 60W 8400lm 120° IP65 830

**Product code 18168**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 8400lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature warm white 3000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1221.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1500 white 230V 60W 8400lm 120° IP65 840

**Product code 15706**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 8400lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1502.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 1500 white 230V 60W 8400lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

**Product code 17602**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 8400lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 65.0mm  
 Width 74.0mm  
 Length 1502.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor / outdoor  
 use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years



LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 600 white 230V 20W 2800lm 120° IP65 840

**Product code 14717**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 2800lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 64.0mm  
 Width 74.0mm  
 Length 659.0mm  
 Weight 800 g  
 Package weight 132 g  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years




LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

# Industrial light Prolumen TP LINK 600 white 230V 20W 2800lm 120° IP65 DALI 840

**Product code 18169 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 2800lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP65  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 64.0mm  
 Width 74.0mm  
 Length 659.0mm  
 Weight 800 g  
 Package weight 132 g  
 Casing colour white  
 Casing material aluminium + plastic  
 Polishing matt  
 Power supply OSRAM  
 Impact resistance IK08  
 Work environment indoor / outdoor use  
 Operation temperature -20° +40°C  
 Certificates CE, D, F  
 Warranty 5 years

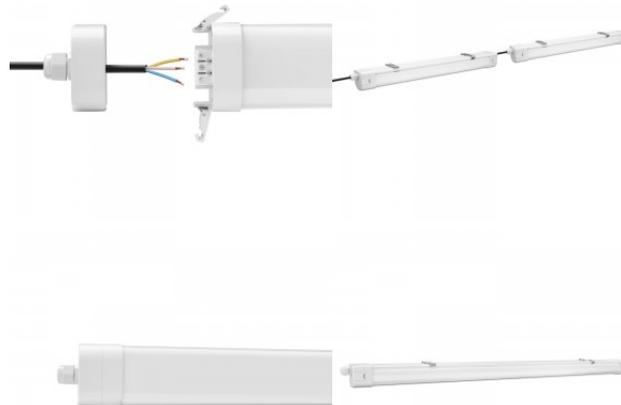

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5-year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects [here!](#)

## Industrial light Prolumen Tubular 1500 230V 60W 9000lm 180° IP69 840

**Product code 17604**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 9000lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature pure white 4000K  
 Lens angle 180  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Protection class IP69  
 Lifespan 100000h  
 Llmf tm21 L80B50 @25°C 50.000h  
 Length 1500.0mm  
 Diameter 80.0mm  
 Weight 1.3 kg  
 In box 6pcs  
 No. of switches 30000pcs  
 Power supply [TRIDONIC](#)  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Operation temperature -10 ~ 40°C  
 Warranty 5 years



Durable linear LED industrial light [industrial light](#) that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.

## Industrial light Tubular 1200 230V 40W 6000lm 120° IP69 DALI 840

**Product code 22511 DALI dimmable**

Supply voltage 230V  
 Dimmable DALI  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 6000lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Protection class IP69  
 Lifespan 100000h  
 Llmf tm21 L80B50 @25°C 50.000h  
 Length 1200.0mm  
 Diameter 80.0mm  
 Weight 1.3 kg  
 In box 6pcs  
 No. of switches 30000pcs  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Operation temperature -10 ~ 40°C  
 Warranty 5 years

Durable linear LED industrial light [industrial light](#) that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.



## Industrial light Tubular 1200 230V 40W 6000lm 180° IP69 840

### Product code 17605

Supply voltage 230V  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 6000lumens  
 Luminaire's efficiency lm79 150W  
 Correlated colour temperature pure white 4000K  
 Lens angle 180  
 Source of light [BRIDGELUX LED](#)  
 Cri 80  
 Protection class IP69  
 Lifespan 100000h  
 Llmf tm21 L80B50 @25°C 50.000h  
 Length 1200.0mm  
 Diameter 80.0mm  
 Weight 1.3 kg  
 In box 6pcs  
 No. of switches 30000pcs  
 Power supply [TRIDONIC](#)  
 Impact resistance IK10  
 Work environment indoor / outdoor use  
 Operation temperature -10 ~ 40°C  
 Warranty 5 years



Durable linear LED industrial light [industrial light](#) that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.