

## Track light Airam black GU10 IP20

### Product code 22090

Brand Airam  
 Socket GU10  
 Protection class IP20  
 Height 176.0mm  
 Diameter 58.0mm  
 Casing colour black  
 Casing material metal  
 Work environment indoor use



## Track light Deko-Light Can black GU10 90° IP20

### Product code 20199

Brand [Deko-Light](#)  
 Output voltage 220-240V  
 Lens angle 90  
 Socket GU10  
 Protection class IP20  
 Height 134.0mm  
 Diameter 60.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -5 kuni 40 °C  
 Warranty 2 years



The CAN spotlight for the 3-phase current track system offers a robust and flexible lighting solution for commercial and private applications. The GU10 base enables quick and simple replacement of the lamp, while the screw-on cylinder housing allows tool-free access. The CAN spotlight for the 3-phase current track system is part of a comprehensive light series and is also available as a pendant, wall, reading and outdoor light.

## Track light Deko-Light Nihal Mini Dim white 15W 35° IP20 3000K warm white

**Product code 20992**

Brand [Deko-Light](#)

Output voltage 220-240V

Output 15W

Correlated colour temperature warm white 3000K

Lens angle 35

Protection class IP20

Height 139.0mm

Width 102.0mm

Length 94.0mm

Diameter 60.0mm

Casing colour white

Casing material aluminium

No. of switches 15000pcs

Work environment indoor use

Operation temperature -5 kuni 40 °C

Warranty 2 years



## Track light Karizma Luce Dea Juno M DTW casambi 1800K - 3000 K black / golden 230V 14W 850lm CRI90 40° IP20 CASAMBI 1800K - 3000K

**Product code 21108 CASAMBI  
dimmable**

Brand [Karizma Luce](#)

Supply voltage 230V

Dimmable CASAMBI

Output 14W

Luminous flux 850lumens

Luminaire's efficiency lm79 61W

Correlated colour temperature 1800K - 3000K

Lens angle 40

Cri 90

Protection class IP20

Height 140.0mm


Diameter 75.0mm

Casing colour black / golden

Casing material aluminium

Work environment indoor use

Warranty 5 years

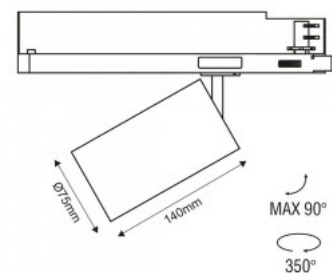

## Track light Karizma Luce Dea Juno S on/off black / golden 230V 12W 1020lm 40° IP20 930

**Product code 23160**

Brand [Karizma Luce](#)

Supply voltage 230V

Output 12W

Maximum output 12W/1m

Luminous flux 1020lumens

Luminaire's efficiency lm79 85W

Correlated colour temperature warm  
white 3000K

Lens angle 40°

Cri 90

Protection class IP20

Height 124.0mm


Diameter 60.0mm

Casing colour black / golden

Casing material aluminium

Work environment indoor use

Warranty 5 years

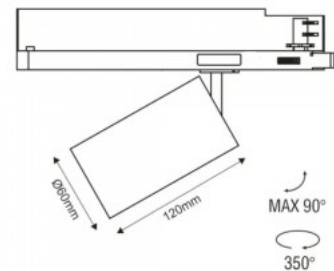

## Track light Karizma Luce Diciotto track black 32W 2550lm 45° IP20 930

**Product code 20673**

Brand [Karizma Luce](#)

Output 32W

Luminous flux 2550lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature warm  
white 3000K

Lens angle 45°

Cri 90

Protection class IP20

Height 76.9mm

Width 506.5mm

Length 40.0mm

Casing colour black

Casing material aluminium

Work environment indoor use



## Track light Karizma Luce Diciotto track Dali black 230V 32W 2700lm 45° IP20 DALI 940

**Product code 20670 DALI dimmable**

Brand [Karizma Luce](#)  
Supply voltage 230V  
Dimmable DALI  
Output voltage 230V  
Output 32W  
Luminous flux 2700lumens  
Luminaire's efficiency lm79 84W  
Correlated colour temperature pure  
white 4000K  
Lens angle 45  
Cri 90  
Protection class IP20  
Height 76.9mm  
Width 506.5mm  
Length 40.0mm  
Casing colour black  
Casing material aluminium  
Work environment indoor use



## Track light Karizma Luce Dodici Track black 19,5W 1750lm 45° IP20 DALI 940

**Product code 20660 DALI dimmable**

Brand [Karizma Luce](#)  
Dimmable DALI  
Output 19,5W  
Luminous flux 1750lumens  
Correlated colour temperature pure  
white 4000K  
Lens angle 45  
Cri 90  
Protection class IP20  
Height 76.9mm  
Width 347.0mm  
Length 40.0mm  
Casing colour black  
Casing material aluminium  
Work environment indoor use



## Track light Karizma Luce Dodici Track on/off black 230V 19,5W 1650lm 45° IP20 930

**Product code 20675**

Brand [Karizma Luce](#)  
Supply voltage 230V  
Output 19,5W  
Luminous flux 1650lumens  
Correlated colour temperature warm  
white 3000K  
Lens angle 45  
Cri 90  
Protection class IP20  
Height 76.9mm  
Width 347.0mm  
Length 40.0mm  
Casing colour black  
Casing material aluminium  
Work environment indoor use



## Track light Karizma Luce Dodici Track white 19,5W 1650lm 45° IP20 TRIAC 930

**Product code 21023 TRIAC dimmable**

Brand [Karizma Luce](#)  
Dimmable TRIAC  
Output 19,5W  
Luminous flux 1650lumens  
Correlated colour temperature warm  
white 3000K  
Lens angle 45  
Cri 90  
Protection class IP20  
Height 76.0mm  
Width 345.0mm  
Length 40.0mm  
Casing colour white  
Casing material aluminium  
Work environment indoor use



## Track light Karizma Luce Fresco Dali black 230V 10W 1200lm 35° IP20 DALI 930

**Product code 20156 DALI dimmable**

Brand [Karizma Luce](#)

Supply voltage 230V

Dimmable DALI

Output 10W

Luminous flux 1200lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature warm  
white 3000K

Lens angle 35

Cri 90

Protection class IP20

Lifespan 50000h

Height 140.0mm

Diameter 60.0mm

Weight 422 g

Casing colour black

Casing material aluminium

Work environment indoor use



Fresco is a compact track spotlight with an integrated driver for residential and hospitality interiors. It suits hotel rooms, restaurants, boutiques, and living spaces. A front ring is standard. The deep-set light source reduces glare and provides a comfortable level of light. The 60mm head and 139mm length keep the form discreet. A tiny adapter ensures a clean, minimal installation.

## Track light Karizma Luce Fresco white 230V 10W 1200lm 25° IP20 930

**Product code 22749**

Brand [Karizma Luce](#)

Supply voltage 230V

Output 10W

Luminous flux 1200lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature warm white 3000K

Lens angle 25

Cri 90

Protection class IP20

Lifespan 50000h

Height 140.0mm

Diameter 60.0mm

Weight 422 g

Casing colour white

Casing material aluminium

Work environment indoor use



## Track light Karizma Luce Ventiquattro Track black 230V 32W 2850lm 45° IP20 DALI 930

**Product code 20698 DALI dimmable**

Brand [Karizma Luce](#)

Supply voltage 230V

Dimmable DALI

Output 32W

Maximum output 40W/1m

Luminous flux 2850lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature warm white 3000K

Lens angle 45

Cri 90

Protection class IP20

Height 76.9mm

Width 666.0mm

Length 40.0mm

Casing colour black

Casing material aluminium

Work environment indoor use



## Track light Karizma Luce Ventiquattro Track black 32W 2850lm 45° IP20 930

**Product code 20674**

---

Brand [Karizma Luce](#)  
Output 32W  
Maximum output 40W/1m  
Luminous flux 2850lumens  
Luminaire's efficiency lm79 89W  
Correlated colour temperature warm  
white 3000K  
Lens angle 45  
Cri 90  
Protection class IP20  
Height 76.9mm  
Width 666.0mm  
Length 40.0mm  
Casing colour black  
Casing material aluminium  
Work environment indoor use



## Track light Karizma Luce Ventiquattro Track black 32W 2850lm 45° IP20 940

**Product code 20699**

---

Brand [Karizma Luce](#)  
Output 32W  
Maximum output 40W/1m  
Luminous flux 2850lumens  
Luminaire's efficiency lm79 89W  
Correlated colour temperature pure  
white 4000K  
Lens angle 45  
Cri 90  
Protection class IP20  
Height 76.9mm  
Width 666.0mm  
Length 40.0mm  
Casing colour black  
Casing material aluminium  
Work environment indoor use



## Track light Karizma Luce Ventiquattro Track Dali black 230V 32W 3050lm 45° IP20 DALI 940

**Product code 20671 DALI dimmable**



Brand [Karizma Luce](#)  
 Supply voltage 230V  
 Dimmable DALI  
 Output 32W  
 Maximum output 40W/1m  
 Luminous flux 3050lumens  
 Luminaire's efficiency lm79 95W  
 Correlated colour temperature pure white 4000K  
 Lens angle 45  
 Cri 90  
 Protection class IP20  
 Height 76.9mm  
 Width 666.0mm  
 Length 40.0mm  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use



## Track light Karizma Luce Ventiquattro Track white 40W 2700lm 45° IP20 927

**Product code 23165**

Brand [Karizma Luce](#)  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 2700lumens  
 Luminaire's efficiency lm79 68W  
 Correlated colour temperature warm white 2700K  
 Lens angle 45  
 Cri 90  
 Protection class IP20  
 Height 76.9mm  
 Width 666.0mm  
 Length 40.0mm  
 Casing colour white  
 Casing material aluminium  
 Work environment indoor use

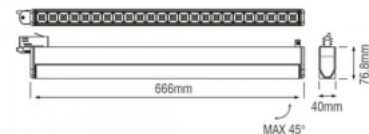

## Track light Karizma Luce Vuoto white 230V GU10 IP20

**Product code 22086**


Brand [Karizma Luce](#)  
 Supply voltage 230V  
 Socket GU10  
 Protection class IP20  
 Height 89.0mm  
 Diameter 58.0mm  
 Casing colour white  
 Casing material aluminium  
 Work environment indoor use  
 Warranty 5 years



## Track light Light4U Edda M HE black 31W 4150lm 45° IP20 DALI 940

**Product code 22167 DALI dimmable**

Brand [Light4U](#)  
 Dimmable DALI  
 Output 31W  
 Luminous flux 4150lumens  
 Luminaire's efficiency lm79 134W  
 Correlated colour temperature pure white 4000K  
 Lens angle 45  
 Cri 90  
 Protection class IP20  
 Lifespan 100000h  
 Height 184.0mm  
 Diameter 95.0mm  
 Casing colour black  
 Work environment indoor use  
 Warranty 5 years

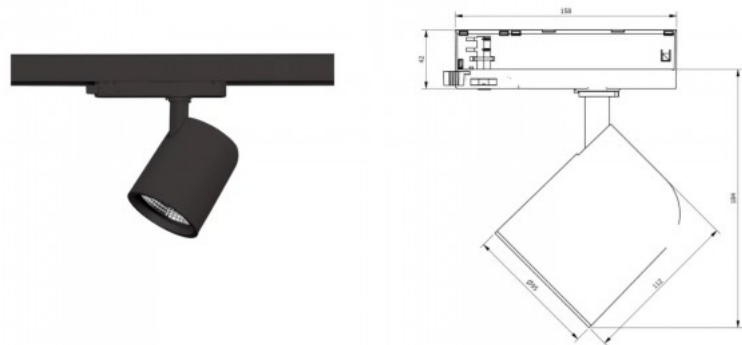

## Track light Light4U Huginn L Dali 2 black 19W 2400lm 36° IP20 3000K warm white

**Product code 23164**

Brand [Light4U](#)

Output 19W

Luminous flux 2400lumens

Luminaire's efficiency lm79 126W

Correlated colour temperature warm  
white 3000K

Lens angle 36

Protection class IP20

Lifespan 100000h

Height 170.0mm


Diameter 80.0mm

Casing colour black

Casing material Diecast aluminium

Work environment indoor use

Warranty 5 years

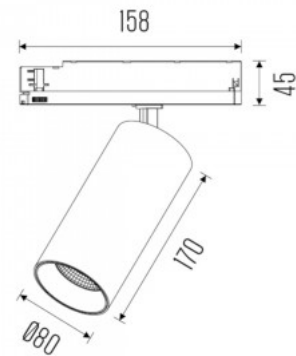

## Track light Light4U Surt 1800lm-2150lm black 29W 15-60° 3000K warm white

**Product code 22088**

Brand [Light4U](#)

Output 29W

Correlated colour temperature warm  
white 3000K

Lens angle 15-60

Height 225.0mm

Diameter 85.0mm

Casing colour black



## Track light Light4U Surt 1800lm-2150lm white 29W 15-60° 3000K warm white

**Product code 22087**

Brand [Light4U](#)  
Output 29W  
Correlated colour temperature warm  
white 3000K  
Lens angle 15-60  
Height 225.0mm  
Diameter 85.0mm  
Casing colour white




## Track light LINEAR L33 UGR17 black 230V 30W 2400lm 90° IP20 TRIAC 930

**Product code 22277 TRIAC dimmable**

Supply voltage 230V  
Dimmable TRIAC  
Output 30W  
Maximum output 30W/1m  
Rated current 750mA  
Luminous flux 2400lumens  
Luminaire's efficiency lm79 80W  
Correlated colour temperature warm  
white 3000K  
Lens angle 90  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Llmf tm21 L80B10 @25°C 50.000h  
Height 33.0mm  
Width 33.0mm  
Length 800.0mm  
Casing colour black  
Casing material aluminium + plastic  
Power supply [KGP](#)  
Impact resistance IK02  
Work environment indoor use



Unit:mm

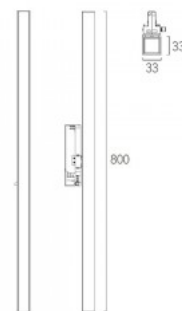

## Track light LINEAR L33 UGR17 white 230V 30W 2400lm 90° IP20 TRIAC 930

**Product code 22278 TRIAC dimmable**


Supply voltage 230V  
Dimmable TRIAC  
Output 30W  
Maximum output 30W/1m  
Rated current 750mA  
Luminous flux 2400lumens  
Luminaire's efficiency lm79 80W  
Correlated colour temperature warm  
white 3000K  
Lens angle 90  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Llmf tm21 L80B10 @25°C 50.000h  
Height 33.0mm  
Width 33.0mm  
Length 800.0mm  
Casing colour white  
Casing material aluminium + plastic  
Power supply [PHILIPS](#)  
Impact resistance IK02  
Work environment indoor use



## Track light LINEAR L51 UGR17 white 230V 40W 5000lm 80° IP20 TRIAC 940

**Product code 22275 TRIAC dimmable**

Supply voltage 230V  
Dimmable TRIAC  
Output 40W  
Maximum output 40W/1m  
Rated current 1050mA  
Luminous flux 5000lumens  
Luminaire's efficiency lm79 125W  
Correlated colour temperature pure  
white 4000K  
Lens angle 80  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Llmf tm21 L80B10 @25°C 50.000h  
Height 35.0mm  
Width 46.0mm  
Length 595.0mm  
Casing colour white  
Casing material aluminium + plastic  
Power supply [PHILIPS](#)  
Impact resistance IK02  
Work environment indoor use

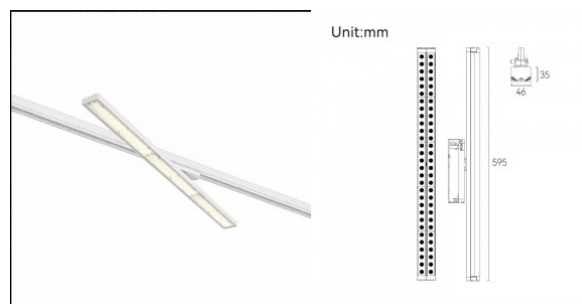


## Track light Maytoni Focus Trinity black / golden 230V GU10 IP20

### Product code 20648

Brand Maytoni  
 Supply voltage 230V  
 Socket GU10  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Height 235.0mm  
 Width 130.0mm  
 Diameter 60.0mm  
 Weight 330 g  
 Package weight 370 g  
 Casing colour black / golden  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 2 years

The Focus track luminaire is a stylish, practical solution for your lighting needs. It combines modern design with high quality to create a truly remarkable piece of lighting. Designed for installation on a three-phase track system, it can effectively light up a wide range of spaces. Its sleek and minimalist design seamlessly complements any interior. The luminaire is made of high-quality metal for durability and reliability. It uses GU10 bulbs (not included), making it easy to switch light sources. Energy-efficient bulbs help reduce power consumption. The product is covered by a 2-year warranty, and we offer technical support.

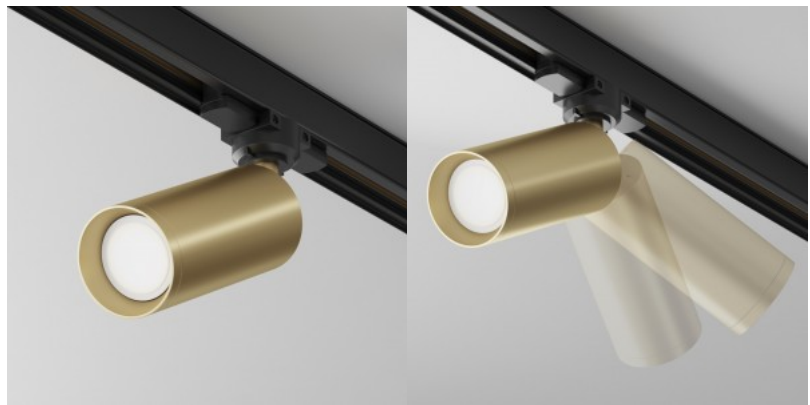

## Track light Maytoni Focus Trinity black 230V GU10 IP20

**Product code 20397**


Brand Maytoni  
Supply voltage 230V  
Socket GU10  
Protection class IP20  
Height 235.0mm  
Width 140.0mm  
Length 130.0mm  
Diameter 60.0mm  
Weight 330 g  
Package weight 370 g  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Certificates CE  
Warranty 2 years



## Track light Maytoni Focus Trinity white 230V GU10 IP20

**Product code 20650**

Brand Maytoni  
Supply voltage 230V  
Socket GU10  
Protection class IP20  
Height 235.0mm  
Width 130.0mm  
Diameter 60.0mm  
Weight 330 g  
Package weight 370 g  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Certificates CE  
Warranty 2 years

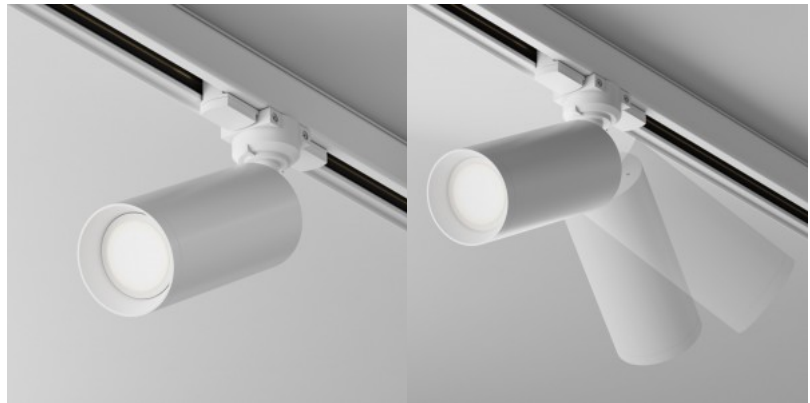

## Track light NEXTRACK Core black 230V 10W 900lm CRI90 36° IP20 3000K, 4000K, 5000K 3CCT

### Product code 18212

Brand NEXTRACK  
 Supply voltage 230V  
 Power factor 0.90  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 900lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 45000h  
 Height 100.0mm  
 Diameter 50.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour black  
 Casing material aluminium  
 No. of switches 20000pcs  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years



## Track light NEXTRACK Core black 230V 20W 1800lm CRI90 36° IP20 3000K, 4000K, 5000K 3CCT

### Product code 18213

Brand NEXTRACK  
 Supply voltage 230V  
 Power factor 0.90  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 1800lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 45000h  
 Height 115.0mm  
 Diameter 50.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour black  
 Casing material aluminium  
 No. of switches 20000pcs  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years



## Track light NEXTRACK Core black 230V 35W 3150lm CRI90 36° IP20 3000K, 4000K, 5000K 3CCT

### Product code 18214

Brand NEXTRACK  
 Supply voltage 230V  
 Power factor 0.90  
 Output 35W  
 Maximum output 35W/1m  
 Luminous flux 3150lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 45000h  
 Height 166.0mm  
 Diameter 50.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour black  
 Casing material aluminium  
 No. of switches 20000pcs  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years



## **Track light NEXTRACK Core white 230V 10W 900lm CRI90 36° IP20 3000K, 4000K, 5000K 3CCT**

### **Product code 20415**

Brand NEXTRACK  
Supply voltage 230V  
Power factor 0.90  
Output 10W  
Maximum output 10W/1m  
Luminous flux 900lumens  
Luminaire's efficiency lm79 90W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5000K  
Lens angle 36  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 45000h  
Height 100.0mm  
Diameter 50.0mm  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminium  
No. of switches 20000pcs  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE  
Warranty 5 years



## **Track light NEXTRACK Core white 230V 20W 1800lm CRI90 36° IP20 3000K, 4000K, 5000K 3CCT**

### **Product code 20418**

Brand NEXTRACK  
Supply voltage 230V  
Power factor 0.90  
Output 20W  
Maximum output 20W/1m  
Luminous flux 1800lumens  
Luminaire's efficiency lm79 90W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5000K  
Lens angle 36  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 45000h  
Height 115.0mm  
Diameter 50.0mm  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminium  
No. of switches 20000pcs  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE  
Warranty 5 years



## **Track light NEXTRACK Core white 230V 35W 3150lm CRI90 36° IP20 3000K, 4000K, 5000K 3CCT**

### **Product code 20417**


Brand NEXTRACK  
Supply voltage 230V  
Power factor 0.90  
Output 35W  
Maximum output 35W/1m  
Luminous flux 3150lumens  
Luminaire's efficiency lm79 90W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5000K  
Lens angle 36  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 45000h  
Height 166.0mm  
Diameter 50.0mm  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminium  
No. of switches 20000pcs  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE  
Warranty 5 years



## Track light NEXTRACK S-LINE black 230V GU10 IP20

### Product code 19412

Brand NEXTRACK  
Supply voltage 230V  
Maximum output 35W/1m  
Socket GU10  
Protection class IP20  
Height 115.0mm  
Diameter 62.0mm  
Weight 250 g  
In box 50pcs  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Warranty 3 years

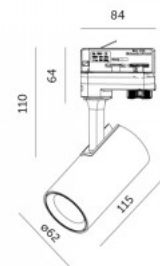

Three-phase track system adapter for GU10 bulbs An adapter designed for a three-phase track system, operating on a 230V power supply. It is compatible exclusively with GU10 bulbs, providing a simple and efficient lighting solution. Light sources are not included, allowing you to select the bulb that best suits your needs. A reliable and practical choice for creating high-quality lighting!

## Track light NEXTRACK S-LINE P black 230V GU10 IP20

### Product code 20162

Supply voltage 230V  
Maximum output 12W/1m  
Socket GU10  
Protection class IP20  
Height 300.0mm  
Diameter 58.0mm  
In package 1pc  
In box 30pcs  
Casing colour black  
Certificates CE  
Warranty 5 years



## Track light NEXTRACK S-LINE P white 230V GU10 IP20

### Product code 20163

Supply voltage 230V  
Maximum output 12W/1m  
Socket GU10  
Protection class IP20  
Height 300.0mm  
Diameter 58.0mm  
In package 1pc  
In box 30pcs  
Casing colour white  
Certificates CE  
Warranty 5 years



## Track light NEXTRACK S-LINE white 230V GU10 IP20

### Product code 17953

Brand NEXTRACK  
Supply voltage 230V  
Maximum output 35W/1m  
Socket GU10  
Protection class IP20  
Height 115.0mm  
Diameter 62.0mm  
Weight 250 g  
In box 50pcs  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Warranty 3 years



Three-phase track system adapter for GU10 bulbs An adapter designed for a three-phase track system, operating on a 230V power supply. It is compatible exclusively with GU10 bulbs, providing a simple and efficient lighting solution. Light sources are not included, allowing you to select the bulb that best suits your needs. A reliable and practical choice for creating high-quality lighting!

## Track light NEXTRACK Vision white 230V 20W 1800lm CRI90 30-60° IP20 3000K, 4000K, 5000K 3CCT

### Product code 20009


Brand NEXTRACK  
 Supply voltage 230V  
 Power factor 0.90  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 1800lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 30-60  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 45000h  
 Height 244.0mm  
 Diameter 58.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour white  
 Casing material aluminium  
 No. of switches 20000pcs  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years



## Track light NEXTRACK Vision Zoom black 230V 20W 1800lm CRI90 30-60° IP20 3000K, 4000K, 5000K 3CCT

### Product code 22183

Brand NEXTRACK  
 Supply voltage 230V  
 Power factor 0.90  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 1800lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 30-60  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 45000h  
 Height 244.0mm  
 Diameter 58.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour black  
 Casing material aluminium  
 No. of switches 20000pcs  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years



LED HOUSE

## Track light Prolumen Bakewell black 230V 30W 3000lm 15° IP20 930

**Product code 18211**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 30W

Maximum output 30W/1m

Luminous flux 3000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm  
white 3000K

Lens angle 15

Source of light [LEDTEEN](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 105.0mm

Diameter 95.0mm

In box 12pcs

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell black 230V 30W 3000lm 24° IP20 930

**Product code 18235**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3000lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 24  
 Source of light [LEDTEEN](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 105.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
 Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell black 230V 30W 3000lm 36° IP20 930

**Product code 16925**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3000lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 36  
 Source of light [LEDTEEN](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 105.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
 Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell black 230V 30W 3000lm 60° IP20 930

**Product code 17143**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3000lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 60  
 Source of light [LEDTEEN](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 105.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
 Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell black 230V 30W 3000lm 60° IP20 940

**Product code 17142**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3000lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature pure white 4000K  
 Lens angle 60  
 Source of light [LEDTEEN](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 105.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
 Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell black 230V 30W 3100lm 36° IP20 940

**Product code 17141**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3100lumens  
 Luminaire's efficiency lm79 103W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Source of light [LEDTEEN](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 105.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
 Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell black 230V 30W 3800lm 15° IP20 930

**Product code 17976**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 30W

Maximum output 30W/1m

Luminous flux 3800lumens

Luminaire's efficiency lm79 127W

Correlated colour temperature warm  
white 3000K

Lens angle 15

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 118.0mm

Diameter 95.0mm

Weight 1.29 kg

In box 12pcs

Casing colour black

Casing material aluminium

Power supply [VS \(Vossloh-Schwabe\)](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell white 230V 30W 3000lm 24° IP20 930

**Product code 18346**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 30W  
Maximum output 30W/1m  
Luminous flux 3000lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature warm  
white 3000K  
Lens angle 24  
Source of light SANAN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 105.0mm  
Diameter 95.0mm  
In box 12pcs  
Casing colour white  
Casing material aluminium  
Power supply [KGP](#)  
Work environment indoor use  
Operation temperature -20° - +40°C  
Certificates CE  
Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell white 230V 30W 3100lm 36° IP20 930

**Product code 17768**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3100lumens  
 Luminaire's efficiency lm79 103W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 36  
 Source of light SANAN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 105.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20° - +40°C  
 Certificates CE  
 Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
 Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell white 230V 30W 3100lm 36° IP20 940

**Product code 17140**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 30W  
Maximum output 30W/1m  
Luminous flux 3100lumens  
Luminaire's efficiency lm79 103W  
Correlated colour temperature pure  
white 4000K  
Lens angle 36  
Source of light SANAN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 105.0mm  
Diameter 95.0mm  
In box 12pcs  
Casing colour white  
Casing material aluminium  
Power supply [KGP](#)  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bakewell white 230V 30W 3100lm 60° IP20 940

**Product code 16924**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 30W  
Maximum output 30W/1m  
Luminous flux 3100lumens  
Luminaire's efficiency lm79 103W  
Correlated colour temperature pure white 4000K  
Lens angle 60  
Source of light [LEDTEEN](#)  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 105.0mm  
Diameter 95.0mm  
In box 12pcs  
Casing colour white  
Casing material aluminium  
Power supply [KGP](#)  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years



PROLUMEN Bakewell is a spotlight with a five-year warranty and a beautiful design. We combine exactly the features you need in the light! The Bakewell track light can be ordered with the following specifications:  
Color: black, white. Beam angle: 15°/24°/36°/60° Color temperature: 3000/4000/5000K

## Track light Prolumen Bath + Honeycomb filter black 230V 8W 650lm 50° IP20 930

**Product code 15464**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 8W  
 Maximum output 8W/1m  
 Luminous flux 650lumens  
 Luminaire's efficiency lm79 81W  
 Correlated colour temperature warm white 3000K  
 Lens angle 50  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 80.0mm  
 Diameter 62.0mm  
 Weight 430 g  
 In package 1pc  
 In box 30pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly simple design LED track light. Black in color, compact in size, this LED light is perfect for home use. The light is designed for indoor use (IP20). The light beam does not distort the true colors of the room (CRI90), and the light temperature of 4000K maintains daylight white light in the room. The light also features a honeycomb filter, which prevents the characteristic glare of bright light. This LED track light attaches to a 3F track, which is also available in the LED house product range!



## Track light Prolumen Bath + Honeycomb filter black 230V 8W 650lm 50° IP20 940

**Product code 15283**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 8W

Maximum output 8W/1m

Luminous flux 650lumens

Luminaire's efficiency lm79 81W

Correlated colour temperature pure white 4000K

Lens angle 50

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 80.0mm

Diameter 62.0mm

In box 30pcs

Casing colour black

Casing material aluminium

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years

An elegantly simple design LED track light. Black in color, compact in size, this LED light is perfect for home use. The light is designed for indoor use (IP20). The light beam does not distort the true colors of the room (CRI90), and the light temperature of 4000K maintains daylight white light in the room. The light also features a honeycomb filter, which prevents the characteristic glare of bright light. This LED track light attaches to a 3F track, which is also available in the LED house product range!



## Track light Prolumen Bath + Honeycomb filter white 230V 8W 650lm 50° IP20 940

**Product code 16274**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 8W

Maximum output 8W/1m

Luminous flux 650lumens

Luminaire's efficiency lm79 81W

Correlated colour temperature pure  
white 4000K

Lens angle 50

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 80.0mm

Diameter 62.0mm

In box 30pcs

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



An elegantly simple design LED track light. White in color, compact in size, this LED light is perfect for home use. This LED track light attaches to a 3F track, which is also available in the LED house product range!

## Track light Prolumen Bolton with honeycomb filter white 230V 10W 1000lm 24° IP20 TRIAC 940

**Product code 16458 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.80

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 24

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 110.0mm

Diameter 50.0mm

Weight 460 g

In box 30pcs

Casing colour white

Casing material aluminium

Polishing matt

Power supply [AIDIMMING](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE, RoHS

Warranty 3 years



An elegantly simple design LED track light. White in color, compact in size, this LED light is perfect for home use. The light is designed for indoor use (IP20). The light beam does not distort the true colors of the room (CRI90), and the light temperature of 3000K maintains warm white light in the room. The light also features a honeycomb filter, which prevents the characteristic glare of bright light. This LED track light attaches to a 3F track, which is also available in the LED house product range!

**Track light Prolumen Bolton Pendant 300 black 230V 6W 600lm 36° IP20 TRIAC 930**

## Product code 15775 TRIAC dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.80

Dimmable TRIAC

Output 6W

Maximum output 6W/1m

Luminous flux 600lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Height 300.0mm

Diameter 50.0mm

In package 1pc


In box 20pcs

Casing colour black

Certificates CE

Warranty 5 years

Stylish black LED pendant light. Suitable for indoor use. Cable length is 1m (dimensions shown in the picture). Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. We recommend this warm white light (3000K) fixture for both living spaces and work environments. With a color rendering index (CRI) of 90, this luminaire enhances color accuracy and details, making it an ideal choice for highlighting art, design elements, and interior spaces. This Bolton luminaire is suitable for indoor use only, with an IP20 protection rating. With TRIAC dimmers, the LED light can easily be adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for work sessions. This LED track light attaches to a 3F track, which you can also find in the LED house product range. Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED house product range!

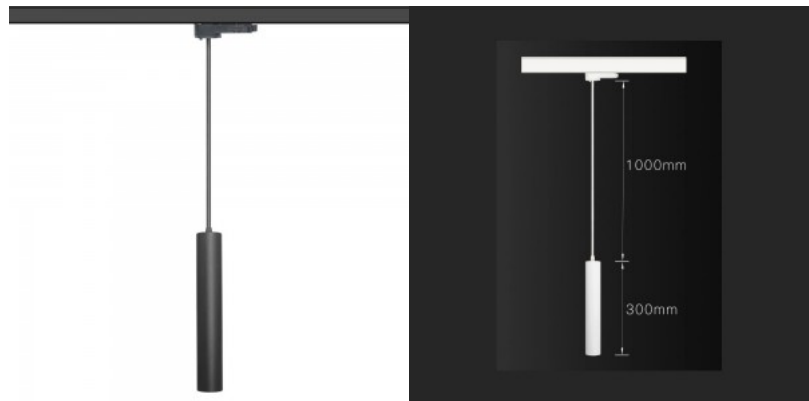

## Track light Prolumen Bradford white 230V 32W 3000lm 38° IP20 930

**Product code 15204**

Brand [Prolumen](#)

Supply voltage 230V

Output 32W

Maximum output 32W/1m

Luminous flux 3000lumens

Luminaire's efficiency lm79 94W

Correlated colour temperature warm white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Protection class IP20

Lifespan 40000h

In box 12pcs

Casing colour white

Casing material aluminium

Polishing matt

Power supply [PHILIPS](#)

Work environment indoor use

Certificates CE

Warranty 5 years



PROLUMEN Bradford white LED track light is a practical and stylish choice that enhances any interior. Whether it is a home, office, or commercial space. CRI90 ensures light in which the room's colors appear true and clear. The 38° beam angle allows directing light precisely where needed, creating a suitable lighting solution according to the requirement.

## Track light Prolumen Bristol + Honeycomb filter white 230V 32W 3200lm 36° IP20 930

**Product code 15284**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 32W

Maximum output 32W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 115.0mm

Diameter 95.0mm

Weight 1.05 kg

In box 12pcs

Casing colour white

Casing material aluminium

Power supply [PHILIPS](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



The elegantly simple design of the PROLUMEN LED track light makes it perfect for both home use and work environments. The light adds high-quality illumination to the room while keeping the colors under the beam true to life (CRI90). This track light is intended for indoor use only (protection class IP20). When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Additionally, the lens is covered by a honeycomb filter, which reduces the glare intensity of the light.

## Track light Prolumen Bristol + Honeycomb filter white 230V 32W 3200lm 36° IP20 940

**Product code 15469**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 32W  
 Maximum output 32W/1m  
 Luminous flux 3200lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 115.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [PHILIPS](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



The elegantly simple design of the PROLUMEN LED track light makes it perfect for both home use and work environments. The light adds high-quality illumination to the room while keeping the colors under the beam true to life (CRI90). This track light is intended for indoor use only (protection class IP20). When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Additionally, the lens is covered by a honeycomb filter, which reduces the glare intensity of the light.

## Track light Prolumen Canv black 230V 14W 2268lm 36° IP20 940

**Product code 17685**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 14W  
 Maximum output 14W/1m  
 Luminous flux 2268lumens  
 Luminaire's efficiency lm79 162W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Protection class IP20  
 Lifespan 50000h  
 Height 100.0mm  
 Diameter 75.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Power supply [PHILIPS](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



## Track light Prolumen Canva black 230V 20W 3240lm 36° IP20 940

**Product code 17681**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 3240lumens  
 Luminaire's efficiency lm79 162W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Protection class IP20  
 Lifespan 50000h  
 Height 115.0mm  
 Diameter 85.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Power supply [PHILIPS](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



## Track light Prolumen Canva black 230V 36W 4680lm 36° IP20 940

**Product code 17678**

Brand [Prolumen](#)  
Supply voltage 230V  
Output 36W  
Maximum output 36W/1m  
Luminous flux 4680lumens  
Luminaire's efficiency lm79 130W  
Correlated colour temperature pure white 4000K  
Lens angle 36  
Source of light [PHILIPS LED](#)  
Cri 90  
Protection class IP20  
Lifespan 50000h  
Height 115.0mm  
Diameter 85.0mm  
In package 1pc  
Casing colour black  
Casing material aluminium  
Power supply [PHILIPS](#)  
Work environment indoor use  
Certificates CE  
Warranty 5 years



## Track light Prolumen Cornwall black 230V 70W 11200lm 90° IP20 840

**Product code 17228**

Brand [Prolumen](#)

Supply voltage 230V

Output 70W

Maximum output 70W/1m

Luminous flux 11200lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 80

Ugr 24

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 77.0mm

Width 189.0mm

Length 577.0mm

Weight 2.92 kg

In box 8pcs

Casing colour black

Casing material aluminium

No. of switches 50000pcs

Power supply [TRIDONIC](#)

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE

Warranty 5 years



LED linear light fixture designed for large commercial spaces, which can be mounted on a track. Intended for indoor use only (IP20). The LED light fixture beam is adjustable. We combine exactly the features you need in the light! The Cornwall track light can be ordered with the following specifications: Color: black, white. Beam angle: 60°/90° Color temperature: 4000/5000/6000K Power: 57/60/64/70W Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Track light Prolumen Durham white 230V 15W 1200lm 20° IP20 DALI 927

**Product code 15963 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 15W  
 Maximum output 15W/1m  
 Luminous flux 1200lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature warm white 2700K  
 Lens angle 20  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 170.0mm  
 Diameter 85.0mm  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years

Elegant LED track light. All Durham models have high-quality color rendering LED chips (CRI90), ensuring the true color accuracy of the light beam. When ordering a suitable LED track light, the Durham model offers the following options: Power ratings: 15W, 20W, 25W, 30W, 42W. All models: 150-200lm/W. Color temperatures: 2700/3000/3500/4000/5000K. Beam angle: 15°/20°/38°/60°. Dimming options: TRIAC, DALI. The body color can be chosen in either black or white. You also have the option to order a honeycomb filter separately! Adding a honeycomb filter to the light reduces the glare of the light.



## Track light Prolumen Durham white 230V 15W 1200lm 38° IP20 DALI 927

**Product code 15964 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 15W  
 Maximum output 15W/1m  
 Luminous flux 1200lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature warm white 2700K  
 Lens angle 38  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 170.0mm  
 Diameter 85.0mm  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Elegant LED track light. All Durham models have high-quality color rendering LED chips (CRI90), ensuring the true color accuracy of the light beam. When ordering a suitable LED track light, the Durham model offers the following options: Power ratings: 15W, 20W, 25W, 30W, 42W. All models: 150-200lm/W. Color temperatures: 2700/3000/3500/4000/5000K. Beam angle: 15°/20°/38°/60°. Dimming options: TRIAC, DALI. The body color can be chosen in either black or white. You also have the option to order a honeycomb filter separately! Adding a honeycomb filter to the light reduces the glare of the light.

# Track light Prolumen Durham white 230V 30W 3000lm 38° IP20 930

**Product code 15949**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3000lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature warm white 3000K  
 Lens angle 38  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 185.0mm  
 Diameter 95.0mm  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [TRIDONIC](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Elegant LED track light. All Durham models have high-quality color rendering LED chips (CRI90), ensuring the true color accuracy of the light beam. When ordering a suitable LED track light, the Durham model offers the following options: Power ratings: 15W, 20W, 25W, 30W, 42W. All models: 150-200lm/W. Color temperatures: 2700/3000/3500/4000/5000K. Beam angle: 15°/20°/38°/60°. Dimming options: TRIAC, DALI. The body color can be chosen in either black or white. You also have the option to order a honeycomb filter separately! Adding a honeycomb filter to the light reduces the glare of the light.

## Track light Prolumen Durham white 230V 50W 4800lm 38° IP20 DALI 940

**Product code 15931 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 50W  
 Maximum output 50W/1m  
 Luminous flux 4800lumens  
 Luminaire's efficiency lm79 96W  
 Correlated colour temperature pure white 4000K  
 Lens angle 38  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 185.0mm  
 Diameter 95.0mm  
 Weight 1.31 kg  
 Package weight 130 g  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years

Elegant LED track light. All Durham models have high-quality color rendering LED chips (CRI90), ensuring the true color accuracy of the light beam. When ordering a suitable LED track light, the Durham model offers the following options: Power ratings: 15W, 20W, 25W, 30W, 42W. All models: 150-200lm/W. Color temperatures: 2700/3000/3500/4000/5000K. Beam angle: 15°/20°/38°/60°. Dimming options: TRIAC, DALI. The body color can be chosen in either black or white. You also have the option to order a honeycomb filter separately! Adding a honeycomb filter to the light reduces the glare of the light.



## Track light Prolumen Fitero 3F DALI black 230V 20W 2500lm 60° IP20 DALI 930

**Product code 22301 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 125W

Correlated colour temperature warm

white 3000K

Lens angle 60

Source of light [BRIDGELUX LED](#)

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 95.0mm

Diameter 85.0mm

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for indoor lighting!

## Track light Prolumen Fitero 3F DALI black 230V 30W 3700lm 24° IP20 DALI 930

**Product code 22079 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3700lumens

Luminaire's efficiency lm79 123W

Correlated colour temperature warm  
white 3000K

Lens angle 24

Source of light [BRIDGELUX LED](#)

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 112.0mm

Diameter 90.0mm

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Fitero 3F DALI black 230V 30W 3700lm 38° IP20 DALI 930

**Product code 22080 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3700lumens

Luminaire's efficiency lm79 123W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light [BRIDGELUX LED](#)

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 112.0mm

Diameter 90.0mm

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Fitero black 230V 20W 2400lm 60° IP20 930

**Product code 22930**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2400lumens  
Luminaire's efficiency lm79 120W  
Correlated colour temperature warm white 3000K  
Lens angle 60  
Source of light [BRIDGELUX LED](#)  
Cri 90  
Sdcm - macadam ellipses 4  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 95.0mm  
Diameter 85.0mm  
Casing colour black  
Casing material aluminium  
Power supply [KGP](#)  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years



Stylish PROLUMEN LED track light for indoor lighting!

## Track light Prolumen Fitero black 230V 20W 2600lm 60° IP20 940

**Product code 19410**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 2600lumens  
 Luminaire's efficiency lm79 130W  
 Correlated colour temperature pure white 4000K  
 Lens angle 60  
 Source of light [BRIDGELUX LED](#)  
 Cri 90  
 Sdcm - macadam ellipses 4  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 95.0mm  
 Diameter 85.0mm  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



Stylish PROLUMEN LED track light for indoor lighting!

## Track light Prolumen Fitero black 230V 30W 3950lm 60° IP20 940

**Product code 19326**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3950lumens  
 Luminaire's efficiency lm79 132W  
 Correlated colour temperature pure white 4000K  
 Lens angle 60  
 Source of light [BRIDGELUX LED](#)  
 Cri 90  
 Sdcm - macadam ellipses 4  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 112.0mm  
 Diameter 90.0mm  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



Stylish PROLUMEN LED track light for indoor lighting!

## Track light Prolumen Fitero honeycomb TRIAC black 230V 20W 2400lm 38° IP20 TRIAC 930

**Product code 22070 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2400lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light [BRIDGELUX LED](#)

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 95.0mm

Diameter 85.0mm

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Fitero honeycomb TRIAC black 230V 35W 4200lm 38° IP20 TRIAC 930

**Product code 22889 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable TRIAC

Output 35W

Maximum output 35W/1m

Luminous flux 4200lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light [BRIDGELUX LED](#)

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 145.0mm

Diameter 85.0mm

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Fitero TRIAC black 230V 10W 1400lm 38° IP20 TRIAC 930

**Product code 23115 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 1400lumens

Luminaire's efficiency lm79 140W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light [BRIDGELUX LED](#)

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 95.0mm

Diameter 85.0mm

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Fitero TRIAC white 230V 20W 2400lm 38° IP20 TRIAC 930

**Product code 22463 TRIAC dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable TRIAC  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2400lumens  
Luminaire's efficiency lm79 120W  
Correlated colour temperature warm white 3000K  
Lens angle 38  
Source of light [BRIDGELUX LED](#)  
Cri 90  
Sdcm - macadam ellipses 4  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 95.0mm  
Diameter 85.0mm  
Casing colour white  
Casing material aluminium  
Power supply [KGP](#)  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years



Stylish PROLUMEN LED track light for indoor lighting!

## Track light Prolumen Fitero white 230V 30W 3950lm 60° IP20 940

**Product code 19327**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3950lumens  
 Luminaire's efficiency lm79 132W  
 Correlated colour temperature pure white 4000K  
 Lens angle 60  
 Source of light [BRIDGELUX LED](#)  
 Cri 90  
 Sdcm - macadam ellipses 4  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 112.0mm  
 Diameter 90.0mm  
 Casing colour white  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



Stylish PROLUMEN LED track light for indoor lighting!

## Track light Prolumen Fitero ZOOM TRIAC black 230V 20W 2200lm 15-55° IP20 TRIAC 940

**Product code 23116 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure white 4000K

Lens angle 15-55

Source of light [BRIDGELUX LED](#)

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 150.0mm

Diameter 65.0mm

Casing colour black

Casing material aluminium

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for indoor lighting!

## **Track light Prolumen Gondo 600 1F DALI black 230V 20-40W 6000lm 50° IP20 DALI 840**

**Product code 22399 DALI dimmable**

---

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable DALI  
Output 20-40W  
Maximum output 40W/1m  
Luminous flux 6000lumens  
Correlated colour temperature pure white 4000K  
Lens angle 50  
Cri 80  
Ugr 13  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 76.0mm  
Width 154.0mm  
Length 565.0mm  
In box 12pcs  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years

## **Track light Prolumen Lizard 1200 black 230V 48W 7200lm 90° IP20 840**

## Product code 17391

Brand [Prolumen](#)  
Supply voltage 230V  
Output 48W  
Maximum output 48W/1m  
Luminous flux 7200lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature pure white 4000K  
Lens angle 90  
Cri 80  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 73.0mm  
Width 65.0mm  
Length 1150.0mm  
Weight 1.7 kg  
In box 8pcs  
Casing colour black  
Casing material aluminium + plastic  
Power supply [PHILIPS](#)  
Impact resistance IK02  
Work environment indoor use  
Operation temperature -20 - +45°C  
Certificates CE  
Warranty 5 years



LED ceiling light designed for large commercial spaces, which can be mounted on a rail. When ordering a suitable LED track light, the Lizard model offers the following options: Length: 1200/1500mm Power: 22 to 68W, including models with adjustable power. Color temperatures: 3000/4000/5000/6000K, as well as CCT options specifically for illuminating meat, fruits and vegetables, fish, and bakery products. The body color can be chosen in either black or white. Illuminate your world with the help of LED House professionals - [check out our project portfolio here!!](#)

## Track light Prolumen Lizard 1500 black 230V 68W 10880lm 90° IP20 840

**Product code 17389**

Brand [Prolumen](#)

Supply voltage 230V

Output 68W

Maximum output 68W/1m

Luminous flux 10880lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 80

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 73.0mm

Width 65.0mm

Length 1438.0mm

Weight 1.7 kg

In box 8pcs

Casing colour black

Casing material aluminium + plastic

Power supply [PHILIPS](#)

Impact resistance IK02

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE

Warranty 5 years



LED ceiling light designed for large commercial spaces, which can be mounted on a rail. When ordering a suitable LED track light, the Lizard model offers the following options: Length: 1200/1500mm Power: 22 to 68W, including models with adjustable power. Color temperatures: 3000/4000/5000/6000K, as well as CCT options specifically for illuminating meat, fruits and vegetables, fish, and bakery products. The body color can be chosen in either black or white. Illuminate your world with the help of LED House professionals - [check out our project portfolio here!!](#)

## Track light Prolumen Lunel black 230V GU10 IP20

### Product code 16402

Brand [Prolumen](#)  
Supply voltage 230V  
Maximum output 5W/1m  
Socket GU10  
Protection class IP20  
Height 95.0mm  
Diameter 54.0mm  
In package 1pc  
In box 30pcs  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years



With its elegant design, the compact GU10 track light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated track light is an ideal choice for home or office environments. You can choose this Lunel series light as a [track light](#), surface-mounted [black](#) or [white](#) light, and also as a [recessed light](#). As a track light, it attaches to the 3F track. The maximum height of the bulb is 75mm. Come and take a look around our showroom in Tallinn!

## Track light Prolumen Lunel white 230V GU10 IP20

**Product code 16564**

Brand [Prolumen](#)  
Supply voltage 230V  
Maximum output 5W/1m  
Socket GU10  
Protection class IP20  
Height 95.0mm  
Diameter 54.0mm  
In package 1pc  
In box 30pcs  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years



With its elegant design, the compact GU10 track light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated track light is an ideal choice for home or office environments. You can choose this Lunel series light as a [track light](#), surface-mounted [black](#) or [white](#) light, and also as a [recessed light](#). As a track light, it attaches to the 3F track. The maximum height of the bulb is 75mm. Come and take a look around our showroom in Tallinn!

## Track light Prolumen Luxembourg black 230V 20W 2000lm 36° 930

**Product code 17251**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2000lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature warm  
white 3000K  
Lens angle 36  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Lifespan 50000h  
Height 179.0mm  
Diameter 75.0mm  
In package 1pc  
Casing colour black  
Casing material aluminium  
Power supply [VS \(Vossloh-Schwabe\)](#)  
Work environment indoor use  
Certificates CE  
Warranty 5 years



## Track light Prolumen Mateo Zoom white 230V 20W 1800lm 15 - 60° IP20 TRIAC 930

---

**Product code 17810 TRIAC dimmable**

---

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 1800lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature warm white 3000K

Lens angle 15 - 60

Source of light CITIZEN LED

Cri 97

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 194.0mm

Diameter 90.0mm

In package 1pc

In box 12pcs

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



PROLUMEN Mateo is the perfect choice for those seeking a high-quality and modern track light with adjustable beam angle and directional lighting. Mateo is designed to be as minimalist as possible to seamlessly blend into contemporary interiors. With the Zoom feature, the beam angle can be adjusted within 15°-60° range, and the light fixture is equipped with TRIAC dimming technology for convenient light intensity control. The light temperature of this fixture is 3000K, providing a pleasant warm light to the room. Additionally, the light beam does not distort the true colors beneath it, as we are committed to offering quality and have selected lights with a high color rendering index for our track lights. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Track light Prolumen Montreuil 3F black 230V 12W 1200lm 36° IP20 DALI 930

**Product code 17619 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 12W  
 Maximum output 12W/1m  
 Luminous flux 1200lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 131.0mm  
 Diameter 55.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [TCI](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Durham model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Montreuil 55 black 230V 10W 1000lm 36° IP20 TRIAC 940

**Product code 18304 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure  
white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 131.0mm

Diameter 55.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 1F black 230V 20W 2200lm 24° IP20 DALI 930

**Product code 18077 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2200lumens  
Luminaire's efficiency lm79 110W  
Correlated colour temperature warm  
white 3000K  
Lens angle 24  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 179.0mm  
Diameter 75.0mm  
In package 1pc  
Casing colour black  
Casing material aluminium  
Power supply [VS \(Vossloh-Schwabe\)](#)  
Work environment indoor use  
Certificates CE  
Warranty 5 years



## Track light Prolumen Montreuil 75 1F black 230V 20W 2200lm 24° IP20 DALI 940

**Product code 18089 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2200lumens  
Luminaire's efficiency lm79 110W  
Correlated colour temperature pure white 4000K  
Lens angle 24  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 179.0mm  
Diameter 75.0mm  
In package 1pc  
Casing colour black  
Casing material aluminium  
Power supply [VS \(Vossloh-Schwabe\)](#)  
Work environment indoor use  
Certificates CE  
Warranty 5 years



## **Track light Prolumen Montreuil 75 1F black 230V 20W 2200lm 36° IP20 DALI 930**

**Product code 18056 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 1F black 230V 20W 2200lm 36° IP20 DALI 940

**Product code 18060 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2200lumens  
Luminaire's efficiency lm79 110W  
Correlated colour temperature pure white 4000K  
Lens angle 36  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 179.0mm  
Diameter 75.0mm  
In package 1pc  
Casing colour black  
Casing material aluminium  
Power supply [VS \(Vossloh-Schwabe\)](#)  
Work environment indoor use  
Certificates CE  
Warranty 5 years



## Track light Prolumen Montreuil 75 1F black 230V 20W 2200lm 60° IP20 DALI 930

**Product code 18057 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 1F black 230V 20W 2200lm 60° IP20 DALI 940

**Product code 18061 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure  
white 4000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## **Track light Prolumen Montreuil 75 1F white 230V 20W 2200lm 36° IP20 DALI 930**

**Product code 20381 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 3F black 230V 20W 2200lm 36° IP20 930

**Product code 18091**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

Casing colour black

Casing material aluminium

Power supply [VS \(Vossloh-Schwabe\)](#)

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 3F black 230V 20W 2200lm 36° IP20 940

**Product code 18090**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure  
white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

Casing colour black

Casing material aluminium

Power supply [VS \(Vossloh-Schwabe\)](#)

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 black 230V 20W 2200lm 36° IP20 TRIAC 930

**Product code 17975 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

In box 18pcs

Casing colour black

Casing material aluminium

Power supply [AIDIMMING](#)

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 black 230V 20W 2200lm 36° IP20 TRIAC 940

**Product code 18059 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure  
white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

Casing colour black

Casing material aluminium

Power supply [VS \(Vossloh-Schwabe\)](#)

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 black 230V 20W 2200lm 60° IP20 TRIAC 940

**Product code 18058 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure  
white 4000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 179.0mm

Diameter 75.0mm

In package 1pc

In box 18pcs

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 Honeycomb filter black 230V 20W 2200lm 60° IP20 TRIAC 930

**Product code 17974 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In box 18pcs

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 Honeycomb filter white 230V 20W 2200lm 60° IP20 TRIAC 930

**Product code 18347 TRIAC dimmable**

---

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 179.0mm

Diameter 75.0mm

In box 18pcs

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 75 Zoom 1F black 230V 20W 1900lm 15-55° IP20 DALI 927

**Product code 17689 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 20W  
Maximum output 20W/1m  
Luminous flux 1900lumens  
Luminaire's efficiency lm79 95W  
Correlated colour temperature warm white 2700K  
Lens angle 15-55  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 176.5mm  
Diameter 75.0mm  
Weight 1.99 kg  
In package 1pc  
In box 18pcs  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Certificates CE  
Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Durham model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Montreuil 90 black 230V 30W 3200lm 38° 940

**Product code 18087**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature pure  
white 4000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 90 black 230V 30W 3200lm 38° DALI 930

**Product code 18175 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## **Track light Prolumen Montreuil 90 black 230V 30W 3200lm 38° IP20 930**

**Product code 18088**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 90 black 230V 30W 3200lm 38° TRIAC 930

**Product code 18051 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 90 black 230V 30W 3200lm 38° TRIAC 940

**Product code 18052 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature pure  
white 4000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## **Track light Prolumen Montreuil 90 RFC white 230V 20W 1850lm CRI90 38° RF 2700K-6500K**

**Product code 18555 RF dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable RF

Output 20W

Maximum output 20W/1m

Luminous flux 1850lumens

Luminaire's efficiency lm79 93W

Correlated colour temperature

2700K-6500K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

In box 12pcs

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## **Track light Prolumen Montreuil 90 white 230V 20W 1850lm CRI90 38° DALI 2700K-6500K**

**Product code 18248 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 1850lumens

Luminaire's efficiency lm79 93W

Correlated colour temperature

2700K-6500K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

In box 12pcs

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 90 white 230V 30W 3000lm 38° DALI 930

**Product code 18176 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

In box 12pcs

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 90 white 230V 30W 3200lm 38° TRIAC 930

**Product code 18053 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature warm  
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil 90 white 230V 30W 3200lm 38° TRIAC 940

**Product code 18054 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature pure  
white 4000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 186.0mm

Diameter 90.0mm

In package 1pc

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE

Warranty 5 years



## Track light Prolumen Montreuil honeycomb ZOOM 3F black 230V 20W 1800lm 15-55° IP20 TRIAC 930

**Product code 17936 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 1800lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature warm white 3000K  
 Lens angle 15-55  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 176.5mm  
 Diameter 75.0mm  
 Weight 1.99 kg  
 In package 1pc  
 In box 18pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Durham model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Montreuil ZOOM 1F black 230V 20W 1900lm 15-55° IP20 DALI 930

**Product code 17848 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 1900lumens  
 Luminaire's efficiency lm79 95W  
 Correlated colour temperature warm white 3000K  
 Lens angle 15-55  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 176.5mm  
 Diameter 75.0mm  
 Weight 1.99 kg  
 In package 1pc  
 In box 18pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Durham model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Montreuil ZOOM 1F black 230V 30W 2500lm 15-60° IP20 DALI 930

**Product code 20385 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 2500lumens  
 Luminaire's efficiency lm79 83W  
 Correlated colour temperature warm white 3000K  
 Lens angle 15-60  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 194.0mm  
 Diameter 90.0mm  
 Weight 1.99 kg  
 In package 1pc  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Durham model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Montreuil Zoom 90 black 230V 20W 1800lm 15 - 60° IP20 TRIAC 930

**Product code 17365 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 1800lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature warm white 3000K  
 Lens angle 15 - 60  
 Source of light CITIZEN LED  
 Cri 97  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 194.0mm  
 Diameter 90.0mm  
 In package 1pc  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 5 years



PROLUMEN Montreuil is the perfect choice for those seeking a high-quality and modern track light with adjustable beam angle and directional lighting. Mateo is designed to be as minimalist as possible to seamlessly blend into contemporary interiors. With the Zoom feature, the beam angle can be adjusted within 15°-60° range, and the light fixture is equipped with TRIAC dimming technology for convenient light intensity control. The light temperature of this fixture is 3000K, providing a pleasant warm light to the room. Additionally, the light beam does not distort the true colors beneath it, as we are committed to offering quality and have selected lights with a high color rendering index for our track lights. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Track light Prolumen Montreuil ZOOM Dimmer on body black 230V 10W 450lm 8-50° IP20 DIMMABLE 930

**Product code 17258 DIMMABLE  
dimnable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DIMMABLE  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 450lumens  
 Luminaire's efficiency lm79 45W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 8-50  
 Source of light CITIZEN LED  
 Cri 97  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 142.0mm  
 Diameter 55.0mm  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Durham model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Montreuil ZOOM honeycomb black 230V 12W 1200lm 8-50° IP20 TRIAC 930

**Product code 16995 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 12W  
 Maximum output 12W/1m  
 Luminous flux 1200lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature warm white 3000K  
 Lens angle 8-50  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 142.0mm  
 Diameter 55.0mm  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Durham model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Montreuil ZOOM white 230V 4W 160lm 12-43° IP20 TRIAC 930

**Product code 17256 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 4W  
 Maximum output 4W/1m  
 Luminous flux 160lumens  
 Luminaire's efficiency lm79 40W  
 Correlated colour temperature warm white 3000K  
 Lens angle 12-43  
 Source of light CITIZEN LED  
 Cri 97  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 86.0mm  
 Diameter 35.0mm  
 In package 1pc  
 In box 30pcs  
 Casing colour white  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Montreuil [track light](#) with an elegant matte white design! Its minimalist design blends perfectly into various interiors, whether at home, in an office, or in a commercial environment. When ordering the right LED track light, the Montreuil model offers the following options: Power: 10W to 20W. Beam angle: zoomable angle from 15° to 55°. Color temperature: 2700-6500K. Housing color: available in either black or white. Dimming options: TRIAC, DALI. Thanks to its high color rendering index, this light is ideal for color-critical environments such as photography, filmmaking, design, and other visual creative fields. CRI90 and 97 ensure light that renders room colors truthfully and clearly. With proper use, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Enhance your everyday lighting quality and choose a top-notch lighting solution from the LED House selection!

## Track light Prolumen Signum Zoom black 230V 30W 850lm 18-36° IP20 0-10V 930

**Product code 21022 0-10V dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable 0-10V  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 850lumens  
 Luminaire's efficiency lm79 28W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 18-36  
 Cri 97  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 In package 1pc  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



## Track light Prolumen Signum Zoom Integrated adapter black 230V 40W 1100lm 18-36° IP20 CASAMBI 930

**Product code 21021 CASAMBI  
dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable CASAMBI  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 1100lumens  
 Luminaire's efficiency lm79 28W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 18-36  
 Cri 97  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 In package 1pc  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



## Track light Prolumen Tamara 1500 white 230V 50W 8000lm 90° IP20 830

**Product code 17474**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 50W  
 Maximum output 50W/1m  
 Luminous flux 8000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature warm white 3000K  
 Lens angle 90  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Height 10.0mm  
 Width 60.0mm  
 Length 1493.0mm  
 In package 1pc  
 In box 5pcs  
 Casing colour white  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -25 - +40°C  
 Certificates CE  
 Warranty 5 years



PROLUMEN Tamara linear track light for stores, reception halls, and other spaces requiring high-quality lighting solutions. When ordering a suitable LED track light, the Tamara model offers the following options: Power: 14W to 50W Color temperatures: 2700-6500K Housing color: available in black or white Length: 600mm/1200mm/1500mm With an IP20 protection class, Tamara lights are designated for use in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Track light Prolumen Tamara 1500 white 230V 50W 8000lm 90° IP20 DALI 830

**Product code 17475 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 50W

Maximum output 50W/1m

Luminous flux 8000lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 80

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 10.0mm

Width 60.0mm

Length 1493.0mm

In package 1pc

Casing colour white

Work environment indoor use

Operation temperature -25 - +40°C

Certificates CE

Warranty 5 years

PROLUMEN Tamara linear track light for stores, reception halls, and other spaces requiring high-quality lighting solutions. When ordering a suitable LED track light, the Tamara model offers the following options: Power: 14W to 50W Color temperatures: 2700-6500K Housing color: available in black or white Length: 600mm/1200mm/1500mm With an IP20 protection class, Tamara lights are designated for use in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Track light Prolumen Tamara 600 black 230V 20W 3200lm 90° IP20 830

**Product code 18244**

Brand [Prolumen](#)

Supply voltage 230V

Output 20W

Maximum output 20W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 80

Protection class IP20

Lifespan 50000h

Height 10.0mm

Width 60.0mm

Length 600.0mm

In package 1pc

In box 10pcs

Casing colour black

Polishing matt

Work environment indoor use

Operation temperature -25 - +40°C

Certificates ENEC, SAA, CB, CE, RoHS

Warranty 5 years



PROLUMEN Tamara linear track light for stores, reception halls, and other spaces requiring high-quality lighting solutions. When ordering a suitable LED track light, the Tamara model offers the following options: Power: 14W to 50W Color temperatures: 2700-6500K Housing color: available in black or white Length: 600mm/1200mm/1500mm With an IP20 protection class, Tamara lights are designated for use in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Track light Prolumen Tamara 600 black 230V 20W 3200lm 90° IP20 840

**Product code 17479**

Brand [Prolumen](#)

Supply voltage 230V

Output 20W

Maximum output 20W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 80

Protection class IP20

Lifespan 50000h

Height 10.0mm

Width 60.0mm

Length 600.0mm

In package 1pc

In box 10pcs

Casing colour black

Polishing matt

Work environment indoor use

Operation temperature -25 - +40°C

Certificates ENEC, SAA, CB, CE, RoHS

Warranty 5 years



PROLUMEN Tamara linear track light for stores, reception halls, and other spaces requiring high-quality lighting solutions. When ordering a suitable LED track light, the Tamara model offers the following options: Power: 14W to 50W Color temperatures: 2700-6500K Housing color: available in black or white Length: 600mm/1200mm/1500mm With an IP20 protection class, Tamara lights are designated for use in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Track light Prolumen Tamara 600 white 230V 20W 3200lm 90° IP20 830

**Product code 17472**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 20W

Maximum output 20W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 80

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 10.0mm

Width 60.0mm

Length 600.0mm

In package 1pc

Casing colour white

Work environment indoor use

Operation temperature -25 - +40°C

Certificates CE

Warranty 5 years

PROLUMEN Tamara linear track light for stores, reception halls, and other spaces requiring high-quality lighting solutions. When ordering a suitable LED track light, the Tamara model offers the following options: Power: 14W to 50W Color temperatures: 2700-6500K Housing color: available in black or white Length: 600mm/1200mm/1500mm With an IP20 protection class, Tamara lights are designated for use in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Track light Prolumen Tamara 600 white 230V 20W 3200lm 90° IP20 840

**Product code 17478**

Brand [Prolumen](#)

Supply voltage 230V

Output 20W

Maximum output 20W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 80

Protection class IP20

Lifespan 50000h

Height 10.0mm

Width 60.0mm

Length 600.0mm

In package 1pc

In box 10pcs

Casing colour white

Polishing matt

Work environment indoor use

Operation temperature -25 - +40°C

Certificates ENEC, SAA, CB, CE, RoHS

Warranty 5 years

PROLUMEN Tamara linear track light for stores, reception halls, and other spaces requiring high-quality lighting solutions. When ordering a suitable LED track light, the Tamara model offers the following options: Power: 14W to 50W Color temperatures: 2700-6500K Housing color: available in black or white Length: 600mm/1200mm/1500mm With an IP20 protection class, Tamara lights are designated for use in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Track light Prolumen Tamara 600 white 230V 20W 3200lm 90° IP20 DALI 830

**Product code 17473 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 80

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 10.0mm

Width 60.0mm

Length 600.0mm

In package 1pc

Casing colour white

Work environment indoor use

Operation temperature -25 - +40°C

Certificates CE

Warranty 5 years

PROLUMEN Tamara linear track light for stores, reception halls, and other spaces requiring high-quality lighting solutions. When ordering a suitable LED track light, the Tamara model offers the following options: Power: 14W to 50W Color temperatures: 2700-6500K Housing color: available in black or white Length: 600mm/1200mm/1500mm With an IP20 protection class, Tamara lights are designated for use in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Track light Prolumen TANGO black 230V 20W 1000lm 36° IP20 930

Product code 23189

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 20W  
Maximum output 20W/1m  
Rated current 350mA  
Luminous flux 1000lumens  
Luminaire's efficiency lm79 50W  
Correlated colour temperature warm white 3000K  
Lens angle 36  
Source of light [BRIDGELUX LED](#)  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 165.0mm  
Diameter 60.0mm  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Operation temperature -15 ~ 40°C



## Track light Prolumen Tokyo + honeycomb filter 1F black 230V 10W 960lm 36° IP20 DALI 940

## Product code 17510 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 10W

Maximum output 10W/1m

Luminous flux 960lumens

Luminaire's efficiency lm79 96W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 130.0mm

Diameter 50.0mm

In package 1pc

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo + honeycomb filter 1F white 230V 10W 960lm 36° IP20 DALI 930

**Product code 17511 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 960lumens  
 Luminaire's efficiency lm79 96W  
 Correlated colour temperature warm white 3000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 Casing colour white  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo + honeycomb filter 1F white 230V 10W 960lm 36° IP20 DALI 940

**Product code 17512 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 960lumens  
 Luminaire's efficiency lm79 96W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 Casing colour white  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo + honeycomb filter black 230V 10W 800lm 36° IP20 930

### Product code 17499

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 800lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature warm white 3000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo + honeycomb filter black 230V 10W 800lm 36° IP20 TRIAC 940

**Product code 17504 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 800lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 In box 16pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo + honeycomb filter black 230V 10W 800lm 50° IP20 930

**Product code 17507**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 800lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature warm white 3000K  
 Lens angle 50  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20° - +40°C  
 Certificates CE  
 Warranty 5 years



An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Track light Prolumen Tokyo + honeycomb filter black 230V 10W 960lm 36° IP20 DALI 930

**Product code 17509 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 960lumens  
 Luminaire's efficiency lm79 96W  
 Correlated colour temperature warm white 3000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo + honeycomb filter white 230V 10W 800lm 36° IP20 TRIAC 930

**Product code 17506 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 800lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature warm white 3000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour white  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo + honeycomb filter white 230V 10W 800lm 36° IP20 TRIAC 940

**Product code 17505 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 800lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 Casing colour white  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Track light Prolumen Tokyo black 230V 10W 800lm 36° IP20 TRIAC 930

**Product code 17503 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable TRIAC  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 800lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature warm white 3000K  
 Lens angle 36  
 Source of light CITIZEN LED  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 50.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

An elegantly designed LED ceiling light with a honeycomb filter, suitable for both commercial and residential spaces. Tokyo ceiling lights have adjustable light direction, and unlike many other ceiling lights, the Tokyo model series allows lights to be directed upwards as well. When ordering a suitable LED track light, the Tokyo model offers the following options: Color temperatures: 2700-5000K, with the option to adjust the light temperature Housing color: available in black or white Beam angle: 15° to 50° Dimming: DALI, TRIAC From LED House's selection, you can also find decorative golden, black, and white rings for Tokyo ceiling lights to enhance their appearance even further. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Accessory Prolumen Tokyo front ring black

**Product code 17515**

Brand [Prolumen](#)  
In package 1pc  
Casing colour black  
Casing material aluminium

Black front ring for Tokyo track lights.



## Accessory Prolumen Tokyo front ring gold

**Product code 17513**

Brand [Prolumen](#)  
In package 1pc  
Casing colour gold  
Casing material aluminium

Gold front ring for Tokyo track lights.




## Accessory Prolumen Tokyo front ring white

**Product code 17514**

---

Brand [Prolumen](#)  
In package 1pc  
Casing colour white  
Casing material aluminium

White front ring for Tokyo track lights.

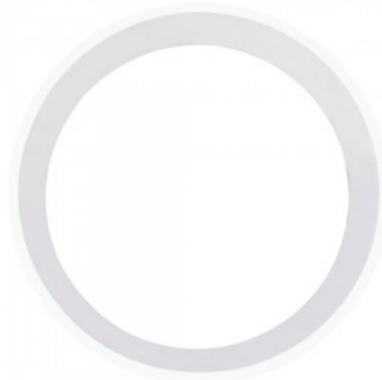

## Track light Prolumen Valdoc 600 black 230V 20W 3200lm 90° IP20 940

**Product code 20465**

---

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Output 20W  
Maximum output 20W/1m  
Luminous flux 3200lumens  
Luminaire's efficiency lm79 160W  
Correlated colour temperature pure white 4000K  
Lens angle 90  
Cri 90  
Sdcm - macadam ellipses 4  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 63.0mm  
Width 61.0mm  
Length 576.0mm  
In box 20pcs  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years

## Track light Prolumen Valencette 1200 black 230V 40W 4400lm 60x90° IP20 930

**Product code 18260**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Output 40W

Maximum output 40W/1m

Luminous flux 4400lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 60x90

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 48.0mm

Width 30.0mm

Length 1185.0mm

In box 20pcs

Casing colour black

Casing material aluminium

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Valencette 1200 black 230V 40W 4400lm 60x90° IP20 940

**Product code 18275**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Output 40W

Maximum output 40W/1m

Luminous flux 4400lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure  
white 4000K

Lens angle 60x90

Cri 90

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 48.0mm

Width 30.0mm

Length 1185.0mm

In box 20pcs

Casing colour black

Casing material aluminium

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Valencette 700 black 230V 20W 2200lm 48° IP20 TRIAC 830

**Product code 17999 TRIAC dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable TRIAC

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm  
white 3000K

Lens angle 48

Cri 80

Sdcm - macadam ellipses 4

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 48.0mm

Width 30.0mm

Length 705.0mm

In box 20pcs

Casing colour black

Casing material aluminium

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Valencette 700 black 230V 20W 2200lm 90° IP20 TRIAC 830

**Product code 22203 TRIAC dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable TRIAC  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 2200lumens  
 Luminaire's efficiency lm79 110W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 90  
 Cri 80  
 Sdcm - macadam ellipses 4  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 48.0mm  
 Width 30.0mm  
 Length 705.0mm  
 In box 20pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



Stylish PROLUMEN LED track light for  
indoor lighting!

## Track light Prolumen Warwick 3F black 230V 30W 3200lm 36° IP20 DALI 930

**Product code 22165 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3200lumens

Luminaire's efficiency lm79 107W

Correlated colour temperature warm

white 3000K

Lens angle 36

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

In box 12pcs

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years

PROLUMEN Warwick luminaire with reflector, featuring a five-year warranty and a stylish design. Also available are special light tones:  
 Bakery products (warm white 2400K).  
 Meat products (warm white 3200K).  
 Meat products (reddish warm white 1900K). Fish products (very cool white 7000K). Selectable beam angles: 15°/24°/36°/60°. Inquire about special tones separately!



## Track light Prolumen Warwick 3F black 230V 30W 3400lm 36° IP20 DALI 930

**Product code 17174 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3400lumens  
 Luminaire's efficiency lm79 113W  
 Correlated colour temperature warm white 3000K  
 Lens angle 36  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

PROLUMEN Warwick luminaire with reflector, featuring a five-year warranty and a stylish design. Also available are special light tones:  
 Bakery products (warm white 2400K).  
 Meat products (warm white 3200K).  
 Meat products (reddish warm white 1900K). Fish products (very cool white 7000K). Selectable beam angles: 15°/24°/36°/60°. Inquire about special tones separately!



## Track light Prolumen Warwick 3F black 230V 30W 3400lm 36° IP20 DALI 940

**Product code 17738 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3400lumens

Luminaire's efficiency lm79 113W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

In box 12pcs

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20° - +40°C

Certificates CE

Warranty 5 years

PROLUMEN Warwick luminaire with reflector, featuring a five-year warranty and a stylish design. Also available are special light tones:

Bakery products (warm white 2400K).

Meat products (warm white 3200K).

Meat products (reddish warm white 1900K). Fish products (very cool white 7000K). Selectable beam angles:

15°/24°/36°/60°. Inquire about special tones separately!



## Track light Prolumen Warwick 3F white 230V 30W 3400lm 15° IP20 DALI 930

**Product code 17170 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3400lumens

Luminaire's efficiency lm79 113W

Correlated colour temperature warm

white 3000K

Lens angle 15

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

In box 12pcs

Casing colour white

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years

PROLUMEN Warwick luminaire with reflector, featuring a five-year warranty and attractive design. Also available are special light tones: Bakery products (warm white 2400K). Meat products (warm white 3200K). Meat products (reddish warm white 1900K). Fish products (very cold white 7000K). Inquire about special tones separately. Available beam angles: 15°/24°/36°/60°.



## Track light Prolumen Warwick 3F white 230V 30W 3400lm 36° IP20 DALI 930

**Product code 17145 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3400lumens  
 Luminaire's efficiency lm79 113W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 36  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [KGP](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

PROLUMEN Warwick luminaire with reflector, featuring a five-year warranty and attractive design. Also available are special light tones:  
 Bakery products (warm white 2400K).  
 Meat products (warm white 3200K).  
 Meat products (reddish warm white 1900K). Fish products (very cold white 7000K). Inquire about special tones separately. Available beam angles: 15°/24°/36°/60°.



## Track light Prolumen Warwick black 230V 30W 3400lm 36° IP20 930

**Product code 17176**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 30W

Maximum output 30W/1m

Luminous flux 3400lumens

Luminaire's efficiency lm79 113W

Correlated colour temperature warm  
white 3000K

Lens angle 36

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

In box 12pcs

Casing colour black

Casing material aluminium

Power supply [KGP](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years

PROLUMEN Warwick luminaire with reflector, featuring a five-year warranty and a stylish design. Also available are special light tones:  
Bakery products (warm white 2400K).  
Meat products (warm white 3200K).  
Meat products (reddish warm white 1900K). Fish products (very cool white 7000K). Selectable beam angles: 15°/24°/36°/60°. Inquire about special tones separately!



## Track light RUNK UGR17 white 230V 30W 3500lm 36° IP20 TRIAC 940

**Product code 22276 TRIAC dimmable**

Supply voltage 230V  
 Dimmable TRIAC  
 Output 30W  
 Maximum output 30W/1m  
 Rated current 1050mA  
 Luminous flux 3500lumens  
 Luminaire's efficiency lm79 117W  
 Correlated colour temperature pure white 4000K  
 Lens angle 36  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 130.0mm  
 Diameter 100.0mm  
 Casing colour white  
 Casing material aluminium + plastic  
 Power supply [PHILIPS](#)  
 Work environment indoor use  
 Operation temperature -15 ~ 40°C



Unit:mm

