



## Power supply 24V DC PFV-30-24 230V 30W IP20

### **Product code 17290**

Supply voltage 230V
Output voltage 24V
Output 30W
Maximum output 30W/1m
Protection class IP20
Height 18.0mm
Width 58.0mm
Length 160.0mm
In package 1pc
Work environment indoor use
Certificates CE
Warranty 5 years

Power supply unit that meets both professional and domestic lighting needs. Compact size, slim structure, lightweight. High efficiency, low temperature rise. Cooling with free air circulation. Complies with international lighting standards. PFV power supply units comply with international lighting standards and have short-circuit, overcurrent, overvoltage, and thermal protection.



## Power supply 24V DC PFV-75-24 230V 75W IP20

#### Product code 17294

Supply voltage 230V
Output voltage 24V
Output 75W
Maximum output 75W/1m
Protection class IP20
Height 18.1mm
Width 58.0mm
Length 160.0mm
In package 1pc
Work environment indoor use
Certificates CE
Warranty 5 years

Power supply unit that meets both professional and domestic lighting needs. Compact size, slim structure, lightweight. High efficiency, low temperature rise. Cooling with free air circulation. Complies with international lighting standards. PFV power supply units comply with international lighting standards and have short-circuit, overcurrent, overvoltage, and thermal protection.








## Power supply 24V DC PFV-8-24 230V 8W IP20

### **Product code 17285**

Supply voltage 230V
Output voltage 24V
Output 8W
Maximum output 8W/1m
Protection class IP20
Height 24.0mm
Width 50.0mm
Length 90.0mm
In package 1pc
Certificates CE
Warranty 5 years

Power supply unit that meets both professional and domestic lighting needs. Compact size, slim structure, lightweight. High efficiency, low temperature rise. Cooling with free air circulation. Complies with international lighting standards. PFV power supply units comply with international lighting standards and have short-circuit, overcurrent, overvoltage, and thermal protection.

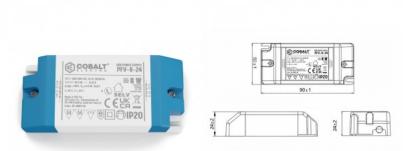

# Power supply Deko-Light 500 mA(CV,DC)-IP,CV,V6-40-24 black 24V 40W IP67 No dim

### Product code 20082 No dim dimmable

Brand Deko-Light Supply voltage 24V Dimmable No dim Output 40W Maximum output 40W/1m Protection class IP67 Lifespan 50000h Height 30.5mm Width 58.0mm Length 176.0mm In package 1pc Casing colour black Casing material plastic Polishing matt Work environment indoor / outdoor use Operation temperature -20 - +50°C Certificates CE Warranty 5 years



Robust housing,flicker-free,secured against short circuits and overloads,overheating protection



# Power supply Deko-Light Mini 220-240 V/AC 500mA (CV,DC)-OCTO,CV black 12W IP65 No dim

# Product code 20081 No dim dimmable

Brand Deko-Light Dimmable No dim Output 12W Maximum output 12W/1m Protection class IP65 Lifespan 50000h Height 24.0mm Width 48.0mm Length 50.0mm In package 1pc Casing colour black Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -20 - +50°C Certificates CE



Flicker-free, secured against short circuits and overloads.

Warranty 5 years

## Power supply GLP POWER GTPC-100-12-D 230V 100W TRIAC

#### Product code 15657 TRIAC dimmable

**Brand GLP POWER** Supply voltage 230V Dimmable TRIAC Output voltage 12V Output 100W Maximum output 100W/1m Rated current 8300mA Height 34.0mm Width 67.0mm Length 210.0mm Weight 360g In box 50pcs Work environment indoor use Operation temperature -20 ~ +50°C Certificates CE Warranty 2 years







## Power supply KGP 12V DC RV-24-12 230V 24W IP20 No dim

# Product code 17414 No dim dimmable

Brand KGP Supply voltage 230V Power factor 0.95 Dimmable No dim Output voltage 12V Output 24W Maximum output 24W/1m Rated current 1200mA Protection class IP20 Lifespan 50000h Height 25.0mm Diameter 55.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -20 - +50°C Certificates CE Warranty 5 years







### Power supply KGP 24V DC CV-100-24 230V 100W IP20 TRIAC

#### Product code 17428 TRIAC dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable TRIAC Output voltage 24V Output 100W Maximum output 100W/1m Rated current 4200mA Protection class IP20 Lifespan 50000h Height 34.0mm Width 67.0mm Length 210.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years







### Power supply KGP 24V DC CV-150-24 230V 150W IP20 TRIAC

#### Product code 17429 TRIAC dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable TRIAC Output voltage 24V Output 150W Maximum output 150W/1m Rated current 4200mA Protection class IP20 Lifespan 50000h Height 34.0mm Width 67.0mm Length 210.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years







### Power supply KGP 24V DC CV-25-24 230V 25W IP20 TRIAC

#### Product code 17426 TRIAC dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable TRIAC Output voltage 24V Output 25W Maximum output 25W/1m Rated current 1040mA Protection class IP20 Lifespan 50000h Height 30.0mm Width 52.0mm Length 128.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years







## Power supply KGP 24V DC CV-50-24 230V 50W IP20 TRIAC

#### Product code 17427 TRIAC dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable TRIAC Output voltage 24V Output 50W Maximum output 50W/1m Rated current 2080mA Protection class IP20 Lifespan 50000h Height 32.0mm Width 61.0mm Length 184.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years







# Power supply KGP 24V DC FV-100-24 /PUSH 230V 100W IP20 DALI / PUSH

# Product code 17412 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 100W Maximum output 100W/1m Rated current 4200mA Protection class IP20 Lifespan 50000h Height 22.0mm Width 65.0mm Length 190.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates CE Warranty 5 years







### Power supply KGP 24V DC FV-12-24 230V 12W IP20

#### Product code 17407

**Brand KGP** Supply voltage 230V Power factor 0.92 Output voltage 24V Output 12W Maximum output 12W/1m Rated current 500mA Protection class IP20 Lifespan 50000h Height 15.5mm Width 46.0mm Length 112.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -30 - +75°C Certificates ENEC, CE, EAC, SAA Warranty 5 years







## Power supply KGP 24V DC FV-120-24 230V 120W IP20 No dim

# Product code 17413 No dim dimmable

Brand KGP Supply voltage 230V Power factor 0.95 Dimmable No dim Output voltage 24V Output 120W Maximum output 120W/1m Rated current 5000mA Protection class IP20 Lifespan 50000h Height 22.0mm Width 65.0mm Length 190.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates CE Warranty 5 years







### **Power supply KGP 24V DC FV-24-24 230V 24W IP20**

### **Product code 17406**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 24W Maximum output 24W/1m Rated current 1000mA Protection class IP20 Lifespan 50000h Height 15.5mm Width 50.0mm Length 137.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates ENEC, CE, EAC, SAA Warranty 5 years







### Power supply KGP 24V DC FV-36-24 230V 36W IP20

### **Product code 17408**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 36W Maximum output 36W/1m Rated current 1500mA Protection class IP20 Lifespan 50000h Height 18.0mm Width 57.0mm Length 170.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates ENEC, CE, EAC, SAA Warranty 5 years







# Power supply KGP 24V DC FV-60-24 /PUSH 230V 60W IP20 DALI / PUSH

# Product code 17410 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP20 Lifespan 50000h Height 18.0mm Width 57.0mm Length 170.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates CE Warranty 5 years







### **Power supply KGP 24V DC FV-60-24 230V 60W IP20**

### **Product code 17409**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP20 Lifespan 50000h Height 18.0mm Width 57.0mm Length 170.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates ENEC, CE, SAA Warranty 5 years







### Power supply KGP 24V DC FV-90-24 230V 90W IP20 No dim

# Product code 17411 No dim dimmable

Brand KGP Supply voltage 230V Power factor 0.95 Dimmable No dim Output voltage 24V Output 90W Maximum output 90W/1m Rated current 3750mA Protection class IP20 Lifespan 50000h Height 22.0mm Width 65.0mm Length 190.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates ENEC, CE, EAC, SAA Warranty 5 years







# Power supply KGP 24V DC LV-100-24 /PUSH-DIM 230V 100W IP20 DALI / PUSH

# Product code 17207 DALI / PUSH dimmable

Brand KGP Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 100W Maximum output 100W/1m Rated current 4170mA Protection class IP20 Height 18.0mm Width 30.0mm Length 350.0mm Weight 210g In box 50pcs Casing material plastic Certificates CE Warranty 5 years

High-quality and reliable 24V power supply unit, which allows powering and controlling DALI or PUSH-DIM lighting systems. This device provides stable and efficient power to 24V lighting elements, such as LED strips. The power supply unit is compact and durable, suitable for indoor use. Additionally, it has easy installation and connection! We are committed to providing high-quality lighting solutions that meet your needs and expectations. Come and take a look, and also ask for advice at our showroom in Tallinn!



## Power supply KGP 24V DC LV-100-24 230V 100W IP20





#### **Product code 17421**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 100W Maximum output 100W/1m Rated current 4170mA Protection class IP20 Lifespan 50000h Height 18.0mm Width 30.0mm Length 350.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates CE, ENEC, SAA Warranty 5 years







# Power supply KGP 24V DC LV-150-24 /PUSH-DIM 230V 150W IP20 DALI / PUSH

# Product code 17206 DALI / PUSH dimmable

Brand KGP Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP20 Height 18.0mm Width 30.0mm Length 350.0mm Weight 310g In box 50pcs Casing material plastic Certificates CE Warranty 5 years

High-quality and reliable 24V power supply unit, which allows powering and controlling DALI or PUSH-DIM lighting systems. This device provides stable and efficient power to 24V lighting elements, such as LED strips. The power supply unit is compact and durable, suitable for indoor use. Additionally, it has easy installation and connection! We are committed to providing high-quality lighting solutions that meet your needs and expectations. Come and take a look, and also ask for advice at our showroom in Tallinn!



## Power supply KGP 24V DC LV-150-24 230V 150W IP20





#### Product code 17423

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP20 Lifespan 50000h Height 18.0mm Width 30.0mm Length 350.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates CE, ENEC, SAA Warranty 5 years







# Power supply KGP 24V DC LV-250-24 /PUSH-DIM 230V 250W IP20 DALI / PUSH

# Product code 17205 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 250W Maximum output 250W/1m Rated current 10420mA Protection class IP20 Height 22.0mm Width 40.0mm Length 400.0mm Weight 530g In box 25pcs Casing material plastic Certificates CE Warranty 5 years

High-quality and reliable 24V power supply unit, which allows powering and controlling DALI or PUSH-DIM lighting systems. This device provides stable and efficient power to 24V lighting elements, such as LED strips. The power supply unit is compact and durable, suitable for indoor use. Additionally, it has easy installation and connection! We are committed to providing high-quality lighting solutions that meet your needs and expectations. Come and take a look, and also ask for advice at our showroom in Tallinn!







## Power supply KGP 24V DC LV-250-24 230V 250W IP20

### **Product code 17231**

**Brand KGP** Supply voltage 230V Output voltage 24V Output 250W Maximum output 250W/1m Rated current 10420mA Protection class IP20 Lifespan 50000h Height 22.0mm Width 40.0mm Length 400.0mm Weight 530g Casing material plastic Operation temperature -25 ~ 45°C Certificates CE, ENEC Warranty 5 years

High-quality and reliable 24V power supply unit. This device provides stable and efficient power to 24V lighting elements, such as LED strips. The power supply unit is compact and durable, suitable for indoor use. Additionally, it has easy installation and connection! We are committed to providing high-quality lighting solutions that meet your needs and expectations. Come and take a look, and also ask for advice at our showroom in Tallinn!







# Power supply KGP 24V DC LV-30-24 /PUSH-DIM 230V 30W IP20 DALI / PUSH

# Product code 17209 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 30W Maximum output 30W/1m Rated current 1250mA Protection class IP20 Height 16.0mm Width 30.0mm Length 300.0mm Weight 143g In box 50pcs Casing material plastic Certificates CE Warranty 5 years

High-quality and reliable 24V power supply unit, which allows powering and controlling DALI or PUSH-DIM lighting systems. This device provides stable and efficient power to 24V lighting elements, such as LED strips. The power supply unit is compact and durable, suitable for indoor use. Additionally, it has easy installation and connection! We are committed to providing high-quality lighting solutions that meet your needs and expectations. Come and take a look, and also ask for advice at our showroom in Tallinn!







## Power supply KGP 24V DC LV-30-24 230V 30W IP20

### **Product code 17232**

Brand KGP
Supply voltage 230V
Output voltage 24V
Output 30W
Maximum output 30W/1m
Rated current 1250mA
Protection class IP20
Height 16.0mm
Width 30.0mm
Length 300.0mm
Weight 143g
In box 50pcs
Casing material plastic
Certificates CE, ENEC
Warranty 5 years









# Power supply KGP 24V DC LV-60-24 /PUSH-DIM 230V 60W IP20 DALI / PUSH

# Product code 17208 DALI / PUSH dimmable

Brand KGP Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP20 Height 18.0mm Width 30.0mm Length 350.0mm Weight 230g In box 50pcs Casing material plastic Certificates CE Warranty 5 years

High-quality and reliable 24V power supply unit, which allows powering and controlling DALI or PUSH-DIM lighting systems. This device provides stable and efficient power to 24V lighting elements, such as LED strips. The power supply unit is compact and durable, suitable for indoor use. Additionally, it has easy installation and connection! We are committed to providing high-quality lighting solutions that meet your needs and expectations. Come and take a look, and also ask for advice at our showroom in Tallinn!



## **Power supply KGP 24V DC LV-60-24 230V 60W IP20**





#### Product code 17419

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP20 Lifespan 50000h Height 16.0mm Width 30.0mm Length 300.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -25 - +45°C Certificates CE, ENEC, SAA Warranty 5 years







## Power supply KGP 24V DC RV-25-24 230V 25W IP20 No dim

# Product code 17415 No dim dimmable

Brand KGP Supply voltage 230V Power factor 0.95 Dimmable No dim Output voltage 24V Output 25W Maximum output 25W/1m Rated current 1040mA Protection class IP20 Lifespan 50000h Height 25.0mm Diameter 55.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor use Operation temperature -20 - +50°C Certificates CE Warranty 5 years







# Power supply KGP 24V XSV-100-24 /PUSH 230V 100W IP67 DALI / PUSH

# Product code 17435 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 100W Maximum output 100W/1m Rated current 4170mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 320.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years







## Power supply KGP 24V XSV-100-24 230V 100W IP67

### **Product code 17434**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 100W Maximum output 100W/1m Rated current 4170mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 320.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years







# Power supply KGP 24V XSV-160-24 /PUSH 230V 160W IP67 DALI / PUSH

# Product code 17437 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 160W Maximum output 160W/1m Rated current 6670mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 350.0mm In package 1pc In box 28pcs Casing material plastic Polishing matt Work environment indoor / outdoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years







## Power supply KGP 24V XSV-160-24 230V 160W IP67

### **Product code 17436**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 160W Maximum output 160W/1m Rated current 6670mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 350.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years







# Power supply KGP 24V XSV-240-24 /PUSH 230V 240W IP67 DALI / PUSH

# Product code 17439 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 240W Maximum output 240W/1m Rated current 10000mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 400.0mm In package 1pc In box 24pcs Casing material plastic Polishing matt Work environment indoor / outdoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years








## Power supply KGP 24V XSV-240-24 230V 240W IP67

### **Product code 17438**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 240W Maximum output 240W/1m Rated current 10000mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 400.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years









# Power supply KGP 24V XSV-30-24 /PUSH 230V 30W IP67 DALI / PUSH

# Product code 17431 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 30W Maximum output 30W/1m Rated current 1250mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 250.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years







## Power supply KGP 24V XSV-30-24 230V 30W IP67

### **Product code 17430**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 30W Maximum output 30W/1m Rated current 1250mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 250.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years







# Power supply KGP 24V XSV-400-24 /PUSH 230V 400W IP67 DALI / PUSH

# Product code 17441 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 400W Maximum output 400W/1m Rated current 16670mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 400.0mm In package 1pc In box 24pcs Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years








### Power supply KGP 24V XSV-400-24 230V 400W IP67

#### **Product code 17440**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 400W Maximum output 400W/1m Rated current 16670mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 400.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years









## Power supply KGP 24V XSV-60-24 /PUSH 230V 60W IP67 DALI / PUSH

## Product code 17433 DALI / PUSH dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI / PUSH Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 290.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years

The 24V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor and outdoor use, IP67. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.







### Power supply KGP 24V XSV-60-24 230V 60W IP67

#### **Product code 17432**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 290.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years

The 24V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor and outdoor use, IP67. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.







### Power supply KGP 48V DC LV-100-48 230V 100W IP20

#### **Product code 17279**

Brand KGP
Supply voltage 230V
Power factor 0.95
Output voltage 48V
Output 100W
Maximum output 100W/1m
Rated current 3125mA
Protection class IP20
Height 18.0mm
Width 30.0mm
Length 350.0mm
In package 1pc
Casing material plastic
Warranty 3 years

The 48V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.







### Power supply KGP 48V DC LV-150-48 230V 150W IP20

#### **Product code 16954**

Brand KGP
Supply voltage 230V
Power factor 0.95
Output voltage 48V
Output 150W
Maximum output 150W/1m
Rated current 3125mA
Protection class IP20
Height 18.0mm
Width 30.0mm
Length 350.0mm
Casing material plastic
Warranty 3 years

The 48V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.







### Power supply KGP 48V DC LV-250-48 230V 250W IP20

#### **Product code 17278**

Brand KGP
Supply voltage 230V
Power factor 0.95
Output voltage 48V
Output 250W
Maximum output 250W/1m
Rated current 3125mA
Protection class IP20
Height 18.0mm
Width 30.0mm
Length 350.0mm
Casing material plastic
Warranty 3 years

The 48V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.



# Power supply KGP 48V DC RV-25-48 white 230V 25W IP20 No dim





## Product code 17416 No dim dimmable

Brand KGP Supply voltage 230V Power factor 0.95 Dimmable No dim Output voltage 48V Output 25W Maximum output 25W/1m Rated current 5200mA Protection class IP20 Lifespan 50000h Height 25.0mm Diameter 55.0mm In package 1pc Casing colour white Casing material plastic Polishing matt Work environment indoor use Operation temperature -20 - +50°C Certificates CE Warranty 5 years

The 12V/24V/48V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.







### Power supply KGP 48V XSV-400-48 230V 400W IP67

#### **Product code 18345**

**Brand KGP** Supply voltage 230V Power factor 0.95 Output voltage 48V Output 400W Maximum output 400W/1m Rated current 8340mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 400.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years

The 48V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor and outdoor use, IP67. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.







### Power supply KGP 48V XSV-400-48 230V 400W IP67 DALI

#### Product code 18554 DALI dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI Output voltage 48V Output 400W Maximum output 400W/1m Rated current 8340mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 400.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years

The 48V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor and outdoor use, IP67. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.








### Power supply KGP XSV100W48 DALI 230V 100W IP67 DALI

#### Product code 18415 DALI dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI Output voltage 48V Output 100W Maximum output 100W/1m Rated current 2080mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 320.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years









### Power supply KGP XSV160W48 DALI 230V 160W IP67 DALI

#### Product code 18532 DALI dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI Output voltage 48V Output 160W Maximum output 160W/1m Rated current 3333mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 350.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor Operation temperature -25 - +50°C Certificates CE Warranty 5 years

The 48V power supply unit provides a stable and safe power source for various electrical devices and lights. The rated power of this power supply unit ensures sufficient power for powering multiple electrical devices. The power supply unit is designed for indoor and outdoor use, IP67. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.








### Power supply KGP XSV240W48 DALI 230V 240W IP67 DALI

#### Product code 18533 DALI dimmable

**Brand KGP** Supply voltage 230V Power factor 0.95 Dimmable DALI Output voltage 48V Output 240W Maximum output 240W/1m Rated current 5000mA Protection class IP67 Lifespan 50000h Height 21.0mm Width 30.0mm Length 400.0mm In package 1pc Casing material plastic Polishing matt Work environment indoor / outdoor use Operation temperature -25 - +50°C Certificates CE Warranty 5 years









# Power supply LTECH 12V DC -150-12- G1D2 / PUSH DIM 230V 150W IP20 DALI / PUSH

## Product code 16144 DALI / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable DALI / PUSH Output voltage 12V Output 150W Maximum output 150W/1m Rated current 12500mA Protection class IP20 Height 33.0mm Width 44.0mm Length 355.0mm Weight 430g In package 1pc Work environment indoor use Operation temperature -20°C~60°C Certificates CE, RoHS Warranty 3 years



# Power supply LTECH 12V DC -60-12-U1D2 230V 60W DALI / PUSH





## Product code 18141 DALI / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable DALI / PUSH Output voltage 12V Output 60W Maximum output 60W/1m Rated current 5000mA Height 30.0mm Width 42.5mm Length 293.0mm Weight 285g In box 30pcs Work environment indoor use Operation temperature -20~50°C°C Certificates CE, ROHS Warranty 5 years

LED power supply that provides reliable and stable output voltage. The device is compatible with multiple dimming interfaces, allowing smooth light adjustment without flickering. Its wide input voltage design ensures universal compatibility with various electrical systems, while high energy efficiency helps reduce power consumption. The unit is equipped with multiple protection mechanisms, including overheating, overvoltage, overload, and short-circuit protection, ensuring safe and long-lasting operation. Additionally, it features soft start and dimming functions, enhancing visual comfort. A compact and lightweight design with removable connection terminals allows flexible installation in different lighting systems. The device meets international safety and quality standards and comes with a long-term warranty.







# Power supply LTECH 12V DC LM-150-12-G1T2 / PUSH DIM 230V 150W TRIAC / PUSH

## Product code 16276 TRIAC / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable TRIAC / PUSH
Output voltage 12V
Output 150W
Maximum output 150W/1m
Rated current 12500mA
Operation temperature -20°C~45°C°C
Certificates CE,RoHS
Warranty 3 years



# Power supply LTECH 12V DC LM-36-12-G1D2 / PUSH DIM 230V 36W DALI / PUSH

## Product code 14985 DALI / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable DALI / PUSH
Output voltage 12V
Output 36W
Maximum output 36W/1m
Rated current 3000mA
Work environment indoor use
Warranty 3 years



# Power supply LTECH 12V DC LM-36-12-G1T2 / PUSH DIM 230V 36W TRIAC / PUSH

Product code 16272 TRIAC / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable TRIAC / PUSH
Output voltage 12V
Output 36W
Maximum output 36W/1m
Rated current 3000mA
Weight 185g
Operation temperature -30 ~ 55°C°C







# Power supply LTECH 12V DC LM-75-12-G1T2 / PUSH DIM 230V 75W IP20 TRIAC / PUSH

## Product code 16088 TRIAC / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable TRIAC / PUSH Output voltage 12V Output 75W Maximum output 75W/1m Rated current 6250mA Protection class IP20 Height 30.0mm Width 43.0mm Length 293.0mm Weight 300g Work environment indoor use Operation temperature -20°C~50°C°C Certificates CE, RoHS Warranty 5 years



# Power supply LTECH 12V DC TD-50-12-E1D1 / PUSH DIM 230V 50W TRIAC / PUSH

## Product code 14930 TRIAC / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable TRIAC / PUSH
Output voltage 12V
Output 50W
Maximum output 50W/1m
Rated current 4200mA
Height 58.0mm
Width 89.0mm
Length 107.0mm
Weight 260g
Work environment indoor use
Operation temperature -30°C ~
55°C°C
Certificates CE







# Power supply LTECH 24V DC -150-24-G2D2 /PUSH DIM/DT 8 230V 150W IP20 DALI / PUSH

## Product code 19522 DALI / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 150W Maximum output 150W/1m Rated current 62500mA Protection class IP20 Height 30.0mm Width 43.0mm Length 352.0mm Weight 430g In package 1pc Work environment indoor use Operation temperature -20°C~60°C Certificates CE, RoHS Warranty 3 years



intended for CCT strip

# Power supply LTECH 24V DC DMX-150-24-F4M1 DMX/ PUSH DIM 230V 150W IP20 DMX / PUSH

## Product code 15909 DMX / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable DMX / PUSH Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP20 Height 37.0mm Width 57.0mm Length 273.0mm Weight 750g Work environment indoor use Operation temperature -30~60°C Certificates CE, RoHS Warranty 3 years





# Power supply LTECH 24V DC LM-150-24-G1D2 / PUSH DIM 230V 150W IP20 DALI / PUSH

## Product code 15926 DALI / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP20 Height 33.0mm Width 44.0mm Length 355.0mm Weight 430g In package 1pc Work environment indoor use Operation temperature -20°C~60°C Certificates CE, RoHS Warranty 3 years



# Power supply LTECH 24V DC LM-150-24-G1T2 / PUSH DIM 230V 150W IP20 TRIAC / PUSH

## **Product code 16168 TRIAC / PUSH dimmable**

**Brand LTECH** Supply voltage 230V Dimmable TRIAC / PUSH Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP20 Height 33.0mm Width 44.0mm Length 355.0mm Weight 430g In package 1pc Work environment indoor use Operation temperature -20°C~60°C Certificates CE, RoHS Warranty 3 years







# Power supply LTECH 24V DC LM-36-24-G1T2 / PUSH DIM 230V 36W TRIAC / PUSH

## Product code 16271 TRIAC / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable TRIAC / PUSH
Output voltage 24V
Output 36W
Maximum output 36W/1m
Rated current 1500mA
Weight 185g
Work environment indoor use
Certificates CE
Warranty 3 years




# Power supply LTECH 24V DC LM-75-24-G1D2 / PUSH DIM 230V 75W DALI / PUSH

## Product code 13858 DALI / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable DALI / PUSH Output voltage 24V Output 75W Maximum output 75W/1m Rated current 3125mA Height 30.0mm Width 43.0mm Length 293.0mm Weight 300g Casing material plastic Work environment indoor use Operation temperature -30° ~ +50°C Certificates CE, RoHS Warranty 3 years









# Power supply LTECH 24V DC LM-75-24-G1T2 / PUSH DIM 230V 75W IP20 TRIAC / PUSH

## Product code 15403 TRIAC / PUSH dimmable

**Brand LTECH** Supply voltage 230V Dimmable TRIAC / PUSH Output voltage 24V Output 75W Maximum output 75W/1m Rated current 3100mA Protection class IP20 Height 30.0mm Width 43.0mm Length 293.0mm Weight 300g Work environment indoor use Operation temperature -20°C~50°C°C Certificates CE, RoHS Warranty 5 years



# Power supply LTECH 24V DC tunable white LM-100-24-G2D2 / PUSH DIM 230V 100W IP20 DALI / PUSH

## Product code 15404 DALI / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable DALI / PUSH
Output voltage 24V
Output 100W
Maximum output 100W/1m
Rated current 4170mA
Protection class IP20
Height 30.0mm
Width 43.0mm
Length 293.0mm
Weight 300g
Work environment indoor use
Certificates CE, SELV
Warranty 3 years







# Power supply LTECH 24V DC tunable white LM-75-24-G2D2 / PUSH DIM 230V 75W IP20 DALI / PUSH

## Product code 15479 DALI / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable DALI / PUSH
Output voltage 24V
Output 75W
Maximum output 75W/1m
Rated current 3125mA
Protection class IP20
Height 30.0mm
Width 43.0mm
Length 293.0mm
Weight 300g
Work environment indoor use
Certificates CE, SELV
Warranty 3 years



# Power supply LTECH LM-36-24-G1D2 / PUSH DIM 230V 36W DALI / PUSH

## Product code 16342 DALI / PUSH dimmable

Brand LTECH
Supply voltage 230V
Dimmable DALI / PUSH
Output voltage 24V
Output 36W
Maximum output 36W/1m
Rated current 1500mA
Height 30.0mm
Width 44.0mm
Length 175.0mm
Weight 190g
Work environment indoor use
Warranty 3 years







# Power supply POS POWER 12V DC Slim FTPC15V12-E 230V 15W IP20

#### **Product code 16694**

Brand POS POWER
Supply voltage 230V
Output voltage 12V
Output 15W
Maximum output 15W/1m
Rated current 1250mA
Protection class IP20
Height 16.0mm
Width 35.5mm
Length 103.0mm
Work environment indoor use
Operation temperature -20 ~ +45°C
Certificates CE



# Power supply POS POWER 12V DC Slim FTPC8V12LC 230V 8W IP20

#### Product code 14306

Brand POS POWER
Supply voltage 230V
Output voltage 12V
Output 8W
Maximum output 8W/1m
Rated current 670mA
Protection class IP20
Height 19.5mm
Width 46.2mm
Length 94.5mm
Weight 64g
Operation temperature -20°C-45°C
Certificates CE
Warranty 3 years







### Power supply POS POWER 24V DC DIN-100-24 230V 100W IP20

#### **Product code 19938**

Brand POS POWER
Supply voltage 230V
Output voltage 24V
Output 100W
Maximum output 100W/1m
Rated current 4150mA
Protection class IP20
Casing material plastic
Work environment indoor use
Certificates CE,RoHS
Warranty 2 years



### Power supply POS POWER 24V DC DIN-60-24 230V 60W IP20

#### **Product code 19937**

Brand POS POWER
Supply voltage 230V
Output voltage 24V
Output 60W
Maximum output 60W/1m
Rated current 2500mA
Protection class IP20
Casing material plastic
Work environment indoor use
Certificates CE,RoHS
Warranty 2 years



# Power supply POS POWER 24V DC Slim FTPC20V24-C2 230V 20W IP20

#### **Product code 16807**

Brand POS POWER
Supply voltage 230V
Output voltage 24V
Output 20W
Maximum output 20W/1m
Rated current 830mA
Protection class IP20
Height 14.0mm
Width 50.0mm
Length 154.0mm
Work environment indoor use







### Power supply POS POWER FTPC50V12-D 230V 50W IP20 TRIAC

#### Product code 15631 TRIAC dimmable

**Brand POS POWER** Supply voltage 230V Dimmable TRIAC Output voltage 12V Output 50W Maximum output 50W/1m Rated current 4160mA Protection class IP20 Height 21.8mm Width 57.0mm Length 177.0mm Weight 200g In box 50pcs Work environment indoor use Operation temperature -20°C ~ 40°C°C Warranty 2 years



## Power supply Scharfer 12V DC SCH-100-12 230V 100W IP67

#### **Product code 16597**

**Brand Scharfer** Supply voltage 230V Output voltage 12V Output 100W Maximum output 100W/1m Rated current 8333mA Protection class IP67 Height 22.0mm Width 40.0mm Length 218.0mm Weight 390g In package 1pc In box 40pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years







### Power supply Scharfer 12V DC SCH-150-12 230V 150W IP67

#### **Product code 16594**

**Brand Scharfer** Supply voltage 230V Output voltage 12V Output 150W Maximum output 150W/1m Rated current 12500mA Protection class IP67 Height 25.0mm Width 57.0mm Length 279.0mm Weight 680g In package 1pc In box 25pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years



### Power supply Scharfer 12V DC SCH-200-12 230V 200W IP67

#### Product code 16593

**Brand Scharfer** Supply voltage 230V Output voltage 12V Output 200W Maximum output 200W/1m Rated current 16000mA Protection class IP67 Height 35.0mm Width 65.0mm Length 225.0mm Weight 860g In package 1pc In box 20pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years







### Power supply Scharfer 12V DC SCH-30-12 230V 30W IP67

#### **Product code 16625**

**Brand Scharfer** Supply voltage 230V Output voltage 12V Output 30W Maximum output 30W/1m Rated current 2500mA Protection class IP67 Height 21.0mm Width 29.0mm Length 162.0mm Weight 170g In package 1pc In box 100pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years



### Power supply Scharfer 12V DC SCH-300-12 230V 300W IP67

#### Product code 16590

**Brand Scharfer** Supply voltage 230V Output voltage 12V Output 300W Maximum output 300W/1m Rated current 25000mA Protection class IP67 Height 40.0mm Width 90.0mm Length 257.0mm Weight 1570g In package 1pc In box 10pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years







### Power supply Scharfer 12V DC SCH-60-12 230V 60W IP67

#### **Product code 16621**

**Brand Scharfer** Supply voltage 230V Output voltage 12V Output 60W Maximum output 60W/1m Rated current 5000mA Protection class IP67 Height 21.0mm Width 29.0mm Length 222.0mm Weight 240g In package 1pc In box 50pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years



### Power supply Scharfer 24V DC SCH-100-24 230V 100W IP67

#### Product code 16596

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 100W Maximum output 100W/1m Rated current 4170mA Protection class IP67 Height 22.0mm Width 40.0mm Length 218.0mm Weight 390g In package 1pc In box 40pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years







### Power supply Scharfer 24V DC SCH-150-24 230V 150W IP67

#### **Product code 16595**

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP67 Height 25.0mm Width 57.0mm Length 279.0mm Weight 680g In package 1pc In box 25pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years



### Power supply Scharfer 24V DC SCH-20-24 230V 20W IP67

#### Product code 16627

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 20W Maximum output 20W/1m Rated current 830mA Protection class IP67 Height 21.0mm Width 29.0mm Length 162.0mm Weight 170g In package 1pc In box 100pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years







### Power supply Scharfer 24V DC SCH-200-24 230V 200W IP67

#### **Product code 16592**

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 200W Maximum output 200W/1m Rated current 8300mA Protection class IP67 Height 35.0mm Width 65.0mm Length 225.0mm Weight 860g In package 1pc In box 20pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years




### Power supply Scharfer 24V DC SCH-30-24 230V 30W IP67

#### Product code 16626

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 30W Maximum output 30W/1m Rated current 1250mA Protection class IP67 Height 21.0mm Width 29.0mm Length 162.0mm Weight 170g In package 1pc In box 100pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years







### Power supply Scharfer 24V DC SCH-300-24 230V 300W IP67

#### **Product code 16591**

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 300W Maximum output 300W/1m Rated current 12500mA Protection class IP67 Height 40.0mm Width 90.0mm Length 257.0mm Weight 1570g In package 1pc In box 10pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years



### Power supply Scharfer 24V DC SCH-400-24 230V 400W IP67

#### Product code 17816

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 400W Maximum output 400W/1m Rated current 16700mA Protection class IP67 Height 40.0mm Width 90.0mm Length 300.0mm Weight 1800g In package 1pc In box 8pcs Casing material metal Operation temperature -30° - +50°C Warranty 7 years







### Power supply Scharfer 24V DC SCH-45-24 230V 45W IP67

#### **Product code 16623**

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 45W Maximum output 45W/1m Rated current 1870mA Protection class IP67 Height 21.0mm Width 29.0mm Length 190.0mm Weight 235g In package 1pc In box 50pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years



## Power supply Scharfer 24V DC SCH-60-24 230V 60W IP67

#### Product code 16622

**Brand Scharfer** Supply voltage 230V Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP67 Height 21.0mm Width 29.0mm Length 222.0mm Weight 240g In package 1pc In box 50pcs Casing material aluminium Operation temperature -30~50°C Warranty 7 years







# Power supply SKYDANCE 12V DC TE-40-12 /PUSH 230V 40W IP20 TRIAC / PUSH

## Product code 17614 TRIAC / PUSH dimmable

**Brand SKYDANCE** Supply voltage 230V Power factor 0.82 Dimmable TRIAC / PUSH Output voltage 12V Output 40W Maximum output 40W/1m Rated current 3300mA Protection class IP20 Lifespan 50000h Height 30.0mm Width 44.0mm Length 168.0mm In package 1pc Casing material plastic Work environment indoor use Operation temperature -30 - +50°C Certificates CE, RoHS Warranty 5 years



# Power supply SKYDANCE 12V DC TE-75-12 /PUSH 230V 75W IP20 TRIAC / PUSH

## Product code 17615 TRIAC / PUSH dimmable

Brand **SKYDANCE** Supply voltage 230V Power factor 0.85 Dimmable TRIAC / PUSH Output voltage 12V Output 75W Maximum output 75W/1m Rated current 6250mA Protection class IP20 Lifespan 50000h Height 30.0mm Width 56.0mm Length 179.0mm In package 1pc Casing material plastic Work environment indoor use Operation temperature -30° - +50°C Certificates CE Warranty 5 years







# Power supply SKYDANCE 12V DC TF-150-12 /PUSH 230V 150W IP20 TRIAC / PUSH

## Product code 17616 TRIAC / PUSH dimmable

Brand **SKYDANCE** Supply voltage 230V Power factor 0.95 Dimmable TRIAC / PUSH Output voltage 12V Output 150W Maximum output 150W/1m Rated current 12500mA Protection class IP20 Lifespan 50000h Height 30.0mm Width 45.0mm Length 310.0mm In package 1pc Casing material plastic Work environment indoor use Operation temperature -30° - +45°C Certificates CE Warranty 5 years



# Power supply SKYDANCE 24V DC LPV-150-24 100-240V 150W IP20 0-10V

#### Product code 18231 0-10V dimmable

**Brand SKYDANCE** Supply voltage 100-240V Dimmable 0-10V Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP20 Height 30.0mm Width 45.0mm Length 310.0mm Weight 420g Package weight 450g In package 1pc Work environment indoor use Operation temperature -30~50°C Certificates CE Warranty 5 years







### Power supply SKYDANCE 24V DC PBL-60-24 100-240V 60W IP20

#### **Product code 17719**

**Brand SKYDANCE** Supply voltage 100-240V Power factor 0.50 Output voltage 24V Output 60W Maximum output 60W/1m Rated current 2500mA Protection class IP20 Lifespan 50000h Height 18.0mm Width 55.5mm Length 164.0mm Weight 150g In package 1pc Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years



60W CV LED driver, suitable for LED strips, to optimize furniture lighting. A very slim and lightweight, yet highly efficient power supply. Connectable with CV0, CV1, and CV2 blocks. Capable of controlling multiple LED strips with an RF remote. Dimmable from 0-100%, with smooth and flicker-free adjustment.





# Power supply SKYDANCE 24V DC TE-75-24/PUSH 230V 75W IP20 TRIAC / PUSH

## Product code 18253 TRIAC / PUSH dimmable

**Brand SKYDANCE** Supply voltage 230V Power factor 0.85 Dimmable TRIAC / PUSH Output voltage 24V Output 75W Maximum output 75W/1m Rated current 3125mA Protection class IP20 Lifespan 50000h Height 30.0mm Width 56.0mm Length 179.0mm In package 1pc Casing material plastic Work environment indoor use Operation temperature -30° - +50°C Certificates CE Warranty 5 years



# Power supply SKYDANCE 24V DC TF-150-24 /PUSH 230V 150W IP20 TRIAC / PUSH

## Product code 18255 TRIAC / PUSH dimmable

Brand **SKYDANCE** Supply voltage 230V Power factor 0.95 Dimmable TRIAC / PUSH Output voltage 24V Output 150W Maximum output 150W/1m Rated current 6250mA Protection class IP20 Lifespan 50000h Height 30.0mm Width 45.0mm Length 310.0mm In package 1pc Casing material plastic Work environment indoor use Operation temperature -30° - +45°C Certificates CE Warranty 5 years





# Power supply SKYDANCE PB-40-12 100-240V 40W IP20 PUSH / RF

## Product code 15765 PUSH / RF dimmable

**Brand SKYDANCE** Supply voltage 100-240V Dimmable PUSH / RF Output voltage 12V Output 40W Maximum output 40W/1m Rated current 3340mA Protection class IP20 Height 30.0mm Width 44.0mm Length 168.5mm In package 1pc Work environment indoor use Operation temperature -30~55°C Certificates CE Warranty 5 years



# Power supply SKYDANCE PB-40-24 100-240V 40W IP20 PUSH / RF

## **Product code 15766** PUSH / RF dimmable

Brand SKYDANCE
Supply voltage 100-240V
Dimmable PUSH / RF
Output 40W
Maximum output 40W/1m
Rated current 1670mA
Protection class IP20
Height 30.0mm
Width 44.0mm
Length 168.5mm
In package 1pc
Work environment indoor use
Operation temperature -30~50°C
Certificates CE
Warranty 5 years







### Power supply SKYDANCE PB-75-12 230V 75W IP20 PUSH / RF

## Product code 15767 PUSH / RF dimmable

Brand **SKYDANCE** Supply voltage 230V Dimmable PUSH / RF Output voltage 12V Output 75W Maximum output 75W/1m Rated current 6250mA Protection class IP20 Height 30.0mm Width 56.0mm Length 179.0mm In package 1pc Work environment indoor use Operation temperature -30~50°C Certificates CE Warranty 5 years



### Power supply SKYDANCE PB-75-24 75W IP20 PUSH / RF

## Product code 15768 PUSH / RF dimmable

Brand SKYDANCE
Dimmable PUSH / RF
Output voltage 24V
Output 75W
Maximum output 75W/1m
Rated current 3125mA
Protection class IP20
Height 30.0mm
Width 56.0mm
Length 179.0mm
In package 1pc
Operation temperature -30~50°C
Certificates CE
Warranty 5 years

