

Ground light Deko-Light Asymmetrical silver 230V 11.9W 700lm 35-45° IP67 830

Product code 20314

Brand [Deko-Light](#)

Supply voltage 230V

Output 11.9W

Luminous flux 700lumens

Luminaire's efficiency lm79 59W

Correlated colour temperature warm
white 3000K

Lens angle 35-45

Cri 80

Protection class IP67

Lifespan 25000h

Height 111.0mm

Diameter 173.0mm

Installation opening diameter 157mm

Weight 1.91 kg

Package weight 2.09 kg

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Impact resistance IK09

Operation temperature -20 ~ 40°C

Warranty 5 years



Ground light Deko-Light Aton DIM silver 230V GU10 IP67

Product code 20335

Brand [Deko-Light](#)

Supply voltage 230V

Socket GU10

Sdcm - macadam ellipses 8

Protection class IP67

Height 111.0mm

Width 97.0mm

Length 97.0mm

Diameter 103.0mm

Installation opening diameter 75mm

Weight 657 g

Package weight 773 g

Casing colour silver

Casing material metal + glass

Operation temperature -10 ~ 50°C



Simple yet brilliant - with its robust construction, the ATON series delivers elegant recessed floor lighting for less. The exchangeable lamps facilitate an individual lighting solution with vision.

Ground light Deko-Light Aton DIM silver 230V GU10 IP67

Product code 20336

Brand [Deko-Light](#)

Supply voltage 230V

Socket GU10

Protection class IP67

Height 111.0mm

Width 97.0mm

Length 97.0mm

Weight 657 g

Casing colour silver

Casing material aluminium + acrylic

Operation temperature -10 ~ 50°C



Simple yet brilliant - with its robust construction, the ATON series delivers elegant recessed floor lighting for less. The exchangeable lamps facilitate an individual lighting solution with vision.

Ground light Deko-Light Flat I silver 230V 12W 860lm 20° IP67 830

Product code 20310

Brand [Deko-Light](#)

Supply voltage 230V

Output 12W

Luminous flux 860lumens

Luminaire's efficiency lm79 72W

Correlated colour temperature warm

white 3000K

Lens angle 20

Cri 80

Protection class IP67

Lifespan 25000h

Height 42.0mm

Diameter 173.0mm

Weight 1.61 kg

Package weight 1.77 kg

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C

Warranty 5 years



Including 0.5 m connecting cable.

Ground light Deko-Light Flat II silver 230V 5.8W 400lm 20° IP67 830

Product code 20309

Brand [Deko-Light](#)

Supply voltage 230V

Output voltage 220-240V

Output 5.8W

Luminous flux 400lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature warm white 3000K

Lens angle 20

Cri 80

Protection class IP67

Lifespan 25000h

Height 44.0mm

Diameter 116.0mm

Weight 694 g

Package weight 755 g

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C

Warranty 5 years



Including 0.5 m connecting cable.

Ground light Deko-Light Flat III silver round 230V 1.3W 40lm 120° IP67 630

Product code 20083

Brand [Deko-Light](#)

Supply voltage 230V

Output 1.3W

Luminous flux 40lumens

Luminaire's efficiency lm79 31W

Correlated colour temperature warm
white 3000K

Lens angle 120

Cri 65

Protection class IP67

Lifespan 25000h

Height 42.0mm

Width 58.0mm

Length 176.0mm

Diameter 116.0mm

Installation opening diameter 100mm

Weight 854 g

In package 1pc

Casing colour silver

Casing material stainless steel + glass

Polishing semigloss

Shape round


Impact resistance IK05

Work environment indoor / outdoor
use

Operation temperature -20 - +40°C

Certificates CE

Warranty 5 years



Ground light Deko-Light Floor-mounted lamp I silver 24V 5.8W 370lm 45° IP67 830

Product code 20319

Brand [Deko-Light](#)

Supply voltage 24V

Output 5.8W

Luminous flux 370lumens

Luminaire's efficiency lm79 64W

Correlated colour temperature warm
white 3000K

Lens angle 45

Cri 80

Protection class IP67

Lifespan 25000h

Height 102.0mm

Diameter 116.0mm

Weight 940 g

Package weight 1.02 kg

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C



Ground light Deko-Light Fornac silver 24V 2,7W 110lm 35-45° IP67 830

Product code 20084

Brand [Deko-Light](#)

Supply voltage 24V

Output 2,7W

Luminous flux 110lumens

Correlated colour temperature warm
white 3000K

Lens angle 35-45

Cri 80

Protection class IP67

Lifespan 25000h

Height 80.0mm

Diameter 55.0mm

Installation opening diameter 48mm

Weight 391 g

In package 1pc

Casing colour silver

Casing material stainless steel + glass

Polishing matt

Impact resistance IK05

Work environment indoor / outdoor
use

Operation temperature -20 - +40°C

Certificates CE

Warranty 5 years



Including 1 m connecting cable with
WEIPU plug

Ground light Deko-Light HP IV silver 24V 14W 800lm 35-45° IP67 830

Product code 20085

Brand [Deko-Light](#)

Supply voltage 24V

Output 14W

Luminous flux 800lumens

Luminaire's efficiency lm79 57W

Correlated colour temperature warm
white 3000K

Lens angle 35-45

Cri 80

Protection class IP67

Lifespan 25000h

Height 111.0mm

Diameter 173.0mm

Installation opening diameter 157mm

Weight 1.4 kg

Package weight 1.56 kg

In package 1pc

Casing colour silver

Casing material stainless steel + glass

Polishing semigloss

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 - +40°C

Certificates CE

Warranty 5 years



Ground light Deko-Light Lamp II silver 230V 4.1W 280lm 30° IP67 830

Product code 20308

Brand [Deko-Light](#)

Supply voltage 230V

Output 4.1W

Luminous flux 280lumens

Luminaire's efficiency lm79 68W

Correlated colour temperature warm
white 3000K

Lens angle 30

Cri 80

Protection class IP67

Lifespan 25000h

Height 102.0mm

Diameter 116.0mm

Weight 1.02 kg

Package weight 1.09 kg

Casing colour silver

Casing material aluminium + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C



Including connecting cable

Ground light Deko-Light Line I silver 230V 5.5W 340lm 35-45° IP67 830

Product code 20318

Brand [Deko-Light](#)

Supply voltage 230V

Output 5.5W

Luminous flux 340lumens

Luminaire's efficiency lm79 62W

Correlated colour temperature warm
white 3000K

Lens angle 35-45

Cri 80

Protection class IP67

Lifespan 25000h

Height 65.0mm

Width 63.0mm

Length 195.0mm

Weight 940 g

Package weight 1.09 kg

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C



Ground light Deko-Light Line II silver 230V 11.9W 730lm 35-45° IP67 830

Product code 20317

Brand [Deko-Light](#)

Supply voltage 230V

Output 11.9W

Luminous flux 730lumens

Luminaire's efficiency lm79 61W

Correlated colour temperature warm

white 3000K

Lens angle 35-45

Cri 80

Protection class IP67

Lifespan 25000h

Height 65.0mm

Width 63.0mm

Length 328.0mm

Weight 1.53 kg


Package weight 1.64 kg

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C

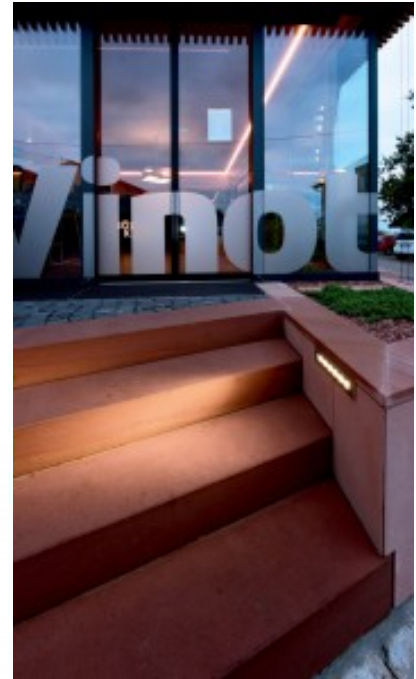

Ground light Deko-Light Pavo silver 230V GU10 IP67

Product code 20337

Brand [Deko-Light](#)

Supply voltage 230V

Socket GU10

Protection class IP67

Height 156.0mm

Diameter 139.0mm

Weight 1.55 kg


Package weight 1.58 kg

Casing colour silver

Casing material aluminium + acrylic

Operation temperature -10 ~ 50°C

Simple yet brilliant - with its robust construction, the PAVO series delivers elegant recessed floor lighting for less. The exchangeable lamps facilitate an individual lighting solution with vision.

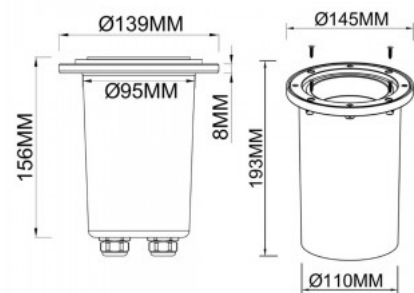

Ground light Deko-Light Pavo silver 230V GU10 IP67

Product code 20338

Brand [Deko-Light](#)

Supply voltage 230V

Socket GU10

Protection class IP67

Height 156.0mm

Width 160.0mm


Length 160.0mm

Weight 1.55 kg

Casing colour silver

Casing material aluminium + acrylic

Operation temperature -10 ~ 50°C

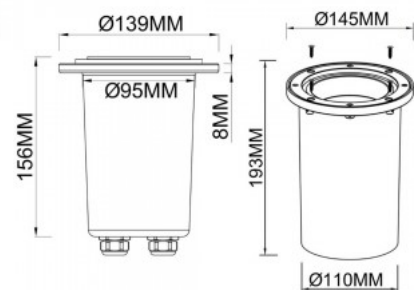

Ground light Deko-Light Peacock silver round 230V 2W 150lm 30° IP67 830

Product code 20159

Brand [Deko-Light](#)

Supply voltage 230V

Output voltage 220-240V

Output 2W

Luminous flux 150lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature warm
white 3000K

Lens angle 30

Cri 80

Protection class IP67

Lifespan 25000h

Height 43.0mm

Diameter 58.0mm

Installation opening diameter 44mm

Casing colour silver

Casing material stainless steel + glass

Polishing semigloss


Shape round

Impact resistance IK08

Work environment indoor / outdoor
use

Operation temperature -20 - +40°C

Including 0.5 m connecting cable with
protected connection socket

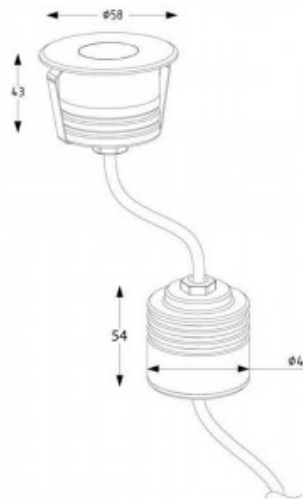

Ground light Deko-Light Quick RD silver GU10 IP67

Product code 21003

Brand [Deko-Light](#)

Output voltage 220-240V

Socket GU10

Protection class IP67

Lifespan 25000h

Height 150.0mm

Diameter 116.0mm

Installation opening diameter 105mm

Casing colour silver

Casing material metal + glass

Work environment outdoor use

Operation temperature -20 ~ 40°C



Ground light Deko-Light Soft Flex silver 230V 9.3W 480lm 60° IP67 830





Ø173

Product code 20311

Brand [Deko-Light](#)
 Supply voltage 230V
 Output 9.3W
 Luminous flux 480lumens
 Luminaire's efficiency lm79 52W
 Correlated colour temperature warm
 white 3000K
 Lens angle 60
 Cri 80
 Protection class IP67
 Lifespan 35000h
 Height 128.0mm
 Weight 2.51 kg
 Package weight 2.77 kg
 Casing colour silver
 Casing material metal + glass
 No. of switches 20000pcs
 Operation temperature -20 ~ 40°C

Adjustable light emission angle
 Including 1 m connecting cable
 Including honeycomb filter

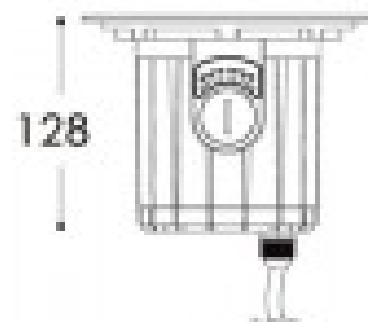

Ø109

Ø155

220

Ø163



Ground light Deko-Light Square COB I silver 230V 7.7W 700lm 25° IP67 830

Product code 20312

Brand [Deko-Light](#)

Supply voltage 230V

Output 7.7W

Luminous flux 700lumens

Luminaire's efficiency lm79 91W

Correlated colour temperature warm
white 3000K

Lens angle 25

Cri 80

Protection class IP67

Lifespan 30000h

Height 75.0mm

Width 125.0mm

Length 125.0mm

Weight 1.18 kg

Package weight 1.26 kg

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C



Ground light Deko-Light Square II silver 230V 3.2W 215lm 120° IP67 830

Product code 20316

Brand [Deko-Light](#)

Supply voltage 230V

Output 3.2W

Luminous flux 215lumens

Luminaire's efficiency lm79 67W

Correlated colour temperature warm
white 3000K

Lens angle 120

Cri 80

Protection class IP67

Lifespan 25000h

Height 75.0mm

Width 125.0mm

Length 125.0mm

Weight 1.16 kg

Package weight 1.47 kg

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 40°C



Incl. two glass lenses [prism, white]

Ground light Deko-Light Tabit silver 230V 3.7W 240lm 120° IP67 830

Product code 20315

Brand [Deko-Light](#)

Supply voltage 230V

Output 3.7W

Luminous flux 240lumens

Luminaire's efficiency lm79 65W

Correlated colour temperature warm
white 3000K

Lens angle 120

Cri 80

Protection class IP67

Lifespan 30000h

Height 68.0mm

Width 100.0mm

Length 200.0mm

Weight 628 g

Package weight 695 g

Casing colour silver

Casing material polycarbonate

No. of switches 20000pcs

Operation temperature -20 ~ 45°C



Paving stone look Suitable for
common paving dimensions Incl. 30
cm connection line with open cable
ends Can be walked on, cannot be
driven on 5,000 N load

Ground light Deko-Light Tall COB I silver 230V 7.8W 720lm 25° IP67 830

Product code 20313

Brand [Deko-Light](#)

Supply voltage 230V

Output 7.8W

Luminous flux 720lumens

Luminaire's efficiency lm79 92W

Correlated colour temperature warm
white 3000K

Lens angle 25

Cri 80

Protection class IP67

Lifespan 30000h

Height 102.0mm

Diameter 116.0mm

Installation opening diameter 102mm

Weight 805 g

Package weight 903 g

Casing colour silver

Casing material metal + glass

No. of switches 100000pcs

Work environment outdoor use

Operation temperature -20 ~ 40°C



Including 0.5 m connecting cable.

Ground light Deko-Light Wall Washer Caph dark gray 230V 38W 2580lm 15-40° IP65 830

Product code 20303

Brand [Deko-Light](#)

Supply voltage 230V

Output 38W

Luminous flux 2580lumens

Luminaire's efficiency lm79 68W

Correlated colour temperature warm white 3000K

Lens angle 15-40

Cri 80

Protection class IP65

Lifespan 30000h

Height 36.7mm

Width 1000.0mm

Length 53.4mm

Weight 3.12 kg

Package weight 3.63 kg

Casing colour dark gray

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 60°C

Warranty 5 years



Including 2 m connecting cable with IP44 shaped plug Despite the linear design, the Wallwasher - CAPH series assortment is well-rounded.

Wallwashers offer a variety of options for accentuating different objects, whether that's a rustic stone wall in warm 3,000 K or a modern new build in RGBW. The different visual designs with symmetrical or asymmetrical diffusion angles help with positioning. With the 230 V variants, no further accessories are required. Thanks to the 24 V versions, the CAPH Wallwashers can be connected to all variants of the control unit on the market.

Ground light Deko-Light Wall Washer Caph dark gray 230V 38W 3000lm 25° IP65 830

Product code 20302

Brand [Deko-Light](#)

Supply voltage 230V

Output 38W

Luminous flux 3000lumens

Luminaire's efficiency lm79 79W

Correlated colour temperature warm white 3000K

Lens angle 25

Cri 80

Protection class IP65

Lifespan 30000h

Height 36.7mm

Width 1000.0mm

Length 53.4mm

Weight 3.12 kg

Package weight 3.63 kg

Casing colour dark gray

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 60°C

Warranty 5 years



Including 2 m connecting cable with IP44 shaped plug Despite the linear design, the Wallwasher - CAPH series assortment is well-rounded.

Wallwashers offer a variety of options for accentuating different objects, whether that's a rustic stone wall in warm 3,000 K or a modern new build in RGBW. The different visual designs with symmetrical or asymmetrical diffusion angles help with positioning. With the 230 V variants, no further accessories are required. Thanks to the 24 V versions, the CAPH Wallwashers can be connected to all variants of the control unit on the market.

Ground light Deko-Light Wall Washer Caph dark gray 24V 60W 2480lm CRI80 15-40° IP65 RGB + 3000K RGBW warm

Product code 20301

Brand [Deko-Light](#)

Supply voltage 24V

Output 60W

Luminous flux 2480lumens

Luminaire's efficiency lm79 41W

Correlated colour temperature RGBW

warm RGB + 3000K

Lens angle 15-40

Cri 80

Protection class IP65

Lifespan 30000h

Height 81.1mm

Width 53.4mm

Length 1000.0mm

Weight 3.12 kg

Package weight 3.82 kg

Casing colour dark gray

Casing material metal + glass

No. of switches 100000pcs

Operation temperature -20 ~ 60°C

Warranty 5 years



Despite the linear design, the Wallwasher - CAPH series assortment is well-rounded. Wallwashers offer a variety of options for accentuating different objects, whether that's a rustic stone wall in warm 3,000 K or a modern new build in RGBW. The different visual designs with symmetrical or asymmetrical diffusion angles help with positioning. With the 230 V variants, no further accessories are required. Thanks to the 24 V versions, the CAPH Wallwashers can be connected to all variants of the control unit on the market.

Ground light Deko-Light Wall Washer Caph Dim dark gray 24V 60W 2800lm CRI80 25° IP65 RGB + 3000K RGBW warm

Product code 20300

Brand [Deko-Light](#)
 Supply voltage 24V
 Output 60W
 Luminous flux 2800lumens
 Luminaire's efficiency lm79 47W
 Correlated colour temperature RGBW
 warm RGB + 3000K
 Lens angle 25
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 81.1mm
 Width 53.4mm
 Length 1000.0mm
 Weight 3.12 kg
 Package weight 3.63 kg
 Casing colour dark gray
 Casing material metal + glass
 No. of switches 100000pcs
 Operation temperature -20 ~ 60°C
 Warranty 5 years



Including 2 m connecting cable with IP44 shaped plug Despite the linear design, the Wallwasher - CAPH series assortment is well-rounded. Wallwashers offer a variety of options for accentuating different objects, whether that's a rustic stone wall in warm 3,000 K or a modern new build in RGBW. The different visual designs with symmetrical or asymmetrical diffusion angles help with positioning.

Recessed light Liralighting DL 200 gray round 36W 3192lm 60° IP67 RGB+4000K RGBW pure white

Product code 19113


Brand [Liralighting](#)
 Power factor 0.90
 Output 36W
 Maximum output 36W/1m
 Luminous flux 3192lumens
 Luminaire's efficiency lm79 89W
 Correlated colour temperature RGBW pure white RGB+4000K
 Lens angle 60
 Sdcm - macadam ellipses 6
 Protection class IP67
 Lifespan 100000h
 Height 80.0mm
 Diameter 240.0mm
 Installation opening diameter 200mm
 In box 30pcs
 Casing colour gray
 Casing material aluminium
 Shape round
 Impact resistance IK10
 Work environment indoor / outdoor use
 Certificates CE, RoHS



Ground light Maytoni Wall Wafer Edge black 15W 1000lm 110° IP65 830

Product code 19775

Brand Maytoni
 Output 15W
 Luminous flux 1000lumens
 Luminaire's efficiency lm79 67W
 Correlated colour temperature warm white 3000K
 Lens angle 110
 Cri 80
 Protection class IP65
 Height 59.0mm
 Width 65.0mm
 Length 1000.0mm
 Weight 800 g
 Package weight 940 g
 Casing colour black
 Casing material aluminium
 Work environment outdoor use
 Operation temperature -40...+50°C

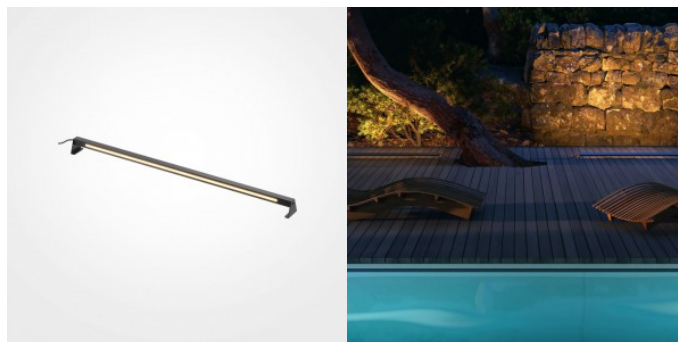

Ground light Maytoni Wall Washer Edge gray 15W 1000lm 110° IP65 830

Product code 19776

Brand Maytoni
Output 15W
Luminous flux 1000lumens
Luminaire's efficiency lm79 67W
Correlated colour temperature warm
white 3000K
Lens angle 110
Cri 80
Protection class IP65
Height 59.0mm
Width 65.0mm
Length 1000.0mm
Weight 800 g
Package weight 940 g
Casing colour gray
Casing material aluminium
Work environment outdoor use
Operation temperature -40...+50°C°C



Ground light Nova Luce Wall Washer Sandy black 24V 36W 3284lm 30° IP67 3000K warm white

Product code 22848

Brand Nova Luce
 Supply voltage 24V
 Output 36W
 Maximum output 36W/1m
 Luminous flux 3284lumens
 Luminaire's efficiency lm79 91W
 Correlated colour temperature warm white 3000K
 Lens angle 30
 Protection class IP67
 Height 120.0mm
 Width 1000.0mm
 Length 65.0mm
 Casing colour black
 Casing material aluminum + glass
 Work environment outdoor use
 Warranty 3 years



The WALL WASHER LED wall spotlight from Nova Luce is a top-notch solution for outdoor lighting that combines functionality and aesthetics. With a maximum power of 36 watts and warm white light, this spotlight creates a pleasant atmosphere and highlights architectural details. Its robust construction and IP67 protection rating ensure that the product is protected against water and dust, making it ideal for outdoor use. With a length of 100 cm and a height of 12 cm, this wall spotlight is perfect for accentuating facades, gardens, or other outdoor areas. The elegant black color harmoniously blends into modern environments and provides a stylish lighting display. IP67 protection rating for optimal weather resistance Energy-efficient LED technology with 36 watts Ideal for accentuating facades and outdoor areas.



Ground light Nova Luce Wall Washer Sandy black 24V 44W 4223lm 30° IP67 3000K warm white

Product code 22855

Brand Nova Luce
 Supply voltage 24V
 Output 44W
 Maximum output 44W/1m
 Luminous flux 4223lumens
 Luminaire's efficiency lm79 96W
 Correlated colour temperature warm white 3000K
 Lens angle 30
 Protection class IP67
 Height 120.0mm
 Width 1000.0mm
 Length 65.0mm
 Casing colour black
 Casing material aluminum + glass
 Work environment outdoor use
 Warranty 3 years



The Wall Washer LED wall spotlight from Nova Luce is a high-quality lighting solution specifically designed for outdoor use. With a power of 48 watts and a warm white light color, this facade-mounted spotlight provides effective and appealing illumination for various applications. Measuring 100 cm in length, 6.5 cm in width, and 12 cm in height, it is an ideal choice for highlighting facades, gardens, or other outdoor areas. The spotlight is equipped with an IP67 protection rating, meaning it is dust-tight and protected against temporary immersion in water. This ensures high durability and reliability, even under demanding weather conditions. The elegant black finish harmoniously integrates into modern architecture and creates a stylish lighting display. The Wall Washer LED wall spotlight is thus a practical and aesthetic solution for those who value quality and design.



INSTALLATION



CONNECTION



Ground light Optonica Spot white GU10 IP65

Product code 22016

Brand [Optonica](#)
 Socket GU10
 Protection class IP65
 Height 125.0mm
 Diameter 83.0mm
 Installation opening diameter 73mm
 Casing colour white
 Casing material metal
 Work environment outdoor use



Terrace light REVAL BULB Agen silver round 12V 0.4W 10lm 90° IP65 830

Product code 18259

Brand [REVAL BULB](#)
 Supply voltage 12V
 Power factor 0.90
 Output 0.4W
 Maximum output 0.4W/1m
 Luminous flux 10lumens
 Luminaire's efficiency lm79 25W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Source of light SANAN LED
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 25000h
 Llmf tm21 L70B50 @25°C 50.000h
 Height 36.5mm
 Diameter 35.0mm
 Installation opening diameter 20mm
 In package 1pc
 In box 100pcs
 Casing colour silver
 Casing material aluminium
 Shape round
 Work environment outdoor use
 Operation temperature -25 ~ +45°C
 Warranty 3 years



Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Terrace light REVAL BULB ALBI silver round 12V 0.3W 10lm 90° IP65 730

Product code 18261

Brand [REVAL BULB](#)
 Supply voltage 12V
 Power factor 0.90
 Output 0.3W
 Maximum output 0.3W/1m
 Luminous flux 10lumens
 Luminaire's efficiency lm79 33W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Source of light SANAN LED
 Cri 70
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 25000h
 Llmf tm21 L70B50 @25°C 50.000h
 Height 41.0mm
 Diameter 26.0mm
 Installation opening diameter 18mm
 In package 1pc
 In box 100pcs
 Casing colour silver
 Casing material aluminium
 Shape round
 Work environment outdoor use
 Operation temperature -25 ~ +45°C
 Warranty 3 years




Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Terrace light REVAL BULB Brest black round 12V 1W 95lm 45° IP67 830

Product code 22659

Brand [REVAL BULB](#)
 Supply voltage 12V
 Output 1W
 Maximum output 1W/1m
 Luminous flux 95lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature warm white 3000K
 Lens angle 45
 Source of light OSRAM LED
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP67
 Lifespan 25000h
 Height 38.0mm
 Diameter 35.0mm
 Installation opening diameter 28mm
 In package 1pc
 In box 216pcs
 Casing colour black
 Casing material aluminium
 Shape round
 Work environment indoor / outdoor use
 Operation temperature -25 ~ +45°C
 Warranty 3 years

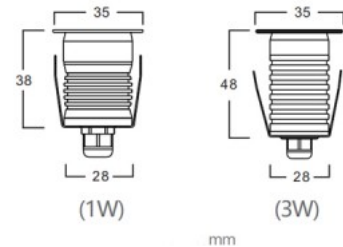


Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Terrace light REVAL BULB Brest silver round 12V 1W 95lm 45° IP67 830

Product code 15684

Brand [REVAL BULB](#)
 Supply voltage 12V
 Output 1W
 Maximum output 1W/1m
 Luminous flux 95lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature warm white 3000K
 Lens angle 45
 Source of light OSRAM LED
 Cri 80
 Protection class IP67
 Lifespan 25000h
 Height 38.0mm
 Diameter 35.0mm
 Installation opening diameter 28mm
 In package 1pc
 In box 216pcs
 Casing colour silver
 Casing material aluminium
 Shape round
 Work environment indoor / outdoor use
 Operation temperature -25 ~ +45°C
 Warranty 3 years


Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

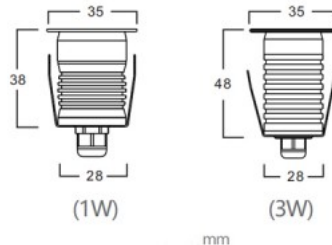

Terrace light REVAL BULB Brest silver round 12V 3W 195lm 15° IP67 830

Product code 22970

Brand [REVAL BULB](#)
 Supply voltage 12V
 Output 3W
 Maximum output 3W/1m
 Luminous flux 195lumens
 Luminaire's efficiency lm79 65W
 Correlated colour temperature warm white 3000K
 Lens angle 15
 Source of light OSRAM LED
 Cri 80
 Sdcm - macadam ellipses 3
 Protection class IP67
 Lifespan 25000h
 Llmf tm21 L70B50 @25°C 50.000h
 Height 48.0mm
 Diameter 35.0mm
 Installation opening diameter 28mm
 In package 1pc
 In box 216pcs
 Casing colour silver
 Casing material aluminium
 Shape round
 Work environment indoor / outdoor use
 Operation temperature -25 ~ +45°C
 Warranty 3 years

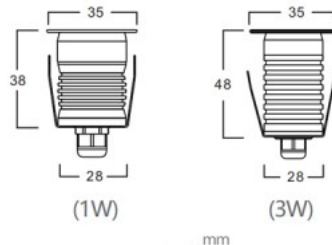

Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Terrace light REVAL BULB Lille silver round 12V 1W 95lm 180° IP67 830

Product code 15690

Brand [REVAL BULB](#)

Supply voltage 12V

Output 1W

Maximum output 1W/1m

Luminous flux 95lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature warm
white 3000K

Lens angle 180

Source of light [EPISTAR LED](#)

Cri 80

Protection class IP67

Height 39.0mm

Diameter 36.0mm

Installation opening diameter 27mm

In package 1pc

In box 180pcs

Casing colour silver

Casing material aluminium + plastic


Shape round

Work environment outdoor use

Operation temperature -25 ~ +45°C

Warranty 3 years

Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)


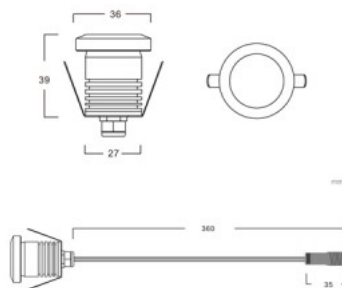


Terrace light REVAL BULB Metz silver round 12V 3W 280lm 180° IP67 830

Product code 15697

Brand [REVAL BULB](#)
 Supply voltage 12V
 Output 3W
 Maximum output 3W/1m
 Luminous flux 280lumens
 Luminaire's efficiency lm79 93W
 Correlated colour temperature warm white 3000K
 Lens angle 180
 Source of light OSRAM LED
 Cri 80
 Protection class IP67
 Lifespan 25000h
 Height 38.0mm
 Diameter 50.0mm
 Installation opening diameter 33mm
 In package 1pc
 In box 180pcs
 Casing colour silver
 Casing material aluminium
 Shape round
 Work environment outdoor use
 Operation temperature -25 ~ +45°C
 Warranty 3 years

Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



Terrace light REVAL BULB petite silver round 12V 1W 87lm 120° IP67 830

Product code 22669

Brand [REVAL BULB](#)

Supply voltage 12V

Output 1W

Maximum output 1W/1m

Luminous flux 87lumens

Luminaire's efficiency lm79 87W

Correlated colour temperature warm
white 3000K

Lens angle 120

Source of light OSRAM LED

Cri 80

Protection class IP67

Lifespan 25000h

Height 38.0mm

Diameter 20.0mm

Installation opening diameter 15.5mm

In package 1pc

In box 288pcs

Casing colour silver


Casing material aluminium

Shape round

Work environment indoor / outdoor
use

Operation temperature -25 ~ +45°C

Warranty 3 years

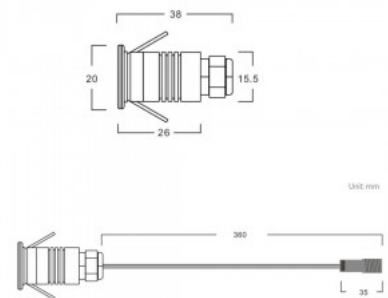

Terrace light REVAL BULB petite+ silver round 12V 1W 95lm 15° IP67 830

Product code 22958

Brand [REVAL BULB](#)

Supply voltage 12V

Output 1W

Maximum output 1W/1m

Luminous flux 95lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature warm
white 3000K

Lens angle 15

Source of light OSRAM LED

Cri 80

Protection class IP67

Lifespan 35000h

Height 47.5mm

Diameter 24.0mm

In package 1pc

In box 288pcs

Casing colour silver

Casing material aluminium

Shape round

Work environment indoor / outdoor
use

Operation temperature -25 ~ +45°C

Warranty 3 years



Terrace light REVAL BULB Pluie silver round 12V 1W 95lm 30° IP67 830

Product code 19706

Brand [REVAL BULB](#)
Supply voltage 12V
Output 1W
Maximum output 1W/1m
Luminous flux 95lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature warm
white 3000K
Lens angle 30
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP67
Height 25.0mm
Diameter 25.0mm
Installation opening diameter 22mm
In package 1pc
In box 180pcs
Casing colour silver
Casing material aluminium + plastic
Shape round
Work environment outdoor use
Operation temperature -25 ~ +45°C
Warranty 3 years



Also suitable for installation inside
handrails

Terrace light REVAL BULB Rouen silver round 12V 1W 95lm 45° IP67 830

Product code 15688

Brand [REVAL BULB](#)
 Supply voltage 12V
 Output 1W
 Maximum output 1W/1m
 Luminous flux 95lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature warm white 3000K
 Lens angle 45
 Source of light OSRAM LED
 Cri 80
 Protection class IP67
 Lifespan 25000h
 Height 36.0mm
 Diameter 35.0mm
 Installation opening diameter 29-32mm
 In package 1pc
 In box 216pcs
 Casing colour silver
 Casing material aluminium
 Shape round
 Work environment outdoor use
 Operation temperature -25 ~ +45°C
 Warranty 3 years



Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Terrace light REVAL BULB Sizun PWM dim silver 12V 3W 180lm 45° IP68 RGB

Product code 16296

Brand [REVAL BULB](#)

Supply voltage 12V

Output 3W

Maximum output 3W/1m

Luminous flux 180lumens

Luminaire's efficiency lm79 60W

Correlated colour temperature RGB

RGB

Lens angle 45

Source of light [EPILEDs](#)

Protection class IP68

Lifespan 25000h

Height 67.0mm

Diameter 52.0mm

In package 1pc

In box 100pcs

Casing colour silver

Casing material aluminium

Work environment indoor / outdoor

use

Operation temperature -25 ~ +45°C

Warranty 3 years



Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Terrace light REVAL BULB Vichy silver round 12V 3W 220lm 30° IP67 830

Product code 15686

Brand [REVAL BULB](#)

Supply voltage 12V

Output 3W

Maximum output 3W/1m

Luminous flux 220lumens

Luminaire's efficiency lm79 73W

Correlated colour temperature warm white 3000K

Lens angle 30

Source of light OSRAM LED

Cri 80

Sdcm - macadam ellipses 6

Protection class IP67

Lifespan 25000h

Height 42.0mm

Diameter 50.0mm

Installation opening diameter 36mm

In package 1pc

In box 180pcs

Casing colour silver

Casing material aluminium

Shape round


Work environment outdoor use

Operation temperature -25 ~ +45°C

Certificates CE

Warranty 3 years


Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

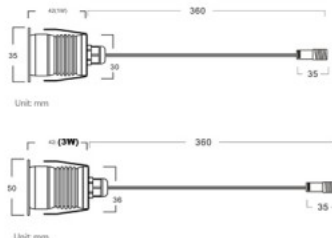

Terrace light REVAL BULB Vichy white round 12V 3W 220lm 30° IP67 830

Product code 18274

Brand [REVAL BULB](#)
 Supply voltage 12V
 Output 3W
 Maximum output 3W/1m
 Luminous flux 220lumens
 Luminaire's efficiency lm79 73W
 Correlated colour temperature warm white 3000K
 Lens angle 30
 Source of light OSRAM LED
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP67
 Lifespan 25000h
 Height 42.0mm
 Diameter 50.0mm
 Installation opening diameter 36mm
 In package 1pc
 In box 180pcs
 Casing colour white
 Casing material aluminium
 Shape round
 Work environment outdoor use
 Operation temperature -25 ~ +45°C
 Certificates CE
 Warranty 3 years

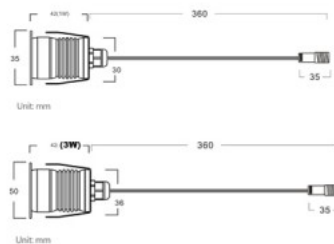

Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Terrace light REVAL BULB VITRA silver round 12V 1W 85lm 15° IP67 830

Product code 19330

Brand [REVAL BULB](#)
Supply voltage 12V
Output 1W
Maximum output 1W/1m
Luminous flux 85lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature warm
white 3000K
Lens angle 15
Source of light OSRAM LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP67
Lifespan 25000h
Height 59.0mm
Diameter 42.0mm
Installation opening diameter 31mm
In package 1pc
In box 180pcs
Casing colour silver
Casing material aluminium
Shape round
Work environment outdoor use
Operation temperature -25 ~ +45°C
Certificates CE
Warranty 3 years



Recessed terrace light for outdoor use. Adds a cozy atmosphere to your home garden and is especially suitable for terraces as mood lighting. This terrace light can be installed both on the floor and on the wall. The IP67 protection class ensures that the light withstands various weather conditions, maintaining its long lifespan. You can find the necessary power supply in the LED House product range. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Ground light Trio Lighting Belaja silver 230V 3,5W 350lm IP65 830

Product code 21112

Brand [Trio Lighting](#)

Supply voltage 230V

Output 3,5W

Luminous flux 350lumens

Correlated colour temperature warm white 3000K

Cri 80

Protection class IP65

Lifespan 35000h

Height 145.0mm

Diameter 110.0mm

Weight 600 g

Package weight 700 g

Casing colour silver

Casing material metal + glass

No. of switches 15000pcs

Work environment outdoor use

Warranty 5 years



Light accents with the BELAJA in-ground spotlight. Whether for the garage entrance, patio or garden bed, the spotlight provides effective and inviting lighting. Thanks to its IP65 protection rating, the recessed luminaire is protected against the ingress of dirt and water and is ideal for outdoor use. The spotlight has a beam angle of 40 degrees and can therefore ideally illuminate various areas. The recessed floor spotlight has a diameter of 11 cm and a height of 14.5 cm and can easily withstand a load of up to 2000 kg. The spotlight is finished in matt nickel, making it absolutely timeless and flexible to integrate. In addition, the luminaires feature modern LED technology, which stands for a high quality of light. LED light sources are characterized by a long service life and low heat generation.



Ground light Trio Lighting Belaja silver 230V 8W 900lm IP65 830

Product code 21111

Brand [Trio Lighting](#)

Supply voltage 230V

Output 8W

Luminous flux 900lumens

Luminaire's efficiency lm79 113W

Correlated colour temperature warm white 3000K

Cri 80

Protection class IP65

Lifespan 35000h

Height 120.0mm

Diameter 160.0mm

Weight 1 kg

Package weight 1.1 kg

Casing colour silver

Casing material metal + glass

No. of switches 15000pcs

Work environment outdoor use

Warranty 5 years



Light accents with the BELAJA in-ground spotlight. Whether for the garage entrance, patio or garden bed, the spotlight provides effective and inviting lighting. Thanks to its IP65 protection rating, the recessed luminaire is protected against the ingress of dirt and water and is ideal for outdoor use. The spotlight has a beam angle of 40 degrees and can therefore ideally illuminate various areas. The recessed floor spotlight has a diameter of 16 cm and a height of 12 cm and can easily withstand a load of up to 2000 kg. The spotlight is finished in matt nickel, making it absolutely timeless and flexible to integrate. In addition, the luminaires feature modern LED technology, which stands for a high quality of light. LED light sources are characterized by a long service life and low heat generation.