

LED industrial light NEXUS NEXFORCE1 1200 230V 40W 6000lm CRI80 120° IP65 4000K pure white

Product code 15816

Price 41,64+VAT

Brand NEXUS
Supply voltage 230V
Output 40W
Luminous flux 6000lumens
Luminaire's efficiency 150W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 50000h
Height 76.0mm
Width 95.0mm
Length 1260.0mm
Weight 1430g
In box 8pcs
Casing material plastic
No. of switches 30000pcs
Power supply [LIFUD](#)
Impact resistance IK08
Work environment indoor / outdoor
use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



LED industrial light NEXUS NEXFORCE1 1500 230V 60W 9000lm CRI80 120° IP65 4000K pure white

Product code 15817

Price 61,75+VAT

Brand NEXUS
Supply voltage 230V
Output 60W
Luminous flux 9000lumens
Luminaire's efficiency 150W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 50000h
Height 76.0mm
Width 95.0mm
Length 1560.0mm
Weight 1800g
In box 8pcs
Casing material plastic
No. of switches 30000pcs
Power supply [LIFUD](#)
Impact resistance IK08
Work environment indoor / outdoor
use
Operation temperature -20 - +40°C
Certificates CE
Warranty 5 years



LED industrial light Northcliffe BARAT LED2X3200 C116 T840 PC/PC OP IC EX 230V 55W 6947lm CRI80 IP66 4000K pure white

Product code 15796

Brand Northcliffe
Supply voltage 230V
Output 55W
Luminous flux 6947lumens
Luminaire's efficiency 126W
Correlated colour temperature (cct)
pure white 4000K
Cri 80
Protection class IP66
Llmf L80B10 @25°C 50.000h
Height 111.0mm
Width 146.0mm
Length 1572.0mm
Weight 3300g
Impact resistance IK08
Warranty 3 years



II 3G Ex nA IIC T6 Gc; II 3D Ex tD IIIC
T85°C

Reflector NOTE PC 100W dia 310

Product code 13890
Price 23,62+VAT

Diameter 310.0mm
Casing material plastic



Reflector NOTE PC Gen2 150W dia 410

Product code 16240

Price 24,82+VAT

Diameter 410.0mm
Casing material plastic




LED sports hall light PROLUMEN Arena HB100 UGR23 130lm/W gray 230V 100W 13700lm CRI80 110° IP65 4000K pure white

Product code 15258

Price 179,05+VAT

Promotional price 130,00+VAT

Brand [PROLUMEN](#)
Supply voltage 230V
Output 100W
Luminous flux 13700lumens
Luminaire's efficiency 137W
Correlated colour temperature (cct) pure white 4000K
Lens angle 110
Source of light [CREE LED](#)
Cri 80
Ugr 23
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf L80B10 @25°C 50.000h
Casing colour gray
Casing material aluminum
Polishing matt
Power supply [MEAN WELL](#)
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years

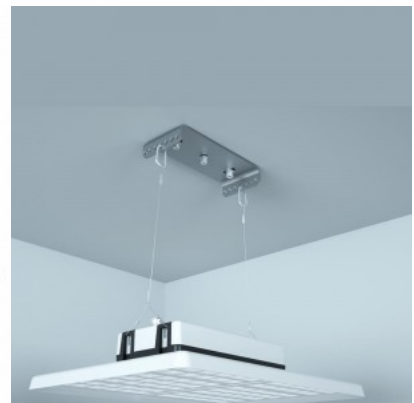

LED sports hall light PROLUMEN Arena HB120 UGR23 160lm/W gray 230V 120W 19200lm CRI80 110° IP65 4000K pure white

Product code 15561

Brand [PROLUMEN](#)

Supply voltage 230V

Output 120W

Luminous flux 19200lumens

Luminaire's efficiency 160W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 110

Source of light [CREE LED](#)

Cri 80

Ugr 23

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 120.0mm

Width 310.0mm

Length 415.0mm

Package weight 5000g

Casing colour gray

Casing material aluminum

Polishing matt

Power supply [MEAN WELL](#)


Impact resistance IK10

Work environment indoor use

Operation temperature -40~70°C

Certificates CE, RoHS

Warranty 5 years

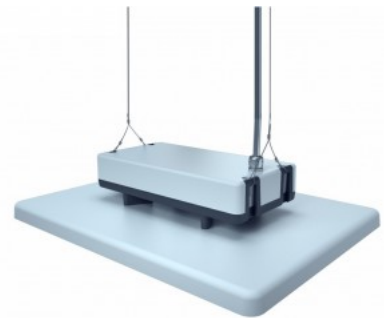

LED sports hall light PROLUMEN Arena HB150 UGR19 DALI gray 230V 150W 24000lm CRI80 80° IP65 4000K pure white

Product code 16417 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 150W

Luminous flux 24000lumens

Luminaire's efficiency 160W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 80

Source of light [CREE LED](#)

Cri 80

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 120.0mm

Width 362.0mm

Length 487.0mm

Casing colour gray

Casing material aluminum

Polishing matt

Power supply [MEAN WELL](#)



Impact resistance IK10

Work environment indoor use

Operation temperature -40~70°C

Certificates CE, RoHS

Warranty 5 years

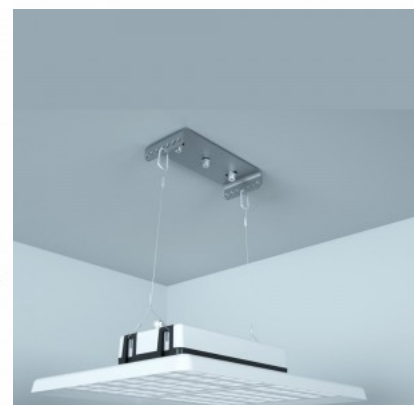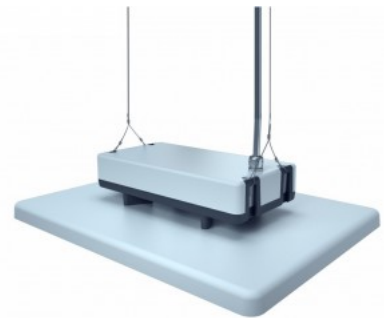

LED sports hall light PROLUMEN Arena HB150 UGR23 160lm/W gray 230V 150W 24000lm CRI80 110° IP65 4000K pure white

Product code 15785

Brand [PROLUMEN](#)
 Supply voltage 230V
 Output 150W
 Luminous flux 24000lumens
 Luminaire's efficiency 160W
 Correlated colour temperature (cct) pure white 4000K
 Lens angle 110
 Source of light [CREE LED](#)
 Cri 80
 Ugr 23
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf L80B10 @25°C 50.000h
 Height 120.0mm
 Width 362.0mm
 Length 487.0mm
 Casing colour gray
 Casing material aluminum
 Polishing matt
 Power supply OSRAM
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years



LED sports hall light PROLUMEN Arena HB200 UGR19 130lm/W gray 230V 200W 26000lm CRI80 80° IP65 5000K pure white

Product code 15139

Price 175,57+VAT

Promotional price 135,00+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 200W

Luminous flux 26000lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)
pure white 5000K

Lens angle 80

Source of light [CREE LED](#)

Cri 80

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Casing colour gray

Casing material aluminum

Polishing matt

Power supply [MEAN WELL](#)


Impact resistance IK10

Work environment indoor use

Operation temperature -40~70°C

Certificates CE, RoHS

Warranty 5 years

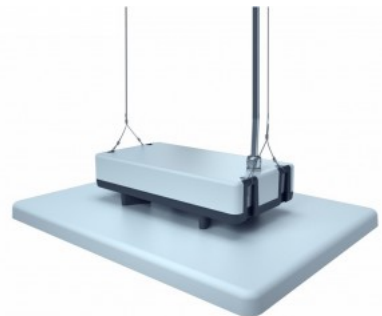

LED sports hall light PROLUMEN Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm CRI80 80° IP65 5000K pure white

Product code 16335

Brand [PROLUMEN](#)

Supply voltage 230V

Output 200W

Luminous flux 32000lumens

Luminaire's efficiency 160W

Correlated colour temperature (cct)

pure white 5000K

Lens angle 80

Source of light [CREE LED](#)

Cri 80

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 120.0mm

Width 362.0mm

Length 487.0mm

Package weight 6500g

Casing colour gray

Casing material aluminum

Polishing matt

Power supply OSRAM



Impact resistance IK10

Work environment indoor use

Operation temperature -40~70°C

Certificates CE, RoHS

Warranty 5 years

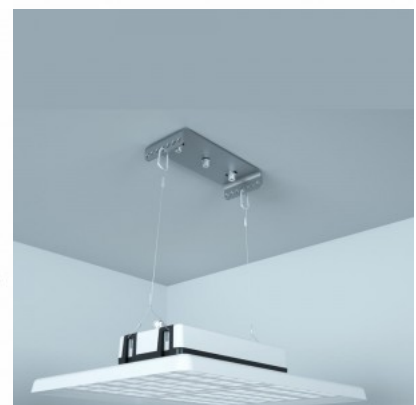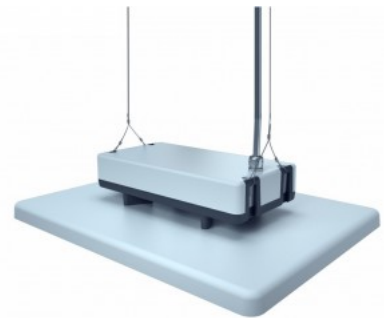

LED sports hall light PROLUMEN Arena HB200 UGR23 160lm/W gray 230V 200W 32000lm CRI80 110° IP65 4000K pure white

Product code 15553 0-10V dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable 0-10V

Output 200W

Luminous flux 32000lumens

Luminaire's efficiency 160W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 110

Source of light [CREE LED](#)

Cri 80

Ugr 23

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 120.0mm

Width 362.0mm

Length 487.0mm

Package weight 6500g

Casing colour gray

Casing material aluminum

Polishing matt

Power supply OSRAM


Impact resistance IK10

Work environment indoor use

Operation temperature -40~70°C

Certificates CE, RoHS

Warranty 5 years

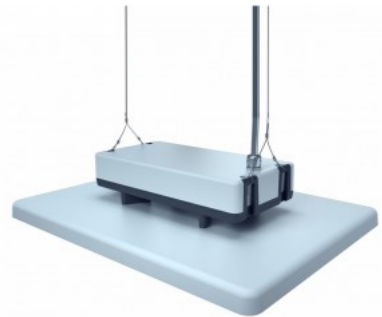

LED explosion protected light PROLUMEN EXPL 230V 80W 9600lm CRI80 120° IP65 4000K pure white

Product code 15337

Brand [PROLUMEN](#)
Supply voltage 230V
Output 80W
Luminous flux 9600lumens
Luminaire's efficiency 120W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [BRIDGELUX LED](#)
Cri 80
Sdcm - macadam ellipses 5
Protection class IP65
Lifespan 50000h
Power supply [LIFUD](#)
Impact resistance IK10
Work environment indoor / outdoor
use
Warranty 5 years



LED industrial light PROLUMEN Galaxy 600 (motion sensor) 230V 100W 14000lm CRI80 80x110° IP44 4000K pure white

Product code 15973

Brand [PROLUMEN](#)
Supply voltage 230V
Output 100W
Luminous flux 14000lumens
Luminaire's efficiency 140W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 80x110
Source of light [CREE LED](#)
Cri 80
Protection class IP44
Lifespan 50000h
Lmf L90B10 @25°C 50.000h
Height 56.0mm
Width 150.0mm
Length 577.0mm
Casing material aluminum
Power supply OSRAM
Impact resistance IK08
Work environment indoor use
Operation temperature -40C- +60°C
Certificates CE, D, F
Warranty 5 years



LED industrial light PROLUMEN Galaxy 600 230V 100W 14000lm CRI80 80x110° IP44 4000K pure white

Product code 15844

Brand [PROLUMEN](#)

Supply voltage 230V

Output 100W

Luminous flux 14000lumens

Luminaire's efficiency 140W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 80x110

Source of light [CREE LED](#)

Cri 80

Protection class IP44

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 56.0mm

Width 150.0mm

Length 577.0mm

Casing material aluminum

Power supply OSRAM

Impact resistance IK08

Work environment indoor use

Operation temperature -40C- +60°C

Certificates CE, D, F

Warranty 5 years



LED industrial light PROLUMEN HiClean 230V 100W 14000lm CRI80 90° IP66 4000K pure white

Product code 16231

Brand [PROLUMEN](#)
Supply voltage 230V
Output 100W
Luminous flux 14000lumens
Luminaire's efficiency 140W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 90
Source of light [NICHIA LED](#)
Cri 80
Protection class IP66
Lifespan 50000h
Llmf L80B10 @25°C 50.000h
Height 200.0mm
Diameter 489.0mm
Casing material aluminum
No. of switches 40000pcs
Power supply [MEAN WELL](#)
Work environment indoor use
Operation temperature -30°C - +50°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light PROLUMEN HiClean 230V 200W 26000lm CRI80 90° IP66 4000K pure white

Product code 14651

Price 456,16+VAT
Promotional price 150,00+VAT

Brand [PROLUMEN](#)
Supply voltage 230V
Output 200W
Luminous flux 26000lumens
Luminaire's efficiency 130W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 90
Source of light [NICHIA LED](#)
Cri 80
Protection class IP66
Lifespan 50000h
Llmf L80B10 @25°C 50.000h
Casing material aluminum
No. of switches 40000pcs
Power supply [MEAN WELL](#)
Work environment indoor use
Operation temperature -30°C - +50°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light PROLUMEN Honor 1200 IK10 silvery 230V 40W 5200lm CRI80 120° IP65 4000K pure white

Product code 13142

Brand [PROLUMEN](#)
Supply voltage 230V
Output 40W
Luminous flux 5200lumens
Luminaire's efficiency 130W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [BRIDGELUX LED](#)
Cri 80
Protection class IP65
Lifespan 50000h
Height 74.0mm
Width 91.0mm
Length 1200.0mm
Casing colour silvery
Casing material aluminum + plastic
Power supply [LIFUD](#)
Impact resistance IK10
Operation temperature -20 +40°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light PROLUMEN Honor 1200 IK10 silvery 230V 60W 7800lm CRI80 120° IP65 4000K pure white

Product code 13666

Brand [PROLUMEN](#)
Supply voltage 230V
Output 60W
Luminous flux 7800lumens
Luminaire's efficiency 130W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [BRIDGELUX LED](#)
Cri 80
Protection class IP65
Lifespan 50000h
Height 74.0mm
Width 90.0mm
Length 1200.0mm
Casing colour silvery
Casing material aluminum + plastic
Power supply [LIFUD](#)
Impact resistance IK10
Operation temperature -20 +40°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light PROLUMEN Honor 1500 IK10 silvery 230V 60W 7800lm CRI80 120° IP65 4000K pure white

Product code 13898

Brand [PROLUMEN](#)
Supply voltage 230V
Output 60W
Luminous flux 7800lumens
Luminaire's efficiency 130W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [BRIDGELUX LED](#)
Cri 80
Protection class IP65
Lifespan 50000h
Height 74.0mm
Width 91.0mm
Length 900.0mm
Casing colour silvery
Casing material aluminum + plastic
Power supply [LIFUD](#)
Impact resistance IK10
Operation temperature -20 +40°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light PROLUMEN Honor 1500 IK10 silvery 230V 80W 10400lm CRI80 120° IP65 4000K pure white

Product code 13667

Brand [PROLUMEN](#)
Supply voltage 230V
Output 80W
Luminous flux 10400lumens
Luminaire's efficiency 130W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [BRIDGELUX LED](#)
Cri 80
Protection class IP65
Lifespan 50000h
Height 74.0mm
Width 90.0mm
Length 1500.0mm
Casing colour silvery
Casing material aluminum + plastic
Power supply [LIFUD](#)
Impact resistance IK10
Operation temperature -20 +40°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light PROLUMEN Honor 600 IK10 silvery 230V 20W 2600lm CRI80 120° IP65 4000K pure white

Product code 13665

Brand [PROLUMEN](#)
Supply voltage 230V
Output 20W
Luminous flux 2600lumens
Luminaire's efficiency 130W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [BRIDGELUX LED](#)
Cri 80
Protection class IP65
Lifespan 50000h
Height 74.0mm
Width 90.0mm
Length 600.0mm
In package 1pc
Casing colour silvery
Casing material aluminum + plastic
Power supply [LIFUD](#)
Impact resistance IK10
Operation temperature -20 +40°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light PROLUMEN Quad Bay 160lm/W 230V 200W 32000lm CRI70 60° IP65 4000K pure white

Product code 14729

Brand [PROLUMEN](#)

Supply voltage 230V

Output 200W

Luminous flux 32000lumens

Luminaire's efficiency 160W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 60

Source of light [LUMILEDS](#)

Cri 70

Protection class IP65

Lifespan 50000h

Height 151.0mm

Width 430.0mm

Length 430.0mm

Weight 5100g

Casing material aluminum

Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40°C ~ 60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial light PROLUMEN T19B + microwave motion sensor silvery 230V 150W 19500lm CRI80 110° IP42 4000K pure white

Product code 13900 0-10V dimmable

Price 171,05+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable 0-10V

Output 150W

Luminous flux 19500lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 110

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 600.0mm

Weight 4000g

Package weight 5200g

In package 1pc

Casing colour silvery



Casing material aluminum + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

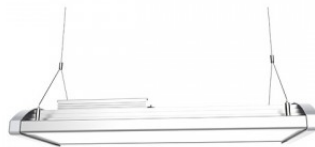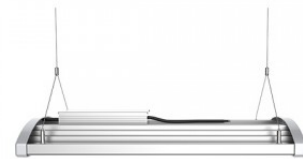

LED industrial light PROLUMEN T19B DALI silvery 230V 100W 13000lm CRI80 120° IP42 4000K pure white

Product code 15856 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 100W

Luminous flux 13000lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 400.0mm

In package 1pc

Casing colour silvery



Casing material aluminum + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

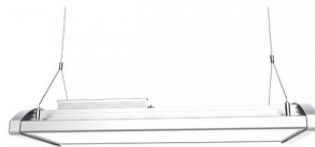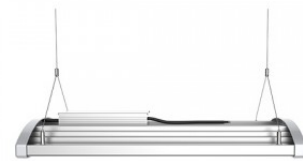

LED industrial light PROLUMEN T19B DALI silvery 230V 150W 19500lm CRI80 120° IP42 4000K pure white

Product code 15848 DALI dimmable

Price 150,00+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 150W

Luminous flux 19500lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 600.0mm

Weight 4000g

Package weight 5200g

In package 1pc

Casing colour silvery



Casing material aluminum + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

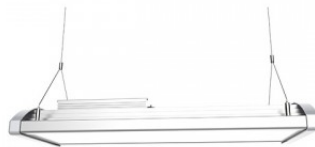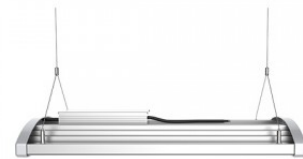

LED industrial light PROLUMEN T19B DALI silvery 230V 200W 26000lm CRI80 120° IP42 4000K pure white

Product code 15855 DALI dimmable

Price 185,91+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 200W

Luminous flux 26000lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 810.0mm

In package 1pc

Casing colour silvery


Casing material aluminum + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

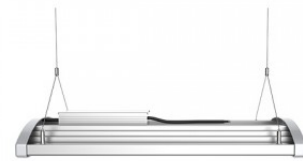

LED industrial light PROLUMEN T19B silvery 230V 100W 13000lm CRI80 120° IP42 4000K pure white

Product code 15859

Brand [PROLUMEN](#)

Supply voltage 230V

Output 100W

Luminous flux 13000lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 400.0mm

In package 1pc

Casing colour silvery


Casing material aluminum + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

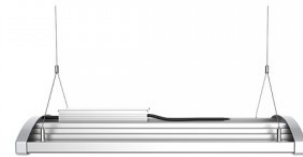

LED industrial light PROLUMEN T19B silvery 230V 150W 19500lm CRI80 110° IP42 4000K pure white

Product code 15349

Brand [PROLUMEN](#)

Supply voltage 230V

Output 150W

Luminous flux 19500lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 110

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 600.0mm

Weight 4000g

Package weight 5200g

In package 1pc

Casing colour silvery



Casing material aluminum + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

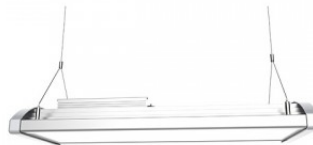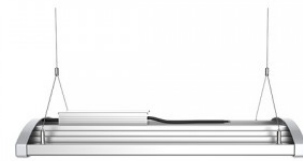

LED industrial light PROLUMEN T19B silvery 230V 200W 26000lm CRI80 120° IP42 4000K pure white

Product code 15858

Brand [PROLUMEN](#)

Supply voltage 230V

Output 200W

Luminous flux 26000lumens

Luminaire's efficiency 130W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 810.0mm

In package 1pc

Casing colour silvery


Casing material aluminum + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

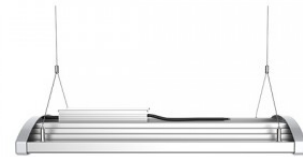

LED industrial light PROLUMEN TP LINK 1200 white 230V 40W 5400lm CRI80 120° IP65 4000K pure white

Product code 15705

Price 46,16+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 40W

Luminous flux 5400lumens

Luminaire's efficiency 135W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Source of light [BRIDGELUX LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 65.0mm

Width 74.0mm

Length 1221.0mm

In package 1pc

In box 6pcs

Casing colour white

Casing material aluminum + plastic

Polishing matt

Power supply OSRAM


Impact resistance IK08

Work environment indoor / outdoor use

Operation temperature -20° +40°C

Certificates CE, D, F

Warranty 5 years

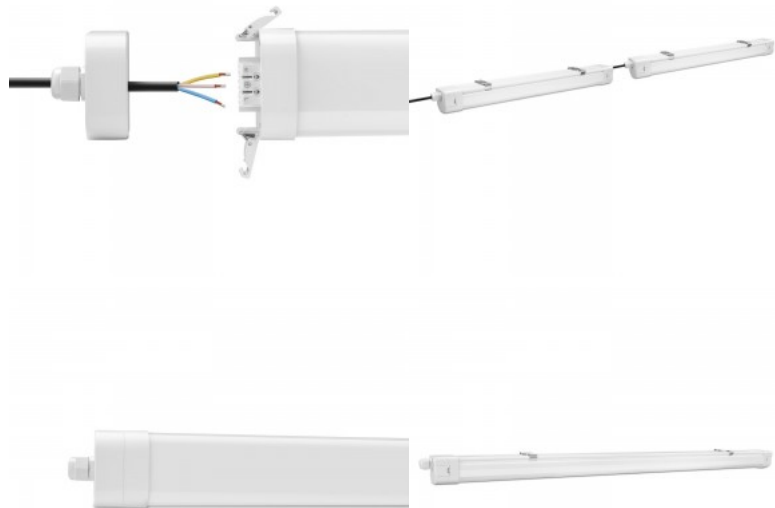

LED industrial light PROLUMEN TP LINK 1500 white 230V 60W 8100lm CRI80 120° IP65 4000K pure white

Product code 15706

Price 58,00+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 60W

Luminous flux 8100lumens

Luminaire's efficiency 135W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Source of light [BRIDGELUX LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 65.0mm

Width 74.0mm

Length 1502.0mm

In package 1pc

In box 6pcs

Casing colour white

Casing material aluminum + plastic

Polishing matt

Power supply OSRAM

Impact resistance IK08


Work environment indoor / outdoor

use

Operation temperature -20° +40°C

Certificates CE, D, F

Warranty 5 years

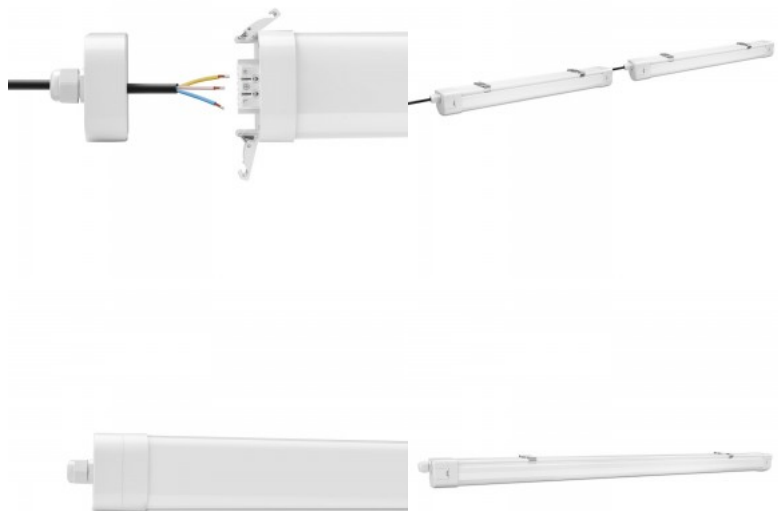

LED industrial light PROLUMEN TP LINK 600 white 230V 20W 2520lm CRI80 120° IP65 4000K pure white

Product code 14717

Price 32,50+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 20W

Luminous flux 2520lumens

Luminaire's efficiency 126W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Source of light [BRIDGELUX LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 64.0mm

Width 74.0mm

Length 659.0mm

Weight 800g

Package weight 132g

Casing colour white

Casing material aluminum + plastic

Polishing matt

Power supply OSRAM

Impact resistance IK08


Work environment indoor / outdoor

use

Operation temperature -20° +40°C

Certificates CE, D, F

Warranty 5 years

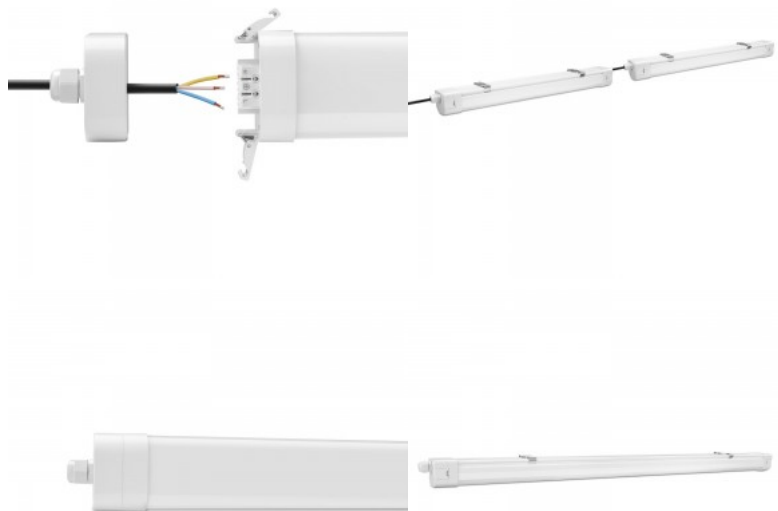

LED warehouse light PROLUMEN UFO Crossover (with sensor plug) black round 230V 100W 15000lm CRI80 90° IP65 4000K pure white

Product code 16418 0-10V dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable 0-10V

Output 100W

Luminous flux 15000lumens

Luminaire's efficiency 150W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 90

Source of light [LUMILEDS](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 174.0mm

Diameter 290.0mm

Weight 2700g

Casing colour black

Casing material aluminum

Polishing matt

Shape round

No. of switches 100000pcs

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial light PROLUMEN UFO IKT (DALI) 230V 100W 14000lm CRI80 110° IP65 4000K pure white

Product code 15824 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 100W
Luminous flux 14000lumens
Luminaire's efficiency 140W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 110
Source of light OSRAM LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 145.0mm
Diameter 290.0mm
Casing material aluminum
Power supply [SOSEN](#)
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +50°C
Certificates CE, D, F
Warranty 5 years



LED industrial light PROLUMEN UFO IKT 230V 100W 15000lm CRI80 110° IP65 4000K pure white

Product code 15769

Price 116,00+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 100W

Luminous flux 15000lumens

Luminaire's efficiency 150W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 110

Source of light OSRAM LED

Cri 80

Sdcm - macadam ellipses 5

Protection class IP65

Lifespan 50000h

Height 145.0mm

Diameter 290.0mm

Casing material aluminum

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +50°C

Certificates CE, D, F

Warranty 5 years



LED explosion protected light PROLUMEN UFO MEGA EX black round 230V 150W 22500lm CRI80 90° IP66 4000K pure white

Product code 16311

Brand [PROLUMEN](#)

Supply voltage 230V

Output 150W

Luminous flux 22500lumens

Luminaire's efficiency 150W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 90

Source of light [CREE LED](#)

Cri 80

Lor 80

Protection class IP66

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 312.0mm

Diameter 354.0mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

No. of switches 100000pcs

Power supply [MEAN WELL](#)

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED warehouse light PROLUMEN UFO NOTE 2 black round 230V 100W 13600lm CRI80 110° IP65 4000K pure white

Product code 15809

Price 116,42+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 100W

Luminous flux 13600lumens

Luminaire's efficiency 136W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 110

Source of light [CREE LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 178.0mm

Diameter 250.0mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

No. of switches 100000pcs

Power supply [MEAN WELL](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED warehouse light PROLUMEN UFO NOTE 2 black round 230V 120W 16080lm CRI80 90° IP65 4000K pure white

Product code 15562

Price 127,09+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 120W

Luminous flux 16080lumens

Luminaire's efficiency 134W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 90

Source of light [CREE LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 181.0mm

Diameter 300.0mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

No. of switches 100000pcs

Power supply [MEAN WELL](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED warehouse light PROLUMEN UFO NOTE 2 black round 230V 150W 21600lm CRI80 90° IP65 4000K pure white

Product code 13603

Price 155,90+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 150W

Luminous flux 21600lumens

Luminaire's efficiency 144W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 90

Source of light [CREE LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 181.0mm

Diameter 300.0mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

No. of switches 100000pcs

Power supply [MEAN WELL](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED warehouse light PROLUMEN UFO NOTE 2 black round 230V 200W 28600lm CRI80 90° IP65 4000K pure white

Product code 15620

Price 193,13+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 200W

Luminous flux 28600lumens

Luminaire's efficiency 143W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 90

Source of light [CREE LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 183.0mm

Width 345.0mm

Diameter 345.0mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

No. of switches 100000pcs

Power supply [MEAN WELL](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED warehouse light PROLUMEN UFO NOTE 2 black round 230V 240W 31440lm CRI80 90° IP65 4000K pure white

Product code 16256

Price 227,80+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 240W

Luminous flux 31440lumens

Luminaire's efficiency 131W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 90

Source of light [CREE LED](#)

Cri 80

Lor 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf L90B10 @25°C 50.000h

Height 183.0mm

Diameter 345.0mm

Weight 5500g

Package weight 6400g

In package 1pc

Casing colour black

Casing material aluminum

Polishing matt

Shape round

No. of switches 100000pcs

Power supply [MEAN WELL](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED warehouse light PROLUMEN UFO NOTE 2 DALI black round 230V 120W 16080lm CRI80 90° IP65 4000K pure white

Product code 16405 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 120W
Luminous flux 16080lumens
Luminaire's efficiency 134W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 90
Source of light [CREE LED](#)
Cri 80
Lor 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf L90B10 @25°C 50.000h
Height 181.0mm
Diameter 300.0mm
Casing colour black
Casing material aluminum
Polishing matt
Shape round
No. of switches 100000pcs
Power supply [MEAN WELL](#)
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



Motion sensor SEN-MW-NOTE 0-10V

Product code 14459 0-10V dimmable

Price 59,04+VAT

Promotional price 45,00+VAT

Dimmable 0-10V
Certificates CE
Warranty 2 years

motion sensor+light sensor, detecting
distance 16m



LED industrial light TPB 1200 230V 36W 5000lm CRI80 120° IP66 4000K pure white

Product code 13141

Supply voltage 230V
Output 36W
Luminous flux 5000lumens
Luminaire's efficiency 139W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [LG INNOTEK LED](#)
Cri 80
Protection class IP66
Lifespan 50000h
Llmf L80B50 @25°C 50.000h
Height 82.0mm
Width 98.0mm
Length 1220.0mm
Weight 1851g
Package weight 200g
In box 6pcs
Casing material plastic
No. of switches 30000pcs
Power supply OSRAM
Impact resistance IK08
Work environment indoor / outdoor
use
Operation temperature -30 - +50°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light TPB 1500 230V 54W 7500lm CRI80 120° IP66 4000K pure white

Product code 13904

Price 76,70+VAT

Supply voltage 230V
Output 54W
Luminous flux 7500lumens
Luminaire's efficiency 139W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [LG INNOTEK LED](#)
Cri 80
Protection class IP66
Lifespan 50000h
Llmf L80B50 @25°C 50.000h
Height 85.0mm
Width 100.0mm
Length 1560.0mm
In box 6pcs
Casing material plastic
No. of switches 30000pcs
Power supply OSRAM
Impact resistance IK08
Work environment indoor / outdoor
use
Operation temperature -30 - +50°C
Certificates CE, RoHS
Warranty 5 years



LED industrial light TPB 600 230V 18W 2600lm CRI80 120° IP66 4000K pure white

Product code 13899

Price 35,94+VAT

Supply voltage 230V
Output 18W
Luminous flux 2600lumens
Luminaire's efficiency 144W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [LG INNOTEK LED](#)
Cri 80
Protection class IP66
Lifespan 50000h
Llmf L80B50 @25°C 50.000h
Height 82.0mm
Width 97.0mm
Length 660.0mm
Casing material plastic
No. of switches 30000pcs
Power supply OSRAM
Impact resistance IK08
Work environment indoor / outdoor
use
Operation temperature -30 - +50°C
Certificates CE, RoHS
Warranty 5 years

