

Reflector Crossover PC 100W

Product code 17743

Casing material plastic

Plastic reflector



Industrial light LED-OH-40NW white 230V 40W 4000lm 120° IP65 840

Product code 19602

Supply voltage 230V

Output 40W

Maximum output 40W/1m

Luminous flux 4000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure
white 4000K

Lens angle 120

Cri 80

Protection class IP65

Height 61.0mm

Width 72.0mm

Length 1180.0mm

Casing colour white

Work environment indoor / outdoor
use

Certificates CE



Motion sensor MW+ daylight sensor

Product code 17121

Motion sensor for CROSSOVER UFO light.



Reflector NOTE PC 100W dia 310

Product code 13890

Diameter 310.0mm
Casing material plastic

Plastic reflector



Motion sensor PIR + daylight sensor

Product code 17305

Motion sensor for CROSSOVER UFO light.



Sports hall light Prolumen Arena 2 HB200 UGR19 160lm/W gray 230V 200W 32000lm 80° IP65 840

Product code 18081

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.95
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire's efficiency lm79 160W
Correlated colour temperature pure white 4000K
Lens angle 80
Source of light [PHILIPS LED](#)
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
En62471 1
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 81.0mm
Width 184.0mm
Length 533.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply [SOSEN](#)
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years



Industrial light Prolumen Arena HB 120 UGR21 120W 19200lm 110° 0-10V 840

Product code 18339 0-10V dimmable

Brand [Prolumen](#)

Dimmable 0-10V

Output 120W

Maximum output 120W/1m

Luminous flux 19200lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 110

Cri 80

Power supply [SOSEN](#)

Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)



Industrial light Prolumen Arena HB 200 UGR21 200W 32000lm 110° 0-10V 840

Product code 18340 0-10V dimmable

Brand [Prolumen](#)

Dimmable 0-10V

Output 200W

Maximum output 200W/1m

Luminous flux 32000lumens

Luminaire's efficiency lm79 160W


Correlated colour temperature pure white 4000K

Lens angle 110

Cri 80

Power supply [SOSEN](#)

Warranty 5 years

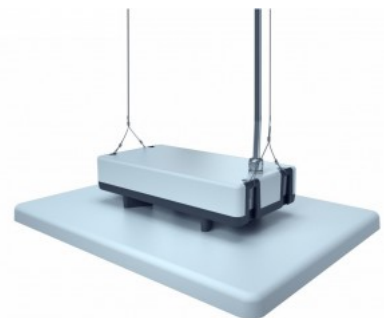

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)

Sports hall light Prolumen Arena HB100 UGR21 160lm/W gray 230V 100W 16000lm 110° IP65 840

Product code 17060

Brand [Prolumen](#)

Supply voltage 230V

Output 100W

Maximum output 100W/1m

Luminous flux 16000lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 110

Source of light [CREE LED](#)

Cri 80

Ugr 21

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 120.0mm

Width 257.0mm

Length 362.0mm

Casing colour gray

Casing material aluminium

Polishing matt

Power supply [MEAN WELL](#)

Impact resistance IK10



Work environment indoor use

Operation temperature -40~70°C

Certificates CE, RoHS

Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)

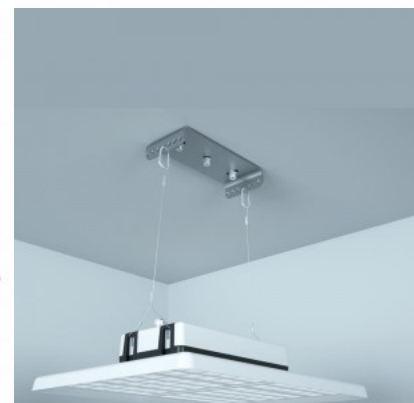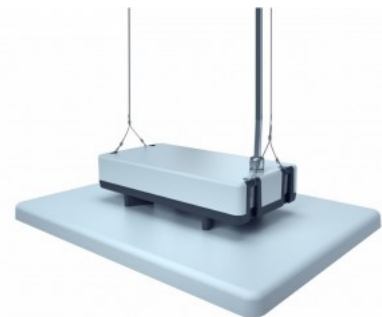

Sports hall light Prolumen Arena HB100 UGR21 160lm/W V gray 230V 120W 19200lm 110° IP65 0-10V 840

Product code 17249 0-10V dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Dimmable 0-10V
 Output 120W
 Maximum output 120W/1m
 Luminous flux 19200lumens
 Luminaire's efficiency 1m79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [CREE LED](#)
 Cri 80
 Ugr 21
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 120.0mm
 Width 257.0mm
 Length 362.0mm
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply [MEAN WELL](#)
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years


Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)



Sports hall light Prolumen Arena HB120 UGR21 160lm/W gray 230V 120W 19200lm 110° IP65 840

Product code 16752

Brand [Prolumen](#)
 Supply voltage 230V
 Output 120W
 Maximum output 120W/1m
 Luminous flux 19200lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [CREE LED](#)
 Cri 80
 Ugr 21
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 310.0mm
 Length 415.0mm
 Package weight 5 kg
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply [MEAN WELL](#)
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

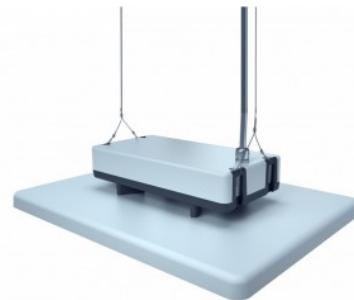


Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)

Sports hall light Prolumen Arena HB120 UGR21 160lm/W gray 230V 120W 19200lm 110° IP65 DALI 840

Product code 15561 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Dimmable DALI
 Output 120W
 Maximum output 120W/1m
 Luminous flux 19200lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [PHILIPS LED](#)
 Cri 80
 Ugr 21
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 310.0mm
 Length 415.0mm
 Package weight 5 kg
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)




Sports hall light Prolumen Arena HB150 UGR19 gray 230V 150W 24000lm 80° IP65 DALI 840

Product code 16417 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Dimmable DALI
 Output 150W
 Maximum output 150W/1m
 Luminous flux 24000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 80
 Source of light [CREE LED](#)
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 362.0mm
 Length 487.0mm
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply [MEAN WELL](#)
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)



Sports hall light Prolumen Arena HB150 UGR21 160lm/W gray 230V 150W 24000lm 110° IP65 840

Product code 15785

Brand [Prolumen](#)
 Supply voltage 230V
 Output 150W
 Maximum output 150W/1m
 Luminous flux 24000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [CREE LED](#)
 Cri 80
 Ugr 21
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 362.0mm
 Length 487.0mm
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply OSRAM
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)





Sports hall light Prolumen Arena HB200 UGR19 160lm/W gray 230V 200W 32000lm 80° IP65 840

Product code 18084

Brand [Prolumen](#)
 Supply voltage 230V
 Output 200W
 Maximum output 200W/1m
 Luminous flux 32000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 80
 Source of light [CREE LED](#)
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 362.0mm
 Length 487.0mm
 Package weight 6.5 kg
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply OSRAM
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)

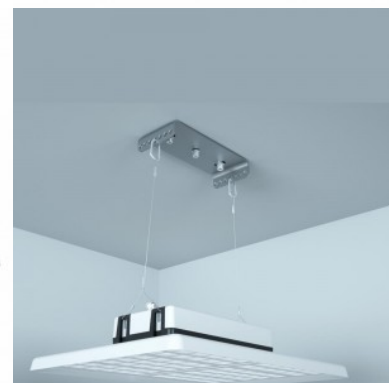
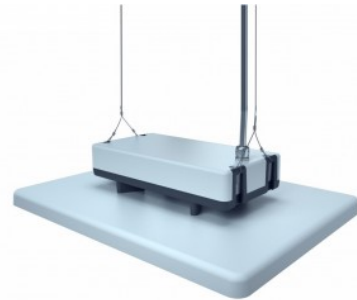


Sports hall light Prolumen Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 110° IP65 0-10V 840

Product code 17720 0-10V dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Dimmable 0-10V
 Output 200W
 Maximum output 200W/1m
 Luminous flux 32000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [CREE LED](#)
 Cri 80
 Ugr 21
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 362.0mm
 Length 487.0mm
 Package weight 6.5 kg
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply [MEAN WELL](#)
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)

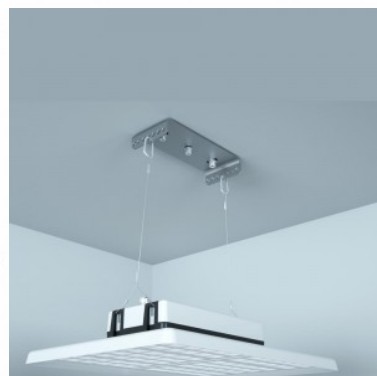


Sports hall light Prolumen Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 110° IP65 DALI 840

Product code 18007 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Dimmable DALI
 Output 200W
 Maximum output 200W/1m
 Luminous flux 32000lumens
 Luminaire's efficiency 160lm/W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [CREE LED](#)
 Cri 80
 Ugr 23
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 362.0mm
 Length 487.0mm
 Package weight 6.5 kg
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply OSRAM
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)





Sports hall light Prolumen Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 80° IP65 850

Product code 16335

Brand [Prolumen](#)
 Supply voltage 230V
 Output 200W
 Maximum output 200W/1m
 Luminous flux 32000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 5000K
 Lens angle 80
 Source of light [CREE LED](#)
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 120.0mm
 Width 362.0mm
 Length 487.0mm
 Package weight 6.5 kg
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply OSRAM
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)

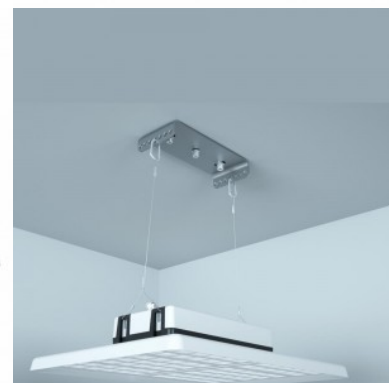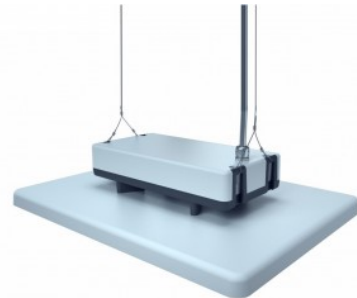


Sports hall light Prolumen Arena HB250 UGR19 160lm/W gray 230V 250W 40000lm 80° IP65 840

Product code 18083

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 250W
 Maximum output 250W/1m
 Luminous flux 40000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 80
 Source of light [CREE LED](#)
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 6
 En62471 1
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 130.0mm
 Width 365.0mm
 Length 720.0mm
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply OSRAM
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)





Sports hall light Prolumen Arena HB300 UGR21 160lm/W gray 230V 300W 48000lm 80° IP65 840

Product code 18080

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 300W
 Maximum output 300W/1m
 Luminous flux 48000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 80
 Source of light [CREE LED](#)
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 6
 En62471 1
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 130.0mm
 Width 365.0mm
 Length 720.0mm
 Casing colour gray
 Casing material aluminium
 Polishing matt
 Power supply OSRAM
 Impact resistance IK10
 Work environment indoor use
 Operation temperature -40~70°C
 Certificates CE, RoHS
 Warranty 5 years


Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the [LED house product range!](#)

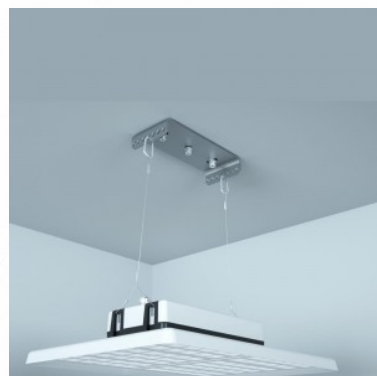

Sports hall light Prolumen Arena mounting bracket gray

Product code 18164

Brand [Prolumen](#)
In box 6pcs
Casing colour gray
Casing material aluminium
Polishing matt
Warranty 5 years

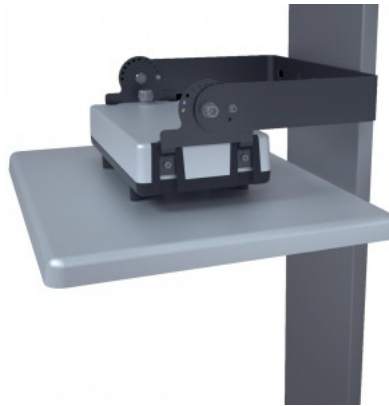

Industrial light Prolumen Astronaut 100W 16000lm 110° DALI 850

Product code 18942 DALI dimmable

Brand [Prolumen](#)
Dimmable DALI
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire's efficiency lm79 160W
Correlated colour temperature pure white 5000K
Lens angle 110
Cri 80
Power supply [SOSEN](#)
Warranty 5 years

High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the [LED house product range!](#)



Industrial light Prolumen Astronaut 200W 32000lm 110° DALI 850

Product code 18943 DALI dimmable

Brand [Prolumen](#)

Dimmable DALI

Output 200W

Maximum output 200W/1m

Luminous flux 32000lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 5000K

Lens angle 110

Cri 80

Power supply [SOSEN](#)

Warranty 5 years

High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the [LED house product range!](#)



Industrial light Prolumen Crossover 100W 15000lm 120° IP65 1-10V 850

Product code 18959 1-10V dimmable

Brand [Prolumen](#)

Dimmable 1-10V

Output 100W

Maximum output 100W/1m

Luminous flux 15000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Power supply [SOSEN](#)

Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen Crossover 100W 15000lm 120° IP65 Sensor Dim 850

**Product code 18970 Sensor Dim
dimmable**

Brand [Prolumen](#)
Dimmable Sensor Dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure
white 5000K
Lens angle 120
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years

LED industrial luminaire, optionally
with a motion sensor. The luminaire's
IP65 protection class means that it is
protected against both fine dust and
water jets. The luminaire has a light
temperature of 4000K, providing
daylight-like illumination - the most
suitable for work environments. With
proper use, the luminaire is energy-
efficient, environmentally friendly, and
has a very long lifespan (50,000
hours). Delivery from EU warehouse in
7-14 days. You can find the best
assortment of industrial lighting in the
[LED house product range!](#)



Industrial light Prolumen Crossover 100W 15000lm 90° IP65 Sensor Dim 850

**Product code 18967 Sensor Dim
dimmable**

Brand [Prolumen](#)
Dimmable Sensor Dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure
white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years

LED industrial luminaire, optionally
with a motion sensor. The luminaire's
IP65 protection class means that it is
protected against both fine dust and
water jets. The luminaire has a light
temperature of 4000K, providing
daylight-like illumination - the most
suitable for work environments. With
proper use, the luminaire is energy-
efficient, environmentally friendly, and
has a very long lifespan (50,000
hours). Delivery from EU warehouse in
7-14 days. You can find the best
assortment of industrial lighting in the
[LED house product range!](#)



Industrial light Prolumen Crossover 150W 22500lm 120° IP65 1-10V 850

Product code 18960 1-10V dimmable

Brand [Prolumen](#)

Dimmable 1-10V

Output 150W

Maximum output 150W/1m

Luminous flux 22500lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Power supply [SOSEN](#)

Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen Crossover 150W 22500lm 90° IP65 Sensor Dim 850

**Product code 18968 Sensor Dim
dimmable**

Brand [Prolumen](#)
Dimmable Sensor Dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure
white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years

LED industrial luminaire, optionally
with a motion sensor. The luminaire's
IP65 protection class means that it is
protected against both fine dust and
water jets. The luminaire has a light
temperature of 4000K, providing
daylight-like illumination - the most
suitable for work environments. With
proper use, the luminaire is energy-
efficient, environmentally friendly, and
has a very long lifespan (50,000
hours). Delivery from EU warehouse in
7-14 days. You can find the best
assortment of industrial lighting in the
[LED house product range!](#)



Industrial light Prolumen Crossover 200W 30000lm 120° IP65 1-10V 850

Product code 18961 1-10V dimmable

Brand [Prolumen](#)

Dimmable 1-10V

Output 200W

Maximum output 200W/1m

Luminous flux 30000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Power supply [SOSEN](#)

Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen Crossover 200W 30000lm 90° IP65 Sensor Dim 850

**Product code 18969 Sensor Dim
dimmable**

Brand [Prolumen](#)
Dimmable Sensor Dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure
white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years

LED industrial luminaire, optionally
with a motion sensor. The luminaire's
IP65 protection class means that it is
protected against both fine dust and
water jets. The luminaire has a light
temperature of 4000K, providing
daylight-like illumination - the most
suitable for work environments. With
proper use, the luminaire is energy-
efficient, environmentally friendly, and
has a very long lifespan (50,000
hours). Delivery from EU warehouse in
7-14 days. You can find the best
assortment of industrial lighting in the
[LED house product range!](#)



Industrial light Prolumen Eternity 100-200W 36000lm 90° IP65 Dip Switch 840

**Product code 18946 Dip Switch
dimmable**

Brand [Prolumen](#)
Dimmable Dip Switch
Output 100-200W
Maximum output 200W/1m
Luminous flux 36000lumens
Correlated colour temperature pure
white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Eternity 100-200W 36000lm 90° IP65 Dip Switch 850

**Product code 18949 Dip Switch
dimmable**

Brand [Prolumen](#)
Dimmable Dip Switch
Output 100-200W
Maximum output 200W/1m
Luminous flux 36000lumens
Correlated colour temperature pure
white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Eternity 60-100W 18000lm 90° IP65 Dip Switch 840

**Product code 18944 Dip Switch
dimmable**

Brand [Prolumen](#)
Dimmable Dip Switch
Output 60-100W
Maximum output 100W/1m
Luminous flux 18000lumens
Correlated colour temperature pure
white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Eternity 60-100W 18000lm 90° IP65 Dip Switch 850

**Product code 18947 Dip Switch
dimmable**

Brand [Prolumen](#)
Dimmable Dip Switch
Output 60-100W
Maximum output 100W/1m
Luminous flux 18000lumens
Correlated colour temperature pure
white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Eternity 80-150W 27000lm 90° IP65 Dip Switch 840

**Product code 18945 Dip Switch
dimmable**

Brand [Prolumen](#)
Dimmable Dip Switch
Output 80-150W
Maximum output 150W/1m
Luminous flux 27000lumens
Correlated colour temperature pure
white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Eternity 80-150W 27000lm 90° IP65 Dip Switch 850

**Product code 18948 Dip Switch
dimmable**

Brand [Prolumen](#)
Dimmable Dip Switch
Output 80-150W
Maximum output 150W/1m
Luminous flux 27000lumens
Correlated colour temperature pure
white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Fairyland 100W 15000lm 90° IP65 No dim 840

Product code 18950 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [MOSO](#)
Warranty 5 years



Industrial light Prolumen Fairyland 100W 15000lm 90° IP65 No dim 850

Product code 18953 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [MOSO](#)
Warranty 5 years



Industrial light Prolumen Fairyland 100W 15000lm 90° IP65 No dim 850

Product code 18956 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Fairyland 150W 22500lm 90° IP65 No dim 840

Product code 18951 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [MOSO](#)
Warranty 5 years



Industrial light Prolumen Fairyland 150W 22500lm 90° IP65 No dim 850

Product code 18954 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [MOSO](#)
Warranty 5 years



Industrial light Prolumen Fairyland 150W 22500lm 90° IP65 No dim 850

Product code 18957 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Fairyland 200W 30000lm 90° IP65 No dim 840

Product code 18952 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [MOSO](#)
Warranty 5 years



Industrial light Prolumen Fairyland 200W 30000lm 90° IP65 No dim 850

Product code 18958 No dim dimmable

Brand [Prolumen](#)
Dimmable No dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply [SOSEN](#)
Warranty 5 years



Industrial light Prolumen Galaxy 600 230V 100W 16000lm 80x110° IP54 840

Product code 15844

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 100W
 Maximum output 100W/1m
 Luminous flux 16000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 80x110
 Source of light [CREE LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 59.0mm
 Width 150.0mm
 Length 576.0mm
 Casing material aluminium
 Power supply [PHILIPS](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40C- +60°C
 Certificates CE, D, F
 Warranty 5 years



PROLUMEN Galaxy series offers versatile and powerful lighting solutions for various needs. These LED luminaires are equipped with high-quality components and provide excellent illumination both indoors and outdoors. The Galaxy series luminaires have several features and characteristics, including: 1. Various power options ranging from 100W to 200W, ensuring a wide selection for different applications. 2. High luminous flux, providing sufficient illumination for larger areas. 3. Different light distribution angles, including 30x90° and 80x110°, ensuring optimal lighting for different environments. 4. Different IP ratings, ensuring durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) providing clear and ergonomic lighting for everyday activities. PROLUMEN Galaxy series luminaires are available with various additional features, including motion sensors or DALI systems, making them even more flexible and energy-efficient. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Industrial light Prolumen Galaxy 600 with motion sensor 230V 100W 14000lm 80x110° IP54 840

Product code 15973

Brand [Prolumen](#)
 Supply voltage 230V
 Output 100W
 Maximum output 100W/1m
 Luminous flux 14000lumens
 Luminaire's efficiency lm79 140W
 Correlated colour temperature pure white 4000K
 Lens angle 80x110
 Source of light [CREE LED](#)
 Cri 80
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 56.0mm
 Width 150.0mm
 Length 577.0mm
 Casing material aluminium
 Power supply OSRAM
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40C- +60°C
 Certificates CE, D, F
 Warranty 5 years



PROLUMEN Galaxy series offers versatile and powerful lighting solutions for various needs. These LED luminaires are equipped with high-quality components and provide excellent illumination both indoors and outdoors. The Galaxy series luminaires have several features and characteristics, including: 1. Various power options ranging from 100W to 200W, ensuring a wide selection for different applications. 2. High luminous flux, providing sufficient illumination for larger areas. 3. Different light distribution angles, including 30x90° and 80x110°, ensuring optimal lighting for different environments. 4. Different IP ratings, ensuring durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) providing clear and ergonomic lighting for everyday activities. PROLUMEN Galaxy series luminaires are available with various additional features, including motion sensors or DALI systems, making them even more flexible and energy-efficient. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Industrial light Prolumen HBL112 + microwave motion sensor silver 230V 120W 15600lm 105° IP42 0-10V 840

Product code 18296 0-10V dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Dimmable 0-10V
 Output 120W
 Maximum output 120W/1m
 Luminous flux 15600lumens
 Luminaire's efficiency lm79 130W
 Correlated colour temperature pure white 4000K
 Lens angle 105
 Cri 80
 Sdcm - macadam ellipses 5
 Protection class IP42
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 111.0mm
 Width 203.0mm
 Length 1200.0mm
 Weight 4 kg
 In package 1pc
 Casing colour silver
 Casing material aluminium + plastic
 Power supply [TRIDONIC](#)
 Impact resistance IK10
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years



The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Industrial light Prolumen HiClean 230V 100W 14000lm 90° IP66 840

Product code 16231

Brand [Prolumen](#)
 Supply voltage 230V
 Output 100W
 Maximum output 100W/1m
 Luminous flux 14000lumens
 Luminaire's efficiency lm79 140W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Source of light [NICHIA LED](#)
 Cri 80
 Protection class IP66
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 200.0mm
 Diameter 489.0mm
 Casing material aluminium
 No. of switches 40000pcs
 Power supply [MEAN WELL](#)
 Work environment indoor use
 Operation temperature -30°C - +50°C
 Certificates CE, RoHS
 Warranty 5 years



Special industrial luminaire for the paper and wood industry. HiClean is an industrial luminaire with breakthrough design, featuring a smooth housing, aesthetics, and dust-resistant properties. With ultra-efficient heat dissipation technology. The new models are 140lm/W or 160lm/W. Stainless steel screws Luminaire does not contain toxic chemicals. Safe optical lens. Stylish design allowing easy cleaning. Automatic shutdown protection IP66 or IP69K IK10 NSF certificate, suitable for use in the food industry. The easily flammable dust on the luminaire is not dangerous as the luminaire cooling is extended throughout the housing. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Industrial light Prolumen Quad Bay 160lm/W 230V 200W 32000lm 60° IP65 740

Product code 14729

Brand [Prolumen](#)

Supply voltage 230V

Output 200W

Maximum output 200W/1m

Luminous flux 32000lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 60

Source of light [LUMILEDS](#)

Cri 70

Protection class IP65

Lifespan 50000h

Height 151.0mm

Width 430.0mm

Length 430.0mm

Weight 5.1 kg

Casing material aluminium


Power supply [MEAN WELL](#)

Work environment outdoor use

Operation temperature -40°C ~ 60°C

Certificates CE, RoHS

Warranty 5 years

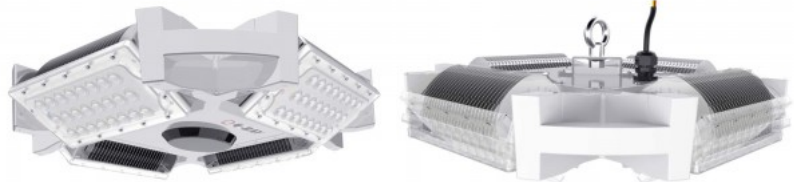

Excellent LED luminaire for illuminating squares, large tents, or spaces from the center. The luminaire has four rotatable LED panels that can be positioned at different angles.

4000K LED lights provide clear and sharp light, perfect for illuminating shops and other commercial spaces.

The luminaire's dust and moisture resistance is IP65, making it suitable for outdoor use. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Industrial light Prolumen T19B silver 230V 150W 19500lm 120° IP42 DALI 840

Product code 15848 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 150W

Maximum output 150W/1m

Luminous flux 19500lumens

Luminaire's efficiency lm79 130W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP42

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 90.0mm

Width 218.0mm

Length 600.0mm

Weight 4 kg

Package weight 5.2 kg

In package 1pc

Casing colour silver

Casing material aluminium + plastic

Power supply TOMCARLINE

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years




The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Industrial light Prolumen T19B silver 230V 200W 26000lm 120° IP42 DALI 840

Product code 15855 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Dimmable DALI
 Output 200W
 Maximum output 200W/1m
 Luminous flux 26000lumens
 Luminaire's efficiency lm79 130W
 Correlated colour temperature pure white 4000K
 Lens angle 120
 Cri 80
 Sdcm - macadam ellipses 5
 Protection class IP42
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 90.0mm
 Width 218.0mm
 Length 810.0mm
 In package 1pc
 Casing colour silver
 Casing material aluminium + plastic
 Power supply TOMCARLINE
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years



The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Industrial light Prolumen UFO ASTRONAUT white 230V 100W 16000lm 110° IP65 840

Product code 17124

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 100W
 Maximum output 100W/1m
 Luminous flux 16000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [PHILIPS LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 130.0mm
 Diameter 380.0mm
 Weight 2.5 kg
 Package weight 3.7 kg
 In package 1pc
 Casing colour white
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS
 Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO ASTRONAUT white 230V 150W 24000lm 110° IP65 840

Product code 17125

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 150W
 Maximum output 150W/1m
 Luminous flux 24000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [PHILIPS LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 130.0mm
 Diameter 380.0mm
 Weight 2.5 kg
 Package weight 3.7 kg
 In package 1pc
 Casing colour white
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS, D
 Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO ASTRONAUT white 230V 150W 24000lm 110° IP65 DALI 850

Product code 17820 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Dimmable DALI
 Output 150W
 Maximum output 150W/1m
 Luminous flux 24000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 5000K
 Lens angle 110
 Source of light [PHILIPS LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 130.0mm
 Diameter 380.0mm
 Weight 2.5 kg
 Package weight 3.7 kg
 In package 1pc
 Casing colour white
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS, D
 Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO ASTRONAUT white 230V 200W 32000lm 110° IP65 840

Product code 17126

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 200W
 Maximum output 200W/1m
 Luminous flux 32000lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [PHILIPS LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 130.0mm
 Diameter 380.0mm
 Weight 2.5 kg
 Package weight 3.7 kg
 In package 1pc
 Casing colour white
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS
 Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO ASTRONAUT white 230V 240W 38400lm 110° IP65 840

Product code 17127

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Output 240W
 Maximum output 240W/1m
 Luminous flux 38400lumens
 Luminaire's efficiency lm79 160W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light [PHILIPS LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 130.0mm
 Diameter 380.0mm
 Weight 2.5 kg
 Package weight 3.7 kg
 In package 1pc
 Casing colour white
 Casing material aluminium
 Polishing matt
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS
 Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover black 230V 100W 15000lm 90° IP65 DALI 840

Product code 17734 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 100W

Maximum output 100W/1m

Luminous flux 15000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Lens angle 90

Source of light [PHILIPS LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 174.0mm

Diameter 290.0mm

In package 1pc

Casing colour black

Casing material aluminium

Polishing matt

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover black 230V 120/150/200W 30000lm 120° IP65 1-10V 840

Product code 21860 1-10V dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable 1-10V

Output 120/150/200W

Maximum output 200W/1m

Luminous flux 30000lumens

Correlated colour temperature pure white 4000K

Lens angle 120

Source of light [PHILIPS LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 142.0mm

Diameter 347.0mm

Weight 3.3 kg

In box 4pcs

Casing colour black

Casing material aluminium

Polishing matt

No. of switches 100000pcs

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover black 230V 150W 22500lm 90° IP65 DALI 840

Product code 18006 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 150W

Maximum output 150W/1m

Luminous flux 22500lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Lens angle 90

Source of light [PHILIPS LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 174.0mm

Diameter 290.0mm

In package 1pc

Casing colour black

Casing material aluminium

Polishing matt

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover black 230V 200W 30000lm 90° IP65 DALI 840

Product code 17783 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 200W

Maximum output 200W/1m

Luminous flux 30000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Lens angle 90

Source of light [PHILIPS LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 142.0mm

Diameter 347.0mm

Weight 3.3 kg

Casing colour black

Casing material aluminium

Polishing matt

No. of switches 100000pcs

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover V black 230V 100W 15000lm 120° IP65 0-10V 840

Product code 17109 0-10V dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable 0-10V

Output 100W

Maximum output 100W/1m

Luminous flux 15000lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Lens angle 120

Source of light [PHILIPS LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 174.0mm

Diameter 290.0mm

Weight 2.7 kg

Casing colour black

Casing material aluminium

Polishing matt

No. of switches 100000pcs

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover V black 230V 150W 22500lm 120° IP65 1-10V 840

Product code 17596 1-10V dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable 1-10V

Output 150W

Maximum output 150W/1m

Luminous flux 22500lumens

Luminaire's efficiency lm79 150W

Correlated colour temperature pure white 4000K

Lens angle 120

Source of light [PHILIPS LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L90B10 @25°C 50.000h

Height 174.0mm

Diameter 290.0mm

Weight 2.7 kg

Casing colour black

Casing material aluminium

Polishing matt

No. of switches 100000pcs

Power supply [SOSEN](#)

Impact resistance IK08

Work environment indoor use

Operation temperature -40 - +60°C

Certificates CE, RoHS

Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover with sensor plug black 230V 100W 15000lm 90° IP65 840

Product code 17587

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 100W
 Maximum output 100W/1m
 Luminous flux 15000lumens
 Luminaire's efficiency lm79 150W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 174.0mm
 Diameter 290.0mm
 Weight 2.7 kg
 Casing colour black
 Casing material aluminium
 Polishing matt
 No. of switches 100000pcs
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS
 Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover with sensor plug black 230V 150W 22500lm 90° IP65 840

Product code 17120

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 150W
 Maximum output 150W/1m
 Luminous flux 22500lumens
 Luminaire's efficiency lm79 150W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Source of light [PHILIPS LED](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 174.0mm
 Diameter 290.0mm
 Weight 2.7 kg
 In box 3pcs
 Casing colour black
 Casing material aluminium
 Polishing matt
 No. of switches 100000pcs
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS
 Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO Crossover with sensor plug black 230V 200W 30000lm 90° IP65 840

Product code 17110

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 200W
 Maximum output 200W/1m
 Luminous flux 30000lumens
 Luminaire's efficiency lm79 150W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Source of light [LUMILEDS](#)
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L90B10 @25°C 50.000h
 Height 174.0mm
 Diameter 290.0mm
 Weight 2.7 kg
 In package 1pc
 In box 4pcs
 Casing colour black
 Casing material aluminium
 Polishing matt
 No. of switches 100000pcs
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +60°C
 Certificates CE, RoHS
 Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the [LED house product range!](#)

Industrial light Prolumen UFO IKT black 230V 100W 15000lm 110° IP65 840

Product code 15769

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 100W
 Maximum output 100W/1m
 Luminous flux 15000lumens
 Luminaire's efficiency lm79 150W
 Correlated colour temperature pure white 4000K
 Lens angle 110
 Source of light OSRAM LED
 Cri 80
 Sdcm - macadam ellipses 5
 Protection class IP65
 Lifespan 50000h
 Height 145.0mm
 Diameter 290.0mm
 Casing colour black
 Casing material aluminium
 Power supply [SOSEN](#)
 Impact resistance IK08
 Work environment indoor use
 Operation temperature -40 - +50°C
 Certificates CE, D, F
 Warranty 5 years



PROLUMEN UFO IKT is an efficient and stylish luminaire suitable for various environments. It features a UFO-shaped design that adds decorative and modern elements to interiors and outdoor spaces. The product boasts several notable features: Efficiency of 150lm/W; Light angle that allows for uniform illumination of large areas. IP65 protection class ensures strong waterproofing for the luminaire, allowing it to be used in outdoor settings, even under direct water pressure. It is a versatile luminaire suitable for both indoor and outdoor use. PROLUMEN provides bright and quality lighting that meets various illumination needs! Illuminate your world with the help of LED House professionals - [check out our portfolio here too!!](#)

Remote RC-200

Product code 17122

Remote control for MW sensor configuration. Light up your world with the help of LED House professionals - [check out our project portfolio here!!](#)



Motion sensor SEN-MW-NOTE V 0-10V

Product code 14459 0-10V dimmable

Dimmable 0-10V
Certificates CE
Warranty 2 years

Motion sensor + light sensor.
Detection range up to 16 meters.
Light up your world with the help of LED House professionals - [check out our project portfolio here!!](#)



Remote TP control panel

Product code 19720

Industrial lighting control panel Note!
This product is suitable for a specific industrial light.

