

Reflector Crossover PC 100W

Product code 17743

Casing material plastic

Plastic reflector



Industrial light ECO TP-12 230V 36W 5760lm 120° IP66 840



8.12.2025



Product code 17459

Brand ECO Supply voltage 230V Power factor 0.90 Output 36W Maximum output 36W/1m Luminous flux 5760lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 120 Source of light PHILIPS LED Cri 80 Uar 25 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Height 70.0mm Width 75.0mm Length 1207.0mm In package 1pc In box 6pcs Casing material polycarbonate Polishing matt Impact resistance IK10 Work environment indoor / outdoor use Operation temperature -20 - +45°C Certificates ENEC, CB, CE, RoHS Warranty 3 years

An industrial luminaire with adjustable power, suitable for both warehouse and car park. In industrial spaces, there is a higher risk of light fixtures getting damaged. To prevent this, this light fixture has an IK10 protection rating. This means that it is difficult to cause mechanical damage to the fixture. A light fixture with an IK10 rating can withstand hammer impacts of up to 20 joules. The user can choose between power settings of which also determines the number of lumens. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - check out our project portfolio here!







Industrial light ECO TP-15 230V 55W 8800lm 120° IP66 840

Product code 17453

Brand ECO Supply voltage 230V Power factor 0.90 Output 55W Maximum output 55W/1m Luminous flux 8800lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 120 Source of light PHILIPS LED Cri 80 Ugr 25 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Height 70.0mm Width 75.0mm Length 1507.0mm In package 1pc In box 6pcs Casing material polycarbonate Polishing matt Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 - +45°C Certificates ENEC, CB, CE, RoHS Warranty 3 years

An industrial luminaire with adjustable power, suitable for both warehouse and car park. In industrial spaces, there is a higher risk of light fixtures getting damaged. To prevent this, this light fixture has an IK10 protection rating. This means that it is difficult to cause mechanical damage to the fixture. A light fixture with an IK10 rating can withstand hammer impacts of up to 20 joules. The user can choose between power settings of which also determines the number of lumens. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - check out our project portfolio here!







Industrial light Farm 2 230V 40W 5400lm IP67 840

Product code 14658

Supply voltage 230V Output 40W Maximum output 40W/1m Luminous flux 5400lumens Luminaire's efficiency lm79 135W Correlated colour temperature pure white 4000K Cri 80 Protection class IP67 Lifespan 100000h Height 115.0mm Width 75.0mm Length 1210.0mm Weight 1700g Package weight 1850g In package 1pc Impact resistance IK10



Motion sensor MW+ daylight sensor

Product code 17121

Motion sensor for CROSSOVER UFO light.







Industrial light NEXUS PRO LIGHT NEXFORCE N 2 1500 230V 70W 12000lm 120° IP66 840

Product code 18129

Brand NEXUS PRO LIGHT Supply voltage 230V Output 70W Maximum output 70W/1m Luminous flux 12000lumens Luminaire's efficiency Im79 171W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP66 Lifespan 50000h Height 80.0mm Width 85.0mm Length 1500.0mm Weight 1630g In box 8pcs Casing material plastic No. of switches 30000pcs Power supply LIFUD Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 - +40°C Certificates CE Warranty 5 years







Industrial light NEXUS PRO LIGHT NEXFORCE1 1200 230V 36W 6300lm 120° IP66 840

Product code 17934

Brand NEXUS PRO LIGHT Supply voltage 230V Output 36W Maximum output 36W/1m Luminous flux 6300lumens Luminaire's efficiency Im79 175W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP66 Lifespan 50000h Height 80.0mm Width 85.0mm Length 1200.0mm Weight 1290g In box 9pcs Casing material plastic No. of switches 30000pcs Power supply LIFUD Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 - +40°C Certificates CE Warranty 5 years







Industrial light NEXUS PRO LIGHT NEXFORCE1 1500 230V 52W 9000lm 120° IP65 840

Product code 17898

Brand NEXUS PRO LIGHT Supply voltage 230V Output 52W Maximum output 52W/1m Luminous flux 9000lumens Luminaire's efficiency Im79 173W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP65 Lifespan 50000h Height 80.0mm Width 85.0mm Length 1500.0mm Weight 1630g In box 9pcs Casing material plastic No. of switches 30000pcs Power supply LIFUD Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 - +40°C Certificates CE Warranty 5 years








Industrial light NEXUS PRO LIGHT NEXFORCE1 1500 230V 60W 9000lm 120° IP65 840

Product code 15817

Brand NEXUS PRO LIGHT Supply voltage 230V Output 60W Maximum output 60W/1m Luminous flux 9000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP65 Lifespan 50000h Height 76.0mm Width 95.0mm Length 1560.0mm Weight 1800g In box 8pcs Casing material plastic No. of switches 30000pcs Power supply LIFUD Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 - +40°C Certificates CE Warranty 5 years







Industrial light NEXUS PRO LIGHT NEXFORCE1 600 230V 20W 3000lm 120° IP65 840

Product code 16982

Brand NEXUS PRO LIGHT Supply voltage 230V Output 20W Maximum output 20W/1m Luminous flux 3000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP65 Lifespan 50000h Height 76.0mm Width 95.0mm Length 600.0mm Weight 780g In box 8pcs Casing material plastic No. of switches 30000pcs Power supply LIFUD Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 - +40°C Certificates CE Warranty 5 years





Industrial light Northcliffe BARAT LED2X3200 C116 T840 PC/PC OP IC EX 230V 55W 6947lm IP66 840

Product code 15796

Brand Northcliffe Supply voltage 230V Output 55W Maximum output 55W/1m Luminous flux 6947lumens Luminaire's efficiency Im79 126W Correlated colour temperature pure white 4000K Cri 80 Protection class IP66 Llmf tm21 L80B10 @25°C 50.000h Height 111.0mm Width 146.0mm Length 1572.0mm Weight 3300g Impact resistance IK08 Warranty 3 years



High-quality LED ceiling light! 4000K LED lights provide clear and sharp light, perfect for illuminating shops and other commercial spaces. IP66 protection class ensures strong waterproofing for the light, allowing it to be used outdoors, even under direct water pressure. If the light malfunctions within 3 years, it will be replaced with a new one. Symbols: II 3G Ex nA IIC T6 Gc; II 3D Ex tD IIIC T85°C You can find the best selection of industrial lighting in the LED house product range!



Industrial light Northcliffe Barat LED2x4700 C117 T840 PC/PC OP IC Ex 230V 81W 9421lm IP66 840

Product code 18035

Brand Northcliffe Supply voltage 230V Output 81W Maximum output 81W/1m Luminous flux 9421lumens Luminaire's efficiency Im79 116W Correlated colour temperature pure white 4000K Cri 80 Protection class IP66 Llmf tm21 L80B50 @25°C 75.000h Height 111.0mm Width 146.0mm Length 1572.0mm Weight 3300g Impact resistance IK08 Warranty 3 years



High-quality LED ceiling light! 4000K LED lights provide clear and sharp light, perfect for illuminating shops and other commercial spaces. IP66 protection class ensures strong waterproofing for the light, allowing it to be used outdoors, even under direct water pressure. If the light malfunctions within 3 years, it will be replaced with a new one. Symbols: II 3G Ex nA IIC T6 Gc; II 3D Ex tD IIIC T85°C You can find the best selection of industrial lighting in the LED house product range!

Reflector NOTE PC 100W dia 310

Product code 13890

Diameter 310.0mm Casing material plastic

Plastic reflector







Motion sensor PIR + daylight sensor

Product code 17305

Motion sensor for CROSSOVER UFO light.



Sports hall light PROLUMEN Arena 2 HB200 UGR19 160lm/W gray 230V 200W 32000lm 80° IP65 840

Product code 18081

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency lm79 160W Correlated colour temperature pure white 4000K Lens angle 80 Source of light PHILIPS LED Cri 80 Ugr 19 Sdcm - macadam ellipses 6 En62471 1 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 81.0mm Width 184.0mm Length 533.0mm Casing colour gray Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK10

Work environment indoor use Operation temperature -40~70°C

Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN Arena HB 120 120W 19200lm 110° 0-10V 840

Product code 18339 0-10V dimmable

Brand PROLUMEN
Dimmable 0-10V
Output 120W
Maximum output 120W/1m
Luminous flux 19200lumens
Luminaire's efficiency Im79 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Arena HB 200 200W 32000lm 110° 0-10V 840

Product code 18340 0-10V dimmable

Brand PROLUMEN
Dimmable 0-10V
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire's efficiency Im79 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years





Industrial light PROLUMEN Arena HB 300 300W 48000lm 80° 0-10V 840

Product code 18341 0-10V dimmable

Brand PROLUMEN
Dimmable 0-10V
Output 300W
Maximum output 300W/1m
Luminous flux 48000lumens
Luminaire's efficiency Im79 160W
Correlated colour temperature pure white 4000K
Lens angle 80
Cri 80
Power supply SOSEN
Warranty 5 years

Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!



Sports hall light PROLUMEN Arena HB100 UGR21 160lm/W gray 230V 100W 16000lm 110° IP65 840



Product code 17060

Brand PROLUMEN Supply voltage 230V Output 100W Maximum output 100W/1m Luminous flux 16000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light **CREE LED** Cri 80 Ugr 21 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 257.0mm Length 362.0mm Casing colour gray Casing material aluminium Polishing matt Power supply **MEAN WELL** Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB100 UGR21 160lm/W V gray 230V 120W 19200lm 110° IP65 0-10V 840

Product code 17249 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Dimmable 0-10V Output 120W Maximum output 120W/1m Luminous flux 19200lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light **CREE LED** Cri 80 Ugr 21 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 120.0mm Width 257.0mm Length 362.0mm Casing colour gray Casing material aluminium Polishing matt Power supply **MEAN WELL** Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB120 UGR21 160lm/W gray 230V 120W 19200lm 110° IP65 840

Product code 16752

Brand PROLUMEN Supply voltage 230V Output 120W Maximum output 120W/1m Luminous flux 19200lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light CREE LED Cri 80 Ugr 21 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 310.0mm Length 415.0mm Package weight 5000g Casing colour gray Casing material aluminium Polishing matt Power supply **MEAN WELL** Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB120 UGR23 160lm/W gray 230V 120W 19200lm 110° IP65 DALI 840

Product code 15561 DALI dimmable

Brand PROLUMEN Supply voltage 230V Dimmable DALI Output 120W Maximum output 120W/1m Luminous flux 19200lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light PHILIPS LED Cri 80 Uar 23 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 310.0mm Length 415.0mm Package weight 5000g Casing colour gray Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years







Sports hall light PROLUMEN Arena HB150 UGR19 gray 230V 150W 24000lm 80° IP65 DALI 840

Product code 16417 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable DALI Output 150W Maximum output 150W/1m Luminous flux 24000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 80 Source of light CREE LED Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 362.0mm Length 487.0mm Casing colour gray Casing material aluminium Polishing matt Power supply **MEAN WELL** Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB150 UGR21 160lm/W gray 230V 150W 24000lm 110° IP65 840

Product code 15785

Brand PROLUMEN Supply voltage 230V Output 150W Maximum output 150W/1m Luminous flux 24000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light CREE LED Cri 80 Uar 21 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 362.0mm Length 487.0mm Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB200 UGR19 160lm/W gray 230V 200W 32000lm 80° IP65 840

Product code 18084

Brand PROLUMEN Supply voltage 230V Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 80 Source of light **CREE LED** Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 362.0mm Length 487.0mm Package weight 6500g Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 110° IP65 0-10V 840

Product code 17720 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Dimmable 0-10V Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light CREE LED Cri 80 Uar 21 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 362.0mm Length 487.0mm Package weight 6500g Casing colour gray Casing material aluminium Polishing matt Power supply **MEAN WELL** Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years







Sports hall light PROLUMEN Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 110° IP65 0-10V 840

Product code 15553 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Dimmable 0-10V Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light CREE LED Cri 80 Uar 21 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 362.0mm Length 487.0mm Package weight 6500g Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 80° IP65 850

Product code 16335

Brand PROLUMEN Supply voltage 230V Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 5000K Lens angle 80 Source of light **CREE LED** Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 362.0mm Length 487.0mm Package weight 6500g Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years







Sports hall light PROLUMEN Arena HB200 UGR23 160lm/W gray 230V 200W 32000lm 110° IP65 DALI 840

Product code 18007 DALI dimmable

Brand PROLUMEN Supply voltage 230V Dimmable DALI Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light CREE LED Cri 80 Uar 23 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 120.0mm Width 362.0mm Length 487.0mm Package weight 6500g Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years







Sports hall light PROLUMEN Arena HB250 UGR19 160lm/W gray 230V 250W 40000lm 80° IP65 840

Product code 18083

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 250W Maximum output 250W/1m Luminous flux 40000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 80 Source of light CREE LED Cri 80 Uar 19 Sdcm - macadam ellipses 6 En62471 1 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 130.0mm Width 365.0mm Length 720.0mm Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years





Sports hall light PROLUMEN Arena HB300 UGR21 160lm/W gray 230V 300W 48000lm 80° IP65 840

Product code 18080

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 300W Maximum output 300W/1m Luminous flux 48000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 80 Source of light CREE LED Cri 80 Uar 19 Sdcm - macadam ellipses 6 En62471 1 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 130.0mm Width 365.0mm Length 720.0mm Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor use Operation temperature -40~70°C Certificates CE, RoHS Warranty 5 years






Sports hall light PROLUMEN Arena mounting bracket gray

Product code 18164

Brand PROLUMEN
In box 6pcs
Casing colour gray
Casing material aluminium
Polishing matt
Warranty 5 years



Industrial light PROLUMEN Astronaut 100W 16000lm 110° DALI 850

Product code 18942 DALI dimmable

Brand PROLUMEN
Dimmable DALI
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire's efficiency Im79 160W
Correlated colour temperature pure white 5000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years

High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!







Industrial light PROLUMEN Astronaut 200W 32000lm 110° DALI 850

Product code 18943 DALI dimmable

Brand PROLUMEN
Dimmable DALI
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire's efficiency Im79 160W
Correlated colour temperature pure white 5000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years

High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the **LED** house product range!







Industrial light PROLUMEN Crossover 100W 15000lm 120° 1-10V 850

Product code 18959 1-10V dimmable

Brand PROLUMEN
Dimmable 1-10V
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Crossover 100W 15000lm 120° Sensor Dim 850

Product code 18970 Sensor Dim dimmable

Brand PROLUMEN
Dimmable Sensor Dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Crossover 100W 15000lm 90° Sensor Dim 850

Product code 18967 Sensor Dim dimmable

Brand PROLUMEN
Dimmable Sensor Dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Crossover 150W 22500lm 120° 1-10V 850

Product code 18960 1-10V dimmable

Brand PROLUMEN
Dimmable 1-10V
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Crossover 150W 22500lm 90° Sensor Dim 850

Product code 18968 Sensor Dim dimmable

Brand PROLUMEN
Dimmable Sensor Dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Crossover 200W 30000lm 120° 1-10V 850

Product code 18961 1-10V dimmable

Brand PROLUMEN
Dimmable 1-10V
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Power supply SOSEN
Warranty 5 years





8.12.2025



Industrial light PROLUMEN Crossover 200W 30000lm 90° Sensor Dim 850

Product code 18969 Sensor Dim dimmable

Brand PROLUMEN
Dimmable Sensor Dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years

LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!



Explosion-proof light PROLUMEN Elegance EX 1200 gray 230V 40W 6000lm 120° IP66 840






Product code 17028

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 40W Maximum output 40W/1m Luminous flux 6000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Height 58.0mm Width 70.0mm Length 1200.0mm In box 4pcs Casing colour gray Casing material aluminium Impact resistance IK10 Work environment indoor / outdoor use Warranty 5 years







Explosion-proof light PROLUMEN Elegance EX 1200 gray 230V 60W 9000lm 120° IP66 840

Product code 17029

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 60W Maximum output 60W/1m Luminous flux 9000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Height 58.0mm Width 70.0mm Length 1200.0mm Casing colour gray Casing material aluminium Impact resistance IK10 Work environment indoor / outdoor Warranty 5 years







Explosion-proof light PROLUMEN Elegance EX 600 gray 230V 20W 3000lm 120° IP66 840

Product code 17026

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 20W Maximum output 20W/1m Luminous flux 3000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Height 58.0mm Width 70.0mm Length 600.0mm Casing colour gray Casing material aluminium Impact resistance IK10 Work environment indoor / outdoor Warranty 5 years







Explosion-proof light PROLUMEN Elegance EX 600 gray 230V 40W 6000lm 120° IP66 840

Product code 17027

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 40W Maximum output 40W/1m Luminous flux 6000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Height 58.0mm Width 70.0mm Length 600.0mm Casing colour gray Casing material aluminium Impact resistance IK10 Work environment indoor / outdoor Warranty 5 years







Industrial light PROLUMEN Eternity 100-200W 36000lm 90° Dip Switch 840

Product code 18946 Dip Switch dimmable

Brand PROLUMEN
Dimmable Dip Switch
Output 100-200W
Maximum output 200W/1m
Luminous flux 36000lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years



Industrial light PROLUMEN Eternity 100-200W 36000lm 90° Dip Switch 850

Product code 18949 Dip Switch dimmable

Brand PROLUMEN
Dimmable Dip Switch
Output 100-200W
Maximum output 200W/1m
Luminous flux 36000lumens
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Eternity 60-100W 18000lm 90° Dip Switch 840

Product code 18944 Dip Switch dimmable

Brand PROLUMEN
Dimmable Dip Switch
Output 60-100W
Maximum output 100W/1m
Luminous flux 18000lumens
Correlated colour temperature pure
white 4000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years



Industrial light PROLUMEN Eternity 60-100W 18000lm 90° Dip Switch 850

Product code 18947 Dip Switch dimmable

Brand PROLUMEN
Dimmable Dip Switch
Output 60-100W
Maximum output 100W/1m
Luminous flux 18000lumens
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Eternity 80-150W 27000lm 90° Dip Switch 840

Product code 18945 Dip Switch dimmable

Brand PROLUMEN
Dimmable Dip Switch
Output 80-150W
Maximum output 150W/1m
Luminous flux 27000lumens
Correlated colour temperature pure
white 4000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years



Industrial light PROLUMEN Eternity 80-150W 27000lm 90° Dip Switch 850

Product code 18948 Dip Switch dimmable

Brand PROLUMEN
Dimmable Dip Switch
Output 80-150W
Maximum output 150W/1m
Luminous flux 27000lumens
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Fairyland 100W 15000lm 90° No dim 840

Product code 18950 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Power supply MOSO
Warranty 5 years



Industrial light PROLUMEN Fairyland 100W 15000lm 90° No dim 850

Product code 18953 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply MOSO
Warranty 5 years







Industrial light PROLUMEN Fairyland 100W 15000lm 90° No dim 850

Product code 18956 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years



Industrial light PROLUMEN Fairyland 150W 22500lm 90° No dim 840

Product code 18951 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Power supply MOSO
Warranty 5 years







Industrial light PROLUMEN Fairyland 150W 22500lm 90° No dim 850

Product code 18954 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply MOSO
Warranty 5 years



Industrial light PROLUMEN Fairyland 150W 22500lm 90° No dim 850

Product code 18957 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years







Industrial light PROLUMEN Fairyland 200W 30000lm 90° No dim 840

Product code 18952 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Power supply MOSO
Warranty 5 years




Industrial light PROLUMEN Fairyland 200W 30000lm 90° No dim 850

Product code 18955 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Power supply MOSO
Warranty 5 years







Industrial light PROLUMEN Fairyland 200W 30000lm 90° No dim 850

Product code 18958 No dim dimmable

Brand PROLUMEN
Dimmable No dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire's efficiency Im79 150W
Correlated colour temperature pure
white 5000K
Lens angle 90
Cri 80
Power supply SOSEN
Warranty 5 years



Industrial light PROLUMEN Galaxy 600 230V 100W 16000lm 80x110° IP54 840





Product code 15844

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 100W Maximum output 100W/1m Luminous flux 16000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 80x110 Source of light CREE LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 59.0mm Width 150.0mm Length 576.0mm Casing material aluminium Power supply PHILIPS Impact resistance IK08 Work environment indoor use Operation temperature -40C- +60°C Certificates CE, D, F Warranty 5 years

PROLUMEN Galaxy series offers versatile and powerful lighting solutions for various needs. These LED luminaires are equipped with highquality components and provide excellent illumination both indoors and outdoors. The Galaxy series luminaires have several features and characteristics, including: 1. Various power options ranging from 100W to 200W, ensuring a wide selection for different applications. 2. High luminous flux, providing sufficient illumination for larger areas. 3. Different light distribution angles, including 30x90° and 80x110°, ensuring optimal lighting for different environments. 4. Different IP ratings, ensuring durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) providing clear and ergonomic lighting for everyday activities. PROLUMEN Galaxy series luminaires are available with various additional features, including motion sensors or DALI systems, making them even more flexible and energy-efficient. Illuminate your world with LED House professionals - check out our project portfolio here!







Industrial light PROLUMEN Galaxy 600 with motion sensor 230V 100W 14000lm 80x110° IP54 840

Product code 15973

Brand **PROLUMEN** Supply voltage 230V Output 100W Maximum output 100W/1m Luminous flux 14000lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 80x110 Source of light **CREE LED** Cri 80 Protection class IP54 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 56.0mm Width 150.0mm Length 577.0mm Casing material aluminium Power supply OSRAM Impact resistance IK08 Work environment indoor use Operation temperature -40C- +60°C Certificates CE, D, F Warranty 5 years

PROLUMEN Galaxy series offers versatile and powerful lighting solutions for various needs. These LED luminaires are equipped with highquality components and provide excellent illumination both indoors and outdoors. The Galaxy series luminaires have several features and characteristics, including: 1. Various power options ranging from 100W to 200W, ensuring a wide selection for different applications. 2. High luminous flux, providing sufficient illumination for larger areas. 3. Different light distribution angles, including 30x90° and 80x110°, ensuring optimal lighting for different environments. 4. Different IP ratings, ensuring durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) providing clear and ergonomic lighting for everyday activities. PROLUMEN Galaxy series luminaires are available with various additional features, including motion sensors or DALI systems, making them even more flexible and energy-efficient. Illuminate your world with LED House professionals - check out our project portfolio here!








Warehouse light PROLUMEN Harrow 1500 white 230V 25-75W 12000lm 90° IP65 DALI 840

Product code 17554 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 25-75W Maximum output 75W/1m Luminous flux 12000lumens Correlated colour temperature pure white 4000K Lens angle 90 Source of light PHILIPS LED Cri 80 Ugr 25 Sdcm - macadam ellipses 5 Protection class IP65 Lifespan 54000h Llmf tm21 L90B50 @25°C 50.000h Height 80.0mm Width 76.0mm Length 1540.0mm In package 1pc In box 9pcs Casing colour white Casing material aluminium Power supply ENEC certified Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20° - +45°C Certificates TUV CE, CB, RoHS Warranty 5 years

Harrow - an innovative industrial and warehouse luminaire that meets a wide range of expectations, boasting an unusually long lifespan and high quality. The Dreamboat luminaire meets various demands: 1. It can be installed either surface-mounted or suspended. 2. DALI dimming technology allows adjusting light intensity according to needs. 3. Power can be changed with a button press, making it possible to install the luminaire at different heights. The luminaire has end caps at both ends, making wiring and maintenance exceptionally easy. Additionally, maintenance costs are lower than usual because individual components of the luminaire can be replaced separately, eliminating the need to replace the entire luminaire in case of a malfunction. Illuminate your world with LED House professionals - check out our project portfolio here!







Warehouse light PROLUMEN Harrow 1500 white 230V 75W 12000lm 90° IP65 840

Product code 18292

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 75W Maximum output 75W/1m Luminous flux 12000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 90 Source of light PHILIPS LED Cri 80 Ugr 25 Sdcm - macadam ellipses 5 Protection class IP65 Lifespan 54000h Llmf tm21 L90B50 @25°C 50.000h Height 80.0mm Width 76.0mm Length 1540.0mm In package 1pc In box 9pcs Casing colour white Casing material aluminium Power supply ENEC certified Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20° - +45°C Certificates TUV CE, CB, RoHS Warranty 5 years

Harrow - an innovative industrial and warehouse luminaire that meets a wide range of expectations, boasting an unusually long lifespan and high quality. The Dreamboat luminaire meets various demands: 1. It can be installed either surface-mounted or suspended. 2. DALI dimming technology allows adjusting light intensity according to needs. 3. Power can be changed with a button press, making it possible to install the luminaire at different heights. The luminaire has end caps at both ends, making wiring and maintenance exceptionally easy. Additionally, maintenance costs are lower than usual because individual components of the luminaire can be replaced separately, eliminating the need to replace the entire luminaire in case of a malfunction. Illuminate your world with LED House professionals - check out our project portfolio here!







Industrial light PROLUMEN HBL112 + microwave motion sensor silvery 230V 120W 15600lm 105° IP42 0-10V 840

Product code 18296 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable 0-10V Output 120W Maximum output 120W/1m Luminous flux 15600lumens Luminaire's efficiency Im79 130W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Sdcm - macadam ellipses 5 Protection class IP42 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 111.0mm Width 203.0mm Length 1200.0mm Weight 4000g In package 1pc Casing colour silver Casing material aluminium + plastic Power supply **TRIDONIC** Impact resistance IK10 Work environment indoor use Certificates CE. RoHS Warranty 5 years

The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - check out our project portfolio here!







Industrial light PROLUMEN Hemera 1200 white 230V 200W 32000lm 30x90° IP66 0-10V 840

Product code 17823 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable 0-10V Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 30x90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 59.0mm Width 105.0mm Length 1207.0mm In package 1pc Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +65°C Certificates CE, RoHS, D

A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Warranty 5 years








Industrial light PROLUMEN Hemera 1200 white 230V 200W 32000lm 30x90° IP66 DALI 840

Product code 19323 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable DALI Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 30x90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 59.0mm Width 105.0mm Length 1207.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium Polishing matt Impact resistance IK08 Work environment indoor use Operation temperature -40 - +65°C Certificates CE, RoHS, D Warranty 5 years

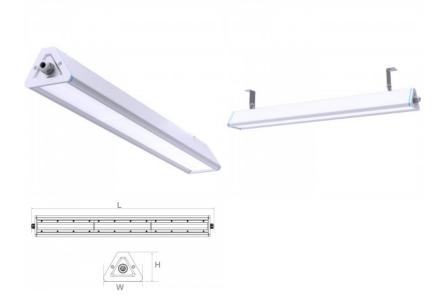





Industrial light PROLUMEN Hemera 230V 100W 16000lm 30x90° IP65 No dim 850

Product code 18936 No dim dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable No dim Output 100W Maximum output 100W/1m Luminous flux 16000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 5000K Lens angle 30x90 Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 79.0mm Width 105.4mm Length 592.0mm Power supply **SOSEN** Warranty 5 years







Industrial light PROLUMEN Hemera 230V 150W 24000lm 30x90° No dim 850

Product code 18937 No dim dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable No dim Output 150W Maximum output 150W/1m Luminous flux 24000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 5000K Lens angle 30x90 Cri 80 Sdcm - macadam ellipses 6 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 59.0mm Width 105.0mm Length 918.0mm Power supply **SOSEN** Warranty 5 years







Industrial light PROLUMEN Hemera 230V 200W 32000lm 30x90° No dim 850

Product code 18938 No dim dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable No dim Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 5000K Lens angle 30x90 Cri 80 Sdcm - macadam ellipses 6 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 59.0mm Width 105.0mm Length 1207.0mm Power supply **SOSEN** Warranty 5 years

A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.



Industrial light PROLUMEN Hemera 600 white 230V 100W 16000lm 30x90° IP66 0-10V 840




60/102 8.12.2025

Product code 17822 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable 0-10V Output 100W Maximum output 100W/1m Luminous flux 16000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 30x90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 79.0mm Width 105.4mm Length 592.0mm In package 1pc In box 4pcs Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40° - +65°C Certificates CE, RoHS, D Warranty 5 years








Industrial light PROLUMEN Hemera 900 white 230V 150W 24000lm 30x90° IP66 0-10V 840


Product code 17821 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable 0-10V Output 150W Maximum output 150W/1m Luminous flux 24000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 30x90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 59.0mm Width 105.0mm Length 918.0mm In package 1pc Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +65°C Certificates CE, RoHS, D

A top-tier LED industrial light that saves you time on maintenance while illuminating spaces more efficiently than many others. The Hemera industrial light has a unique triangular housing design. Smooth surface, no dust, and no water accumulation. The strip mining lamp uses a special lens and PCB design to achieve a unique linear lighting effect. This not only enhances the aesthetics of lighting and improves light distribution efficiency but also reduces glare.

Warranty 5 years

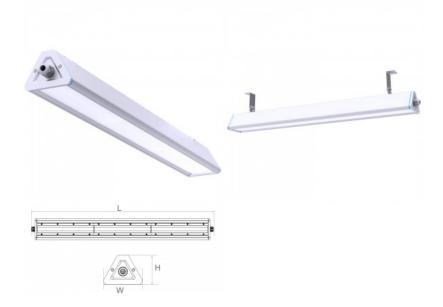





Industrial light PROLUMEN HiClean 230V 100W 14000lm 90° IP66 840

Product code 16231

Brand PROLUMEN Supply voltage 230V Output 100W Maximum output 100W/1m Luminous flux 14000lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 90 Source of light NICHIA LED Cri 80 Protection class IP66 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 200.0mm Diameter 489.0mm Casing material aluminium No. of switches 40000pcs Power supply **MEAN WELL** Work environment indoor use Operation temperature -30°C - +50°C Certificates CE, RoHS Warranty 5 years

Special industrial luminaire for the paper and wood industry. HiClean is an industrial luminaire with breakthrough design, featuring a smooth housing, aesthetics, and dustresistant properties. With ultraefficient heat dissipation technology. The new models are 140lm/W or 160lm/W. Stainless steel screws Luminaire does not contain toxic chemicals. Safe optical lens. Stylish design allowing easy cleaning. Automatic shutdown protection IP66 or IP69K IK10 NSF certificate, suitable for use in the food industry. The easily flammable dust on the luminaire is not dangerous as the luminaire cooling is extended throughout the housing. Illuminate your world with LED House professionals - check out our project portfolio here!









Explosion-proof light PROLUMEN Matrix 1400 230V 60W 8400lm 120° IP66 850

Product code 18036

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 60W Maximum output 60W/1m Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 5000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Sdcm - macadam ellipses 5 Protection class IP66 Lifespan 50000h Height 63.0mm Width 115.0mm Length 1335.0mm Power supply **TRIDONIC** Impact resistance IK10 Work environment indoor / outdoor use Warranty 5 years

Explosion-proof LED luminaire is a specially designed luminaire intended for use in hazardous environments where explosive gases, vapors, or dust clouds may occur. Installed, for example, in power plants, gas stations, tunnels, etc. Created according to strict explosion-proof standards and certifications to ensure their safe use in such risky situations. Luminaire explosion-proof certifications according to international standards: II 2 G Ex e mb IIC T6 Gc Parima tööstusvalgustuse sortimendi leiad LED house tootevalikust!







Explosion-proof light PROLUMEN Matrix 230V 80W 9600lm 120° IP65 840

Product code 15337

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 80W Maximum output 80W/1m Luminous flux 9600lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Sdcm - macadam ellipses 5 Protection class IP65 Lifespan 50000h Height 63.0mm Width 115.0mm Length 1335.0mm Power supply **LIFUD** Impact resistance IK10 Work environment indoor / outdoor Warranty 5 years

Explosion-proof LED luminaire is a specially designed luminaire intended for use in hazardous environments where explosive gases, vapors, or dust clouds may occur. Installed, for example, in power plants, gas stations, tunnels, etc. Created according to strict explosion-proof standards and certifications to ensure their safe use in such risky situations. Luminaire explosion-proof certifications according to international standards: II 2 G Ex e mb IIC T6 Gc Parima tööstusvalgustuse sortimendi leiad LED house tootevalikust!







Industrial light PROLUMEN Quad Bay 160lm/W 230V 200W 32000lm 60° IP65 740

Product code 14729

Brand PROLUMEN Supply voltage 230V Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 60 Source of light **LUMILEDS** Cri 70 Protection class IP65 Lifespan 50000h Height 151.0mm Width 430.0mm Length 430.0mm Weight 5100g Casing material aluminium Power supply MEAN WELL Work environment outdoor use Operation temperature -40°C ~ 60°C Certificates CE, RoHS Warranty 5 years

Excellent LED luminaire for illuminating squares, large tents, or spaces from the center. The luminaire has four rotatable LED panels that can be positioned at different angles. 4000K LED lights provide clear and sharp light, perfect for illuminating shops and other commercial spaces. The luminaire's dust and moisture resistance is IP65, making it suitable for outdoor use. Illuminate your world with LED House professionals - check out our project portfolio here!







Industrial light PROLUMEN QUATTRO 1200 gray 230V 40W 6400lm 120° IP66 840

Product code 17638

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 40W Maximum output 40W/1m Luminous flux 6400lumens Luminaire's efficiency lm79 160W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Protection class IP66 Lifespan 50000h Height 102.0mm Width 122.0mm Length 1200.0mm In package 1pc Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor / outdoor Certificates CE, ENEC, SAA Warranty 5 years







Industrial light PROLUMEN QUATTRO 1200 gray 230V 60W 9600lm 120° IP66 840

Product code 17019

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 60W Maximum output 60W/1m Luminous flux 9600lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Protection class IP66 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 102.0mm Width 122.0mm Length 1200.0mm In package 1pc Casing colour gray Casing material aluminium + plastic Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor / outdoor Certificates CE, D, F Warranty 5 years







Industrial light PROLUMEN QUATTRO 1200 gray 230V 80W 12800lm 120° IP66 840

Product code 17020

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 80W Maximum output 80W/1m Luminous flux 12800lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Protection class IP66 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 102.0mm Width 122.0mm Length 1200.0mm In package 1pc Casing colour gray Casing material aluminium + plastic Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor / outdoor Certificates CE, D, F Warranty 5 years







Industrial light PROLUMEN QUATTRO 1500 gray 230V 150W 24000lm 120° IP66 840

Product code 17018

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 150W Maximum output 150W/1m Luminous flux 24000lumens Luminaire's efficiency lm79 160W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Protection class IP66 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 102.0mm Width 122.0mm Length 1500.0mm In package 1pc Casing colour gray Casing material aluminium + plastic Polishing matt Power supply **SOSEN** Impact resistance IK10 Work environment indoor / outdoor Certificates CE, D, F Warranty 5 years







Industrial light PROLUMEN QUATTRO 600 gray 230V 30W 4800lm 120° IP66 840

Product code 17637

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 30W Maximum output 30W/1m Luminous flux 4800lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Sdcm - macadam ellipses 6 Protection class IP66 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 102.0mm Width 122.0mm Length 600.0mm In package 1pc Casing colour gray Casing material aluminium Polishing matt Power supply OSRAM Impact resistance IK10 Work environment indoor / outdoor Certificates CE, ENEC, SAA Warranty 5 years








Industrial light PROLUMEN T19B silvery 230V 150W 19500lm 120° IP42 DALI 840

Product code 15848 DALI dimmable

Brand PROLUMEN Supply voltage 230V Dimmable DALI Output 150W Maximum output 150W/1m Luminous flux 19500lumens Luminaire's efficiency Im79 130W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP42 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 90.0mm Width 218.0mm Length 600.0mm Weight 4000g Package weight 5200g In package 1pc Casing colour silver Casing material aluminium + plastic Power supply TOMCARLINE Work environment indoor use Certificates CE, RoHS Warranty 5 years

The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - check out our project portfolio here!







Industrial light PROLUMEN T19B silvery 230V 200W 26000lm 120° IP42 DALI 840

Product code 15855 DALI dimmable

Brand PROLUMEN Supply voltage 230V Dimmable DALI Output 200W Maximum output 200W/1m Luminous flux 26000lumens Luminaire's efficiency Im79 130W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP42 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 90.0mm Width 218.0mm Length 810.0mm In package 1pc Casing colour silver Casing material aluminium + plastic Power supply TOMCARLINE Work environment indoor use Certificates CE, RoHS Warranty 5 years

The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - check out our project portfolio here!














Industrial light PROLUMEN TP LINK 1200 white 230V 40W 5600lm 120° IP65 840

Product code 15705

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 5600lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1221.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!







Industrial light PROLUMEN TP LINK 1200 white 230V 40W 5600lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

Product code 17603

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 5600lumens Luminaire's efficiency Im79 140W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1221.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!








Industrial light PROLUMEN TP LINK 1200 with motion sensor white 230V 40W 5600lm 120° IP65 840

Product code 18310

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 5600lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1221.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Polishing matt Power supply **LIFUD** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!








Industrial light PROLUMEN TP LINK 1500 +MW white 230V 60W 8400lm 120° IP65 840

Product code 18348

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 60W Maximum output 60W/1m Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1502.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Polishing matt Power supply **LIFUD** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!








Industrial light PROLUMEN TP LINK 1500 230V 45W 6300lm 120° IP65 840

Product code 18150

Brand **PROLUMEN** Supply voltage 230V Power factor 0.95 Output 45W Maximum output 45W/1m Luminous flux 6300lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1502.0mm In package 1pc In box 6pcs Casing material aluminium + plastic Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F Warranty 5 years

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!








Industrial light PROLUMEN TP LINK 1500 30-60W 230V 60W 8400lm 120° IP65 840

Product code 15735

Brand **PROLUMEN** Supply voltage 230V Power factor 0.95 Output 60W Maximum output 60W/1m Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1502.0mm In package 1pc In box 6pcs Casing material aluminium + plastic Polishing matt Power supply OSRAM Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F Warranty 5 years

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!








Industrial light PROLUMEN TP LINK 1500 white 230V 60W 8400lm 120° IP65 830

Product code 18168

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 60W Maximum output 60W/1m Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature warm white 3000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1221.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!








Industrial light PROLUMEN TP LINK 1500 white 230V 60W 8400lm 120° IP65 840

Product code 15706

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 60W Maximum output 60W/1m Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1502.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!








Industrial light PROLUMEN TP LINK 1500 white 230V 60W 8400lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

Product code 17602

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 60W Maximum output 60W/1m Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 65.0mm Width 74.0mm Length 1502.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Certificates CE, D, F Warranty 5 years








Industrial light PROLUMEN TP LINK 600 white 230V 20W 2800lm 120° IP65 840

Product code 14717

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 20W Maximum output 20W/1m Luminous flux 2800lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 64.0mm Width 74.0mm Length 659.0mm Weight 800g Package weight 132g Casing colour white Casing material aluminium + plastic Polishing matt Power supply OSRAM Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!

Certificates CE, D, F Warranty 5 years








Industrial light PROLUMEN TP LINK 600 white 230V 20W 2800lm 120° IP65 DALI 840

Product code 18169 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 20W Maximum output 20W/1m Luminous flux 2800lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 120 Source of light BRIDGELUX LED Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 64.0mm Width 74.0mm Length 659.0mm Weight 800g Package weight 132g Casing colour white Casing material aluminium + plastic Polishing matt Power supply OSRAM Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20° +40°C Certificates CE, D, F

LED industrial luminaire, suitable for use in workshops, warehouses, corridors, under roofs, garages, etc. In workspaces, LED lighting is an excellent choice: it provides bright and ergonomic lighting, which helps maintain employees' focus and productivity. Reliability is ensured by the OSRAM power supply unit and a 5year warranty. If the luminaire fails within 5 years, we will replace it with a new one! Very easy and quick installation: The luminaire fits between two clips, which are fastened with two screws. On average, installation takes less than 3 minutes! IP65 protection class ensures strong waterproofness of the luminaire and allows it to be used in outdoor conditions, where it may even be under direct water pressure. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!







Industrial light PROLUMEN Tubular 1500 230V 60W 9000lm 180° IP69 840

Product code 17604

Brand PROLUMEN Supply voltage 230V Output 60W Maximum output 60W/1m Luminous flux 9000lumens Luminaire's efficiency lm79 150W Correlated colour temperature pure white 4000K Lens angle 180 Source of light BRIDGELUX LED Cri 80 Protection class IP69 Lifespan 100000h Llmf tm21 L80B50 @25°C 50.000h Length 1500.0mm Diameter 80.0mm Weight 1300g In box 6pcs No. of switches 30000pcs Power supply **TRIDONIC** Impact resistance IK10 Work environment indoor / outdoor Operation temperature -10 ~ 40°C

Durable linear LED industrial light industrial light that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.







Industrial light PROLUMEN UFO ASTRONAUT white 230V 100W 16000lm 110° IP65 840



85/102 8.12.2025

Product code 17124

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 100W Maximum output 100W/1m Luminous flux 16000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 130.0mm Diameter 380.0mm Weight 2500g Package weight 3700g In package 1pc Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years





Industrial light PROLUMEN UFO ASTRONAUT white 230V 150W 24000lm 110° IP65 840

Product code 17125

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 150W Maximum output 150W/1m Luminous flux 24000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 130.0mm Diameter 380.0mm Weight 2500g Package weight 3700g In package 1pc Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS, D Warranty 5 years

High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!



8.12.2025





Industrial light PROLUMEN UFO ASTRONAUT white 230V 150W 24000lm 110° IP65 DALI 850

Product code 17820 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable DALI Output 150W Maximum output 150W/1m Luminous flux 24000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 5000K Lens angle 110 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 130.0mm Diameter 380.0mm Weight 2500g Package weight 3700g In package 1pc Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS, D Warranty 5 years





88/102 8.12.2025

Industrial light PROLUMEN UFO ASTRONAUT white 230V 200W 32000lm 110° IP65 840

Product code 17126

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 200W Maximum output 200W/1m Luminous flux 32000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 130.0mm Diameter 380.0mm Weight 2500g Package weight 3700g In package 1pc Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years





89/102 8.12.2025

Industrial light PROLUMEN UFO ASTRONAUT white 230V 240W 38400lm 110° IP65 840

Product code 17127

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Output 240W Maximum output 240W/1m Luminous flux 38400lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 110 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 130.0mm Diameter 380.0mm Weight 2500g Package weight 3700g In package 1pc Casing colour white Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN UFO Crossover black 230V 100W 15000lm 90° IP65 DALI 840

Product code 17734 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable DALI Output 100W Maximum output 100W/1m Luminous flux 15000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 174.0mm Diameter 290.0mm In package 1pc Casing colour black Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years











Industrial light PROLUMEN UFO Crossover black 230V 150W 22500lm 90° IP65 DALI 840

Product code 18006 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.95 Dimmable DALI Output 150W Maximum output 150W/1m Luminous flux 22500lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 174.0mm Diameter 290.0mm In package 1pc Casing colour black Casing material aluminium Polishing matt Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years









2 8.12,2025

Industrial light PROLUMEN UFO Crossover black 230V 200W 30000lm 120° IP65 1-10V 840

Product code 17236 1-10V dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable 1-10V Output 200W Maximum output 200W/1m Luminous flux 30000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 142.0mm Diameter 347.0mm Weight 3300g In box 4pcs Casing colour black Casing material aluminium Polishing matt No. of switches 100000pcs Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years












Industrial light PROLUMEN UFO Crossover black 230V 200W 30000lm 90° IP65 DALI 840

Product code 17783 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 200W Maximum output 200W/1m Luminous flux 30000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 142.0mm Diameter 347.0mm Weight 3300g Casing colour black Casing material aluminium Polishing matt No. of switches 100000pcs Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN UFO Crossover V black 230V 100W 15000lm 120° IP65 0-10V 840

Product code 17109 0-10V dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable 0-10V Output 100W Maximum output 100W/1m Luminous flux 15000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 174.0mm Diameter 290.0mm Weight 2700g Casing colour black Casing material aluminium Polishing matt No. of switches 100000pcs Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN UFO Crossover V black 230V 150W 22500lm 120° IP65 1-10V 840

Product code 17596 1-10V dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable 1-10V Output 150W Maximum output 150W/1m Luminous flux 22500lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 174.0mm Diameter 290.0mm Weight 2700g Casing colour black Casing material aluminium Polishing matt No. of switches 100000pcs Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN UFO Crossover with sensor plug black 230V 100W 15000lm 90° IP65 840

Product code 17587

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 100W Maximum output 100W/1m Luminous flux 15000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 90 Source of light LUMILEDS Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 174.0mm Diameter 290.0mm Weight 2700g Casing colour black Casing material aluminium Polishing matt No. of switches 100000pcs Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN UFO Crossover with sensor plug black 230V 150W 22500lm 90° IP65 840

Product code 17120

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 150W Maximum output 150W/1m Luminous flux 22500lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 90 Source of light PHILIPS LED Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 174.0mm Diameter 290.0mm Weight 2700g In box 3pcs Casing colour black Casing material aluminium Polishing matt No. of switches 100000pcs Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN UFO Crossover with sensor plug black 230V 200W 30000lm 90° IP65 840

Product code 17110

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 200W Maximum output 200W/1m Luminous flux 30000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 90 Source of light LUMILEDS Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 174.0mm Diameter 290.0mm Weight 2700g In package 1pc In box 4pcs Casing colour black Casing material aluminium Polishing matt No. of switches 100000pcs Power supply **SOSEN** Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years







Industrial light PROLUMEN UFO IKT black 230V 100W 15000lm 110° IP65 840

Product code 15769

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 100W Maximum output 100W/1m Luminous flux 15000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 110 Source of light OSRAM LED Cri 80 Sdcm - macadam ellipses 5 Protection class IP65 Lifespan 50000h Height 145.0mm Diameter 290.0mm Casing colour black Casing material aluminium Power supply SOSEN Impact resistance IK08 Work environment indoor use Operation temperature -40 - +50°C Certificates CE, D, F Warranty 5 years

PROLUMEN UFO IKT is an efficient and stylish luminaire suitable for various environments. It features a UFOshaped design that adds decorative and modern elements to interiors and outdoor spaces. The product boasts several notable features: Efficiency of 150lm/W; Light angle that allows for uniform illumination of large areas. IP65 protection class ensures strong waterproofing for the luminaire, allowing it to be used in outdoor settings, even under direct water pressure. It is a versatile luminaire suitable for both indoor and outdoor use. PROLUMEN provides bright and quality lighting that meets various illumination needs! Illuminate your world with the help of LED House professionals - check out our portfolio here too!!







Industrial light PROLUMEN UFO NOTE 2 black round 230V 200W 28600lm 90° IP65 840

Product code 15620

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 200W Maximum output 200W/1m Luminous flux 28600lumens Luminaire's efficiency Im79 143W Correlated colour temperature pure white 4000K Lens angle 90 Source of light **CREE LED** Cri 80 Lor 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L90B10 @25°C 50.000h Height 183.0mm Width 345.0mm Diameter 345.0mm Casing colour black Casing material aluminium Polishing matt Shape round No. of switches 100000pcs Power supply MEAN WELL Impact resistance IK08 Work environment indoor use Operation temperature -40 - +60°C Certificates CE, RoHS Warranty 5 years

UFO-type LED industrial light for warehouse, industrial building, production. The LED light has a 5-year factory warranty. In case of a failure, the faulty light will be replaced with a new one within this period. Lighting calculations can determine how many lights are needed for the desired illumination area. These lights are equipped with Mean Well power supplies, providing peace of mind for a long time.







101/102 8.12.2025

Remote RC-200

Product code 17122

Remote control for MW sensor configuration. Light up your world with the help of LED House professionals - check out our project portfolio here!!



Motion sensor SEN-MW-NOTE V 0-10V

Product code 14459 0-10V dimmable

Dimmable 0-10V Certificates CE Warranty 2 years

Motion sensor + light sensor.

Detection range up to 16 meters.

Light up your world with the help of
LED House professionals - check out
our project portfolio here!!



Industrial light Tubular 1200 230V 40W 6000lm 180° IP69 840



102/102 8.12.2025

Product code 17605

Supply voltage 230V Output 40W Maximum output 40W/1m Luminous flux 6000lumens Luminaire's efficiency Im79 150W Correlated colour temperature pure white 4000K Lens angle 180 Source of light **BRIDGELUX LED** Cri 80 Protection class IP69 Lifespan 100000h Llmf tm21 L80B50 @25°C 50.000h Length 1200.0mm Diameter 80.0mm Weight 1300g In box 6pcs No. of switches 30000pcs Power supply **TRIDONIC** Impact resistance IK10 Work environment indoor / outdoor Operation temperature -10 ~ 40°C Warranty 5 years

Durable linear LED industrial light industrial light that can also be washed with pressure! The IP69 protection rating means that the luminaire is protected against dust and water, making it suitable for many demanding environments. The luminaire is specially reinforced and can withstand a 5kg weight dropped from a height of 40cm.





