Reflector Crossover PC 100W

Product code 17743

Casing material plastic

Plastic reflector



Industrial light LED-OH-40NW white 230V 40W 4000lm 120° IP65 840

Product code 19602

Supply voltage 230V
Output 40W
Maximum output 40W/1m
Luminous flux 4000lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP65
Height 61.0mm
Width 72.0mm
Length 1180.0mm
Casing colour white
Work environment indoor / outdoor use
Certificates CE



Motion sensor MW+ daylight sensor

Product code 17121

Motion sensor for CROSSOVER UFO light.



Reflector NOTE PC 100W dia 310

Product code 13890

Diameter 310.0mm
Casing material plastic

Plastic reflector



Motion sensor PIR + daylight sensor

Product code 17305

Motion sensor for CROSSOVER UFO light.



Sports hall light Prolumen Arena 2 HB200 UGR19 160lm/W gray 230V 200W 32000lm 80° IP65 840

Product code 18081

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 80
Source of light PHILIPS LED
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
En62471 1
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 81.0mm
Width 184.0mm
Length 533.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years



Industrial light Prolumen Arena HB 120 UGR21 120W 19200lm 110° 0-10V 840

Product code 18339 0-10V dimmable

Brand Prolumen
Dimmable 0-10V
Output 120W
Maximum output 120W/1m
Luminous flux 19200lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Industrial light Prolumen Arena HB 200 UGR21 200W 32000lm 110° 0-10V 840

Product code 18340 0-10V dimmable

Brand Prolumen
Dimmable 0-10V
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB100 UGR21 160lm/W gray 230V 100W 16000lm 110° IP65 840

Product code 17060

Brand Prolumen
Supply voltage 230V
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light CREE LED
Cri 80
Ugr 21
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 257.0mm
Length 362.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply MEAN WELL
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB100 UGR21 160lm/W V gray 230V 120W 19200lm 110° IP65 0-10V 840

Product code 17249 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Dimmable 0-10V
Output 120W
Maximum output 120W/1m
Luminous flux 19200lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light CREE LED
Cri 80
Ugr 21
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 120.0mm
Width 257.0mm
Length 362.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply MEAN WELL
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB120 UGR21 160lm/W gray 230V 120W 19200lm 110° IP65 840

Product code 16752

Brand Prolumen
Supply voltage 230V
Output 120W
Maximum output 120W/1m
Luminous flux 19200lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light CREE LED
Cri 80
Ugr 21
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 310.0mm
Length 415.0mm
Package weight 5 kg
Casing colour gray
Casing material aluminium
Polishing matt
Power supply MEAN WELL
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB120 UGR21 160lm/W gray 230V 120W 19200lm 110° IP65 DALI 840

Product code 15561 DALI dimmable

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 120W
Maximum output 120W/1m
Luminous flux 19200lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light PHILIPS LED
Cri 80
Ugr 21
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 310.0mm
Length 415.0mm
Package weight 5 kg
Casing colour gray
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB150 UGR19 gray 230V 150W 24000lm 80° IP65 DALI 840

Product code 16417 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 150W
Maximum output 150W/1m
Luminous flux 24000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 80
Source of light CREE LED
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 362.0mm
Length 487.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply MEAN WELL
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years



Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB150 UGR21 160lm/W gray 230V 150W 24000lm 110° IP65 840

Product code 15785

Brand Prolumen
Supply voltage 230V
Output 150W
Maximum output 150W/1m
Luminous flux 24000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light CREE LED
Cri 80
Ugr 21
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 362.0mm
Length 487.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB200 UGR19 160lm/W gray 230V 200W 32000lm 80° IP65 840

Product code 18084

Brand Prolumen
Supply voltage 230V
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 80
Source of light CREE LED
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 362.0mm
Length 487.0mm
Package weight 6.5 kg
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 110° IP65 0-10V 840

Product code 17720 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Dimmable 0-10V
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light CREE LED
Cri 80
Ugr 21
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 362.0mm
Length 487.0mm
Package weight 6.5 kg
Casing colour gray
Casing material aluminium
Polishing matt
Power supply MEAN WELL
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 110° IP65 DALI 840

Product code 18007 DALI dimmable

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light CREE LED
Cri 80
Ugr 23
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 362.0mm
Length 487.0mm
Package weight 6.5 kg
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years



Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB200 UGR21 160lm/W gray 230V 200W 32000lm 80° IP65 850

Product code 16335

Brand Prolumen
Supply voltage 230V
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 80
Source of light CREE LED
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Width 362.0mm
Length 487.0mm
Package weight 6.5 kg
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years






Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB250 UGR19 160lm/W gray 230V 250W 40000lm 80° IP65 840

Product code 18083

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 250W
Maximum output 250W/1m
Luminous flux 40000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 80
Source of light CREE LED
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
En62471 1
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 130.0mm
Width 365.0mm
Length 720.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years



Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena HB300 UGR21 160lm/W gray 230V 300W 48000lm 80° IP65 840

Product code 18080


Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 300W
Maximum output 300W/1m
Luminous flux 48000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 80
Source of light CREE LED
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
En62471 1
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 130.0mm
Width 365.0mm
Length 720.0mm
Casing colour gray
Casing material aluminium
Polishing matt
Power supply OSRAM
Impact resistance IK10
Work environment indoor use
Operation temperature -40~70°C
Certificates CE, RoHS
Warranty 5 years



Applications: sports halls, workshops, event arenas, industries, etc. All details of the luminaire are shatterproof! The luminaire lens is made of polycarbonate. Polycarbonate is a thermoplastic polymer used in various applications due to its durability, lightweight, and transparency. In case of malfunction within 5 years, the luminaire will be replaced with a new one. Through the initial calculation conducted by LED house, it becomes clear how many luminaires are needed to achieve the desired light density in the building. These luminaires use Mean Well power supplies, providing peace of mind with their reliability for a long time. The highest quality lighting solutions can be found in the LED house product range!

Sports hall light Prolumen Arena mounting bracket gray

Product code 18164

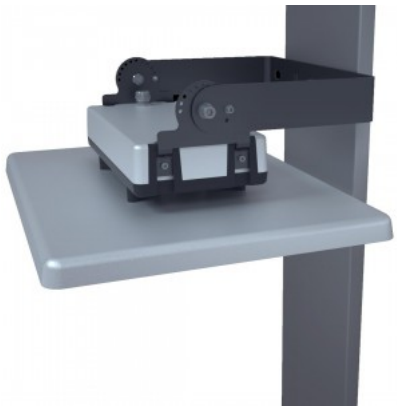

Brand Prolumen
In box 6pcs
Casing colour gray
Casing material aluminium
Polishing matt
Warranty 5 years

Industrial light Prolumen Astronaut 100W 16000lm 110° DALI 850

Product code 18942 **DALI dimmable**



Brand Prolumen
Dimmable DALI
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years

High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Astronaut 200W 32000lm 110° DALI 850

Product code 18943 DALI dimmable

Brand Prolumen
Dimmable DALI
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 110
Cri 80
Power supply SOSEN
Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Crossover 100W 15000lm 120° IP65 1-10V 850

Product code 18959 1-10V dimmable

Brand Prolumen
Dimmable 1-10V
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Crossover 100W 15000lm 90° IP65 Sensor Dim 850

Product code 18967 **Sensor Dim dimmable**

Brand Prolumen
Dimmable Sensor Dim
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Crossover 150W 22500lm 120° IP65 1-10V 850

Product code 18960 1-10V dimmable

Brand Prolumen
Dimmable 1-10V
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Crossover 150W 22500lm 90° IP65 Sensor Dim 850

Product code 18968 **Sensor Dim dimmable**

Brand Prolumen
Dimmable Sensor Dim
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Crossover 200W 30000lm 120° IP65 1-10V 850

Product code 18961 1-10V dimmable

Brand Prolumen
Dimmable 1-10V
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Crossover 200W 30000lm 90° IP65 Sensor Dim 850

Product code 18969 Sensor Dim dimmable

Brand Prolumen
Dimmable Sensor Dim
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen Eternity 100-200W 36000lm 90° IP65 Dip Switch 840

Product code 18946 Dip Switch dimmable



Brand Prolumen
Dimmable Dip Switch
Output 100-200W
Maximum output 200W/1m
Luminous flux 36000lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years

Industrial light Prolumen Eternity 100-200W 36000lm 90° IP65 Dip Switch 850

Product code 18949 Dip Switch dimmable



Brand Prolumen
Dimmable Dip Switch
Output 100-200W
Maximum output 200W/1m
Luminous flux 36000lumens
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years

Industrial light Prolumen Eternity 60-100W 18000lm 90° IP65 Dip Switch 840

Product code 18944 Dip Switch dimmable



Brand Prolumen
Dimmable Dip Switch
Output 60-100W
Maximum output 100W/1m
Luminous flux 18000lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years

Industrial light Prolumen Eternity 60-100W 18000lm 90° IP65 Dip Switch 850

Product code 18947 Dip Switch dimmable



Brand Prolumen
Dimmable Dip Switch
Output 60-100W
Maximum output 100W/1m
Luminous flux 18000lumens
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years

Industrial light Prolumen Eternity 80-150W 27000lm 90° IP65 Dip Switch 840

Product code 18945 Dip Switch dimmable



Brand Prolumen
Dimmable Dip Switch
Output 80-150W
Maximum output 150W/1m
Luminous flux 27000lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years

Industrial light Prolumen Eternity 80-150W 27000lm 90° IP65 Dip Switch 850

Product code 18948 Dip Switch dimmable



Brand Prolumen
Dimmable Dip Switch
Output 80-150W
Maximum output 150W/1m
Luminous flux 27000lumens
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years

Industrial light Prolumen Fairyland 100W 15000lm 90° IP65 No dim 840

Product code 18950

Brand Prolumen
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply MOSO
Warranty 5 years



Industrial light Prolumen Fairyland 100W 15000lm 90° IP65 No dim 850

Product code 18953

Brand Prolumen
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply MOSO
Warranty 5 years



Industrial light Prolumen Fairyland 100W 15000lm 90° IP65 No dim 850

Product code 18956

Brand Prolumen
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



Industrial light Prolumen Fairyland 150W 22500lm 90° IP65 No dim 840

Product code 18951

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply MOSO
Warranty 5 years



Industrial light Prolumen Fairyland 150W 22500lm 90° IP65 No dim 850

Product code 18954

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply MOSO
Warranty 5 years



Industrial light Prolumen Fairyland 150W 22500lm 90° IP65 No dim 850

Product code 18957

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



Industrial light Prolumen Fairyland 200W 30000lm 90° IP65 No dim 840

Product code 18952

Brand Prolumen
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP65
Power supply MOSO
Warranty 5 years



Industrial light Prolumen Fairyland 200W 30000lm 90° IP65 No dim 850

Product code 18958

Brand Prolumen
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 90
Cri 80
Protection class IP65
Power supply SOSEN
Warranty 5 years



Industrial light Prolumen Galaxy 600 230V 100W 16000lm 80x110° IP54 840

Product code 15844

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 80x110
Source of light CREE LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 59.0mm
Width 150.0mm
Length 576.0mm
Casing material aluminium
Power supply PHILIPS
Impact resistance IK08
Work environment indoor use
Operation temperature -40C- +60°C
Certificates CE, D, F
Warranty 5 years



PROLUMEN Galaxy series offers versatile and powerful lighting solutions for various needs. These LED luminaires are equipped with high-quality components and provide excellent illumination both indoors and outdoors. The Galaxy series luminaires have several features and characteristics, including: 1. Various power options ranging from 100W to 200W, ensuring a wide selection for different applications. 2. High luminous flux, providing sufficient illumination for larger areas. 3. Different light distribution angles, including 30x90° and 80x110°, ensuring optimal lighting for different environments. 4. Different IP ratings, ensuring durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) providing clear and ergonomic lighting for everyday activities. PROLUMEN Galaxy series luminaires are available with various additional features, including motion sensors or DALI systems, making them even more flexible and energy-efficient. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen Galaxy 600 with motion sensor 230V 100W 14000lm 80x110° IP54 840

Product code 15973

Brand Prolumen
Supply voltage 230V
Output 100W
Maximum output 100W/1m
Luminous flux 14000lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 80x110
Source of light CREE LED
Cri 80
Protection class IP54
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 56.0mm
Width 150.0mm
Length 577.0mm
Casing material aluminium
Power supply OSRAM
Impact resistance IK08
Work environment indoor use
Operation temperature -40C- +60°C
Certificates CE, D, F
Warranty 5 years



PROLUMEN Galaxy series offers versatile and powerful lighting solutions for various needs. These LED luminaires are equipped with high-quality components and provide excellent illumination both indoors and outdoors. The Galaxy series luminaires have several features and characteristics, including: 1. Various power options ranging from 100W to 200W, ensuring a wide selection for different applications. 2. High luminous flux, providing sufficient illumination for larger areas. 3. Different light distribution angles, including 30x90° and 80x110°, ensuring optimal lighting for different environments. 4. Different IP ratings, ensuring durability and suitability for various environmental conditions. 5. Daylight colour temperature (4000K) providing clear and ergonomic lighting for everyday activities. PROLUMEN Galaxy series luminaires are available with various additional features, including motion sensors or DALI systems, making them even more flexible and energy-efficient. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen HBL112 + microwave motion sensor silver 230V 120W 15600lm 105° IP42 0-10V 840

Product code 18296 **0-10V dimmable**

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 120W
Maximum output 120W/1m
Luminous flux 15600lumens
Luminaire’s efficiency 130W
Correlated colour temperature pure white 4000K
Lens angle 105
Cri 80
Sdcm - macadam ellipses 5
Protection class IP42
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 111.0mm
Width 203.0mm
Length 1200.0mm
Weight 4 kg
In package 1pc
Casing colour silver
Casing material aluminium + plastic
Power supply TRIDONIC
Impact resistance IK10
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen HiClean 230V 100W 14000lm 90° IP66 840

Product code 16231

Brand Prolumen
Supply voltage 230V
Output 100W
Maximum output 100W/1m
Luminous flux 14000lumens
Luminaire’s efficiency 140W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light NICHIA LED
Cri 80
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 200.0mm
Diameter 489.0mm
Casing material aluminium
No. of switches 40000pcs
Power supply MEAN WELL
Work environment indoor use
Operation temperature -30℃ - +50°C
Certificates CE, RoHS
Warranty 5 years



Special industrial luminaire for the paper and wood industry. HiClean is an industrial luminaire with breakthrough design, featuring a smooth housing, aesthetics, and dust-resistant properties. With ultra-efficient heat dissipation technology. The new models are 140lm/W or 160lm/W. Stainless steel screws Luminaire does not contain toxic chemicals. Safe optical lens. Stylish design allowing easy cleaning. Automatic shutdown protection IP66 or IP69K IK10 NSF certificate, suitable for use in the food industry. The easily flammable dust on the luminaire is not dangerous as the luminaire cooling is extended throughout the housing. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen LINTEX 1200 white 230V 30-75W 12000lm 90° IP20 840

Product code 23922

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 30-75W
Maximum output 75W/1m
Luminous flux 12000lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 44.0mm
Width 70.0mm
Length 1152.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply BOKE
Operation temperature -20° - +45°C
Certificates CE, RoHS, ENEC
Warranty 5 years



Industrial light Prolumen Quad Bay 160lm/W 230V 200W 32000lm 60° IP65 740

Product code 14729

Brand Prolumen
Supply voltage 230V
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 60
Source of light LUMILEDS
Cri 70
Protection class IP65
Lifespan 50000h
Height 151.0mm
Width 430.0mm
Length 430.0mm
Weight 5.1 kg
Casing material aluminium
Power supply MEAN WELL
Work environment outdoor use
Operation temperature –40°C ~ 60°C
Certificates CE, RoHS
Warranty 5 years



Excellent LED luminaire for illuminating squares, large tents, or spaces from the center. The luminaire has four rotatable LED panels that can be positioned at different angles. 4000K LED lights provide clear and sharp light, perfect for illuminating shops and other commercial spaces. The luminaire's dust and moisture resistance is IP65, making it suitable for outdoor use. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen RALTEX 1200 white 230V 50W 8000lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

Product code 18263 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 50W
Maximum output 50W/1m
Luminous flux 8000lumens
Luminaire’s efficiency 160W
Correlated colour temperature 3CCT
3000K, 4000K, 5000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 3
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 69.0mm
Width 74.0mm
Length 1200.0mm
Weight 1.5 kg
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply BOKE
Operation temperature -20° - +45°C
Certificates CE, RoHS, ENEC
Warranty 5 years



This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.

Industrial light Prolumen RALTEX 1500 DALI white 230V 63W 10080lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

Product code 18264 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 63W
Maximum output 63W/1m
Luminous flux 10080lumens
Luminaire’s efficiency 160W
Correlated colour temperature 3CCT
3000K, 4000K, 5000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 3
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 69.0mm
Width 74.0mm
Length 1500.0mm
Weight 1.9 kg
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply BOKE
Operation temperature -20° - +45°C
Certificates CE, RoHS, ENEC
Warranty 5 years



This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.

Industrial light Prolumen RALTEX 1500 white 230V 32-60W 9600lm CRI80 120° IP66 3000K, 4000K, 5000K 3CCT

Product code 23905

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 32-60W
Maximum output 60W/1m
Luminous flux 9600lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 3
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 69.0mm
Width 74.0mm
Length 1500.0mm
Weight 1.9 kg
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply LIFUD
Operation temperature -20° - +45°C
Certificates CE, RoHS, ENEC
Warranty 5 years



This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.

Industrial light Prolumen RALTEX 600 white 230V 30W 4800lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

Product code 18262 **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 30W
Maximum output 30W/1m
Luminous flux 4800lumens
Luminaire’s efficiency 160W
Correlated colour temperature 3CCT
3000K, 4000K, 5000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 3
Protection class IP66
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 69.0mm
Width 74.0mm
Length 600.0mm
Weight 1.13 kg
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply BOKE
Operation temperature -20° - +45°C
Certificates CE, RoHS, ENEC
Warranty 5 years



This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.

Industrial light Prolumen T19B silver 230V 150W 19500lm 120° IP42 DALI 840

Product code 15848 DALI dimmable

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 150W
Maximum output 150W/1m
Luminous flux 19500lumens
Luminaire’s efficiency 130W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP42
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 90.0mm
Width 218.0mm
Length 600.0mm
Weight 4 kg
Package weight 5.2 kg
In package 1pc
Casing colour silver
Casing material aluminium + plastic
Power supply TOMCARLINE
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen T19B silver 230V 200W 26000lm 120° IP42 DALI 840

Product code 15855 DALI dimmable

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 200W
Maximum output 200W/1m
Luminous flux 26000lumens
Luminaire’s efficiency 130W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP42
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 90.0mm
Width 218.0mm
Length 810.0mm
In package 1pc
Casing colour silver
Casing material aluminium + plastic
Power supply TOMCARLINE
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



The PROLUMEN T19B series offers versatile lighting solutions for various needs. These silver lights are available in different power ratings and configurations, including those equipped with motion sensors or DALI systems. Their features include a high level of luminous flux, a wide light distribution angle, IP42 protection class, and daylight color temperature. . PROLUMEN T19B series lights are energy-efficient and durable, providing clear and ergonomic lighting in various environments. Illuminate your world with LED House professionals - check out our project portfolio here!

Industrial light Prolumen UFO ASTRONAUT white 230V 100W 16000lm 110° IP65 840

Product code 17124

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 130.0mm
Diameter 380.0mm
Weight 2.5 kg
Package weight 3.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO ASTRONAUT white 230V 150W 24000lm 110° IP65 840

Product code 17125

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 150W
Maximum output 150W/1m
Luminous flux 24000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 130.0mm
Diameter 380.0mm
Weight 2.5 kg
Package weight 3.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS, D
Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO ASTRONAUT white 230V 150W 24000lm 110° IP65 DALI 850

Product code 17820 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 150W
Maximum output 150W/1m
Luminous flux 24000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 110
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 130.0mm
Diameter 380.0mm
Weight 2.5 kg
Package weight 3.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS, D
Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO ASTRONAUT white 230V 200W 32000lm 110° IP65 840

Product code 17126

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 200W
Maximum output 200W/1m
Luminous flux 32000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 130.0mm
Diameter 380.0mm
Weight 2.5 kg
Package weight 3.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO ASTRONAUT white 230V 240W 38400lm 110° IP65 840

Product code 17127

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 240W
Maximum output 240W/1m
Luminous flux 38400lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 130.0mm
Diameter 380.0mm
Weight 2.5 kg
Package weight 3.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



High-quality UFO-type LED industrial luminaire. Ideal for warehouses, industrial buildings, and manufacturing. With lighting calculations, you can determine how many luminaires are needed for the desired light intensity in an area. The IP65 protection class means that the luminaire is protected against fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable light for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover black 230V 100W 15000lm 90° IP65 DALI 840

Product code 17734 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 174.0mm
Diameter 290.0mm
In package 1pc
Casing colour black
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover black 230V 120/150/200W 30000lm 120° IP65 1-10V 840

Product code 21860 1-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable 1-10V
Output 120/150/200W
Maximum output 200W/1m
Luminous flux 30000lumens
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 142.0mm
Diameter 347.0mm
Weight 3.3 kg
In box 4pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 100000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover black 230V 150W 22500lm 90° IP65 DALI 840

Product code 18006 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 174.0mm
Diameter 290.0mm
In package 1pc
Casing colour black
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover black 230V 200W 30000lm 90° IP65 DALI 840

Product code 17783 DALI dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 142.0mm
Diameter 347.0mm
Weight 3.3 kg
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 100000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover V black 230V 100W 15000lm 120° IP65 0-10V 840

Product code 17109 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable 0-10V
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 174.0mm
Diameter 290.0mm
Weight 2.7 kg
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 100000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover V black 230V 150W 22500lm 120° IP65 1-10V 840

Product code 17596 1-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Dimmable 1-10V
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 174.0mm
Diameter 290.0mm
Weight 2.7 kg
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 100000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire. The luminaire's IP65 protection class means that the luminaire is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover with sensor plug black 230V 100W 15000lm 90° IP65 840

Product code 17587

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light LUMILEDS
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 174.0mm
Diameter 290.0mm
Weight 2.7 kg
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 100000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover with sensor plug black 230V 150W 22500lm 90° IP65 840

Product code 17120

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light PHILIPS LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 174.0mm
Diameter 290.0mm
Weight 2.7 kg
In box 3pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 100000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO Crossover with sensor plug black 230V 200W 30000lm 90° IP65 840

Product code 17110

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light LUMILEDS
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 174.0mm
Diameter 290.0mm
Weight 2.7 kg
In package 1pc
In box 4pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 100000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +60°C
Certificates CE, RoHS
Warranty 5 years



LED industrial luminaire, optionally with a motion sensor. The luminaire's IP65 protection class means that it is protected against both fine dust and water jets. The luminaire has a light temperature of 4000K, providing daylight-like illumination - the most suitable for work environments. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Delivery from EU warehouse in 7-14 days. You can find the best assortment of industrial lighting in the LED house product range!

Industrial light Prolumen UFO IKT black 230V 100W 15000lm 110° IP65 840

Product code 15769

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 110
Source of light OSRAM LED
Cri 80
Sdcm - macadam ellipses 5
Protection class IP65
Lifespan 50000h
Height 145.0mm
Diameter 290.0mm
Casing colour black
Casing material aluminium
Power supply SOSEN
Impact resistance IK08
Work environment indoor use
Operation temperature -40 - +50°C
Certificates CE, D, F
Warranty 5 years



PROLUMEN UFO IKT is an efficient and stylish luminaire suitable for various environments. It features a UFO-shaped design that adds decorative and modern elements to interiors and outdoor spaces. The product boasts several notable features: Efficiency of 150lm/W; Light angle that allows for uniform illumination of large areas. IP65 protection class ensures strong waterproofing for the luminaire, allowing it to be used in outdoor settings, even under direct water pressure. It is a versatile luminaire suitable for both indoor and outdoor use. PROLUMEN provides bright and quality lighting that meets various illumination needs! Illuminate your world with the help of LED House professionals - check out our portfolio here too!!

Remote RC-200

Product code 17122



Remote control for MW sensor configuration. Light up your world with the help of LED House professionals - check out our project portfolio here!!

Motion sensor SEN-MW-NOTE V 0-10V

Product code 14459 0-10V dimmable



Dimmable 0-10V
Certificates CE
Warranty 2 years

Motion sensor + light sensor. Detection range up to 16 meters. Light up your world with the help of LED House professionals - check out our project portfolio here!!

Remote TP control panel

Product code 19720



Industrial lighting control panel Note! This product is suitable for a specific industrial light.

© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee