# Emergency light AXN 6W LED Ta: -25C...+40C, premium LiFePO4 6,4V batteries white round 230V 6W 780lm IP65 DALI 750

**Product code 23490 DALI dimmable**

Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 780lumens
Luminaire’s efficiency 130W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Lifespan 50000h
Height 58.0mm
Diameter 202.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor / outdoor use
Operation temperature -25-45°C
Warranty 5 years

# Emergency light INTELIGHT Directo S M 3H AT white 3W CRI80 IP20

**Product code 18196**

Brand INTELIGHT
Output 3W
Maximum output 3W/1m
Cri 80
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Directo S M 3H CT Wells white 3W CRI80 IP20

**Product code 17995**

Brand INTELIGHT
Output 3W
Maximum output 3W/1m
Cri 80
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Directo S NM 1H AT white 230V 1.5W CRI80 IP20

**Product code 18534**

Brand INTELIGHT
Supply voltage 230V
Output 1.5W
Maximum output 1.5W/1m
Rated current 500mA
Cri 80
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*


# Emergency light INTELIGHT Kasjopeja SA 3h manual testing 230V 3.6W CRI70 IP20

**Product code 16460**

Brand INTELIGHT
Supply voltage 230V
Output 3.6W
Maximum output 3.6W/1m
Cri 70
Protection class IP20
Height 250.0mm
Width 28.0mm
Length 321.0mm
Weight 808 g
Package weight 981 g
In package 1pc
Casing material aluminium + plastic
Work environment indoor use
Operation temperature 10-40°C
Certificates CE
Warranty 1 years

The battery lasts 3 hours. Charging time 24 h The luminaire is two-sided. It comes with stickers (right, left) It can be installed either on the ceiling or on the wall. Two modes of operation: lights up when electricity is interrupted or permanently. Adjustable switch. Manufactured by the EU.



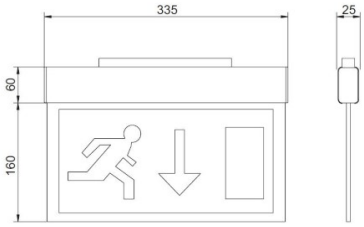



# Emergency light INTELIGHT LED Exit Orion A/TA 3h manual testing gray 230V 4W IP65

**Product code 17592**

Brand INTELIGHT
Supply voltage 230V
Output 4W
Maximum output 4W/1m
Protection class IP65
Height 73.0mm
Width 118.0mm
Length 352.0mm
Weight 733 g
Package weight 850 g
In package 1pc
Casing colour gray
Casing material plastic
Operation temperature 10-55°C
Certificates CE
Warranty 1 years








# Emergency light INTELIGHT LED Exit Orion AT 3h automatic testing 230V 4W IP65

**Product code 15318**

Brand INTELIGHT
Supply voltage 230V
Output 4W
Maximum output 4W/1m
Protection class IP65
Height 73.0mm
Width 118.0mm
Length 352.0mm
Weight 1 kg
In package 1pc
Casing material plastic
Operation temperature 10-55°C
Certificates CE
Warranty 1 years



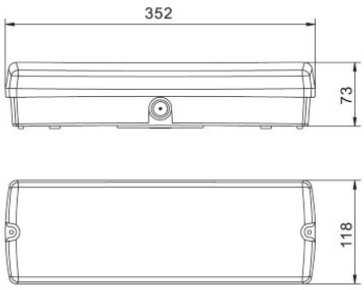


# Emergency light INTELIGHT LED Exit Suprema A/TA 3h automatic testing white 230V 3W 424lm IP54 750

**Product code 15108**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 424lumens
Luminaire’s efficiency 141W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 52.0mm
Width 60.0mm
Length 335.0mm
In package 1pc
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 10-50°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT LED Exit Suprema P-TS SA 3h automatic testing 93957 black 230V 5W IP54 750

**Product code 17096**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 52.0mm
Width 60.0mm
Length 335.0mm
In package 1pc
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10-50°C
Certificates CE
Warranty 1 years



Thanks to the special lens, it illuminates up to 30m away. Optional accessories available: recessed kit, wall mount, suspension kit, and glass with directional signs. Testing can be done either manually with the button on the luminaire or via the WELLS (wireless central monitoring system).

*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*


# Emergency light INTELIGHT LTR-25 8W 230V 8W

**Product code 19605**

Brand INTELIGHT
Supply voltage 230V
Output 8W
Maximum output 8W/1m
In package 1pc
Operation temperature kuni -25°C
Certificates CE,RoHS
Warranty 1 years

The heating element is designed for use with ORION and VELLA series emergency lights, which are permanently located at temperatures between + 10° C and -25° C. Activates when the temperature is below + 3° C and deactivates when it reaches + 10° C. Approved for use with: NiCd, NiMH and LiFePO4 batteries Standby: Uses less than 1W Operating Mode: Uses a maximum of 15W The warranty applies if the heating element is used inside an ORION or VELLA series luminaire.



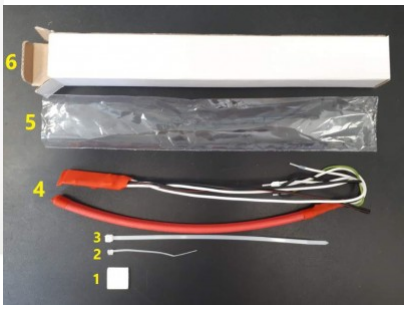


# Emergency light INTELIGHT ORION II - DS SET - PMMA PLATE white 230V

**Product code 23949**

Brand INTELIGHT
Supply voltage 230V
Lifespan 50000h
Casing colour white
Operation temperature -20 - +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT ORION II 150 NM 3H AT LT 230V 12W 183lm CRI70 IP65

**Product code 18229**

Brand INTELIGHT
Supply voltage 230V
Output 12W
Maximum output 12W/1m
Luminous flux 183lumens
Luminaire’s efficiency 15W
Cri 70
Protection class IP65
Lifespan 50000h
Height 73.0mm
Width 118.0mm
Length 352.0mm
Weight 770 g
In package 1pc
Casing material plastic
Operation temperature -20 - +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT ORION II 250 M 3H AT 230V 3W 290lm CRI70 IP65

**Product code 22201**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 290lumens
Luminaire’s efficiency 97W
Cri 70
Protection class IP65
Lifespan 50000h
Height 64.0mm
Width 110.0mm
Length 352.0mm
Weight 770 g
In package 1pc
Casing material plastic
Operation temperature -20 - +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT ORION II 250 NM 3H AT 230V 3W 290lm CRI70 IP65

**Product code 21020**


Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 290lumens
Luminaire’s efficiency 97W
Cri 70
Protection class IP65
Lifespan 50000h
Height 64.0mm
Width 110.0mm
Length 352.0mm
Weight 770 g
In package 1pc
Casing material plastic
Operation temperature -20 - +40°C
Certificates CE
Warranty 1 years



# INTELIGHT ORION II PROTECTIVE METAL GRID gray

**Product code 23950**

Brand INTELIGHT
Height 73.0mm
Width 118.0mm
Length 352.0mm
Weight 733 g
Package weight 850 g
In package 1pc
Casing colour gray
Casing material plastic
Operation temperature 10-55°C
Certificates CE
Warranty 1 years

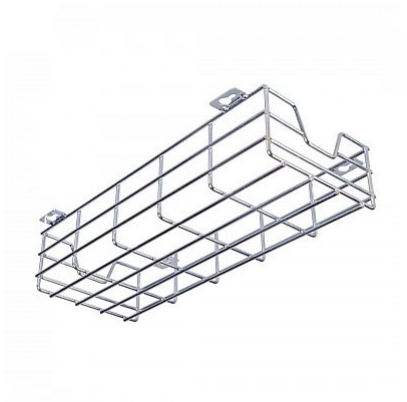

# Emergency light INTELIGHT ORION LED 100 II CB central battery 230V 3.5W 126lm CRI70 IP65

**Product code 15621**

Brand INTELIGHT
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 126lumens
Luminaire’s efficiency 36W
Cri 70
Protection class IP65
Height 73.0mm
Width 118.0mm
Length 352.0mm
Weight 770 g
In package 1pc
Casing material plastic
Operation temperature 10-55°C
Certificates CE
Warranty 1 years




# Emergency light INTELIGHT ORION LED 100 SA 3H CT LT central battery white 230V 15W 122lm 30° IP65 750

**Product code 17402**

Brand INTELIGHT
Supply voltage 230V
Output 15W
Maximum output 15W/1m
Luminous flux 122lumens
Luminaire’s efficiency 8W
Correlated colour temperature pure white 5000K
Lens angle 30
Cri 70
Protection class IP65
Height 64.0mm
Width 110.0mm
Length 352.0mm
In package 1pc
Casing colour white
Casing material plastic
Operation temperature 10-40°C
Certificates CE
Warranty 1 years

LED safety light for central battery systems. Battery warranty 1 year.








# Emergency light INTELIGHT ORION LED 150 CB central battery 230V 3.5W 182lm CRI70 IP65

**Product code 15622**

Brand INTELIGHT
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 182lumens
Luminaire’s efficiency 52W
Cri 70
Protection class IP65
Height 64.0mm
Width 110.0mm
Length 352.0mm
Weight 770 g
In package 1pc
Casing material plastic
Operation temperature 10-55°C
Certificates CE
Warranty 1 years





# Emergency light INTELIGHT ORION LED 150 SA 3H CT LT central battery white 230V 15W 183lm 30° IP65 750

**Product code 17401**

Brand INTELIGHT
Supply voltage 230V
Output 15W
Maximum output 15W/1m
Luminous flux 183lumens
Luminaire’s efficiency 12W
Correlated colour temperature pure white 5000K
Lens angle 30
Cri 70
Protection class IP65
Height 64.0mm
Width 110.0mm
Length 352.0mm
In package 1pc
Casing colour white
Casing material plastic
Operation temperature 10-40°C
Certificates CE
Warranty 1 years

LED safety light for central battery systems. Battery warranty 1 year.

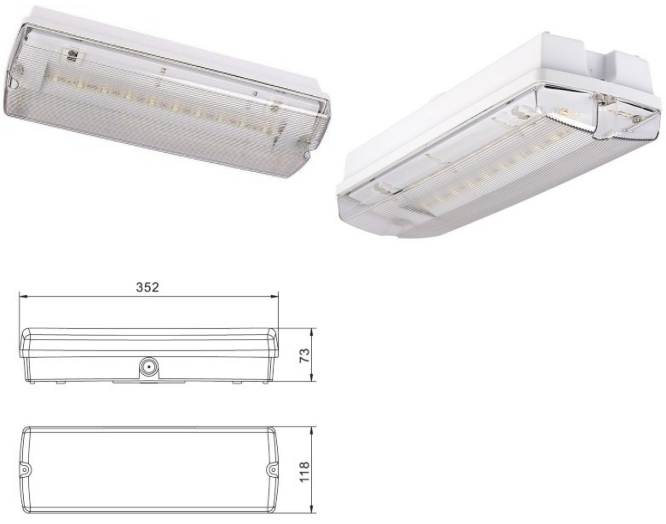

# Emergency light INTELIGHT Pictogram 93336

**Product code 18015**

Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years



# Emergency light INTELIGHT Pictogram 93335

**Product code 18014**

Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years



# Emergency light INTELIGHT Pictogram 93338

**Product code 16617**

Brand INTELIGHT
Height 123.0mm
Width 246.0mm



# Emergency light INTELIGHT Pictogram E1



**Product code 20388**

Brand INTELIGHT

# Emergency light INTELIGHT Pictogram E2

**Product code 15303**



Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years

# Emergency light INTELIGHT Pictogram E3

**Product code 15304**



Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years

# Emergency light INTELIGHT Pictogram E4

**Product code 15237**

Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years



# Emergency light INTELIGHT Pictogram E7

**Product code 15236**

Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years



# Emergency light INTELIGHT Pictogram E8

**Product code 20392**

Brand INTELIGHT
Warranty 1 years



## Emergency light INTELIGHT Pictogram E9

**Product code 20390**

Brand INTELIGHT
Warranty 1 years



## Emergency light INTELIGHT Pictogram OR11

**Product code 23692**

Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years




## Emergency light INTELIGHT Pictogram OR12

**Product code 23722**

Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years



# Emergency light INTELIGHT Pictogram OR5

**Product code 23691**

Brand INTELIGHT
Height 150.0mm
Width 300.0mm
Warranty 1 years



# Emergency light INTELIGHT Pictogramm VD5

**Product code 18002**

Brand INTELIGHT
Height 125.0mm
Width 125.0mm
Warranty 1 years



# Emergency light INTELIGHT STARLET PROOF SO 250 NM 1H CT white round 1,7W 302lm IP66 750

**Product code 23947**

Brand INTELIGHT
Output 1,7W
Maximum output 2.7W/1m
Rated current 600mA
Luminous flux 302lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP66
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET PROOF SO 250 NM 1H LT white round 1,7W 302lm IP66 750

**Product code 23948**

Brand INTELIGHT
Output 1,7W
Maximum output 12.6W/1m
Rated current 1000mA
Luminous flux 302lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP66
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Starlet QUAD LED SC 250 M 1H AT white square 230V 5W 240lm IP20 750

**Product code 18270**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 48W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT Starlet QUAD LED SCH 250 M/NM 3H AT automatic testing 92966 white square 230V 6W 240lm IP20 750

**Product code 16644**

Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 240lumens
Luminaire’s efficiency 40W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT Starlet QUAD LED SO 150 SA 3H AT automatic testing 92816 white square 3.5W 150lm IP20 750

**Product code 17253**

Brand INTELIGHT
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 150lumens
Luminaire’s efficiency 43W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Starlet QUAD LED SO 150 SA 3H CT Wells LT 92818 white square 4W 170lm IP20 750

**Product code 17403**

Brand INTELIGHT
Output 4W
Maximum output 4W/1m
Luminous flux 170lumens
Luminaire’s efficiency 43W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Starlet QUAD LED SOH 250 M 1H AT white square 230V 5W 260lm IP20 750

**Product code 18269**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 260lumens
Luminaire’s efficiency 52W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT Starlet QUAD LED SOH 250 M/NM 3H AT automatic testing 92866 white square 230V 6W 260lm IP20 750

**Product code 16643**

Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 260lumens
Luminaire’s efficiency 43W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET QUAD SC 250 M 1H CT white square 6W 254lm IP20 750

**Product code 18289**

Brand INTELIGHT
Output 6W
Maximum output 6W/1m
Luminous flux 254lumens
Luminaire’s efficiency 42W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET QUAD SCH 350 NM, SCH 1H CT– central test system white square 230V 2W 356lm IP20 750

**Product code 18285**

Brand INTELIGHT
Supply voltage 230V
Output 2W
Maximum output 2W/1m
Luminous flux 356lumens
Luminaire’s efficiency 178W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET QUAD SO 250 M 1H CT white square 6W 263lm IP20 750

**Product code 18288**

Brand INTELIGHT
Output 6W
Maximum output 6W/1m
Luminous flux 263lumens
Luminaire’s efficiency 44W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Starlet Quad SO 250, M/NM, AT, 1h automatic testing 92988 black square 230V 1.5W 260lm IP20 750

**Product code 16616**

Brand INTELIGHT
Supply voltage 230V
Output 1.5W
Maximum output 1.5W/1m
Luminous flux 260lumens
Luminaire’s efficiency 173W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour black
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT Starlet Quad SO 250, M/NM, AT, 3h automatic testing 92986 black square 230V 1.5W 260lm IP20 750

**Product code 17099**

Brand INTELIGHT
Supply voltage 230V
Output 1.5W
Maximum output 1.5W/1m
Luminous flux 260lumens
Luminaire’s efficiency 173W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour black
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET QUAD SO 350 NM 2H AT white square 230V 3W 391lm IP20 750

**Product code 22132**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 391lumens
Luminaire’s efficiency 130W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT Starlet Quad SO, NM, MT, 1h manual testing black square 230V 1.5W 260lm IP20 750

**Product code 16406**

Brand INTELIGHT
Supply voltage 230V
Output 1.5W
Maximum output 1.5W/1m
Luminous flux 260lumens
Luminaire’s efficiency 173W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour black
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET QUAD SOH 350 NM 2H CT white square 230V 3W 390lm IP20 750

**Product code 18291**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 390lumens
Luminaire’s efficiency 130W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SC 150 M 3H CT Wells black round 4W 150lm IP20 750

**Product code 18011**

Brand INTELIGHT
Output 4W
Maximum output 4W/1m
Luminous flux 150lumens
Luminaire’s efficiency 38W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour black
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SC 150 M 3H CT Wells white round 4W 150lm IP20 750

**Product code 17994**

Brand INTELIGHT
Output 4W
Maximum output 4W/1m
Luminous flux 150lumens
Luminaire’s efficiency 38W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SC 150 NM 1H AT white round 1W 148lm IP20 750

**Product code 22692**

Brand INTELIGHT
Output 1W
Maximum output 1W/1m
Luminous flux 148lumens
Luminaire’s efficiency 148W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SC 150 NM 1H MT white round 1W 148lm IP20 750

**Product code 22693**

Brand INTELIGHT
Output 1W
Maximum output 1W/1m
Luminous flux 148lumens
Luminaire’s efficiency 148W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SC 350 NM 2H AT black round 2,5W 335lm IP20 750

**Product code 22616**

Brand INTELIGHT
Output 2,5W
Maximum output 2.5W/1m
Luminous flux 335lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour black
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Starlet Round SC, SA, AT, 3h automatic testing 91672 white round 230V 6W 240lm IP20 750

**Product code 16999**

Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 240lumens
Luminaire’s efficiency 40W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 32.0mm
Diameter 145.0mm
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature +10 ~ +55°C
Warranty 1 years



# Emergency light INTELIGHT Starlet Round SC, SA, AT, 3h manual testing 91674 white round 230V 6W 240lm IP20 750

**Product code 16998**



Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 240lumens
Luminaire’s efficiency 40W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 32.0mm
Diameter 145.0mm
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature +10 ~ +55°C
Warranty 1 years

# Emergency light INTELIGHT STARLET ROUND SO 150 M 3H AT black round 4W 171lm IP20 750

**Product code 19087**



Brand INTELIGHT
Output 4W
Maximum output 4W/1m
Luminous flux 171lumens
Luminaire’s efficiency 43W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour black
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years

# Emergency light INTELIGHT STARLET ROUND SO 150 M 3H AT white round 4W 171lm IP20 750

**Product code 22971**

Brand INTELIGHT
Output 4W
Maximum output 4W/1m
Luminous flux 171lumens
Luminaire’s efficiency 43W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SO 150 M 3H CT Wells black round 4W 150lm IP20 750

**Product code 18012**

Brand INTELIGHT
Output 4W
Maximum output 4W/1m
Luminous flux 150lumens
Luminaire’s efficiency 38W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour black
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SO 150 M 3H CT Wells white round 4W 150lm IP20 750

**Product code 17993**

Brand INTELIGHT
Output 4W
Maximum output 4W/1m
Luminous flux 150lumens
Luminaire’s efficiency 38W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SO 150 NM 1H AT white round 1W 171lm IP20 750

**Product code 18562**

Brand INTELIGHT
Output 1W
Maximum output 1W/1m
Luminous flux 171lumens
Luminaire’s efficiency 171W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SO 150 NM 1H MT white round 1W 171lm IP20 750

**Product code 22694**

Brand INTELIGHT
Output 1W
Maximum output 1W/1m
Luminous flux 171lumens
Luminaire’s efficiency 171W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SO 150 NM 3H MT black round 1.5W 171lm IP20 750

**Product code 19707**

Brand INTELIGHT
Output 1.5W
Maximum output 1.5W/1m
Luminous flux 171lumens
Luminaire’s efficiency 114W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour black
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT STARLET ROUND SO 250 NM 3H AT white round 1,5W 299lm IP20 750

**Product code 20440**



Brand INTELIGHT
Output 1,5W
Maximum output 1.5W/1m
Luminous flux 299lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years

# Emergency light INTELIGHT STARLET ROUND SO 350 NM 2H AT white round 1,5W 299lm IP20 750

**Product code 22202**



Brand INTELIGHT
Output 1,5W
Maximum output 1.5W/1m
Luminous flux 299lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years

# Emergency light INTELIGHT Starlet Round SO, SA, AT, 3h automatic testing 91756 white round 230V 6W 280lm IP20 750

**Product code 16996**

Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 280lumens
Luminaire’s efficiency 47W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 32.0mm
Diameter 145.0mm
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature +10 ~ +55°C
Warranty 1 years



# Emergency light INTELIGHT Starlet Round SO, SA, AT, 3h manual testing 91758 white round 230V 6W 280lm IP20 750

**Product code 16997**

Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 280lumens
Luminaire’s efficiency 47W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 32.0mm
Diameter 145.0mm
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature +10 ~ +55°C
Warranty 1 years



# Emergency light INTELIGHT Starlet Round SOH, A, AT 2h automatic testing white round 230V 3W 380lm IP20 750

**Product code 17516**



Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 380lumens
Luminaire’s efficiency 127W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 32.0mm
Diameter 145.0mm
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature +10 ~ +55°C
Warranty 1 years

# Emergency light INTELIGHT STARLET ROUND SP 350 NM 2H AT black round 2,5W 357lm IP20 750

**Product code 22619**



Brand INTELIGHT
Output 2,5W
Maximum output 2.5W/1m
Luminous flux 357lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour black
Casing material polycarbonate
Shape round
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years

# Emergency light INTELIGHT Starlet SC, M/NM, AT, 3h, automatic testing white round 230V 2W 180lm IP20 750

**Product code 16275**

Brand INTELIGHT
Supply voltage 230V
Output 2W
Maximum output 2W/1m
Luminous flux 180lumens
Luminaire’s efficiency 90W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Weight 324 g
Package weight 378 g
Casing colour white
Casing material aluminium
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 1 years






# Emergency light INTELIGHT Starlet SO 200, M/NM, AT, 3h, automatic testing white round 230V 2W 200lm IP20 750

**Product code 16333**

Brand INTELIGHT
Supply voltage 230V
Output 2W
Maximum output 2W/1m
Luminous flux 200lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Casing colour white
Casing material aluminium
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 1 years






# Emergency light INTELIGHT Starlet SO, SA, AT, 3h, automatic testing white round 230V 3W 300lm IP20 750

**Product code 16664**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 300lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 59.0mm
Diameter 70.0mm
Casing colour white
Casing material aluminium
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 1 years






# Emergency light INTELIGHT Starlet SO, SA, MT, 3h, manual testing white round 230V 3W 300lm IP20 750

**Product code 16456**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 300lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 59.0mm
Diameter 70.0mm
Weight 750 g
Casing colour white
Casing material aluminium
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 1 years






# Emergency light INTELIGHT STARLET SPOT QUAD SC 350 M 3H MT white square 230V 9W 305lm IP20 750

**Product code 22139**

Brand INTELIGHT
Supply voltage 230V
Output 9W
Maximum output 9W/1m
Luminous flux 305lumens
Luminaire’s efficiency 34W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET SPOT QUAD SO 350 M 3H AT white square 230V 9W 346lm IP20 750

**Product code 22138**

Brand INTELIGHT
Supply voltage 230V
Output 9W
Maximum output 9W/1m
Luminous flux 346lumens
Luminaire’s efficiency 38W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET SPOT QUAD SO 350 NM 3H AT 84053 white square 230V 3,5W 346lm IP20 750

**Product code 23598**

Brand INTELIGHT
Supply voltage 230V
Output 3,5W
Maximum output 3.5W/1m
Luminous flux 346lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 22.0mm
Width 80.0mm
Length 80.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET SPOT QUAD SO 350 NM 3H MT white square 230V 3W 346lm IP20 750

**Product code 22324**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 346lumens
Luminaire’s efficiency 115W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



# Emergency light INTELIGHT STARLET SPOT ROUND SC 350 NM 1H CT white 2W 305lm IP20 5000K pure white

**Product code 23944**

Brand INTELIGHT
Output 2W
Maximum output 2W/1m
Rated current 100mA
Luminous flux 305lumens
Luminaire’s efficiency 153W
Correlated colour temperature pure white 5000K
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Work environment indoor use
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Starlet Spot Round SO 350 NM 3H MT white 3W IP20

**Product code 19647**

Brand INTELIGHT
Output 3W
Maximum output 3W/1m
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Work environment indoor use
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT Starlet White II LED SC 200 M/NM 3H MT, manual testing white round 230V 2W 200lm IP20 750

**Product code 17833**

Brand INTELIGHT
Supply voltage 230V
Output 2W
Maximum output 2W/1m
Luminous flux 200lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Weight 322 g
Package weight 367 g
Casing colour white
Casing material aluminium
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 1 years






# Emergency light INTELIGHT Starlet White II LED SO 200 M/NM 3H MT, manual testing white round 230V 2W 200lm IP20 750

**Product code 16437**

Brand INTELIGHT
Supply voltage 230V
Output 2W
Maximum output 2W/1m
Luminous flux 200lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Weight 322 g
Package weight 367 g
Casing colour white
Casing material aluminium
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 1 years






# Emergency light INTELIGHT Starlet White II LED SOH 300 M/NM 3H AT, automatic testing 92166 white round 230V 3W 310lm IP20 750

**Product code 16560**

Brand INTELIGHT
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 310lumens
Luminaire’s efficiency 103W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Casing colour white
Casing material aluminium
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 1 years






# Emergency light INTELIGHT Suprema D, SA, AT, NT, 3h, automatic testing white 230V 5W 350lm IP54 750

**Product code 15127**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 350lumens
Luminaire’s efficiency 70W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 217.0mm
Width 60.0mm
Length 335.0mm
In box 1pc
Casing colour white
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature 10°C ÷ 50°C°C
Certificates CE
Warranty 1 years



• Easy installation: NT-surface • Various optics • batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries • Compatible with Wells Wireless Monitoring System • Visibility: 30 m

# Emergency light INTELIGHT Suprema D, SA, AT, PT, 3h automatic testing white 230V 5W 350lm IP54 750

**Product code 15128**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 350lumens
Luminaire’s efficiency 70W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 217.0mm
Width 80.0mm
Length 335.0mm
In box 1pc
Casing colour white
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature 10°C ÷ 50°C°C
Certificates CE
Warranty 1 years



Easy installation: PT-recessed Various optics Batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries Visibility: 30 m

# Emergency light INTELIGHT SUPREMA D-std M 3H AT IP54 NT-S [BLK] black 230V 5W IP54 750

**Product code 16942**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 52.0mm
Width 60.0mm
Length 335.0mm
In package 1pc
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10-50°C
Certificates CE
Warranty 1 years



Thanks to the special lens, it illuminates up to 30 meters away. Additional accessories available: Recessed kit, wall mounting kit, suspension kit, and glass with directional signs. Testing can be done either manually with the button on the luminaire or using the WELLS (wireless central monitoring system).

*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Emergency light INTELIGHT SUPREMA D-std M 3H CT IP54 NT WELLS white 230V 6W IP54 750

**Product code 22075**

Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 52.0mm
Width 60.0mm
Length 335.0mm
In package 1pc
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 10-50°C
Certificates CE
Warranty 1 years



• Easy installation: NT-surface • Various optics • batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries • Compatible with Wells Wireless Monitoring System • Visibility: 30 m

# Emergency light INTELIGHT SUPREMA D-std M 3H CT IP54 PT WELLS white 230V 6W 350lm IP54 750

**Product code 22076**

Brand INTELIGHT
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 350lumens
Luminaire’s efficiency 58W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Lifespan 50000h
Height 217.0mm
Width 80.0mm
Length 335.0mm
In box 1pc
Casing colour white
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature 10°C ÷ 40°C°C
Certificates CE
Warranty 1 years



Easy installation: PT-recessed Various optics Batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries Visibility: 30 m

# Emergency light INTELIGHT SUPREMA SO 150 M 3H AT IP54 PT white 230V 7W 167lm IP54 750

**Product code 20439**

Brand INTELIGHT
Supply voltage 230V
Output 7W
Maximum output 7W/1m
Luminous flux 167lumens
Luminaire’s efficiency 24W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 52.0mm
Width 60.0mm
Length 335.0mm
In package 1pc
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 10-50°C
Certificates CE
Warranty 1 years



# Emergency light INTELIGHT VELLA LED ECO SO 125 CB central battery 93665 230V 2.5W 157lm IP65 750

**Product code 15623**

Brand INTELIGHT
Supply voltage 230V
Output 2.5W
Maximum output 2.5W/1m
Luminous flux 157lumens
Luminaire’s efficiency 63W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years






# Emergency light INTELIGHT VELLA LED ECO SO 125 NM 1H MT manual testing 93660 black 230V 1.5W 157lm IP65

**Product code 16559**

Brand INTELIGHT
Supply voltage 230V
Output 1.5W
Maximum output 1.5W/1m
Luminous flux 157lumens
Luminaire’s efficiency 105W
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED ECO SO 125 NM 1H MT manual testing 93676 230V 3.5W 125lm IP65

**Product code 15459**

Brand INTELIGHT
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 125lumens
Luminaire’s efficiency 36W
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 484 g
Package weight 577 g
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED ECO SO 125 SA 1H MT M/NM manual testing 93675 230V 3.5W 157lm IP65 750

**Product code 15749**

Brand INTELIGHT
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 157lumens
Luminaire’s efficiency 45W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 491 g
Package weight 609 g
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA LED ECO SO 125 SA 3H MT M/NM manual testing 93667 230V 4W 157lm IP65 750

**Product code 17830**

Brand INTELIGHT
Supply voltage 230V
Output 4W
Maximum output 4W/1m
Luminous flux 157lumens
Luminaire’s efficiency 39W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 491 g
Package weight 609 g
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED ECO SO 150 M/NM 3H AT automatic testing 93622 black 230V 3.5W 190lm IP65

**Product code 17098**

Brand INTELIGHT
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 190lumens
Luminaire’s efficiency 54W
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 454 g
Package weight 549 g
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED ECO SO 150 NM 1H AT automatic testing 93625 black 230V 3.5W 190lm IP65

**Product code 16615**

Brand INTELIGHT
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 190lumens
Luminaire’s efficiency 54W
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 454 g
Package weight 549 g
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED ECO SO 250 A 1H MT manual testing 93662 230V 314lm IP65 750

**Product code 16526**

Brand INTELIGHT
Supply voltage 230V
Luminous flux 314lumens
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA LED ECO SO 250 CB central battery 93651 230V 5W 314lm IP65 750

**Product code 15624**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 314lumens
Luminaire’s efficiency 63W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED ECO SO 250 M/NM 3H MT manual testing 93653 230V 7W 314lm IP65 750

**Product code 15246**

Brand INTELIGHT
Supply voltage 230V
Output 7W
Maximum output 7W/1m
Luminous flux 314lumens
Luminaire’s efficiency 45W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA LED ECO SO 650 SA 2H AT automatic testing 93527 230V 12W 732lm IP65 750

**Product code 16527**

Brand INTELIGHT
Supply voltage 230V
Output 12W
Maximum output 12W/1m
Luminous flux 732lumens
Luminaire’s efficiency 61W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED SC 150 SA 3H AT automatic testing 93702 230V 5W 331lm IP65 750

**Product code 16014**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 331lumens
Luminaire’s efficiency 66W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA LED SC 250 CB central battery 93700 230V 5W 331lm IP65 750

**Product code 15625**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 331lumens
Luminaire’s efficiency 66W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED SCA 250 CB central battery 93699 230V 5W 333lm IP65 750

**Product code 15626**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 333lumens
Luminaire’s efficiency 67W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA LED SO 150 SA 3H AT automatic testing 93508 230V 5W 331lm IP65 750

**Product code 15747**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 331lumens
Luminaire’s efficiency 66W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 546 g
Package weight 600 g
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED SO 150 SA 3H CT Wells 93512 230V 7W 190lm IP65 750

**Product code 17404**

Brand INTELIGHT
Supply voltage 230V
Output 7W
Maximum output 7W/1m
Luminous flux 190lumens
Luminaire’s efficiency 27W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 546 g
Package weight 600 g
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA LED SO 150 SA 3H CT Wells 93512 black 230V 7W 190lm IP65 750

**Product code 18013**

Brand INTELIGHT
Supply voltage 230V
Output 7W
Maximum output 7W/1m
Luminous flux 190lumens
Luminaire’s efficiency 27W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 546 g
Package weight 600 g
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA LED SOH 250 CB central battery 93549 230V 5W 346lm IP65 750

**Product code 15627**

Brand INTELIGHT
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 346lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA SO 150 NM 1H AT 230V 3.5W 190lm IP65 750

**Product code 15746**

Brand INTELIGHT
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 190lumens
Luminaire’s efficiency 54W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 505 g
Package weight 597 g
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA SO 250 M 1H AT 230V 7W 331lm IP65 750

**Product code 18272**

Brand INTELIGHT
Supply voltage 230V
Output 7W
Maximum output 7W/1m
Luminous flux 331lumens
Luminaire’s efficiency 47W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 505 g
Package weight 597 g
In package 1pc
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA SO 250 M 1H CT 230V 10W 369lm IP65 750

**Product code 18287**

Brand INTELIGHT
Supply voltage 230V
Output 10W
Maximum output 10W/1m
Luminous flux 369lumens
Luminaire’s efficiency 37W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 546 g
Package weight 600 g
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA SO 250 M 3H AT 230V 8W 333lm IP65

**Product code 19648**

Brand INTELIGHT
Supply voltage 230V
Output 8W
Maximum output 8W/1m
Luminous flux 333lumens
Luminaire’s efficiency 42W
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Weight 484 g
Package weight 577 g
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years




# Emergency light INTELIGHT VELLA SO 250 SA 3H CT 8W 250lm IP65

**Product code 21029**

Brand INTELIGHT
Output 8W
Luminous flux 250lumens
Luminaire’s efficiency 31W
Protection class IP65
Height 144.0mm
Width 269.0mm
Length 42.0mm
Casing material plastic




*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Emergency light INTELIGHT VELLA SO 650 M 2H DA 82823 DALI black 230V 12W 732lm IP65 DALI 750

**Product code 23503 DALI dimmable**

Brand INTELIGHT
Supply voltage 230V
Dimmable DALI
Output 12W
Maximum output 12W/1m
Luminous flux 732lumens
Luminaire’s efficiency 61W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT VELLA SO 650 M 2H DA 82859 DALI white 230V 12W 732lm IP65 DALI 750

**Product code 23489 DALI dimmable**

Brand INTELIGHT
Supply voltage 230V
Dimmable DALI
Output 12W
Maximum output 12W/1m
Luminous flux 732lumens
Luminaire’s efficiency 61W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 42.0mm
Width 144.0mm
Length 269.0mm
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 10 ~ 50°C
Warranty 1 years



# Emergency light INTELIGHT WARS 2X120 gray 230V 49W 4500lm IP65 840

**Product code 18094**

Brand INTELIGHT
Supply voltage 230V
Output 49W
Maximum output 49W/1m
Luminous flux 4500lumens
Luminaire’s efficiency 92W
Correlated colour temperature pure white 4000K
Cri 80
Protection class IP65
Height 88.0mm
Width 124.0mm
Length 1262.0mm
In package 1pc
Casing colour gray
Casing material polycarbonate
Work environment indoor / outdoor use
Operation temperature -25 ~ 40°C
Certificates CE,RoHS
Warranty 1 years



# Emergency light INTELIGHT WARS 2x120 LED 2h MT SA manual testing 93122 gray 230V 52W 4500lm IP65 840

**Product code 16832**

Brand INTELIGHT
Supply voltage 230V
Output 52W
Maximum output 52W/1m
Luminous flux 4500lumens
Luminaire’s efficiency 87W
Correlated colour temperature pure white 4000K
Cri 80
Protection class IP65
Height 88.0mm
Width 124.0mm
Length 1262.0mm
In package 1pc
Casing colour gray
Casing material polycarbonate
Work environment indoor / outdoor use
Operation temperature -25 ~ 40°C
Certificates CE,RoHS
Warranty 1 years



# Emergency light INTELIGHT WARS 2X120 M 3H LT manual testing + heater gray 230V 66W 4825lm IP65 840

**Product code 18093**

Brand INTELIGHT
Supply voltage 230V
Output 66W
Maximum output 66W/1m
Luminous flux 4825lumens
Luminaire’s efficiency 73W
Correlated colour temperature pure white 4000K
Cri 80
Protection class IP65
Height 88.0mm
Width 124.0mm
Length 661.0mm
In package 1pc
Casing colour gray
Casing material polycarbonate
Work environment indoor / outdoor use
Operation temperature -25°C - 40°C°C
Certificates CE, RoHS
Warranty 1 years



# Emergency light INTELIGHT WARS LED PANEL 2x60 SA 3H MT manual testing gray 230V 27W 2700lm IP65 840

**Product code 16283**

Brand INTELIGHT
Supply voltage 230V
Output 27W
Maximum output 27W/1m
Luminous flux 2700lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 4000K
Cri 80
Protection class IP65
Height 88.0mm
Width 124.0mm
Length 661.0mm
In package 1pc
Casing colour gray
Casing material polycarbonate
Work environment indoor use
Operation temperature -25°C - 40°C°C
Certificates CE, RoHS
Warranty 1 years



# Emergency light INTELIGHT WARS LED PANEL 2x60 SA-6W 2H AT automatic testing gray 230V 27W 2700lm IP65 840

**Product code 16284**

Brand INTELIGHT
Supply voltage 230V
Output 27W
Maximum output 27W/1m
Luminous flux 2700lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 4000K
Cri 80
Protection class IP65
Height 88.0mm
Width 124.0mm
Length 661.0mm
In package 1pc
Casing colour gray
Casing material polycarbonate
Work environment indoor use
Operation temperature -25°C - 40°C°C
Certificates CE, RoHS
Warranty 1 years



# Emergency light Prolumen 3W 3h AT DALI black 230V 3.5W 450lm IP20 750

**Product code 23403**

Brand Prolumen
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 450lumens
Luminaire’s efficiency 129W
Correlated colour temperature pure white 5000K
Source of light SAMSUNG LED
Cri 70
Protection class IP20
Lifespan 50000h
Height 30.0mm
Diameter 55.0mm
Installation opening diameter 50mm
In package 1pc
In box 30pcs
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 3200mAh
Warranty 5 years

The set includes two different lenses.



# Emergency light Prolumen 3W 3h AT white 230V 3.5W 240lm IP20 750

**Product code 19525**

Brand Prolumen
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Source of light SAMSUNG LED
Cri 70
Protection class IP20
Height 32.0mm
Width 80.0mm
Length 80.0mm
Installation opening diameter 50mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses.

# Emergency light Prolumen EM29-DA-3H, 1F white 230V 2.5W 380lm IP20 DALI 750

**Product code 23106 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 2.5W
Maximum output 2.5W/1m
Rated current 2000mA
Luminous flux 380lumens
Luminaire’s efficiency 152W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 53.0mm
Width 89.0mm
Length 193.0mm
In package 1pc
In box 20pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Work environment indoor use
Operation temperature -0° - +45°C
Warranty 5 years



# Emergency light Prolumen EPE-EX1-DA-3H, 1F white 230V 3W 220lm IP20 DALI 850

**Product code 23107 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3W
Maximum output 3W/1m
Rated current 6000mA
Luminous flux 220lumens
Luminaire’s efficiency 73W
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP20
Height 45.0mm
Width 223.0mm
Length 315.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Work environment indoor use
Operation temperature -0° - +45°C
Battery LiFePO4 3,2V 1500mAh
Warranty 5 years



*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Emergency light Prolumen Exit M22 AT, 3h black 230V 9W 800lm IP66 850

**Product code 17859**



Brand Prolumen
Supply voltage 230V
Output 9W
Maximum output 9W/1m
Luminous flux 800lumens
Luminaire’s efficiency 89W
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP66
Height 202.0mm
Width 120.0mm
Length 202.0mm
In package 1pc
In box 4pcs
Casing colour black
Casing material aluminium
Polishing matt
Work environment indoor / outdoor use
Operation temperature -35° - +45°C
Battery LiFePO4 6,4V 6000mAh
Warranty 5 years

# Emergency light Prolumen Exit M22 DALI, 3h black 230V 9W 800lm IP66 850


**Product code 18155**



Brand Prolumen
Supply voltage 230V
Output 9W
Maximum output 9W/1m
Luminous flux 800lumens
Luminaire’s efficiency 89W
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP66
Height 202.0mm
Width 120.0mm
Length 202.0mm
In package 1pc
In box 4pcs
Casing colour black
Casing material aluminium
Polishing matt
Work environment indoor / outdoor use
Operation temperature -35° - +45°C
Battery LiFePO4 6,4V 6000mAh
Warranty 5 years

# Emergency light Prolumen EXIT M3 AT white 230V 8W 650lm 120° IP65 850

**Product code 23296**

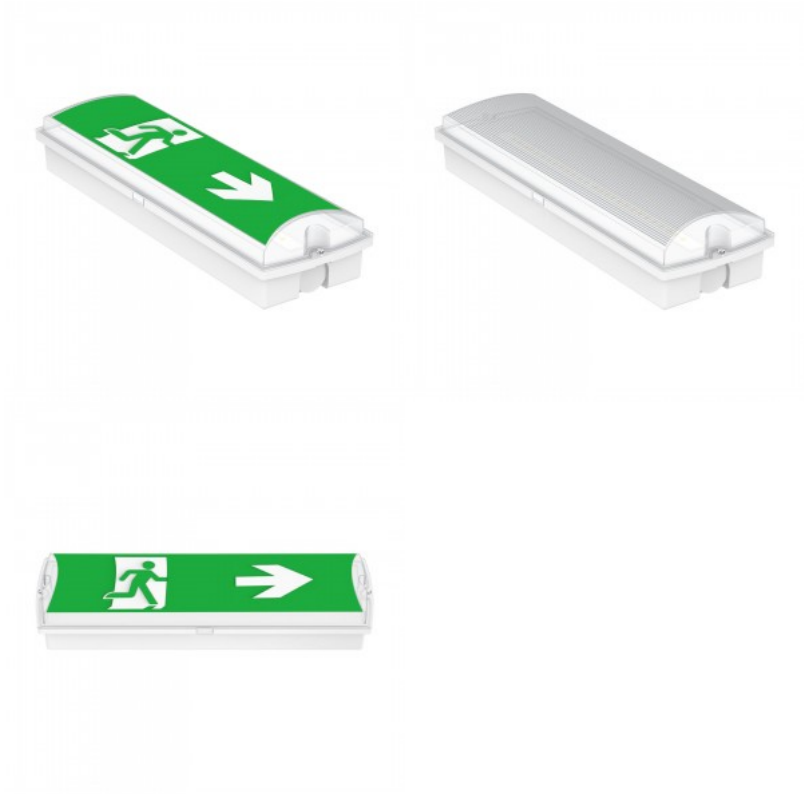

Brand Prolumen
Supply voltage 230V
Output 8W
Maximum output 8W/1m
Luminous flux 650lumens
Luminaire’s efficiency 81W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Height 77.0mm
Width 135.0mm
Length 335.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V
Warranty 5 years

*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Emergency light Prolumen EXIT M3 AT, DALI white 230V 8W 650lm 120° IP65 850


**Product code 19375**



Brand Prolumen
Supply voltage 230V
Output 8W
Maximum output 8W/1m
Luminous flux 650lumens
Luminaire’s efficiency 81W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 50000h
Height 77.0mm
Width 135.0mm
Length 335.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V
Warranty 5 years

# Emergency light Prolumen EXIT M3 3h AT white 230V 6W 200lm 120° IP65 850

**Product code 17220**

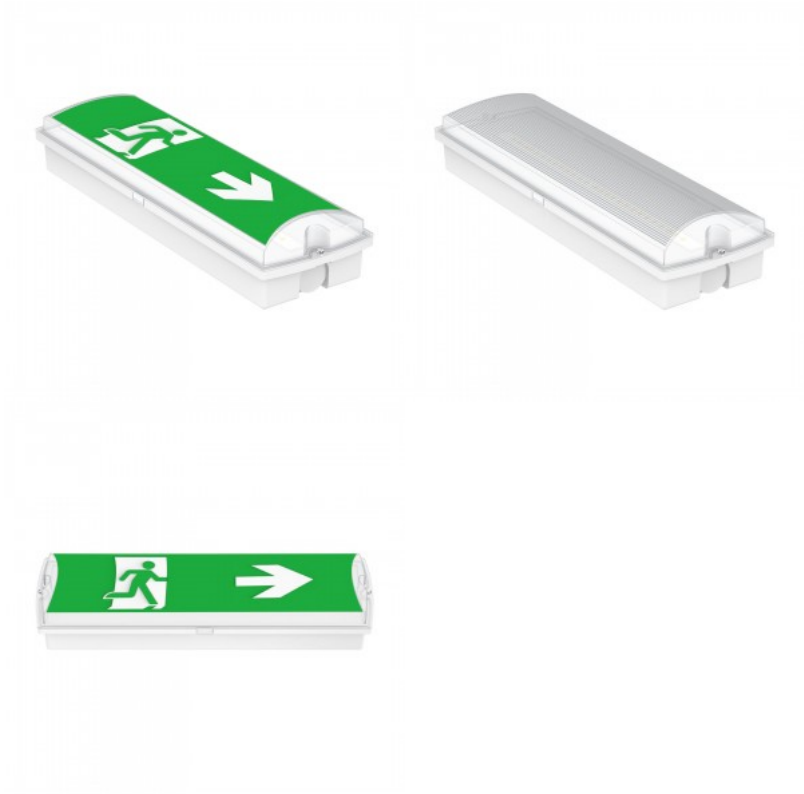

Brand Prolumen
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 200lumens
Luminaire’s efficiency 33W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Height 62.0mm
Width 105.0mm
Length 340.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V
Warranty 5 years

# Emergency light Prolumen EXIT M3 3H DALI white 230V 6W 200lm 120° IP65 DALI 850


**Product code 17564** **DALI dimmable**



Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 200lumens
Luminaire’s efficiency 33W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Height 62.0mm
Width 105.0mm
Length 340.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V
Warranty 5 years

# Emergency light Prolumen EXIT M3 3h MT white 230V 6W 200lm 120° IP65 850

**Product code 17221**

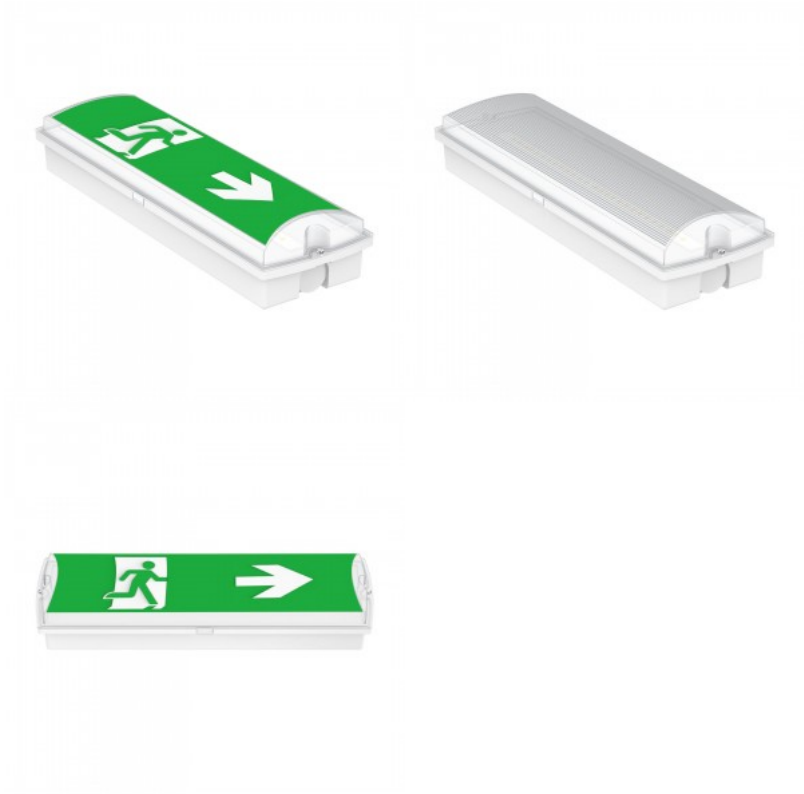


Brand Prolumen
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 200lumens
Luminaire’s efficiency 33W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 80
Protection class IP65
Height 62.0mm
Width 105.0mm
Length 340.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V
Warranty 5 years

*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Emergency light Prolumen EXIT M3B 3h white 230V 14W 1200lm IP65 850

**Product code 18142**

Brand Prolumen
Supply voltage 230V
Output 14W
Maximum output 14W/1m
Luminous flux 1200lumens
Luminaire’s efficiency 86W
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP65
Height 77.0mm
Width 135.0mm
Length 335.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V
Warranty 5 years

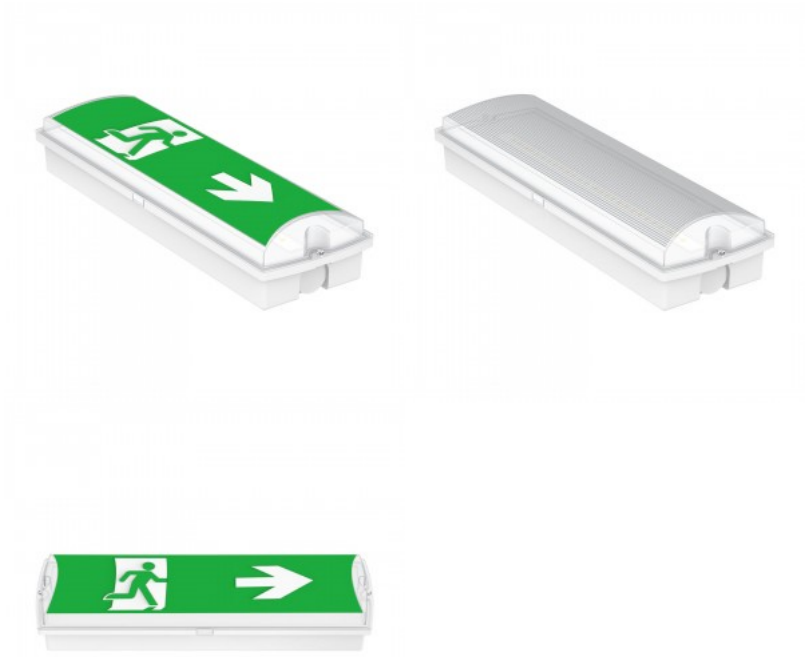

# Emergency light Prolumen EXIT X1 AT 3h DALI white 230V 3W 180lm 120° IP20 DALI 750

**Product code 23698** **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3W
Maximum output 3W/1m
Luminous flux 180lumens
Luminaire’s efficiency 60W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Protection class IP20
Height 38.0mm
Width 164.0mm
Length 235.0mm
In package 1pc
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V 600mAh
Warranty 5 years



# Emergency light Prolumen EXIT X12 AT 3h DALI white 230V 3W 180lm 120° IP20 DALI 750

**Product code 23355 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3W
Maximum output 3W/1m
Luminous flux 180lumens
Luminaire’s efficiency 60W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Protection class IP20
Height 59.0mm
Width 218.0mm
Length 403.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Warranty 5 years



# Emergency light Prolumen EXIT X2B AT 3h DALI white 230V 3W 180lm 120° IP65 DALI 750

**Product code 23702 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3W
Maximum output 3W/1m
Luminous flux 180lumens
Luminaire’s efficiency 60W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Protection class IP65
Lifespan 50000h
Height 59.0mm
Width 213.0mm
Length 362.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0-45°C
Warranty 5 years



# Emergency light Prolumen EXIT X2B AT 3h DALI white 230V 3W 180lm 120° IP65 DALI 750

**Product code 22984** **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3W
Maximum output 3W/1m
Luminous flux 180lumens
Luminaire’s efficiency 60W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Protection class IP65
Lifespan 50000h
Height 59.0mm
Width 213.0mm
Length 362.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Warranty 5 years




*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Emergency light Prolumen EXIT X2B AT 3h white 230V 3W 180lm 120° IP65 750

**Product code 17836**

Brand Prolumen
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 180lumens
Luminaire’s efficiency 60W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Protection class IP65
Height 59.0mm
Width 213.0mm
Length 362.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Warranty 5 years




# Emergency light Prolumen EXIT X2B riputustrossid white

**Product code 23497**

Brand Prolumen
Casing colour white
Casing material plastic
Work environment indoor / outdoor use



# Emergency light Prolumen EXIT X2B seinakinnitus white

**Product code 23496**

Brand Prolumen
Casing colour white
Casing material plastic
Work environment indoor / outdoor use




# Emergency light Prolumen EXIT X3B AT 3h black 230V 2.5W 200lm 120° IP65 760

**Product code 22775**

Brand Prolumen
Supply voltage 230V
Output 2.5W
Maximum output 2.5W/1m
Luminous flux 200lumens
Luminaire’s efficiency 80W
Correlated colour temperature cold white 6000K
Lens angle 120
Cri 70
Protection class IP65
Height 92.0mm
Width 182.0mm
Length 382.0mm
In package 1pc
In box 10pcs
Casing colour black
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Warranty 5 years



# Emergency light Prolumen EXIT X3B AT 3h white 230V 2.5W 200lm 120° IP65 750

**Product code 17835**

Brand Prolumen
Supply voltage 230V
Output 2.5W
Maximum output 2.5W/1m
Luminous flux 200lumens
Luminaire’s efficiency 80W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Protection class IP65
Height 92.0mm
Width 182.0mm
Length 382.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0-45°C
Warranty 5 years




# Emergency light Prolumen EXIT X5 3h white 230V 6W IP65 850

**Product code 22200**

Brand Prolumen
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP65
Height 194.0mm
Width 108.0mm
Length 340.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material plastic
Work environment outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V 1500mAh
Certificates CE
Warranty 5 years

Thanks to the special lens, it illuminates up to 30 meters away.



# Emergency light Prolumen EXIT X5 3h white 230V 6W IP65 DALI 850

**Product code 17563** **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP65
Height 194.0mm
Width 108.0mm
Length 340.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material plastic
Work environment outdoor use
Operation temperature 0-45°C
Battery LiFePO4 6,4V 1500mAh
Certificates CE
Warranty 5 years




Thanks to the special lens, it illuminates up to 30 meters away.

# Emergency light Prolumen EXIT X6 3h AT white 230V 3W IP20 750

**Product code 17210**

Brand Prolumen
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 230.0mm
Width 43.0mm
Length 328.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 3,2V 1500mAh
Certificates CE
Warranty 5 years

Exit light with adjustable positioning as desired. Thanks to a special lens, it illuminates up to 30 meters away.

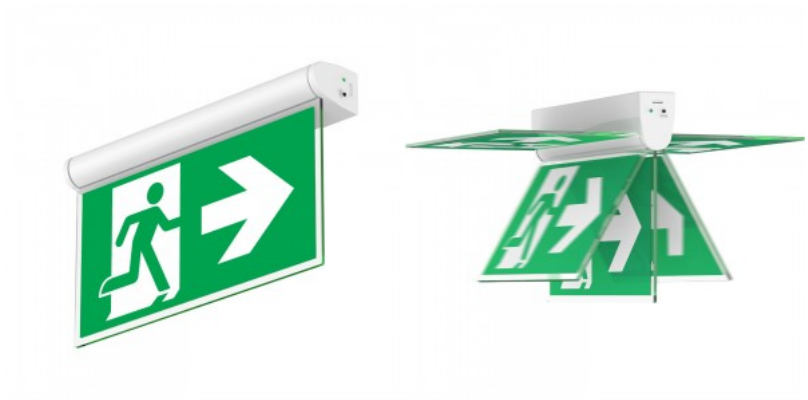


# Emergency light Prolumen EXIT X6 3h MT white 230V 3W IP20 850

**Product code 17219**

Brand Prolumen
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP20
Height 230.0mm
Width 43.0mm
Length 328.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 3,2V 1500mAh
Certificates CE
Warranty 5 years

Exit light with adjustable positioning as desired. Thanks to a special lens, it illuminates up to 30 meters away.

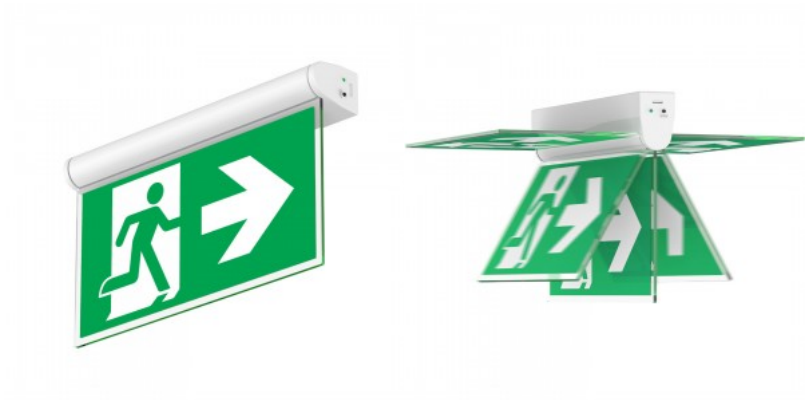


# Emergency light Prolumen EXIT X6 3h white 230V 3W IP20 DALI 850

**Product code 17562 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3W
Maximum output 3W/1m
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP20
Height 230.0mm
Width 43.0mm
Length 328.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 3,2V 1500mAh
Certificates CE
Warranty 5 years

Exit light with adjustable positioning as desired. Thanks to a special lens, it illuminates up to 30 meters away.

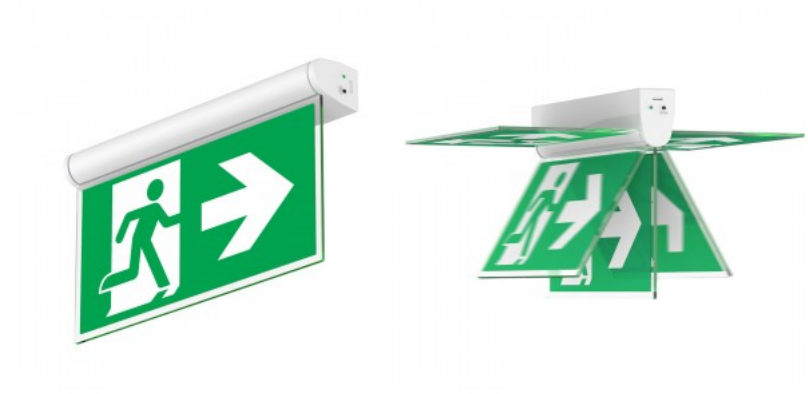

# Emergency light Prolumen Exit X6 AT, 3h white 230V 3W 220lm IP20 850

**Product code 17699**

Brand Prolumen
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 220lumens
Luminaire’s efficiency 73W
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP20
Height 230.0mm
Width 43.0mm
Length 328.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Work environment indoor use
Operation temperature -0° - +45°C
Battery LiFePO4 3,2V 1500mAh
Warranty 5 years



# Emergency light Prolumen Exit X7 3H AT white 230V 3W IP40 750

**Product code 23597**

Brand Prolumen
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Correlated colour temperature pure white 5000K
Source of light SAMSUNG LED
Cri 70
Protection class IP40
Height 45.0mm
Width 190.0mm
Length 330.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years



# Emergency light Prolumen EXIT X7 white 230V 3W IP40 DALI 850

**Product code 18135 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3W
Maximum output 3W/1m
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP40
Height 190.0mm
Width 45.0mm
Length 330.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 3.2V 1500m
Warranty 5 years



# Emergency light Prolumen M2 AT 3h white round 6W 450lm IP65 750

**Product code 17834**

Brand Prolumen
Output 6W
Maximum output 6W/1m
Luminous flux 450lumens
Luminaire’s efficiency 75W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Operation temperature 0-45°C
Certificates CE
Warranty 5 years



# Emergency light Prolumen M2 CBS white 230V 3.5W 240lm IP20 750

**Product code 17646**

Brand Prolumen
Supply voltage 230V
Power factor 0.30
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Source of light SAMSUNG LED
Cri 70
Protection class IP20
Height 55.3mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor / outdoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.



# Emergency light Prolumen M2 IP65 box white round IP65

**Product code 17246**

Brand Prolumen
Protection class IP65
Height 78.0mm
Diameter 175.0mm
In package 1pc
In box 20pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor / outdoor use
Operation temperature 0-45°C
Warranty 5 years

IP65 enclosure



# Emergency light Prolumen M2, 3h AT ST white round 230V 3W 240lm IP20 750

**Product code 17245**

Brand Prolumen
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 240lumens
Luminaire’s efficiency 80W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 62.0mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.



# Emergency light Prolumen M2, 3h black round 230V 3.5W 240lm IP20 750

**Product code 22779**

Brand Prolumen
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 62.0mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour black
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.



# Emergency light Prolumen M2, 3h black round 230V 3.5W 240lm IP20 DALI 750

**Product code 19324** **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 62.0mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour black
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.



# Emergency light Prolumen M2, 3h white round 230V 3.5W 240lm IP20 DALI 750

**Product code 17566 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 62.0mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.



# Emergency light Prolumen M2, 3h white round 230V 6W 450lm IP20 DALI 750

**Product code 18137** **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 450lumens
Luminaire’s efficiency 75W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 62.0mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.



# Emergency light Prolumen M2, AT, 3h black round 230V 6W 450lm IP20 DALI 750

**Product code 23364** **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 450lumens
Luminaire’s efficiency 75W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 55.3mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour black
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.

# Emergency light Prolumen M2, AT, 3h black round 230V 6W 450lm IP20 DALI 750

**Product code 23492 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 450lumens
Luminaire’s efficiency 75W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Lifespan 50000h
Height 55.3mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour black
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.

# Emergency light Prolumen M2, AT, 3h white round 230V 6W 450lm IP20 750

**Product code 17744**

Brand Prolumen
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 450lumens
Luminaire’s efficiency 75W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 55.3mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.



# Emergency light Prolumen M2, AT, 3h white round 230V 6W 450lm IP20 DALI 750

**Product code 23363** **DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 450lumens
Luminaire’s efficiency 75W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Lifespan 50000h
Height 55.3mm
Diameter 140.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.

# Emergency light Prolumen M22 AT, 3h white 230V 9W 800lm IP66 850

**Product code 17860**



Brand Prolumen
Supply voltage 230V
Output 9W
Maximum output 9W/1m
Luminous flux 800lumens
Luminaire’s efficiency 89W
Correlated colour temperature pure white 5000K
Cri 80
Protection class IP66
Height 202.0mm
Width 120.0mm
Length 202.0mm
In package 1pc
In box 4pcs
Casing colour white
Casing material aluminium
Polishing matt
Work environment indoor / outdoor use
Operation temperature -35° - +45°C
Battery LiFePO4 6,4V 6000mAh
Warranty 5 years

*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Emergency light Prolumen M4 2h AT white 230V 4W 450lm IP20 750

**Product code 23294**



Brand Prolumen
Supply voltage 230V
Output 4W
Maximum output 6W/1m
Rated current 1500mA
Luminous flux 450lumens
Luminaire’s efficiency 113W
Correlated colour temperature pure white 5000K
Source of light SAMSUNG LED
Cri 70
Protection class IP20
Height 48.0mm
Width 148.0mm
Length 148.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years

The set includes two different lenses.

# Emergency light Prolumen M4 3h AT white 230V 3.5W 240lm IP20 750

**Product code 19524**

Brand Prolumen
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Source of light SAMSUNG LED
Cri 70
Protection class IP20
Height 48.0mm
Width 148.0mm
Length 148.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses.

# Emergency light Prolumen M4 3H DALI white 230V 6W 450lm IP20 DALI 750

**Product code 19325 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 450lumens
Luminaire’s efficiency 75W
Correlated colour temperature pure white 5000K
Source of light SAMSUNG LED
Cri 70
Protection class IP20
Lifespan 50000h
Height 48.0mm
Width 148.0mm
Length 148.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses.

# Emergency light Prolumen M5 AT, 3h white round 230V 3.5W 240lm IP20 750

**Product code 17697**

Brand Prolumen
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire’s efficiency 69W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 48.0mm
Diameter 140.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature -0° - +45°C
Battery LiFePO4 6,4V 1500mAh
Warranty 5 years



The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.

# Emergency light Prolumen M7 AT, 3h white 230V 3.5W 220lm IP20 750

**Product code 17698**



Brand Prolumen
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 220lumens
Luminaire’s efficiency 63W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 98.0mm
Width 63.0mm
Length 212.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material polycarbonate
Polishing matt
Work environment indoor use
Operation temperature -0° - +45°C
Battery LiFePO4 6,4V 1500mAh
Warranty 5 years

# Emergency light Prolumen M9 3H DALI black round 230V 6W 750lm IP65 DALI 750

**Product code 23354 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 750lumens
Luminaire’s efficiency 125W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 62.0mm
Diameter 80.0mm
Installation opening diameter 72mm
In package 1pc
In box 20pcs
Casing colour black
Casing material aluminium
Polishing matt
Shape round
Impact resistance IK10
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 6.4V 4500m
Warranty 5 years



A durable and reliable emergency light designed to ensure safety in various environments. Its waterproof and dustproof design allows installation even in challenging conditions, providing stable and clear illumination in emergency situations. The device is equipped with smart features that ensure its seamless operation and reduce maintenance needs.

# Emergency light Prolumen M9 3H DALI white round 230V 6W 750lm IP65 DALI 750

**Product code 18138 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Dimmable DALI
Output 6W
Maximum output 6W/1m
Luminous flux 750lumens
Luminaire’s efficiency 125W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP65
Height 62.0mm
Diameter 80.0mm
Installation opening diameter 72mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium
Polishing matt
Shape round
Impact resistance IK10
Work environment indoor use
Operation temperature 0-45°C
Battery LiFePO4 6.4V 4500m
Warranty 5 years



A durable and reliable emergency light designed to ensure safety in various environments. Its waterproof and dustproof design allows installation even in challenging conditions, providing stable and clear illumination in emergency situations. The device is equipped with smart features that ensure its seamless operation and reduce maintenance needs.

## Emergency light Prolumen Pictogram Down

**Product code 17223**

Brand Prolumen

Pictogram "Evacuation Exit" for LED EXIT X6 emergency lights.



## Emergency light Prolumen Pictogram Down

**Product code 17892**


Brand Prolumen

Pictogram "Evacuation Exit" for LED EXIT X3B emergency lights.





# Emergency light Prolumen Pictogram Left

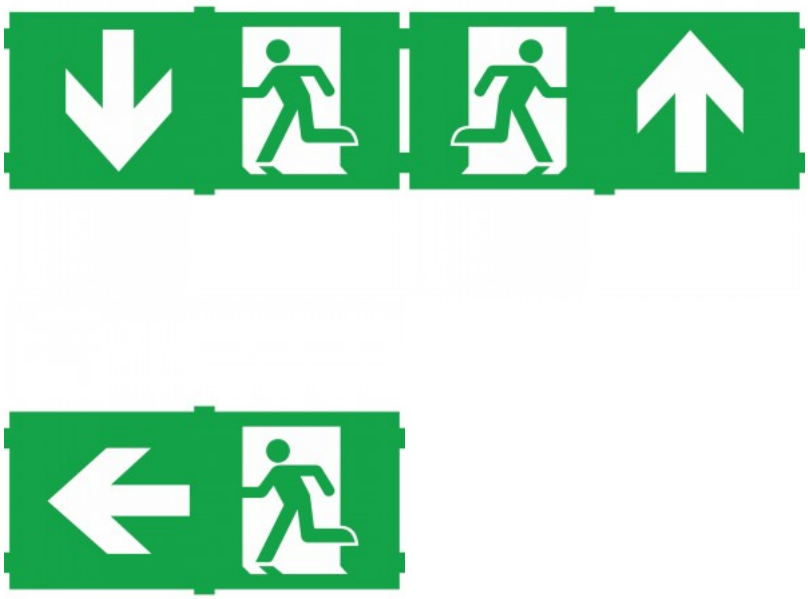

**Product code 17894**

Brand Prolumen

Pictogram "Evacuation Exit" for LED EXIT X3B emergency lights.

# Emergency light Prolumen Pictogram UP




**Product code 17222**

Brand Prolumen

Pictogram "Evacuation Exit" for LED EXIT X6 emergency lights.

# Emergency light Prolumen Pictogram Up

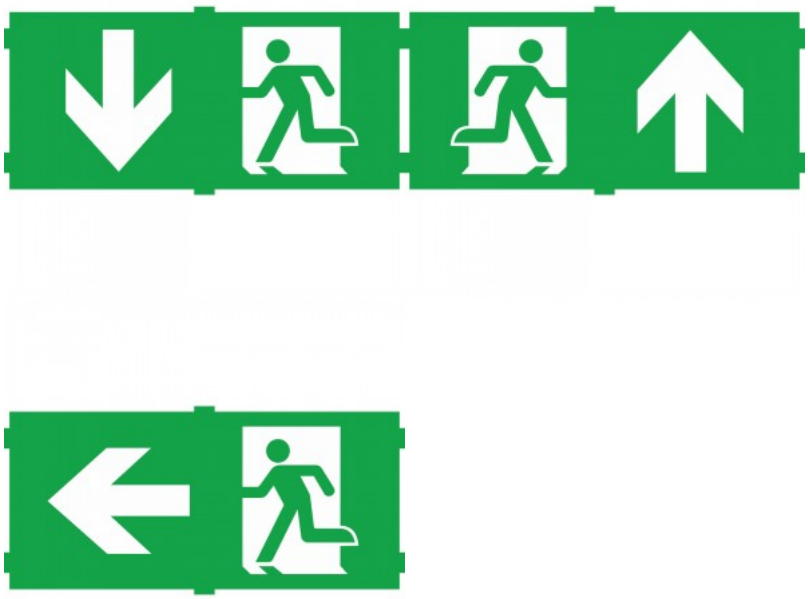

**Product code 17893**

Brand Prolumen

Pictogram "Evacuation Exit" for LED EXIT X3B emergency lights.