

## Emergency light INTELIGHT Directo S M 3H AT white 3W CRI80 IP20

**Product code 18196**

Brand [INTELIGHT](#)

Output 3W

Maximum output 3W/1m

Cri 80

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Directo S M 3H CT Wells white 3W CRI80 IP20

**Product code 17995**

Brand [INTELIGHT](#)

Output 3W

Maximum output 3W/1m

Cri 80

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Directo S NM 1H AT white 230V 1.5W CRI80 IP20

**Product code 18534**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 1.5W

Maximum output 1.5W/1m

Rated current 500mA

Cri 80

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Kasjopeja SA 3h manual testing 230V 3.6W CRI70 IP20

**Product code 16460**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.6W

Maximum output 3.6W/1m

Cri 70

Protection class IP20

Height 250.0mm

Width 28.0mm

Length 321.0mm

Weight 808 g

Package weight 981 g

In package 1pc


Casing material aluminium + plastic

Work environment indoor use

Operation temperature 10-40°C

Certificates CE

Warranty 1 years



The battery lasts 3 hours. Charging time 24 h The luminaire is two-sided. It comes with stickers (right, left) It can be installed either on the ceiling or on the wall. Two modes of operation: lights up when electricity is interrupted or permanently. Adjustable switch. Manufactured by the EU.

## Emergency light INTELIGHT LED Exit Orion A/TA 3h manual testing gray 230V 4W IP65

**Product code 17592**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 4W  
 Maximum output 4W/1m  
 Protection class IP65  
 Height 73.0mm  
 Width 118.0mm  
 Length 352.0mm  
 Weight 733 g  
 Package weight 850 g  
 In package 1pc  
 Casing colour gray  
 Casing material plastic  
 Operation temperature 10-55°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT LED Exit Orion AT 3h automatic testing 230V 4W IP65

**Product code 15318**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 4W  
 Maximum output 4W/1m  
 Protection class IP65  
 Height 73.0mm  
 Width 118.0mm  
 Length 352.0mm  
 Weight 1 kg  
 In package 1pc  
 Casing material plastic  
 Operation temperature 10-55°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT LED Exit Suprema A/TA 3h automatic testing white 230V 3W 424lm IP54 750

**Product code 15108**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 424lumens

Luminaire's efficiency lm79 141W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP54

Height 52.0mm

Width 60.0mm

Length 335.0mm

In package 1pc

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 10-50°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT LED Exit Suprema P-TS SA 3h automatic testing 93957 black 230V 5W IP54 750

**Product code 17096**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP54

Height 52.0mm

Width 60.0mm

Length 335.0mm

In package 1pc

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature 10-50°C

Certificates CE

Warranty 1 years



Thanks to the special lens, it illuminates up to 30m away. Optional accessories available: recessed kit, wall mount, suspension kit, and glass with directional signs. Testing can be done either manually with the button on the luminaire or via the WELLS (wireless central monitoring system).

**Emergency light INTELIGHT LTR-25 8W 230V 8W**

**Product code 19605**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 8W

Maximum output 8W/1m

In package 1pc

Operation temperature kuni -25°C

Certificates CE,RoHS

Warranty 1 years

The heating element is designed for use with ORION and VELLA series emergency lights, which are permanently located at temperatures between + 10° C and -25° C.

Activates when the temperature is below + 3° C and deactivates when it reaches + 10° C. Approved for use with: NiCd, NiMH and LiFePO4 batteries Standby: Uses less than 1W Operating Mode: Uses a maximum of 15W The warranty applies if the heating element is used inside an ORION or VELLA series luminaire.



## Emergency light INTELIGHT ORION II 150 NM 3H AT LT 230V 12W 183lm CRI70 IP65

**Product code 18229**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 12W  
 Maximum output 12W/1m  
 Luminous flux 183lumens  
 Luminaire's efficiency lm79 15W  
 Cri 70  
 Protection class IP65  
 Lifespan 50000h  
 Height 73.0mm  
 Width 118.0mm  
 Length 352.0mm  
 Weight 770 g  
 In package 1pc  
 Casing material plastic  
 Operation temperature -20 - +40°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT ORION II 250 M 3H AT 230V 3W 290lm CRI70 IP65

**Product code 22201**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 3W  
 Maximum output 3W/1m  
 Luminous flux 290lumens  
 Luminaire's efficiency lm79 97W  
 Cri 70  
 Protection class IP65  
 Lifespan 50000h  
 Height 64.0mm  
 Width 110.0mm  
 Length 352.0mm  
 Weight 770 g  
 In package 1pc  
 Casing material plastic  
 Operation temperature -20 - +40°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT ORION II 250 NM 3H AT 230V 3W 290lm CRI70 IP65

**Product code 21020**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 3W  
 Maximum output 3W/1m  
 Luminous flux 290lumens  
 Luminaire's efficiency lm79 97W  
 Cri 70  
 Protection class IP65  
 Lifespan 50000h  
 Height 64.0mm  
 Width 110.0mm  
 Length 352.0mm  
 Weight 770 g  
 In package 1pc  
 Casing material plastic  
 Operation temperature -20 - +40°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT ORION LED 100 II CB central battery 230V 3.5W 126lm CRI70 IP65

**Product code 15621**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 3.5W  
 Maximum output 3.5W/1m  
 Luminous flux 126lumens  
 Luminaire's efficiency lm79 36W  
 Cri 70  
 Protection class IP65  
 Height 73.0mm  
 Width 118.0mm  
 Length 352.0mm  
 Weight 770 g  
 In package 1pc  
 Casing material plastic  
 Operation temperature 10-55°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT ORION LED 100 SA 3H CT LT central battery white 230V 15W 122lm 30° IP65 750

**Product code 17402**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 15W

Maximum output 15W/1m

Luminous flux 122lumens

Luminaire's efficiency lm79 8W

Correlated colour temperature pure white 5000K

Lens angle 30

Cri 70

Protection class IP65

Height 64.0mm

Width 110.0mm

Length 352.0mm

In package 1pc


Casing colour white

Casing material plastic

Operation temperature 10-40°C

Certificates CE

Warranty 1 years

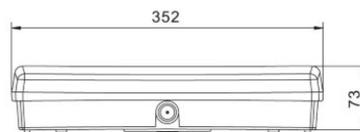

LED safety light for central battery systems. Battery warranty 1 year.

## Emergency light INTELIGHT ORION LED 150 CB central battery 230V 3.5W 182lm CRI70 IP65

**Product code 15622**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 182lumens

Luminaire's efficiency lm79 52W

Cri 70

Protection class IP65

Height 64.0mm

Width 110.0mm

Length 352.0mm

Weight 770 g


In package 1pc

Casing material plastic

Operation temperature 10-55°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT ORION LED 150 SA 3H CT LT central battery white 230V 15W 183lm 30° IP65 750

**Product code 17401**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 15W

Maximum output 15W/1m

Luminous flux 183lumens

Luminaire's efficiency lm79 12W

Correlated colour temperature pure white 5000K

Lens angle 30

Cri 70

Protection class IP65

Height 64.0mm

Width 110.0mm

Length 352.0mm

In package 1pc


Casing colour white

Casing material plastic

Operation temperature 10-40°C

Certificates CE

Warranty 1 years

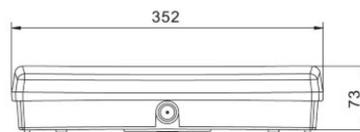

LED safety light for central battery systems. Battery warranty 1 year.

## Emergency light INTELIGHT Pictogram 93336

**Product code 18015**

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



## Emergency light INTELIGHT Pictogram 93335

Product code 18014

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



## Emergency light INTELIGHT Pictogram 93338

Product code 16617

Brand [INTELIGHT](#)

Height 123.0mm

Width 246.0mm



## Emergency light INTELIGHT Pictogram E1

Product code 20388

Brand [INTELIGHT](#)



## Emergency light INTELIGHT Pictogram E2

**Product code 15303**

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



## Emergency light INTELIGHT Pictogram E3

**Product code 15304**

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



## Emergency light INTELIGHT Pictogram E4

**Product code 15237**

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



## Emergency light INTELIGHT Pictogram E7

**Product code 15236**

---

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



## Emergency light INTELIGHT Pictogram E8

**Product code 20392**

---

Brand [INTELIGHT](#)

Warranty 1 years



## Emergency light INTELIGHT Pictogram E9

**Product code 20390**

---

Brand [INTELIGHT](#)

Warranty 1 years



## Emergency light INTELIGHT Pictogramm VD5

**Product code 18002**

Brand [INTELIGHT](#)

Height 125.0mm

Width 125.0mm

Warranty 1 years



## Emergency light INTELIGHT Starlet QUAD LED SC 250 M 1H AT white square 230V 5W 240lm IP20 750

**Product code 18270**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 48W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



## Emergency light INTELIGHT Starlet QUAD LED SCH 250 M/NM 3H AT automatic testing 92966 white square 230V 6W 240lm IP20 750

**Product code 16644**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 6W  
 Maximum output 6W/1m  
 Luminous flux 240lumens  
 Luminaire's efficiency lm79 40W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT Starlet QUAD LED SO 150 SA 3H AT automatic testing 92816 white square 3.5W 150lm IP20 750

**Product code 17253**

Brand [INTELIGHT](#)  
 Output 3.5W  
 Maximum output 3.5W/1m  
 Luminous flux 150lumens  
 Luminaire's efficiency lm79 43W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Width 0.0mm  
 In package 1pc  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT Starlet QUAD LED SO 150 SA 3H CT Wells LT 92818 white square 4W 170lm IP20 750

**Product code 17403**

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 170lumens

Luminaire's efficiency lm79 43W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Starlet QUAD LED SOH 250 M 1H AT white square 230V 5W 260lm IP20 750

**Product code 18269**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 260lumens

Luminaire's efficiency lm79 52W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



## Emergency light INTELIGHT Starlet QUAD LED SOH 250 M/NM 3H AT automatic testing 92866 white square 230V 6W 260lm IP20 750

**Product code 16643**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 6W  
 Maximum output 6W/1m  
 Luminous flux 260lumens  
 Luminaire's efficiency lm79 43W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT STARLET QUAD SC 250 M 1H CT white square 6W 254lm IP20 750

**Product code 18289**

Brand [INTELIGHT](#)  
 Output 6W  
 Maximum output 6W/1m  
 Luminous flux 254lumens  
 Luminaire's efficiency lm79 42W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Width 0.0mm  
 In package 1pc  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT STARLET QUAD SCH 350 NM, SCH 1H CT- central test system white square 230V 2W 356lm IP20 750

**Product code 18285**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 2W  
 Maximum output 2W/1m  
 Luminous flux 356lumens  
 Luminaire's efficiency lm79 178W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT STARLET QUAD SO 250 M 1H CT white square 6W 263lm IP20 750

**Product code 18288**

Brand [INTELIGHT](#)  
 Output 6W  
 Maximum output 6W/1m  
 Luminous flux 263lumens  
 Luminaire's efficiency lm79 44W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Width 0.0mm  
 In package 1pc  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT Starlet Quad SO 250, M/NM, AT, 1h automatic testing 92988 black square 230V 1.5W 260lm IP20 750

**Product code 16616**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 1.5W  
 Maximum output 1.5W/1m  
 Luminous flux 260lumens  
 Luminaire's efficiency lm79 173W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour black  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT Starlet Quad SO 250, M/NM, AT, 3h automatic testing 92986 black square 230V 1.5W 260lm IP20 750

**Product code 17099**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 1.5W  
 Maximum output 1.5W/1m  
 Luminous flux 260lumens  
 Luminaire's efficiency lm79 173W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour black  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT STARLET QUAD SO 350 NM 2H AT white square 230V 3W 391lm IP20 750

**Product code 22132**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 3W  
 Maximum output 3W/1m  
 Luminous flux 391lumens  
 Luminaire's efficiency lm79 130W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT Starlet Quad SO, NM, MT, 1h manual testing black square 230V 1.5W 260lm IP20 750

**Product code 16406**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 1.5W  
 Maximum output 1.5W/1m  
 Luminous flux 260lumens  
 Luminaire's efficiency lm79 173W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour black  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT STARLET QUAD SOH 350 NM 2H CT white square 230V 3W 390lm IP20 750

**Product code 18291**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 390lumens

Luminaire's efficiency lm79 130W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SC 150 M 3H CT Wells black round 4W 150lm IP20 750

**Product code 18011**

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SC 150 M 3H CT Wells white round 4W 150lm IP20 750

**Product code 17994**

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SC 150 NM 1H AT white round 1W 148lm IP20 750

**Product code 22692**

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 148lumens

Luminaire's efficiency lm79 148W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SC 150 NM 1H MT white round 1W 148lm IP20 750

**Product code 22693**

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 148lumens

Luminaire's efficiency lm79 148W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SC 350 NM 2H AT black round 2,5W 335lm IP20 750

**Product code 22616**

Brand [INTELIGHT](#)

Output 2,5W

Maximum output 2.5W/1m

Luminous flux 335lumens

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Starlet Round SC, SA, AT, 3h automatic testing 91672 white round 230V 6W 240lm IP20 750

**Product code 16999**

Brand [INTELIGHT](#)  
Supply voltage 230V  
Output 6W  
Maximum output 6W/1m  
Luminous flux 240lumens  
Luminaire's efficiency lm79 40W  
Correlated colour temperature pure white 5000K  
Cri 70  
Protection class IP20  
Height 32.0mm  
Diameter 145.0mm  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Shape round  
Work environment indoor use  
Operation temperature +10 ~ +55°C  
Warranty 1 years



## Emergency light INTELIGHT Starlet Round SC, SA, AT, 3h manual testing 91674 white round 230V 6W 240lm IP20 750

**Product code 16998**

Brand [INTELIGHT](#)  
Supply voltage 230V  
Output 6W  
Maximum output 6W/1m  
Luminous flux 240lumens  
Luminaire's efficiency lm79 40W  
Correlated colour temperature pure white 5000K  
Cri 70  
Protection class IP20  
Height 32.0mm  
Diameter 145.0mm  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Shape round  
Work environment indoor use  
Operation temperature +10 ~ +55°C  
Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 150 M 3H AT black round 4W 171lm IP20 750

**Product code 19087**

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 43W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 150 M 3H CT Wells black round 4W 150lm IP20 750

**Product code 18012**

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 150 M 3H CT Wells white round 4W 150lm IP20 750

**Product code 17993**

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 150 NM 1H AT white round 1W 171lm IP20 750

**Product code 18562**

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 171W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 150 NM 1H MT white round 1W 171lm IP20 750

**Product code 22694**

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 171W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 150 NM 3H MT black round 1.5W 171lm IP20 750

**Product code 19707**

Brand [INTELIGHT](#)

Output 1.5W

Maximum output 1.5W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 114W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 250 NM 3H AT white round 1,5W 299lm IP20 750

**Product code 20440**

Brand [INTELIGHT](#)

Output 1,5W

Maximum output 1.5W/1m

Luminous flux 299lumens

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SO 350 NM 2H AT white round 1,5W 299lm IP20 750

**Product code 22202**

Brand [INTELIGHT](#)

Output 1,5W

Maximum output 1.5W/1m

Luminous flux 299lumens

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Starlet Round SO, SA, AT, 3h automatic testing 91756 white round 230V 6W 280lm IP20 750

**Product code 16996**

Brand [INTELIGHT](#)  
Supply voltage 230V  
Output 6W  
Maximum output 6W/1m  
Luminous flux 280lumens  
Luminaire's efficiency lm79 47W  
Correlated colour temperature pure white 5000K  
Cri 70  
Protection class IP20  
Height 32.0mm  
Diameter 145.0mm  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Shape round  
Work environment indoor use  
Operation temperature +10 ~ +55°C  
Warranty 1 years



## Emergency light INTELIGHT Starlet Round SO, SA, AT, 3h manual testing 91758 white round 230V 6W 280lm IP20 750

**Product code 16997**

Brand [INTELIGHT](#)  
Supply voltage 230V  
Output 6W  
Maximum output 6W/1m  
Luminous flux 280lumens  
Luminaire's efficiency lm79 47W  
Correlated colour temperature pure white 5000K  
Cri 70  
Protection class IP20  
Height 32.0mm  
Diameter 145.0mm  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Shape round  
Work environment indoor use  
Operation temperature +10 ~ +55°C  
Warranty 1 years



## Emergency light INTELIGHT Starlet Round SOH, A, AT 2h automatic testing white round 230V 3W 380lm IP20 750

**Product code 17516**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 380lumens

Luminaire's efficiency lm79 127W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 32.0mm

Diameter 145.0mm

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature +10 ~ +55°C

Warranty 1 years



## Emergency light INTELIGHT STARLET ROUND SP 350 NM 2H AT black round 2,5W 357lm IP20 750

**Product code 22619**

Brand [INTELIGHT](#)

Output 2,5W

Maximum output 2.5W/1m

Luminous flux 357lumens

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Starlet SC, M/NM, AT, 3h, automatic testing white round 230V 2W 180lm IP20 750

**Product code 16275**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 2W

Maximum output 2W/1m

Luminous flux 180lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Weight 324 g

Package weight 378 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



## Emergency light INTELIGHT Starlet SO 200, M/NM, AT, 3h, automatic testing white round 230V 2W 200lm IP20 750

**Product code 16333**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 2W

Maximum output 2W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



## Emergency light INTELIGHT Starlet SO, SA, AT, 3h, automatic testing white round 230V 3W 300lm IP20 750

**Product code 16664**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 300lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 59.0mm

Diameter 70.0mm

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



## Emergency light INTELIGHT Starlet SO, SA, MT, 3h, manual testing white round 230V 3W 300lm IP20 750

**Product code 16456**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 300lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 59.0mm

Diameter 70.0mm

Weight 750 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



## **Emergency light INTELIGHT STARLET SPOT QUAD SC 350 M 3H MT white square 230V 9W 305lm IP20 750**

**Product code 22139**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 9W  
 Maximum output 9W/1m  
 Luminous flux 305lumens  
 Luminaire's efficiency lm79 34W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## **Emergency light INTELIGHT STARLET SPOT QUAD SO 350 M 3H AT white square 230V 9W 346lm IP20 750**

**Product code 22138**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 9W  
 Maximum output 9W/1m  
 Luminous flux 346lumens  
 Luminaire's efficiency lm79 38W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Height 35.5mm  
 Width 133.0mm  
 Length 133.0mm  
 Casing colour white  
 Casing material polycarbonate  
 Shape square  
 Work environment indoor use  
 Operation temperature 0 ~ +40°C  
 Warranty 1 years



## Emergency light INTELIGHT STARLET SPOT QUAD SO 350 NM 3H MT white square 230V 3W 346lm IP20 750

**Product code 22324**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 346lumens

Luminaire's efficiency lm79 115W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



## Emergency light INTELIGHT Starlet Spot Round SO 350 NM 3H MT white 3W IP20

**Product code 19647**

Brand [INTELIGHT](#)

Output 3W

Maximum output 3W/1m

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Work environment indoor use

Certificates CE

Warranty 1 years



## Emergency light INTELIGHT Starlet White II LED SC 200 M/NM 3H MT, manual testing white round 230V 2W 200lm IP20 750

**Product code 17833**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 2W

Maximum output 2W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Weight 322 g

Package weight 367 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



## Emergency light INTELIGHT Starlet White II LED SO 200 M/NM 3H MT, manual testing white round 230V 2W 200lm IP20 750

**Product code 16437**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 2W

Maximum output 2W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Weight 322 g

Package weight 367 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



## Emergency light INTELIGHT Starlet White II LED SOH 300 M/NM 3H AT, automatic testing 92166 white round 230V 3W 310lm IP20 750

### Product code 16560

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 3W  
 Maximum output 3W/1m  
 Luminous flux 310lumens  
 Luminaire's efficiency lm79 103W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP20  
 Casing colour white  
 Casing material aluminium  
 Shape round  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 1 years



## Emergency light INTELIGHT Suprema D, SA, AT, NT, 3h, automatic testing white 230V 5W 350lm IP54 750

## Product code 15127

---

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 350lumens

Luminaire's efficiency lm79 70W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP54

Height 217.0mm

Width 60.0mm

Length 335.0mm

In box 1pc

Casing colour white

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature 10°C ÷  
50°C

Certificates CE

Warranty 1 years



- Easy installation: NT-surface •
- Various optics • batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries • Compatible with Wells Wireless Monitoring System •
- Visibility: 30 m

## Emergency light INTELIGHT Suprema D, SA, AT, PT, 3h automatic testing white 230V 5W 350lm IP54 750

**Product code 15128**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 350lumens

Luminaire's efficiency lm79 70W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP54

Height 217.0mm

Width 80.0mm

Length 335.0mm

In box 1pc

Casing colour white

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature 10°C ÷ 50°C

Certificates CE

Warranty 1 years



Easy installation: PT-recessed Various optics Batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries Visibility: 30 m

## Emergency light INTELIGHT SUPREMA D-std M 3H AT IP54 NT-S [BLK] black 230V 5W IP54 750

**Product code 16942**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP54

Height 52.0mm

Width 60.0mm

Length 335.0mm

In package 1pc

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature 10-50°C

Certificates CE

Warranty 1 years



Thanks to the special lens, it illuminates up to 30 meters away.  
Additional accessories available:  
Recessed kit, wall mounting kit, suspension kit, and glass with directional signs. Testing can be done either manually with the button on the luminaire or using the WELLS (wireless central monitoring system).

## Emergency light INTELIGHT SUPREMA D-std M 3H CT IP54 NT WELLS white 230V 6W IP54 750

**Product code 22075**

Brand [INTELIGHT](#)  
Supply voltage 230V  
Output 6W  
Maximum output 6W/1m  
Correlated colour temperature pure  
white 5000K  
Cri 70  
Protection class IP54  
Height 52.0mm  
Width 60.0mm  
Length 335.0mm  
In package 1pc  
Casing colour white  
Casing material plastic  
Work environment indoor use  
Operation temperature 10-50°C  
Certificates CE  
Warranty 1 years



- Easy installation: NT-surface •
- Various optics • batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries • Compatible with Wells Wireless Monitoring System •
- Visibility: 30 m

## Emergency light INTELIGHT SUPREMA D-std M 3H CT IP54 PT WELLS white 230V 6W 350lm IP54 750

**Product code 22076**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 350lumens

Luminaire's efficiency lm79 58W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP54

Lifespan 50000h

Height 217.0mm

Width 80.0mm

Length 335.0mm

In box 1pc

Casing colour white

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature 10°C ÷  
40°C°C

Certificates CE

Warranty 1 years



Easy installation: PT-recessed Various  
optics Batteries with a longer lifetime  
of lithium phosphate (LiFePO®)  
batteries Visibility: 30 m

## Emergency light INTELIGHT SUPREMA SO 150 M 3H AT IP54 PT white 230V 7W 167lm IP54 750

**Product code 20439**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 7W  
 Maximum output 7W/1m  
 Luminous flux 167lumens  
 Luminaire's efficiency lm79 24W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP54  
 Height 52.0mm  
 Width 60.0mm  
 Length 335.0mm  
 In package 1pc  
 Casing colour white  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10-50°C  
 Certificates CE  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 125 CB central battery 93665 230V 2.5W 157lm IP65 750

**Product code 15623**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 2.5W  
 Maximum output 2.5W/1m  
 Luminous flux 157lumens  
 Luminaire's efficiency lm79 63W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 In package 1pc  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 125 NM 1H MT manual testing 93660 black 230V 1.5W 157lm IP65

**Product code 16559**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 1.5W  
 Maximum output 1.5W/1m  
 Luminous flux 157lumens  
 Luminaire's efficiency lm79 105W  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Casing colour black  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 125 NM 1H MT manual testing 93676 230V 3.5W 125lm IP65

**Product code 15459**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 3.5W  
 Maximum output 3.5W/1m  
 Luminous flux 125lumens  
 Luminaire's efficiency lm79 36W  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 484 g  
 Package weight 577 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 125 SA 1H MT M/NM manual testing 93675 230V 3.5W 157lm IP65 750

**Product code 15749**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 3.5W  
 Maximum output 3.5W/1m  
 Luminous flux 157lumens  
 Luminaire's efficiency lm79 45W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 491 g  
 Package weight 609 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 125 SA 3H MT M/NM manual testing 93667 230V 4W 157lm IP65 750

**Product code 17830**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 4W  
 Maximum output 4W/1m  
 Luminous flux 157lumens  
 Luminaire's efficiency lm79 39W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 491 g  
 Package weight 609 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 150 M/NM 3H AT automatic testing 93622 black 230V 3.5W 190lm IP65

**Product code 17098**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 190lumens

Luminaire's efficiency lm79 54W

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 454 g

Package weight 549 g

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 150 NM 1H AT automatic testing 93625 black 230V 3.5W 190lm IP65

**Product code 16615**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 190lumens

Luminaire's efficiency lm79 54W

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 454 g

Package weight 549 g

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 250 A 1H MT manual testing 93662 230V 314lm IP65 750

**Product code 16526**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Luminous flux 314lumens  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 250 CB central battery 93651 230V 5W 314lm IP65 750

**Product code 15624**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 5W  
 Maximum output 5W/1m  
 Luminous flux 314lumens  
 Luminaire's efficiency lm79 63W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 In package 1pc  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 250 M/NM 3H MT manual testing 93653 230V 7W 314lm IP65 750

**Product code 15246**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 7W  
 Maximum output 7W/1m  
 Luminous flux 314lumens  
 Luminaire's efficiency lm79 45W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED ECO SO 650 SA 2H AT automatic testing 93527 230V 12W 732lm IP65 750

**Product code 16527**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 12W  
 Maximum output 12W/1m  
 Luminous flux 732lumens  
 Luminaire's efficiency lm79 61W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED SC 150 SA 3H AT automatic testing 93702 230V 5W 331lm IP65 750

**Product code 16014**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 331lumens

Luminaire's efficiency lm79 66W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA LED SC 250 CB central battery 93700 230V 5W 331lm IP65 750

**Product code 15625**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 331lumens

Luminaire's efficiency lm79 66W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA LED SCA 250 CB central battery 93699 230V 5W 333lm IP65 750

**Product code 15626**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 333lumens

Luminaire's efficiency lm79 67W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA LED SO 150 SA 3H AT automatic testing 93508 230V 5W 331lm IP65 750

**Product code 15747**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 331lumens

Luminaire's efficiency lm79 66W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 546 g

Package weight 600 g

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA LED SO 150 SA 3H CT Wells 93512 230V 7W 190lm IP65 750

**Product code 17404**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 7W  
 Maximum output 7W/1m  
 Luminous flux 190lumens  
 Luminaire's efficiency lm79 27W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 546 g  
 Package weight 600 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED SO 150 SA 3H CT Wells 93512 black 230V 7W 190lm IP65 750

**Product code 18013**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 7W  
 Maximum output 7W/1m  
 Luminous flux 190lumens  
 Luminaire's efficiency lm79 27W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 546 g  
 Package weight 600 g  
 Casing colour black  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA LED SOH 250 CB central battery 93549 230V 5W 346lm IP65 750

**Product code 15627**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 346lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA SO 150 NM 1H AT 230V 3.5W 190lm IP65 750

**Product code 15746**

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 190lumens

Luminaire's efficiency lm79 54W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 505 g

Package weight 597 g

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



## Emergency light INTELIGHT VELLA SO 250 M 1H AT 230V 7W 331lm IP65 750

**Product code 18272**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 7W  
 Maximum output 7W/1m  
 Luminous flux 331lumens  
 Luminaire's efficiency lm79 47W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 505 g  
 Package weight 597 g  
 In package 1pc  
 Casing material plastic  
 Work environment indoor / outdoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA SO 250 M 1H CT 230V 10W 369lm IP65 750

**Product code 18287**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 10W  
 Maximum output 10W/1m  
 Luminous flux 369lumens  
 Luminaire's efficiency lm79 37W  
 Correlated colour temperature pure white 5000K  
 Cri 70  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 546 g  
 Package weight 600 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA SO 250 M 3H AT 230V 8W 333lm IP65

**Product code 19648**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 8W  
 Maximum output 8W/1m  
 Luminous flux 333lumens  
 Luminaire's efficiency lm79 42W  
 Protection class IP65  
 Height 42.0mm  
 Width 144.0mm  
 Length 269.0mm  
 Weight 484 g  
 Package weight 577 g  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 10 ~ 50°C  
 Warranty 1 years



## Emergency light INTELIGHT VELLA SO 250 SA 3H CT 8W 250lm IP65

**Product code 21029**

Brand [INTELIGHT](#)  
 Output 8W  
 Luminous flux 250lumens  
 Luminaire's efficiency lm79 31W  
 Protection class IP65  
 Height 144.0mm  
 Width 269.0mm  
 Length 42.0mm  
 Casing material plastic



## Emergency light INTELIGHT WARS 2X120 gray 230V 49W 4500lm IP65 840

**Product code 18094**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 49W  
 Maximum output 49W/1m  
 Luminous flux 4500lumens  
 Luminaire's efficiency lm79 92W  
 Correlated colour temperature pure white 4000K  
 Cri 80  
 Protection class IP65  
 Height 88.0mm  
 Width 124.0mm  
 Length 1262.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material polycarbonate  
 Work environment indoor / outdoor use  
 Operation temperature -25 ~ 40°C  
 Certificates CE,RoHS  
 Warranty 1 years



## Emergency light INTELIGHT WARS 2x120 LED 2h MT SA manual testing 93122 gray 230V 52W 4500lm IP65 840

**Product code 16832**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 52W  
 Maximum output 52W/1m  
 Luminous flux 4500lumens  
 Luminaire's efficiency lm79 87W  
 Correlated colour temperature pure white 4000K  
 Cri 80  
 Protection class IP65  
 Height 88.0mm  
 Width 124.0mm  
 Length 1262.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material polycarbonate  
 Work environment indoor / outdoor use  
 Operation temperature -25 ~ 40°C  
 Certificates CE,RoHS  
 Warranty 1 years



## Emergency light INTELIGHT WARS 2X120 M 3H LT manual testing + heater gray 230V 66W 4825lm IP65 840

**Product code 18093**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 66W  
 Maximum output 66W/1m  
 Luminous flux 4825lumens  
 Luminaire's efficiency lm79 73W  
 Correlated colour temperature pure white 4000K  
 Cri 80  
 Protection class IP65  
 Height 88.0mm  
 Width 124.0mm  
 Length 661.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material polycarbonate  
 Work environment indoor / outdoor use  
 Operation temperature -25°C - 40°C  
 Certificates CE, RoHS  
 Warranty 1 years



## Emergency light INTELIGHT WARS LED PANEL 2x60 SA 3H MT manual testing gray 230V 27W 2700lm IP65 840

**Product code 16283**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 27W  
 Maximum output 27W/1m  
 Luminous flux 2700lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature pure white 4000K  
 Cri 80  
 Protection class IP65  
 Height 88.0mm  
 Width 124.0mm  
 Length 661.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material polycarbonate  
 Work environment indoor use  
 Operation temperature -25°C - 40°C  
 Certificates CE, RoHS  
 Warranty 1 years



## Emergency light INTELIGHT WARS LED PANEL 2x60 SA-6W 2H AT automatic testing gray 230V 27W 2700lm IP65 840

**Product code 16284**

Brand [INTELIGHT](#)  
 Supply voltage 230V  
 Output 27W  
 Maximum output 27W/1m  
 Luminous flux 2700lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature pure white 4000K  
 Cri 80  
 Protection class IP65  
 Height 88.0mm  
 Width 124.0mm  
 Length 661.0mm  
 In package 1pc  
 Casing colour gray  
 Casing material polycarbonate  
 Work environment indoor use  
 Operation temperature -25°C - 40°C  
 Certificates CE, RoHS  
 Warranty 1 years



## Emergency light Prolumen 3W 3h AT white 230V 3.5W 240lm IP20 750

**Product code 19525**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 3.5W  
 Maximum output 3.5W/1m  
 Luminous flux 240lumens  
 Luminaire's efficiency lm79 69W  
 Correlated colour temperature pure white 5000K  
 Source of light [SAMSUNG LED](#)  
 Cri 70  
 Protection class IP20  
 Height 32.0mm  
 Width 80.0mm  
 Length 80.0mm  
 Installation opening diameter 50mm  
 In package 1pc  
 In box 30pcs  
 Casing colour white  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature 0° - +45°C  
 Battery LiFePO4 1500mAh  
 Warranty 5 years



The set includes two different lenses.

## Emergency light Prolumen Exit M22 AT, 3h black 230V 9W 800lm IP66 850

**Product code 17859**

Brand [Prolumen](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 800lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP66

Height 202.0mm

Width 120.0mm

Length 202.0mm

In package 1pc

In box 4pcs

Casing colour black

Casing material aluminium

Polishing matt

Work environment indoor / outdoor use

Operation temperature -35° - +45°C

Battery LiFePO4 6,4V 6000mAh

Warranty 5 years



## Emergency light Prolumen Exit M22 DALI, 3h black 230V 9W 800lm IP66 850

**Product code 18155**

Brand [Prolumen](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 800lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP66

Height 202.0mm

Width 120.0mm

Length 202.0mm

In package 1pc

In box 4pcs

Casing colour black

Casing material aluminium

Polishing matt

Work environment indoor / outdoor use

Operation temperature -35° - +45°C

Battery LiFePO4 6,4V 6000mAh

Warranty 5 years



## Emergency light Prolumen EXIT M3 AT, DALI white 230V 8W 650lm 120° IP65 850

**Product code 19375**

Brand [Prolumen](#)

Supply voltage 230V

Output 8W

Maximum output 8W/1m

Luminous flux 650lumens

Luminaire's efficiency lm79 81W

Correlated colour temperature pure  
white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 77.0mm

Width 135.0mm

Length 335.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor  
use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



## Emergency light Prolumen EXIT M3 3h AT white 230V 6W 200lm 120° IP65 850

**Product code 17220**

Brand [Prolumen](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 33W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 62.0mm

Width 105.0mm

Length 340.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



## Emergency light Prolumen EXIT M3 3h MT white 230V 6W 200lm 120° IP65 850

**Product code 17221**

Brand [Prolumen](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 33W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 62.0mm

Width 105.0mm

Length 340.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



## Emergency light Prolumen EXIT M3B 3h white 230V 14W 1200lm IP65 850

**Product code 18142**

Brand [Prolumen](#)

Supply voltage 230V

Output 14W

Maximum output 14W/1m

Luminous flux 1200lumens

Luminaire's efficiency lm79 86W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP65

Height 77.0mm

Width 135.0mm

Length 335.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



## Emergency light Prolumen EXIT X2B AT 3h white 230V 3W 180lm 120° IP65 750

**Product code 17836**

Brand [Prolumen](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 180lumens

Luminaire's efficiency lm79 60W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 70

Protection class IP65

Height 59.0mm

Width 213.0mm

Length 362.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Warranty 5 years



## Emergency light Prolumen EXIT X3B AT 3h black 230V 2.5W 200lm 120° IP65 750

**Product code 22775**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 2.5W  
 Maximum output 2.5W/1m  
 Luminous flux 200lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature pure white 5000K  
 Lens angle 120  
 Cri 70  
 Protection class IP65  
 Height 92.0mm  
 Width 182.0mm  
 Length 382.0mm  
 In package 1pc  
 In box 10pcs  
 Casing colour black  
 Casing material plastic  
 Work environment indoor / outdoor use  
 Operation temperature 0-45°C  
 Warranty 5 years



## Emergency light Prolumen EXIT X3B AT 3h white 230V 2.5W 200lm 120° IP65 750

**Product code 17835**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 2.5W  
 Maximum output 2.5W/1m  
 Luminous flux 200lumens  
 Luminaire's efficiency lm79 80W  
 Correlated colour temperature pure white 5000K  
 Lens angle 120  
 Cri 70  
 Protection class IP65  
 Height 92.0mm  
 Width 182.0mm  
 Length 382.0mm  
 In package 1pc  
 In box 10pcs  
 Casing colour white  
 Casing material plastic  
 Work environment indoor / outdoor use  
 Operation temperature 0-45°C  
 Warranty 5 years



## Emergency light Prolumen EXIT X5 3h white 230V 6W IP65 850

**Product code 22200**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 6W  
 Maximum output 6W/1m  
 Correlated colour temperature pure white 5000K  
 Cri 80  
 Protection class IP65  
 Height 194.0mm  
 Width 108.0mm  
 Length 340.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material plastic  
 Work environment outdoor use  
 Operation temperature 0-45°C  
 Battery LiFePO4 6,4V 1500mAh  
 Certificates CE  
 Warranty 5 years



Thanks to the special lens, it illuminates up to 30 meters away.

## Emergency light Prolumen EXIT X5 3h white 230V 6W IP65 DALI 850

**Product code 17563 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Dimmable DALI  
 Output 6W  
 Maximum output 6W/1m  
 Correlated colour temperature pure white 5000K  
 Cri 80  
 Protection class IP65  
 Height 194.0mm  
 Width 108.0mm  
 Length 340.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material plastic  
 Work environment outdoor use  
 Operation temperature 0-45°C  
 Battery LiFePO4 6,4V 1500mAh  
 Certificates CE  
 Warranty 5 years



Thanks to the special lens, it illuminates up to 30 meters away.

## Emergency light Prolumen EXIT X6 3h AT white 230V 3W IP20 750

**Product code 17210**

Brand [Prolumen](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Height 230.0mm

Width 43.0mm

Length 328.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 3,2V 1500mAh

Certificates CE

Warranty 5 years



Exit light with adjustable positioning  
as desired. Thanks to a special lens, it  
illuminates up to 30 meters away.

## Emergency light Prolumen EXIT X6 3h MT white 230V 3W IP20 850

**Product code 17219**

Brand [Prolumen](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Correlated colour temperature pure  
white 5000K

Cri 80

Protection class IP20

Height 230.0mm

Width 43.0mm

Length 328.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 3,2V 1500mAh

Certificates CE

Warranty 5 years



Exit light with adjustable positioning  
as desired. Thanks to a special lens, it  
illuminates up to 30 meters away.

## Emergency light Prolumen EXIT X6 3h white 230V 3W IP20 DALI 850

**Product code 17562 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3W

Maximum output 3W/1m

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP20

Height 230.0mm

Width 43.0mm

Length 328.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 3,2V 1500mAh

Certificates CE

Warranty 5 years



Exit light with adjustable positioning as desired. Thanks to a special lens, it illuminates up to 30 meters away.

## Emergency light Prolumen Exit X6 AT, 3h white 230V 3W 220lm IP20 850

**Product code 17699**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 3W  
 Maximum output 3W/1m  
 Luminous flux 220lumens  
 Luminaire's efficiency lm79 73W  
 Correlated colour temperature pure white 5000K  
 Cri 80  
 Protection class IP20  
 Height 230.0mm  
 Width 43.0mm  
 Length 328.0mm  
 In package 1pc  
 In box 10pcs  
 Casing colour white  
 Casing material polycarbonate  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -0° - +45°C  
 Battery LiFePO4 3,2V 1500mAh  
 Warranty 5 years



## Emergency light Prolumen EXIT X7 white 230V 3W IP40 DALI 850

**Product code 18135 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Dimmable DALI  
 Output 3W  
 Maximum output 3W/1m  
 Correlated colour temperature pure white 5000K  
 Cri 80  
 Protection class IP40  
 Height 190.0mm  
 Width 45.0mm  
 Length 330.0mm  
 In package 1pc  
 Casing colour white  
 Casing material polycarbonate  
 Work environment indoor use  
 Operation temperature 0-45°C  
 Battery LiFePO4 3.2V 1500m  
 Warranty 5 years



## Emergency light Prolumen LEXIT M3 3h white 230V 6W 200lm 120° IP65 DALI 850

**Product code 17564 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 6W

Maximum output 6W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 33W

Correlated colour temperature pure  
white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 62.0mm

Width 105.0mm

Length 340.0mm

In package 1pc

In box 10pcs

Casing colour white


Casing material plastic

Work environment indoor / outdoor  
use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years

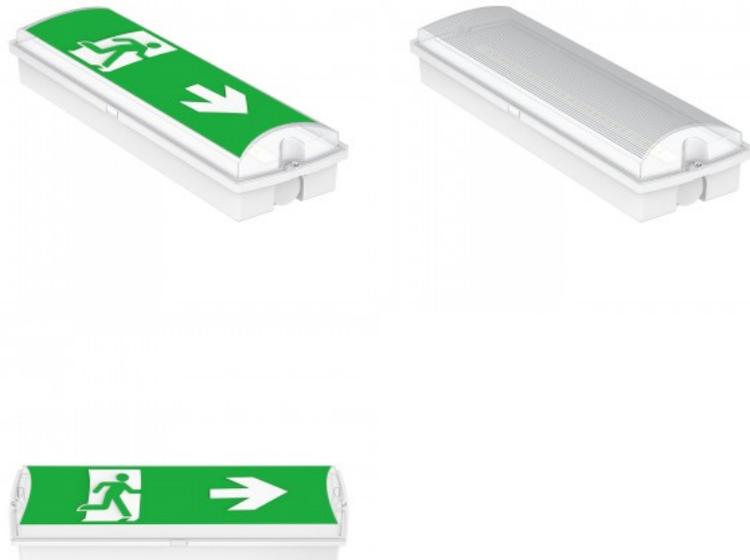

## Emergency light Prolumen M2 AT 3h white round 6W 450lm IP65 750

**Product code 17834**

Brand [Prolumen](#)

Output 6W

Maximum output 6W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP65

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Operation temperature 0-45°C

Certificates CE

Warranty 5 years



## Emergency light Prolumen M2 CBS white 230V 3.5W 240lm IP20 750

**Product code 17646**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.30  
 Output 3.5W  
 Maximum output 3.5W/1m  
 Luminous flux 240lumens  
 Luminaire's efficiency lm79 69W  
 Correlated colour temperature pure white 5000K  
 Source of light [SAMSUNG LED](#)  
 Cri 70  
 Protection class IP20  
 Height 55.3mm  
 Diameter 140.0mm  
 In package 1pc  
 In box 30pcs  
 Casing colour white  
 Casing material plastic  
 Work environment indoor / outdoor use  
 Operation temperature 0° - +45°C  
 Battery LiFePO4 1500mAh  
 Warranty 5 years



The set includes two different lenses.  
 Additionally, an IP65 enclosure is available as an accessory.

## Emergency light Prolumen M2 IP65 box white round IP65

**Product code 17246**

Brand [Prolumen](#)  
 Protection class IP65  
 Height 78.0mm  
 Diameter 175.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour white  
 Casing material polycarbonate  
 Polishing matt  
 Shape round  
 Work environment indoor / outdoor use  
 Operation temperature 0-45°C  
 Warranty 5 years



IP65 enclosure

## Emergency light Prolumen M2, 3h AT ST white round 230V 3W 240lm IP20 750

**Product code 17245**

Brand [Prolumen](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.

Additionally, an IP65 enclosure is  
available as an accessory.

## Emergency light Prolumen M2, 3h black round 230V 3.5W 240lm IP20 750

**Product code 22779**

Brand [Prolumen](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour black

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.  
Additionally, an IP65 enclosure is  
available as an accessory.

## Emergency light Prolumen M2, 3h black round 230V 3.5W 240lm IP20 DALI 750

**Product code 19324 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour black

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.  
Additionally, an IP65 enclosure is available as an accessory.

## Emergency light Prolumen M2, 3h white round 230V 3.5W 240lm IP20 DALI 750

**Product code 17566 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.  
Additionally, an IP65 enclosure is available as an accessory.

## Emergency light Prolumen M2, 3h white round 230V 6W 450lm IP20 DALI 750

**Product code 18137 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 6W

Maximum output 6W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.

## Emergency light Prolumen M2, AT, 3h white round 230V 6W 450lm IP20 750

**Product code 17744**

Brand [Prolumen](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Height 55.3mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.

Additionally, an IP65 enclosure is  
available as an accessory.

## Emergency light Prolumen M22 AT, 3h white 230V 9W 800lm IP66 850

**Product code 17860**

Brand [Prolumen](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 800lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP66

Height 202.0mm

Width 120.0mm

Length 202.0mm

In package 1pc

In box 4pcs

Casing colour white

Casing material aluminium

Polishing matt

Work environment indoor / outdoor use

Operation temperature -35° - +45°C

Battery LiFePO4 6,4V 6000mAh

Warranty 5 years



## Emergency light Prolumen M4 3h AT white 230V 3.5W 240lm IP20 750

**Product code 19524**

---

Brand [Prolumen](#)  
Supply voltage 230V  
Output 3.5W  
Maximum output 3.5W/1m  
Luminous flux 240lumens  
Luminaire's efficiency lm79 69W  
Correlated colour temperature pure white 5000K  
Source of light [SAMSUNG LED](#)  
Cri 70  
Protection class IP20  
Height 48.0mm  
Width 148.0mm  
Length 148.0mm  
In package 1pc  
In box 30pcs  
Casing colour white  
Casing material plastic  
Work environment indoor use  
Operation temperature 0° - +45°C  
Battery LiFePO4 1500mAh  
Warranty 5 years



The set includes two different lenses.

## **Emergency light Prolumen M4 3h white 230V 3.5W 240lm IP20 DALI 750**

**Product code 19325 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure  
white 5000K

Source of light [SAMSUNG LED](#)

Cri 70

Protection class IP20

Height 48.0mm

Width 148.0mm

Length 148.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0° - +45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.

## Emergency light Prolumen M5 AT, 3h white round 230V 3.5W 240lm IP20 750

**Product code 17697**

Brand [Prolumen](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Height 48.0mm

Diameter 140.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature -0° - +45°C

Battery LiFePO4 6,4V 1500mAh

Warranty 5 years



The set includes two different lenses.  
Additionally, an IP65 enclosure is  
available as an accessory.

## Emergency light Prolumen M7 AT, 3h white 230V 3.5W 220lm IP20 750

**Product code 17698**

Brand [Prolumen](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 220lumens

Luminaire's efficiency lm79 63W

Correlated colour temperature pure  
white 5000K

Cri 70

Protection class IP20

Height 98.0mm

Width 63.0mm

Length 212.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Work environment indoor use

Operation temperature -0° - +45°C

Battery LiFePO4 6,4V 1500mAh

Warranty 5 years



## Emergency light Prolumen M9, 3H white round 230V 6W 750lm IP65 DALI 750

**Product code 18138 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Dimmable DALI  
Output 6W  
Maximum output 6W/1m  
Luminous flux 750lumens  
Luminaire's efficiency lm79 125W  
Correlated colour temperature pure white 5000K  
Cri 70  
Protection class IP65  
Height 62.0mm  
Diameter 80.0mm  
Installation opening diameter 72mm  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminium  
Polishing matt  
Shape round  
Impact resistance IK10  
Work environment indoor use  
Operation temperature 0-45°C  
Battery LiFePO4 6.4V 4500m  
Warranty 5 years



A durable and reliable emergency light designed to ensure safety in various environments. Its waterproof and dustproof design allows installation even in challenging conditions, providing stable and clear illumination in emergency situations. The device is equipped with smart features that ensure its seamless operation and reduce maintenance needs.

**Emergency light Prolumen Pictogram Down****Product code 17223**

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED EXIT X6 emergency lights.



## Emergency light Prolumen Pictogram Down



Product code 17892

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED EXIT X3B emergency lights.



## Emergency light Prolumen Pictogram Left



Product code 17894

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED EXIT X3B emergency lights.



## Emergency light Prolumen Pictogram UP

Product code 17222

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED EXIT X6 emergency lights.



## Emergency light Prolumen Pictogram Up

Product code 17893

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED EXIT X3B emergency lights.

