

Emergency light INTELIGHT Directo S M 3H AT white 3W CRI80 IP20

Product code 18196

Brand [INTELIGHT](#)

Output 3W

Maximum output 3W/1m

Cri 80

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT Directo S M 3H CT Wells white 3W CRI80 IP20

Product code 17995

Brand [INTELIGHT](#)

Output 3W

Maximum output 3W/1m

Cri 80

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT Directo S NM 1H AT white 230V 1.5W CRI80 IP20

Product code 18534


Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 1.5W
 Maximum output 1.5W/1m
 Rated current 500mA
 Cri 80
 Protection class IP20
 Width 0.0mm
 In package 1pc
 Casing colour white
 Casing material polycarbonate
 Work environment indoor use
 Operation temperature 0 ~ +40°C
 Certificates CE
 Warranty 1 years



Emergency light INTELIGHT Kasjopeja SA 3h manual testing 230V 3.6W CRI70 IP20

Product code 16460

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 3.6W
 Maximum output 3.6W/1m
 Cri 70
 Protection class IP20
 Height 250.0mm
 Width 28.0mm
 Length 321.0mm
 Weight 808 g
 Package weight 981 g
 In package 1pc
 Casing material aluminium + plastic
 Work environment indoor use
 Operation temperature 10-40°C
 Certificates CE
 Warranty 1 years

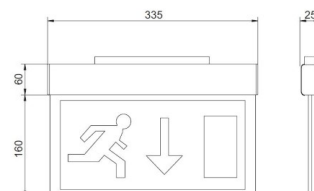

The battery lasts 3 hours. Charging time 24 h The luminaire is two-sided. It comes with stickers (right, left) It can be installed either on the ceiling or on the wall. Two modes of operation: lights up when electricity is interrupted or permanently. Adjustable switch. Manufactured by the EU.

Emergency light INTELIGHT LED Exit Orion A/TA 3h manual testing gray 230V 4W IP65

Product code 17592


Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 4W
 Maximum output 4W/1m
 Protection class IP65
 Height 73.0mm
 Width 118.0mm
 Length 352.0mm
 Weight 733 g
 Package weight 850 g
 In package 1pc
 Casing colour gray
 Casing material plastic
 Operation temperature 10-55°C
 Certificates CE
 Warranty 1 years



Emergency light INTELIGHT LED Exit Orion AT 3h automatic testing 230V 4W IP65

Product code 15318

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 4W
 Maximum output 4W/1m
 Protection class IP65
 Height 73.0mm
 Width 118.0mm
 Length 352.0mm
 Weight 1 kg
 In package 1pc
 Casing material plastic
 Operation temperature 10-55°C
 Certificates CE
 Warranty 1 years

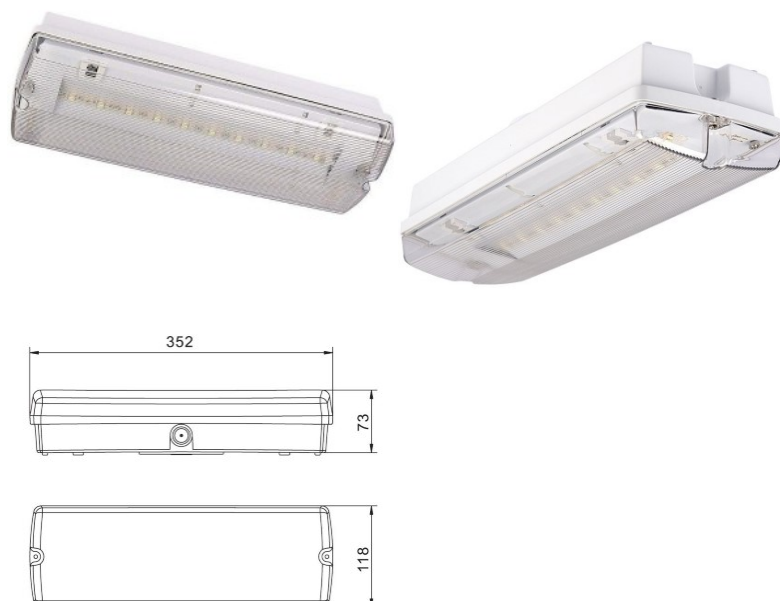

Emergency light INTELIGHT LED Exit Suprema A/TA 3h automatic testing white 230V 3W 424lm IP54 750

Product code 15108

Brand [INTELIGHT](#)
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 424lumens
Luminaire's efficiency lm79 141W
Correlated colour temperature pure
white 5000K
Cri 70
Protection class IP54
Height 52.0mm
Width 60.0mm
Length 335.0mm
In package 1pc
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 10-50°C
Certificates CE
Warranty 1 years



Emergency light INTELIGHT LED Exit Suprema P-TS SA 3h automatic testing 93957 black 230V 5W IP54 750

Product code 17096

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP54

Height 52.0mm

Width 60.0mm

Length 335.0mm

In package 1pc

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature 10-50°C

Certificates CE

Warranty 1 years



Thanks to the special lens, it illuminates up to 30m away. Optional accessories available: recessed kit, wall mount, suspension kit, and glass with directional signs. Testing can be done either manually with the button on the luminaire or via the WELLS (wireless central monitoring system).

Emergency light INTELIGHT LTR-25 8W 230V 8W

Product code 19605

Brand [INTELIGHT](#)

Supply voltage 230V

Output 8W

Maximum output 8W/1m

In package 1pc

Operation temperature kuni -25°C

Certificates CE, RoHS

Warranty 1 years

The heating element is designed for use with ORION and VELLA series emergency lights, which are permanently located at temperatures between + 10° C and -25° C.

Activates when the temperature is below + 3° C and deactivates when it reaches + 10° C. Approved for use with: NiCd, NiMH and LiFePO4 batteries Standby: Uses less than 1W Operating Mode: Uses a maximum of 15W The warranty applies if the heating element is used inside an ORION or VELLA series luminaire.



Emergency light INTELIGHT ORION II 150 NM 3H AT LT 230V 12W 183lm CRI70 IP65

Product code 18229

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 12W
 Maximum output 12W/1m
 Luminous flux 183lumens
 Luminaire's efficiency lm79 15W
 Cri 70
 Protection class IP65
 Lifespan 50000h
 Height 73.0mm
 Width 118.0mm
 Length 352.0mm
 Weight 770 g
 In package 1pc
 Casing material plastic
 Operation temperature -20 - +40°C
 Certificates CE
 Warranty 1 years



Emergency light INTELIGHT ORION II 250 M 3H AT 230V 3W 290lm CRI70 IP65

Product code 22201

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 3W
 Maximum output 3W/1m
 Luminous flux 290lumens
 Luminaire's efficiency lm79 97W
 Cri 70
 Protection class IP65
 Lifespan 50000h
 Height 64.0mm
 Width 110.0mm
 Length 352.0mm
 Weight 770 g
 In package 1pc
 Casing material plastic
 Operation temperature -20 - +40°C
 Certificates CE
 Warranty 1 years



Emergency light INTELIGHT ORION II 250 NM 3H AT 230V 3W 290lm CRI70 IP65

Product code 21020

Brand [INTELIGHT](#)
Supply voltage 230V
Output 3W
Maximum output 3W/1m
Luminous flux 290lumens
Luminaire's efficiency lm79 97W
Cri 70
Protection class IP65
Lifespan 50000h
Height 64.0mm
Width 110.0mm
Length 352.0mm
Weight 770 g
In package 1pc
Casing material plastic
Operation temperature -20 - +40°C
Certificates CE
Warranty 1 years



Emergency light INTELIGHT ORION LED 100 II CB central battery 230V 3.5W 126lm CRI70 IP65

Product code 15621

Brand [INTELIGHT](#)
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 126lumens
Luminaire's efficiency lm79 36W
Cri 70
Protection class IP65
Height 73.0mm
Width 118.0mm
Length 352.0mm
Weight 770 g
In package 1pc
Casing material plastic
Operation temperature 10-55°C
Certificates CE
Warranty 1 years



Emergency light INTELIGHT ORION LED 100 SA 3H CT LT central battery white 230V 15W 122lm 30° IP65 750

Product code 17402

Brand [INTELIGHT](#)

Supply voltage 230V

Output 15W

Maximum output 15W/1m

Luminous flux 122lumens

Luminaire's efficiency lm79 8W

Correlated colour temperature pure white 5000K

Lens angle 30

Cri 70

Protection class IP65

Height 64.0mm

Width 110.0mm

Length 352.0mm

In package 1pc


Casing colour white

Casing material plastic

Operation temperature 10-40°C

Certificates CE

Warranty 1 years

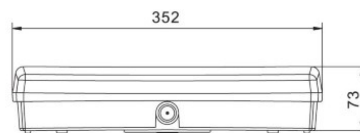

LED safety light for central battery systems. Battery warranty 1 year.

Emergency light INTELIGHT ORION LED 150 CB central battery 230V 3.5W 182lm CRI70 IP65

Product code 15622

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 182lumens

Luminaire's efficiency lm79 52W

Cri 70

Protection class IP65

Height 64.0mm

Width 110.0mm

Length 352.0mm

Weight 770 g


In package 1pc

Casing material plastic

Operation temperature 10-55°C

Certificates CE

Warranty 1 years

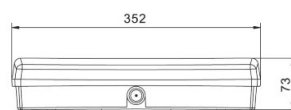

Emergency light INTELIGHT ORION LED 150 SA 3H CT LT central battery white 230V 15W 183lm 30° IP65 750

Product code 17401

Brand [INTELIGHT](#)

Supply voltage 230V

Output 15W

Maximum output 15W/1m

Luminous flux 183lumens

Luminaire's efficiency lm79 12W

Correlated colour temperature pure white 5000K

Lens angle 30

Cri 70

Protection class IP65

Height 64.0mm

Width 110.0mm

Length 352.0mm

In package 1pc


Casing colour white

Casing material plastic

Operation temperature 10-40°C

Certificates CE

Warranty 1 years



LED safety light for central battery systems. Battery warranty 1 year.

Emergency light INTELIGHT Pictogram 93336

Product code 18015

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



Emergency light INTELIGHT Pictogram 93335

Product code 18014

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



Emergency light INTELIGHT Pictogram 93338

Product code 16617

Brand [INTELIGHT](#)

Height 123.0mm

Width 246.0mm



Emergency light INTELIGHT Pictogram E1

Product code 20388

Brand [INTELIGHT](#)



Emergency light INTELIGHT Pictogram E2

Product code 15303

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



Emergency light INTELIGHT Pictogram E3

Product code 15304

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



Emergency light INTELIGHT Pictogram E4

Product code 15237

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



Emergency light INTELIGHT Pictogram E7

Product code 15236

Brand [INTELIGHT](#)

Height 150.0mm

Width 300.0mm

Warranty 1 years



Emergency light INTELIGHT Pictogram E8

Product code 20392

Brand [INTELIGHT](#)

Warranty 1 years



Emergency light INTELIGHT Pictogram E9

Product code 20390

Brand [INTELIGHT](#)

Warranty 1 years



Emergency light INTELIGHT Pictogramm VD5

Product code 18002

Brand [INTELIGHT](#)

Height 125.0mm

Width 125.0mm

Warranty 1 years



Emergency light INTELIGHT Starlet QUAD LED SC 250 M 1H AT white square 230V 5W 240lm IP20 750

Product code 18270

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 48W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT Starlet QUAD LED SCH 250 M/NM 3H AT automatic testing 92966 white square 230V 6W 240lm IP20 750

Product code 16644

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 6W
 Maximum output 6W/1m
 Luminous flux 240lumens
 Luminaire's efficiency lm79 40W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Height 35.5mm
 Width 133.0mm
 Length 133.0mm
 Casing colour white
 Casing material polycarbonate
 Shape square
 Work environment indoor use
 Operation temperature 0 ~ +40°C
 Warranty 1 years



Emergency light INTELIGHT Starlet QUAD LED SO 150 SA 3H AT automatic testing 92816 white square 3.5W 150lm IP20 750

Product code 17253

Brand [INTELIGHT](#)
 Output 3.5W
 Maximum output 3.5W/1m
 Luminous flux 150lumens
 Luminaire's efficiency lm79 43W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Width 0.0mm
 In package 1pc
 Casing colour white
 Casing material polycarbonate
 Shape square
 Work environment indoor use
 Operation temperature 0 ~ +40°C
 Certificates CE
 Warranty 1 years



Emergency light INTELIGHT Starlet QUAD LED SO 150 SA 3H CT Wells LT 92818 white square 4W 170lm IP20 750

Product code 17403

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 170lumens

Luminaire's efficiency lm79 43W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT Starlet QUAD LED SOH 250 M 1H AT white square 230V 5W 260lm IP20 750

Product code 18269

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 260lumens

Luminaire's efficiency lm79 52W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT Starlet QUAD LED SOH 250 M/NM 3H AT automatic testing 92866 white square 230V 6W 260lm IP20 750

Product code 16643

Brand [INTELIGHT](#)
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 260lumens
Luminaire's efficiency lm79 43W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 35.5mm
Width 133.0mm
Length 133.0mm
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Warranty 1 years



Emergency light INTELIGHT STARLET QUAD SC 250 M 1H CT white square 6W 254lm IP20 750

Product code 18289

Brand [INTELIGHT](#)
Output 6W
Maximum output 6W/1m
Luminous flux 254lumens
Luminaire's efficiency lm79 42W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Width 0.0mm
In package 1pc
Casing colour white
Casing material polycarbonate
Shape square
Work environment indoor use
Operation temperature 0 ~ +40°C
Certificates CE
Warranty 1 years



Emergency light INTELIGHT STARLET QUAD SCH 350 NM, SCH 1H CT- central test system white square 230V 2W 356lm IP20 750

Product code 18285

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 2W
 Maximum output 2W/1m
 Luminous flux 356lumens
 Luminaire's efficiency lm79 178W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Height 35.5mm
 Width 133.0mm
 Length 133.0mm
 Casing colour white
 Casing material polycarbonate
 Shape square
 Work environment indoor use
 Operation temperature 0 ~ +40°C
 Warranty 1 years



Emergency light INTELIGHT STARLET QUAD SO 250 M 1H CT white square 6W 263lm IP20 750

Product code 18288

Brand [INTELIGHT](#)
 Output 6W
 Maximum output 6W/1m
 Luminous flux 263lumens
 Luminaire's efficiency lm79 44W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Width 0.0mm
 In package 1pc
 Casing colour white
 Casing material polycarbonate
 Shape square
 Work environment indoor use
 Operation temperature 0 ~ +40°C
 Certificates CE
 Warranty 1 years



Emergency light INTELIGHT Starlet Quad SO 250, M/NM, AT, 1h automatic testing 92988 black square 230V 1.5W 260lm IP20 750

Product code 16616

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 1.5W
 Maximum output 1.5W/1m
 Luminous flux 260lumens
 Luminaire's efficiency lm79 173W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Height 35.5mm
 Width 133.0mm
 Length 133.0mm
 Casing colour black
 Casing material polycarbonate
 Shape square
 Work environment indoor use
 Operation temperature 0 ~ +40°C
 Warranty 1 years



Emergency light INTELIGHT Starlet Quad SO 250, M/NM, AT, 3h automatic testing 92986 black square 230V 1.5W 260lm IP20 750

Product code 17099

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 1.5W
 Maximum output 1.5W/1m
 Luminous flux 260lumens
 Luminaire's efficiency lm79 173W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Height 35.5mm
 Width 133.0mm
 Length 133.0mm
 Casing colour black
 Casing material polycarbonate
 Shape square
 Work environment indoor use
 Operation temperature 0 ~ +40°C
 Warranty 1 years



Emergency light INTELIGHT STARLET QUAD SO 350 NM 2H AT white square 230V 3W 391lm IP20 750

Product code 22132

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 391lumens

Luminaire's efficiency lm79 130W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT Starlet Quad SO, NM, MT, 1h manual testing black square 230V 1.5W 260lm IP20 750

Product code 16406

Brand [INTELIGHT](#)

Supply voltage 230V

Output 1.5W

Maximum output 1.5W/1m

Luminous flux 260lumens

Luminaire's efficiency lm79 173W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour black

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT STARLET QUAD SOH 350 NM 2H CT white square 230V 3W 390lm IP20 750

Product code 18291

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 390lumens

Luminaire's efficiency lm79 130W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SC 150 M 3H CT Wells black round 4W 150lm IP20 750

Product code 18011

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SC 150 M 3H CT Wells white round 4W 150lm IP20 750

Product code 17994

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SC 150 NM 1H AT white round 1W 148lm IP20 750

Product code 22692

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 148lumens

Luminaire's efficiency lm79 148W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SC 150 NM 1H MT white round 1W 148lm IP20 750

Product code 22693

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 148lumens

Luminaire's efficiency lm79 148W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SC 350 NM 2H AT black round 2,5W 335lm IP20 750

Product code 22616

Brand [INTELIGHT](#)

Output 2,5W

Maximum output 2.5W/1m

Luminous flux 335lumens

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT Starlet Round SC, SA, AT, 3h automatic testing 91672 white round 230V 6W 240lm IP20 750

Product code 16999

Brand [INTELIGHT](#)
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 240lumens
Luminaire's efficiency lm79 40W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 32.0mm
Diameter 145.0mm
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature +10 ~ +55°C
Warranty 1 years



Emergency light INTELIGHT Starlet Round SC, SA, AT, 3h manual testing 91674 white round 230V 6W 240lm IP20 750

Product code 16998

Brand [INTELIGHT](#)
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 240lumens
Luminaire's efficiency lm79 40W
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP20
Height 32.0mm
Diameter 145.0mm
Casing colour white
Casing material polycarbonate
Polishing matt
Shape round
Work environment indoor use
Operation temperature +10 ~ +55°C
Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 150 M 3H AT black round 4W 171lm IP20 750

Product code 19087

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 43W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 150 M 3H AT white round 4W 171lm IP20 750

Product code 22971

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 43W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 150 M 3H CT Wells black round 4W 150lm IP20 750

Product code 18012

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 150 M 3H CT Wells white round 4W 150lm IP20 750

Product code 17993

Brand [INTELIGHT](#)

Output 4W

Maximum output 4W/1m

Luminous flux 150lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 150 NM 1H AT white round 1W 171lm IP20 750

Product code 18562

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 171W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 150 NM 1H MT white round 1W 171lm IP20 750

Product code 22694

Brand [INTELIGHT](#)

Output 1W

Maximum output 1W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 171W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 150 NM 3H MT black round 1.5W 171lm IP20 750

Product code 19707

Brand [INTELIGHT](#)

Output 1.5W

Maximum output 1.5W/1m

Luminous flux 171lumens

Luminaire's efficiency lm79 114W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 250 NM 3H AT white round 1,5W 299lm IP20 750

Product code 20440

Brand [INTELIGHT](#)

Output 1,5W

Maximum output 1.5W/1m

Luminous flux 299lumens

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SO 350 NM 2H AT white round 1,5W 299lm IP20 750

Product code 22202

Brand [INTELIGHT](#)

Output 1,5W

Maximum output 1.5W/1m

Luminous flux 299lumens

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT Starlet Round SO, SA, AT, 3h automatic testing 91756 white round 230V 6W 280lm IP20 750

Product code 16996

Brand [INTELIGHT](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 280lumens

Luminaire's efficiency lm79 47W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 32.0mm

Diameter 145.0mm

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature +10 ~ +55°C

Warranty 1 years



Emergency light INTELIGHT Starlet Round SO, SA, AT, 3h manual testing 91758 white round 230V 6W 280lm IP20 750

Product code 16997

Brand [INTELIGHT](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 280lumens

Luminaire's efficiency lm79 47W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 32.0mm

Diameter 145.0mm

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature +10 ~ +55°C

Warranty 1 years



Emergency light INTELIGHT Starlet Round SOH, A, AT 2h automatic testing white round 230V 3W 380lm IP20 750

Product code 17516

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 380lumens

Luminaire's efficiency lm79 127W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 32.0mm

Diameter 145.0mm

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature +10 ~ +55°C

Warranty 1 years



Emergency light INTELIGHT STARLET ROUND SP 350 NM 2H AT black round 2,5W 357lm IP20 750

Product code 22619

Brand [INTELIGHT](#)

Output 2,5W

Maximum output 2.5W/1m

Luminous flux 357lumens

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour black

Casing material polycarbonate

Shape round

Work environment indoor use

Operation temperature 0 ~ +40°C

Certificates CE

Warranty 1 years



Emergency light INTELIGHT Starlet SC, M/NM, AT, 3h, automatic testing white round 230V 2W 180lm IP20 750

Product code 16275

Brand [INTELIGHT](#)

Supply voltage 230V

Output 2W

Maximum output 2W/1m

Luminous flux 180lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Weight 324 g

Package weight 378 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



Emergency light INTELIGHT Starlet SO 200, M/NM, AT, 3h, automatic testing white round 230V 2W 200lm IP20 750

Product code 16333

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 2W
 Maximum output 2W/1m
 Luminous flux 200lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Casing colour white
 Casing material aluminium
 Shape round
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 1 years



Emergency light INTELIGHT Starlet SO, SA, AT, 3h, automatic testing white round 230V 3W 300lm IP20 750

Product code 16664

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 3W
 Maximum output 3W/1m
 Luminous flux 300lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Height 59.0mm
 Diameter 70.0mm
 Casing colour white
 Casing material aluminium
 Shape round
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 1 years



Emergency light INTELIGHT Starlet SO, SA, MT, 3h, manual testing white round 230V 3W 300lm IP20 750

Product code 16456

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 300lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 59.0mm

Diameter 70.0mm

Weight 750 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



Emergency light INTELIGHT STARLET SPOT QUAD SC 350 M 3H MT white square 230V 9W 305lm IP20 750

Product code 22139

Brand [INTELIGHT](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 305lumens

Luminaire's efficiency lm79 34W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT STARLET SPOT QUAD SO 350 M 3H AT white square 230V 9W 346lm IP20 750

Product code 22138

Brand [INTELIGHT](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 346lumens

Luminaire's efficiency lm79 38W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT STARLET SPOT QUAD SO 350 NM 3H MT white square 230V 3W 346lm IP20 750

Product code 22324

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 346lumens

Luminaire's efficiency lm79 115W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 35.5mm

Width 133.0mm

Length 133.0mm

Casing colour white

Casing material polycarbonate

Shape square

Work environment indoor use

Operation temperature 0 ~ +40°C

Warranty 1 years



Emergency light INTELIGHT Starlet Spot Round SO 350 NM 3H MT white 3W IP20

Product code 19647

Brand [INTELIGHT](#)

Output 3W

Maximum output 3W/1m

Protection class IP20

Width 0.0mm

In package 1pc

Casing colour white

Casing material polycarbonate

Work environment indoor use

Certificates CE

Warranty 1 years



Emergency light INTELIGHT Starlet White II LED SC 200 M/NM 3H MT, manual testing white round 230V 2W 200lm IP20 750

Product code 17833

Brand [INTELIGHT](#)

Supply voltage 230V

Output 2W

Maximum output 2W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Weight 322 g

Package weight 367 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



Emergency light INTELIGHT Starlet White II LED SO 200 M/NM 3H MT, manual testing white round 230V 2W 200lm IP20 750

Product code 16437

Brand [INTELIGHT](#)

Supply voltage 230V

Output 2W

Maximum output 2W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Weight 322 g

Package weight 367 g

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



Emergency light INTELIGHT Starlet White II LED SOH 300 M/NM 3H AT, automatic testing 92166 white round 230V 3W 310lm IP20 750

Product code 16560

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 310lumens

Luminaire's efficiency lm79 103W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Casing colour white

Casing material aluminium

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 1 years



Emergency light INTELIGHT Suprema D, SA, AT, NT, 3h, automatic testing white 230V 5W 350lm IP54 750

Product code 15127

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 350lumens

Luminaire's efficiency lm79 70W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP54

Height 217.0mm

Width 60.0mm

Length 335.0mm

In box 1pc

Casing colour white

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature 10°C ÷
50°C

Certificates CE

Warranty 1 years



- Easy installation: NT-surface •
- Various optics • batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries • Compatible with Wells Wireless Monitoring System •
- Visibility: 30 m

Emergency light INTELIGHT Suprema D, SA, AT, PT, 3h automatic testing white 230V 5W 350lm IP54 750

Product code 15128

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 350lumens

Luminaire's efficiency lm79 70W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP54

Height 217.0mm

Width 80.0mm

Length 335.0mm

In box 1pc

Casing colour white

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature 10°C ÷ 50°C

Certificates CE

Warranty 1 years



Easy installation: PT-recessed Various optics Batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries Visibility: 30 m

Emergency light INTELIGHT SUPREMA D-std M 3H AT IP54 NT-S [BLK] black 230V 5W IP54 750

Product code 16942

Brand [INTELIGHT](#)
Supply voltage 230V
Output 5W
Maximum output 5W/1m
Correlated colour temperature pure white 5000K
Cri 70
Protection class IP54
Height 52.0mm
Width 60.0mm
Length 335.0mm
In package 1pc
Casing colour black
Casing material plastic
Work environment indoor use
Operation temperature 10-50°C
Certificates CE
Warranty 1 years



Thanks to the special lens, it illuminates up to 30 meters away.
Additional accessories available:
Recessed kit, wall mounting kit, suspension kit, and glass with directional signs. Testing can be done either manually with the button on the luminaire or using the WELLS (wireless central monitoring system).

Emergency light INTELIGHT SUPREMA D-std M 3H CT IP54 NT WELLS white 230V 6W IP54 750

Product code 22075

Brand [INTELIGHT](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP54

Height 52.0mm

Width 60.0mm

Length 335.0mm

In package 1pc

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 10-50°C

Certificates CE

Warranty 1 years



- Easy installation: NT-surface •
- Various optics • batteries with a longer lifetime of lithium phosphate (LiFePO®) batteries • Compatible with Wells Wireless Monitoring System •
- Visibility: 30 m

Emergency light INTELIGHT SUPREMA D-std M 3H CT IP54 PT WELLS white 230V 6W 350lm IP54 750

Product code 22076

Brand [INTELIGHT](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 350lumens

Luminaire's efficiency lm79 58W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP54

Lifespan 50000h

Height 217.0mm

Width 80.0mm

Length 335.0mm

In box 1pc

Casing colour white

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature 10°C ÷
40°C°C

Certificates CE

Warranty 1 years



Easy installation: PT-recessed Various
optics Batteries with a longer lifetime
of lithium phosphate (LiFePO®)
batteries Visibility: 30 m

Emergency light INTELIGHT SUPREMA SO 150 M 3H AT IP54 PT white 230V 7W 167lm IP54 750

Product code 20439

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 7W
 Maximum output 7W/1m
 Luminous flux 167lumens
 Luminaire's efficiency lm79 24W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP54
 Height 52.0mm
 Width 60.0mm
 Length 335.0mm
 In package 1pc
 Casing colour white
 Casing material plastic
 Work environment indoor use
 Operation temperature 10-50°C
 Certificates CE
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 125 CB central battery 93665 230V 2.5W 157lm IP65 750

Product code 15623

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 2.5W
 Maximum output 2.5W/1m
 Luminous flux 157lumens
 Luminaire's efficiency lm79 63W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 In package 1pc
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 125 NM 1H MT manual testing 93660 black 230V 1.5W 157lm IP65

Product code 16559

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 1.5W
 Maximum output 1.5W/1m
 Luminous flux 157lumens
 Luminaire's efficiency lm79 105W
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Casing colour black
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 125 NM 1H MT manual testing 93676 230V 3.5W 125lm IP65

Product code 15459

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 3.5W
 Maximum output 3.5W/1m
 Luminous flux 125lumens
 Luminaire's efficiency lm79 36W
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 484 g
 Package weight 577 g
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 125 SA 1H MT M/NM manual testing 93675 230V 3.5W 157lm IP65 750

Product code 15749

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 3.5W
 Maximum output 3.5W/1m
 Luminous flux 157lumens
 Luminaire's efficiency lm79 45W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 491 g
 Package weight 609 g
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 125 SA 3H MT M/NM manual testing 93667 230V 4W 157lm IP65 750

Product code 17830

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 4W
 Maximum output 4W/1m
 Luminous flux 157lumens
 Luminaire's efficiency lm79 39W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 491 g
 Package weight 609 g
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 150 M/NM 3H AT automatic testing 93622 black 230V 3.5W 190lm IP65

Product code 17098

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 190lumens

Luminaire's efficiency lm79 54W

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 454 g

Package weight 549 g

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 150 NM 1H AT automatic testing 93625 black 230V 3.5W 190lm IP65

Product code 16615

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 190lumens

Luminaire's efficiency lm79 54W

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 454 g

Package weight 549 g

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 250 A 1H MT manual testing 93662 230V 314lm IP65 750

Product code 16526

Brand [INTELIGHT](#)
 Supply voltage 230V
 Luminous flux 314lumens
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 250 CB central battery 93651 230V 5W 314lm IP65 750

Product code 15624

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 5W
 Maximum output 5W/1m
 Luminous flux 314lumens
 Luminaire's efficiency lm79 63W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 In package 1pc
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 250 M/NM 3H MT manual testing 93653 230V 7W 314lm IP65 750

Product code 15246

Brand [INTELIGHT](#)

Supply voltage 230V

Output 7W

Maximum output 7W/1m

Luminous flux 314lumens

Luminaire's efficiency lm79 45W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED ECO SO 650 SA 2H AT automatic testing 93527 230V 12W 732lm IP65 750

Product code 16527

Brand [INTELIGHT](#)

Supply voltage 230V

Output 12W

Maximum output 12W/1m

Luminous flux 732lumens

Luminaire's efficiency lm79 61W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED SC 150 SA 3H AT automatic testing 93702 230V 5W 331lm IP65 750

Product code 16014

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 331lumens

Luminaire's efficiency lm79 66W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED SC 250 CB central battery 93700 230V 5W 331lm IP65 750

Product code 15625

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 331lumens

Luminaire's efficiency lm79 66W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED SCA 250 CB central battery 93699 230V 5W 333lm IP65 750

Product code 15626

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 333lumens

Luminaire's efficiency lm79 67W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED SO 150 SA 3H AT automatic testing 93508 230V 5W 331lm IP65 750

Product code 15747

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 331lumens

Luminaire's efficiency lm79 66W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 546 g

Package weight 600 g

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA LED SO 150 SA 3H CT Wells 93512 230V 7W 190lm IP65 750

Product code 17404

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 7W
 Maximum output 7W/1m
 Luminous flux 190lumens
 Luminaire's efficiency lm79 27W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 546 g
 Package weight 600 g
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED SO 150 SA 3H CT Wells 93512 black 230V 7W 190lm IP65 750

Product code 18013

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 7W
 Maximum output 7W/1m
 Luminous flux 190lumens
 Luminaire's efficiency lm79 27W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 546 g
 Package weight 600 g
 Casing colour black
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA LED SOH 250 CB central battery 93549 230V 5W 346lm IP65 750

Product code 15627

Brand [INTELIGHT](#)

Supply voltage 230V

Output 5W

Maximum output 5W/1m

Luminous flux 346lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA SO 150 NM 1H AT 230V 3.5W 190lm IP65 750

Product code 15746

Brand [INTELIGHT](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 190lumens

Luminaire's efficiency lm79 54W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 42.0mm

Width 144.0mm

Length 269.0mm

Weight 505 g

Package weight 597 g

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature 10 ~ 50°C

Warranty 1 years



Emergency light INTELIGHT VELLA SO 250 M 1H AT 230V 7W 331lm IP65 750

Product code 18272

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 7W
 Maximum output 7W/1m
 Luminous flux 331lumens
 Luminaire's efficiency lm79 47W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 505 g
 Package weight 597 g
 In package 1pc
 Casing material plastic
 Work environment indoor / outdoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA SO 250 M 1H CT 230V 10W 369lm IP65 750

Product code 18287

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 10W
 Maximum output 10W/1m
 Luminous flux 369lumens
 Luminaire's efficiency lm79 37W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 546 g
 Package weight 600 g
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA SO 250 M 3H AT 230V 8W 333lm IP65

Product code 19648

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 8W
 Maximum output 8W/1m
 Luminous flux 333lumens
 Luminaire's efficiency lm79 42W
 Protection class IP65
 Height 42.0mm
 Width 144.0mm
 Length 269.0mm
 Weight 484 g
 Package weight 577 g
 Casing material plastic
 Work environment indoor use
 Operation temperature 10 ~ 50°C
 Warranty 1 years



Emergency light INTELIGHT VELLA SO 250 SA 3H CT 8W 250lm IP65

Product code 21029

Brand [INTELIGHT](#)
 Output 8W
 Luminous flux 250lumens
 Luminaire's efficiency lm79 31W
 Protection class IP65
 Height 144.0mm
 Width 269.0mm
 Length 42.0mm
 Casing material plastic



Emergency light INTELIGHT WARS 2X120 gray 230V 49W 4500lm IP65 840

Product code 18094

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 49W
 Maximum output 49W/1m
 Luminous flux 4500lumens
 Luminaire's efficiency lm79 92W
 Correlated colour temperature pure white 4000K
 Cri 80
 Protection class IP65
 Height 88.0mm
 Width 124.0mm
 Length 1262.0mm
 In package 1pc
 Casing colour gray
 Casing material polycarbonate
 Work environment indoor / outdoor use
 Operation temperature -25 ~ 40°C
 Certificates CE,RoHS
 Warranty 1 years



Emergency light INTELIGHT WARS 2x120 LED 2h MT SA manual testing 93122 gray 230V 52W 4500lm IP65 840

Product code 16832

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 52W
 Maximum output 52W/1m
 Luminous flux 4500lumens
 Luminaire's efficiency lm79 87W
 Correlated colour temperature pure white 4000K
 Cri 80
 Protection class IP65
 Height 88.0mm
 Width 124.0mm
 Length 1262.0mm
 In package 1pc
 Casing colour gray
 Casing material polycarbonate
 Work environment indoor / outdoor use
 Operation temperature -25 ~ 40°C
 Certificates CE,RoHS
 Warranty 1 years



Emergency light INTELIGHT WARS 2X120 M 3H LT manual testing + heater gray 230V 66W 4825lm IP65 840

Product code 18093

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 66W
 Maximum output 66W/1m
 Luminous flux 4825lumens
 Luminaire's efficiency lm79 73W
 Correlated colour temperature pure white 4000K
 Cri 80
 Protection class IP65
 Height 88.0mm
 Width 124.0mm
 Length 661.0mm
 In package 1pc
 Casing colour gray
 Casing material polycarbonate
 Work environment indoor / outdoor use
 Operation temperature -25°C - 40°C
 Certificates CE, RoHS
 Warranty 1 years



Emergency light INTELIGHT WARS LED PANEL 2x60 SA 3H MT manual testing gray 230V 27W 2700lm IP65 840

Product code 16283

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 27W
 Maximum output 27W/1m
 Luminous flux 2700lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 4000K
 Cri 80
 Protection class IP65
 Height 88.0mm
 Width 124.0mm
 Length 661.0mm
 In package 1pc
 Casing colour gray
 Casing material polycarbonate
 Work environment indoor use
 Operation temperature -25°C - 40°C
 Certificates CE, RoHS
 Warranty 1 years



Emergency light INTELIGHT WARS LED PANEL 2x60 SA-6W 2H AT automatic testing gray 230V 27W 2700lm IP65 840

Product code 16284

Brand [INTELIGHT](#)
 Supply voltage 230V
 Output 27W
 Maximum output 27W/1m
 Luminous flux 2700lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 4000K
 Cri 80
 Protection class IP65
 Height 88.0mm
 Width 124.0mm
 Length 661.0mm
 In package 1pc
 Casing colour gray
 Casing material polycarbonate
 Work environment indoor use
 Operation temperature -25°C - 40°C
 Certificates CE, RoHS
 Warranty 1 years



Emergency light Prolumen 3W 3h AT white 230V 3.5W 240lm IP20 750

Product code 19525

Brand [Prolumen](#)
 Supply voltage 230V
 Output 3.5W
 Maximum output 3.5W/1m
 Luminous flux 240lumens
 Luminaire's efficiency lm79 69W
 Correlated colour temperature pure white 5000K
 Source of light [SAMSUNG LED](#)
 Cri 70
 Protection class IP20
 Height 32.0mm
 Width 80.0mm
 Length 80.0mm
 Installation opening diameter 50mm
 In package 1pc
 In box 30pcs
 Casing colour white
 Casing material plastic
 Work environment indoor use
 Operation temperature 0° - +45°C
 Battery LiFePO4 1500mAh
 Warranty 5 years



The set includes two different lenses.

Emergency light Prolumen EM29-DA-3H, 1F white 230V 2.5W 380lm IP20 DALI 750

Product code 23106 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 2.5W

Maximum output 2.5W/1m

Rated current 2000mA

Luminous flux 380lumens

Luminaire's efficiency lm79 152W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 53.0mm

Width 89.0mm

Length 193.0mm

In package 1pc

In box 20pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Work environment indoor use

Operation temperature -0° - +45°C

Warranty 5 years



Emergency light Prolumen EPE-EX1-DA-3H, 1F white 230V 3W 220lm IP20 DALI 850

Product code 23107 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3W

Maximum output 3W/1m

Rated current 6000mA

Luminous flux 220lumens

Luminaire's efficiency lm79 73W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP20

Height 45.0mm

Width 223.0mm

Length 315.0mm

In package 1pc

In box 6pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Work environment indoor use

Operation temperature -0° - +45°C

Battery LiFePO4 3,2V 1500mAh

Warranty 5 years



Emergency light Prolumen Exit M22 AT, 3h black 230V 9W 800lm IP66 850

Product code 17859

Brand [Prolumen](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 800lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP66

Height 202.0mm

Width 120.0mm

Length 202.0mm

In package 1pc

In box 4pcs

Casing colour black

Casing material aluminium

Polishing matt

Work environment indoor / outdoor use

Operation temperature -35° - +45°C

Battery LiFePO4 6,4V 6000mAh

Warranty 5 years



Emergency light Prolumen Exit M22 DALI, 3h black 230V 9W 800lm IP66 850

Product code 18155

Brand [Prolumen](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 800lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure
white 5000K

Cri 80

Protection class IP66

Height 202.0mm

Width 120.0mm

Length 202.0mm

In package 1pc

In box 4pcs

Casing colour black

Casing material aluminium

Polishing matt

Work environment indoor / outdoor
use

Operation temperature -35° - +45°C

Battery LiFePO4 6,4V 6000mAh

Warranty 5 years



Emergency light Prolumen EXIT M3 AT white 230V 8W 650lm 120° IP65 850

Product code 23296

Brand [Prolumen](#)

Supply voltage 230V

Output 8W

Maximum output 8W/1m

Luminous flux 650lumens

Luminaire's efficiency lm79 81W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 77.0mm

Width 135.0mm

Length 335.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



Emergency light Prolumen EXIT M3 AT, DALI white 230V 8W 650lm 120° IP65 850

Product code 19375

Brand [Prolumen](#)

Supply voltage 230V

Output 8W

Maximum output 8W/1m

Luminous flux 650lumens

Luminaire's efficiency lm79 81W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 77.0mm

Width 135.0mm

Length 335.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



Emergency light Prolumen EXIT M3 3h AT white 230V 6W 200lm 120° IP65 850

Product code 17220

Brand [Prolumen](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 33W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 62.0mm

Width 105.0mm

Length 340.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



Emergency light Prolumen EXIT M3 3H DALI white 230V 6W 200lm 120° IP65 DALI 850

Product code 17564 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 6W

Maximum output 6W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 33W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 62.0mm

Width 105.0mm

Length 340.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



Emergency light Prolumen EXIT M3 3h MT white 230V 6W 200lm 120° IP65 850

Product code 17221

Brand [Prolumen](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 33W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 80

Protection class IP65

Height 62.0mm

Width 105.0mm

Length 340.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



Emergency light Prolumen EXIT M3B 3h white 230V 14W 1200lm IP65 850

Product code 18142

Brand [Prolumen](#)

Supply voltage 230V

Output 14W

Maximum output 14W/1m

Luminous flux 1200lumens

Luminaire's efficiency lm79 86W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP65

Height 77.0mm

Width 135.0mm

Length 335.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V

Warranty 5 years



Emergency light Prolumen EXIT X2B AT 3h DALI white 230V 3W 180lm 120° IP65 DALI 750

Product code 22984 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3W

Maximum output 3W/1m

Luminous flux 180lumens

Luminaire's efficiency lm79 60W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 70

Protection class IP65

Height 59.0mm

Width 213.0mm

Length 362.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Warranty 5 years



Emergency light Prolumen EXIT X2B AT 3h white 230V 3W 180lm 120° IP65 750

Product code 17836

Brand [Prolumen](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Luminous flux 180lumens

Luminaire's efficiency lm79 60W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 70

Protection class IP65

Height 59.0mm

Width 213.0mm

Length 362.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Warranty 5 years



Emergency light Prolumen EXIT X3B AT 3h black 230V 2.5W 200lm 120° IP65 760

Product code 22775

Brand [Prolumen](#)

Supply voltage 230V

Output 2.5W

Maximum output 2.5W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature cold white 6000K

Lens angle 120

Cri 70

Protection class IP65

Height 92.0mm

Width 182.0mm

Length 382.0mm

In package 1pc

In box 10pcs

Casing colour black

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Warranty 5 years



Emergency light Prolumen EXIT X3B AT 3h white 230V 2.5W 200lm 120° IP65 750

Product code 17835

Brand [Prolumen](#)

Supply voltage 230V

Output 2.5W

Maximum output 2.5W/1m

Luminous flux 200lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature pure white 5000K

Lens angle 120

Cri 70

Protection class IP65

Height 92.0mm

Width 182.0mm

Length 382.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0-45°C

Warranty 5 years



Emergency light Prolumen EXIT X5 3h white 230V 6W IP65 850

Product code 22200

Brand [Prolumen](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP65

Height 194.0mm

Width 108.0mm

Length 340.0mm

In package 1pc

In box 6pcs

Casing colour white

Casing material plastic

Work environment outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V 1500mAh

Certificates CE

Warranty 5 years



Thanks to the special lens, it illuminates up to 30 meters away.

Emergency light Prolumen EXIT X5 3h white 230V 6W IP65 DALI 850

Product code 17563 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 6W

Maximum output 6W/1m

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP65

Height 194.0mm

Width 108.0mm

Length 340.0mm

In package 1pc

In box 6pcs

Casing colour white

Casing material plastic

Work environment outdoor use

Operation temperature 0-45°C

Battery LiFePO4 6,4V 1500mAh

Certificates CE

Warranty 5 years



Thanks to the special lens, it illuminates up to 30 meters away.

Emergency light Prolumen EXIT X6 3h AT white 230V 3W IP20 750

Product code 17210

Brand [Prolumen](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 230.0mm

Width 43.0mm

Length 328.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 3,2V 1500mAh

Certificates CE

Warranty 5 years



Exit light with adjustable positioning
as desired. Thanks to a special lens, it
illuminates up to 30 meters away.

Emergency light Prolumen EXIT X6 3h MT white 230V 3W IP20 850

Product code 17219

Brand [Prolumen](#)

Supply voltage 230V

Output 3W

Maximum output 3W/1m

Correlated colour temperature pure
white 5000K

Cri 80

Protection class IP20

Height 230.0mm

Width 43.0mm

Length 328.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 3,2V 1500mAh

Certificates CE

Warranty 5 years



Exit light with adjustable positioning
as desired. Thanks to a special lens, it
illuminates up to 30 meters away.

Emergency light Prolumen EXIT X6 3h white 230V 3W IP20 DALI 850

Product code 17562 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3W

Maximum output 3W/1m

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP20

Height 230.0mm

Width 43.0mm

Length 328.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 3,2V 1500mAh

Certificates CE

Warranty 5 years



Exit light with adjustable positioning as desired. Thanks to a special lens, it illuminates up to 30 meters away.

Emergency light Prolumen Exit X6 AT, 3h white 230V 3W 220lm IP20 850

Product code 17699

Brand [Prolumen](#)
 Supply voltage 230V
 Output 3W
 Maximum output 3W/1m
 Luminous flux 220lumens
 Luminaire's efficiency lm79 73W
 Correlated colour temperature pure white 5000K
 Cri 80
 Protection class IP20
 Height 230.0mm
 Width 43.0mm
 Length 328.0mm
 In package 1pc
 In box 10pcs
 Casing colour white
 Casing material polycarbonate
 Polishing matt
 Work environment indoor use
 Operation temperature -0° - +45°C
 Battery LiFePO4 3,2V 1500mAh
 Warranty 5 years



Emergency light Prolumen EXIT X7 white 230V 3W IP40 DALI 850

Product code 18135 DALI dimmable

Brand [Prolumen](#)
 Supply voltage 230V
 Dimmable DALI
 Output 3W
 Maximum output 3W/1m
 Correlated colour temperature pure white 5000K
 Cri 80
 Protection class IP40
 Height 190.0mm
 Width 45.0mm
 Length 330.0mm
 In package 1pc
 Casing colour white
 Casing material polycarbonate
 Work environment indoor use
 Operation temperature 0-45°C
 Battery LiFePO4 3.2V 1500m
 Warranty 5 years



Emergency light Prolumen M2 AT 3h white round 6W 450lm IP65 750

Product code 17834

Brand [Prolumen](#)

Output 6W

Maximum output 6W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Operation temperature 0-45°C

Certificates CE

Warranty 5 years



Emergency light Prolumen M2 CBS white 230V 3.5W 240lm IP20 750

Product code 17646

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.30

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 5000K

Source of light [SAMSUNG LED](#)

Cri 70

Protection class IP20

Height 55.3mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material plastic

Work environment indoor / outdoor use

Operation temperature 0° - +45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.
Additionally, an IP65 enclosure is available as an accessory.

Emergency light Prolumen M2 IP65 box white round IP65

Product code 17246

Brand [Prolumen](#)
 Protection class IP65
 Height 78.0mm
 Diameter 175.0mm
 In package 1pc
 In box 20pcs
 Casing colour white
 Casing material polycarbonate
 Polishing matt
 Shape round
 Work environment indoor / outdoor use
 Operation temperature 0-45°C
 Warranty 5 years



IP65 enclosure

Emergency light Prolumen M2, 3h AT ST white round 230V 3W 240lm IP20 750

Product code 17245

Brand [Prolumen](#)
 Supply voltage 230V
 Output 3W
 Maximum output 3W/1m
 Luminous flux 240lumens
 Luminaire's efficiency lm79 80W
 Correlated colour temperature pure white 5000K
 Cri 70
 Protection class IP20
 Height 62.0mm
 Diameter 140.0mm
 In package 1pc
 In box 30pcs
 Casing colour white
 Casing material polycarbonate
 Polishing matt
 Shape round
 Work environment indoor use
 Operation temperature 0-45°C
 Battery LiFePO4 1500mAh
 Warranty 5 years



The set includes two different lenses.
 Additionally, an IP65 enclosure is available as an accessory.

Emergency light Prolumen M2, 3h black round 230V 3.5W 240lm IP20 750

Product code 22779

Brand [Prolumen](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour black

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.
Additionally, an IP65 enclosure is available as an accessory.

Emergency light Prolumen M2, 3h black round 230V 3.5W 240lm IP20 DALI 750

Product code 19324 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour black

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.
Additionally, an IP65 enclosure is
available as an accessory.

Emergency light Prolumen M2, 3h white round 230V 3.5W 240lm IP20 DALI 750

Product code 17566 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.
Additionally, an IP65 enclosure is available as an accessory.

Emergency light Prolumen M2, 3h white round 230V 6W 450lm IP20 DALI 750

Product code 18137 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 6W

Maximum output 6W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP20

Height 62.0mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses. Additionally, an IP65 enclosure is available as an accessory.

Emergency light Prolumen M2, AT, 3h white round 230V 6W 450lm IP20 750

Product code 17744

Brand [Prolumen](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 55.3mm

Diameter 140.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.

Additionally, an IP65 enclosure is
available as an accessory.

Emergency light Prolumen M22 AT, 3h white 230V 9W 800lm IP66 850

Product code 17860

Brand [Prolumen](#)

Supply voltage 230V

Output 9W

Maximum output 9W/1m

Luminous flux 800lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure white 5000K

Cri 80

Protection class IP66

Height 202.0mm

Width 120.0mm

Length 202.0mm

In package 1pc

In box 4pcs

Casing colour white

Casing material aluminium

Polishing matt

Work environment indoor / outdoor use

Operation temperature -35° - +45°C

Battery LiFePO4 6,4V 6000mAh

Warranty 5 years



Emergency light Prolumen M4 2h AT white 230V 4W 450lm IP20 750

Product code 23294

Brand [Prolumen](#)
Supply voltage 230V
Output 4W
Maximum output 6W/1m
Rated current 1500mA
Luminous flux 450lumens
Luminaire's efficiency lm79 113W
Correlated colour temperature pure white 5000K
Source of light [SAMSUNG LED](#)
Cri 70
Protection class IP20
Height 48.0mm
Width 148.0mm
Length 148.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses.

Emergency light Prolumen M4 3h AT white 230V 3.5W 240lm IP20 750

Product code 19524

Brand [Prolumen](#)
Supply voltage 230V
Output 3.5W
Maximum output 3.5W/1m
Luminous flux 240lumens
Luminaire's efficiency lm79 69W
Correlated colour temperature pure white 5000K
Source of light [SAMSUNG LED](#)
Cri 70
Protection class IP20
Height 48.0mm
Width 148.0mm
Length 148.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature 0° - +45°C
Battery LiFePO4 1500mAh
Warranty 5 years



The set includes two different lenses.

Emergency light Prolumen M4 3H DALI white 230V 3.5W 240lm IP20 DALI 750

Product code 19325 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure
white 5000K

Source of light [SAMSUNG LED](#)

Cri 70

Protection class IP20

Height 48.0mm

Width 148.0mm

Length 148.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature 0° - +45°C

Battery LiFePO4 1500mAh

Warranty 5 years



The set includes two different lenses.

Emergency light Prolumen M5 AT, 3h white round 230V 3.5W 240lm IP20 750

Product code 17697

Brand [Prolumen](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 240lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 48.0mm

Diameter 140.0mm

In package 1pc

In box 10pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Shape round

Work environment indoor use

Operation temperature -0° - +45°C

Battery LiFePO4 6,4V 1500mAh

Warranty 5 years



The set includes two different lenses.
Additionally, an IP65 enclosure is
available as an accessory.

Emergency light Prolumen M7 AT, 3h white 230V 3.5W 220lm IP20 750

Product code 17698

Brand [Prolumen](#)

Supply voltage 230V

Output 3.5W

Maximum output 3.5W/1m

Luminous flux 220lumens

Luminaire's efficiency lm79 63W

Correlated colour temperature pure
white 5000K

Cri 70

Protection class IP20

Height 98.0mm

Width 63.0mm

Length 212.0mm

In package 1pc

In box 30pcs

Casing colour white

Casing material polycarbonate

Polishing matt

Work environment indoor use

Operation temperature -0° - +45°C

Battery LiFePO4 6,4V 1500mAh

Warranty 5 years



Emergency light Prolumen M9 3H DALI white round 230V 6W 750lm IP65 DALI 750

Product code 18138 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Dimmable DALI

Output 6W

Maximum output 6W/1m

Luminous flux 750lumens

Luminaire's efficiency lm79 125W

Correlated colour temperature pure white 5000K

Cri 70

Protection class IP65

Height 62.0mm

Diameter 80.0mm

Installation opening diameter 72mm

In package 1pc

In box 20pcs

Casing colour white

Casing material aluminium

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor use

Operation temperature 0-45°C

Battery LiFePO4 6.4V 4500m

Warranty 5 years



A durable and reliable emergency light designed to ensure safety in various environments. Its waterproof and dustproof design allows installation even in challenging conditions, providing stable and clear illumination in emergency situations. The device is equipped with smart features that ensure its seamless operation and reduce maintenance needs.

Emergency light Prolumen Pictogram Down

Product code 17223

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED EXIT X6 emergency lights.



Emergency light Prolumen Pictogram Down



Product code 17892

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED
EXIT X3B emergency lights.



Emergency light Prolumen Pictogram Left



Product code 17894

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED
EXIT X3B emergency lights.



Emergency light Prolumen Pictogram UP

Product code 17222

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED
EXIT X6 emergency lights.



Emergency light Prolumen Pictogram Up

Product code 17893

Brand [Prolumen](#)

Pictogram "Evacuation Exit" for LED
EXIT X3B emergency lights.

