

LED panel AIGOSTAR E6 D115 white round 230V 9W 470lm CRI80 160° IP20 3000K warm white

Product code 13984

Price 4,18+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 9W
Electric current 70mA
Luminous flux 470lumens
Luminaire's efficiency 52W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 115.0mm
Installation opening diameter
100-110mm
In box 20pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20°C~40°C
Certificates CE,RoHS
Warranty 2 years




LED downlight AIGOSTAR E6 D170 motion sensor white round 230V 12W 750lm CRI80 120° IP20 3000K warm white

Product code 14790

Price 14,25+VAT

Equivalent 75W regular bulb
Brand AIGOSTAR
Supply voltage 230V
Output 12W
Electric current 100mA
Luminous flux 750lumens
Luminaire's efficiency 63W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 20000h
Height 42.0mm
Diameter 170.0mm
Installation opening diameter 155mm
In box 20pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
No. of switches 12500pcs
Work environment indoor use
Operation temperature -10°C - 40°C
Certificates CE, RoHS
Warranty 2 years

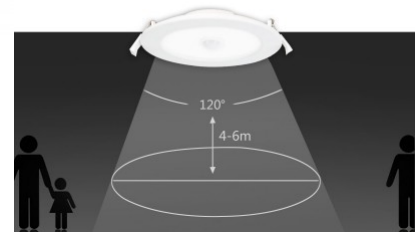

A built-in highly sensitive infrared ray induction probe can recognize the change of human infrared spectrum, which responds promptly even when people are 4 or 6 meters away, with a induction angle of 120 degrees. It can last for 60 seconds

LED panel AIGOSTAR E6 D170 white round 230V 16W 1130lm CRI80 120° IP20 3000K warm white

Product code 15598

Price 8,41+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 16W
Electric current 140mA
Luminous flux 1130lumens
Luminaire's efficiency 71W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 170.0mm
Installation opening diameter 155mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C- 40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 D170 white round 230V 16W 1180lm CRI80 160° IP20 4000K pure white

Product code 13986

Price 6,27+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 16W
Electric current 125mA
Luminous flux 1180lumens
Luminaire's efficiency 74W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 170.0mm
Installation opening diameter
150-160mm
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C~40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 D220 white round 230V 18W 1230lm CRI80 160° IP20 3000K warm white

Product code 13987

Price 8,32+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 18W
Electric current 140mA
Luminous flux 1230lumens
Luminaire's efficiency 68W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 220.0mm
Installation opening diameter 205mm
In box 10pcs
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C- 40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 D220 white round 230V 18W 1300lm CRI80 160° IP20 4000K pure white

Product code 13921

Price 9,67+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 18W
Electric current 140mA
Luminous flux 1300lumens
Luminaire's efficiency 72W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 220.0mm
Installation opening diameter 205mm
In box 10pcs
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C- 40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 D240 white round 230V 20W 1370lm CRI80 160° IP20 3000K warm white

Product code 13981

Price 9,05+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 20W
Electric current 140mA
Luminous flux 1370lumens
Luminaire's efficiency 69W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 240.0mm
Installation opening diameter 215mm
In box 10pcs
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C- 40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 D240 white round 230V 20W 1400lm CRI80 160° IP20 4000K pure white

Product code 16270

Price 12,68+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 20W
Electric current 140mA
Luminous flux 1400lumens
Luminaire's efficiency 70W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 240.0mm
Installation opening diameter 215mm
In box 10pcs
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C- 40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 D240 white round 230V 20W 1450lm CRI80 160° IP20 6000K cold white

Product code 13988

Price 12,30+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 20W
Electric current 140mA
Luminous flux 1450lumens
Luminaire's efficiency 73W
Correlated colour temperature (cct)
cold white 6000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 240.0mm
Installation opening diameter 215mm
In box 10pcs
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C- 40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 D240 white round 230V 24W 1650lm CRI80 120° IP20 3000K warm white

Product code 15259

Price 13,85+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 24W
Electric current 140mA
Luminous flux 1650lumens
Luminaire's efficiency 69W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Diameter 240.0mm
Installation opening diameter 220mm
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminum + plastic
Polishing semimatt
Shape round
Work environment indoor use
Operation temperature -20°C- 40°C
Certificates CE,RoHS
Warranty 2 years



LED panel AIGOSTAR E6 white square 230V 6W 320lm CRI80 160° IP20 3000K warm white

Product code 14147

Equivalent 30W regular bulb
Brand AIGOSTAR
Supply voltage 230V
Output 6W
Electric current 50mA
Luminous flux 320lumens
Luminaire's efficiency 53W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Width 115.0mm
Length 115.0mm
Installation opening diameter
100-110mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape square
No. of switches 12500pcs
Work environment indoor use
Operation temperature -20~+40°C
Certificates CE, RoHS
Warranty 2 years



LED panel EMOS NEXXO D120 black round 230V 7W 480lm CRI80 110° IP40/20 3000K, 3500K, 4000K WW/WW/NW

Product code 16567

Price 9,88+VAT

Brand [EMOS](#)

Supply voltage 230V

Output 7W

Luminous flux 480lumens

Luminaire's efficiency 69W

Correlated colour temperature (cct)

WW/WW/NW 3000K, 3500K, 4000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 120.0mm

Installation opening diameter 105mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



LED panel EMOS NEXXO D170 black round 230V 12.5W 1050lm CRI80 110° IP40/20 3000K, 3500K, 4000K WW/WW/NW

Product code 16568

Price 13,40+VAT

Brand [EMOS](#)

Supply voltage 230V

Output 12.5W

Luminous flux 1050lumens

Luminaire's efficiency 84W

Correlated colour temperature (cct)

WW/WW/NW 3000K, 3500K, 4000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 170.0mm

Installation opening diameter 155mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



LED panel EMOS NEXXO D225 black round 230V 18W 1600lm CRI80 110° IP40/20 3000K, 3500K, 4000K WW/WW/NW

Product code 16569

Price 17,18+VAT

Brand [EMOS](#)

Supply voltage 230V

Output 18W

Luminous flux 1600lumens

Luminaire's efficiency 89W

Correlated colour temperature (cct)

WW/WW/NW 3000K, 3500K, 4000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 225.0mm

Installation opening diameter 205mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



LED panel LED BRAVO CIRCLE PT D300 white 230V 24W 1730lm CRI80 120° IP20 4000K pure white

Product code 15840

Price 8,42+VAT

Supply voltage 230V

Output 24W

Luminous flux 1730lumens

Luminaire's efficiency 72W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Protection class IP20

Lifespan 15000h

Height 13.0mm

Diameter 300.0mm

Installation opening diameter 280mm

Weight 640g

Casing colour white

Casing material aluminum + plastic

No. of switches 10000pcs

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE, RoHS

Warranty 2 years



LED panel REVAL BULB D120 TRIAC white round 230V 6W 540lm CRI80 120° IP44 3000K warm white

Product code 13569 TRIAC dimmable

Price 12,00+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 6W

Luminous flux 540lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

warm white 3000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 20.0mm

Diameter 120.0mm

Installation opening diameter 105mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D145 TRIAC white round 230V 9W 810lm CRI80 120° IP44 3000K warm white

Product code 15462 TRIAC dimmable

Price 13,70+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 9W

Luminous flux 810lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

warm white 3000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 20.0mm

Diameter 145.0mm

Installation opening diameter 130mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D145 TRIAC white round 230V 9W 810lm CRI80 120° IP44 4000K pure white

Product code 14382 TRIAC dimmable

Price 13,70+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 9W

Luminous flux 810lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 12.0mm

Diameter 145.0mm

Installation opening diameter 130mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D170 TRIAC white round 230V 12W 1080lm CRI80 120° IP44 3000K warm white

Product code 15463 TRIAC dimmable

Price 14,10+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 12W

Luminous flux 1080lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

warm white 3000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 20.0mm

Diameter 170.0mm

Installation opening diameter 155mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D170 TRIAC white round 230V 12W 1080lm CRI80 120° IP44 4000K pure white

Product code 16031 TRIAC dimmable

Price 14,10+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 12W

Luminous flux 1080lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 20.0mm

Diameter 170.0mm

Installation opening diameter 155mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D190 TRIAC white round 230V 15W 1350lm CRI80 120° IP44 3000K warm white

Product code 13572 TRIAC dimmable

Price 14,24+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 15W

Luminous flux 1350lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

warm white 3000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 20.0mm

Diameter 190.0mm

Installation opening diameter 175mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D190 TRIAC white round 230V 15W 1350lm CRI80 120° IP44 4000K pure white

Product code 13742 TRIAC dimmable

Price 17,55+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 15W

Luminous flux 1350lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Diameter 190.0mm

Installation opening diameter 180mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D225 TRIAC white round 230V 18W 1620lm CRI80 120° IP44 3000K warm white

Product code 13433 TRIAC dimmable

Price 15,71+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 18W

Luminous flux 1620lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

warm white 3000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 20.0mm

Diameter 225.0mm

Installation opening diameter 205mm

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB D225 TRIAC white round 230V 18W 1620lm CRI80 120° IP44 4000K pure white

Product code 13785 TRIAC dimmable

Price 15,62+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 18W

Luminous flux 1620lumens

Luminaire's efficiency 90W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Source of light [EPISTAR LED](#)

Cri 80

Protection class IP44

Lifespan 40000h

Llmf L70 @25°C 50.000h

Height 11.0mm

Diameter 225.0mm

Installation opening diameter 210mm

Weight 398g

Casing colour white

Casing material aluminum

Polishing matt

Shape round

No. of switches 15000pcs

Certificates CE

Warranty 3 years



LED panel REVAL BULB LL TRIAC white square 230V 9W 630lm CRI80 140° 3000K warm white

Product code 14805 TRIAC dimmable

Price 13,90+VAT

Promotional price 7,00+VAT

Brand [REVAL BULB](#)

Supply voltage 230V

Dimmable TRIAC

Output 9W

Luminous flux 630lumens

Luminaire's efficiency 70W

Correlated colour temperature (cct)
warm white 3000K

Lens angle 140

Cri 80

Lifespan 40000h

Width 145.0mm

Length 145.0mm

Installation opening diameter 132 x
132mm

Package weight 13000g

In package 30pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape square

Work environment indoor use

Certificates CE, RoHS

Warranty 2 years

Power supply: 25-50V DC, 300mA
(supplied)

