




LED dome light module LMM1842 230V 18W 1700lm 180° IP20 842

Product code 16303

Supply voltage 230V Output 18W Maximum output 18W/1m Luminous flux 1700lumens Luminaire's efficiency Im79 94W Correlated colour temperature pure white 4200K Lens angle 180 Cri 80 Protection class IP20 Lifespan 25000h Height 25.0mm Diameter 215.0mm Weight 100g Package weight 150g In box 20pcs No. of switches 15000pcs Work environment indoor use Operation temperature -25 ~ +50°C

Ceiling light module. Suitable for indoor use only, protection class IP20. LED luminaire with a 4200K light temperature provides clear light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

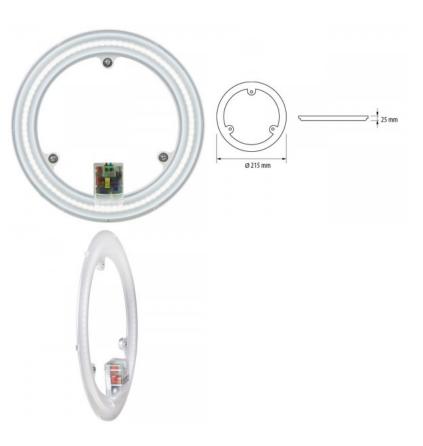

Dome light Nairos G2 black 230V 12W 1140lm CRI80 90° IP65 3000K, 4000K, 6000K 3CCT





Product code 20086

Supply voltage 230V Power factor 0.70 Output 12W Maximum output 12W/1m Luminous flux 1140lumens Luminaire's efficiency Im79 95W Correlated colour temperature 3CCT 3000K, 4000K, 6000K Lens angle 90 Cri 80 Protection class IP65 Lifespan 30000h Height 50.0mm Diameter 200.0mm Weight 400g In box 20pcs Casing colour black Casing material plastic No. of switches 20000pcs Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years

A modern luminaire suitable for both indoor and outdoor use. This round ceiling light fixture features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the **PROLUMEN** catalogue as well!







Dome light Nairos G2 black 230V 24W 2280lm CRI80 120° IP65 3000K, 4000K, 6000K 3CCT

Product code 17906

Supply voltage 230V Power factor 0.70 Output 24W Maximum output 24W/1m Luminous flux 2280lumens Luminaire's efficiency Im79 95W Correlated colour temperature 3CCT 3000K, 4000K, 6000K Lens angle 120 Cri 80 Protection class IP65 Lifespan 30000h Height 55.0mm Diameter 300.0mm Weight 700g In box 10pcs Casing colour black Casing material plastic No. of switches 20000pcs Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years

A modern luminaire suitable for both indoor and outdoor use. This round ceiling light fixture features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the PROLUMEN catalogue as well!







Dome light Nairos LX with motion sensor white round 230V 24W 2520lm CRI80 120° IP65 3000K, 4000K, 6000K 3CCT

Product code 17523

Supply voltage 230V Power factor 0.70 Output 24W Maximum output 24W/1m Luminous flux 2520lumens Luminaire's efficiency Im79 105W Correlated colour temperature 3CCT 3000K, 4000K, 6000K Lens angle 120 Cri 80 Protection class IP65 Lifespan 30000h Height 55.0mm Diameter 300.0mm Weight 650g In box 5pcs Casing colour white Casing material metal + plastic Shape round No. of switches 20000pcs Impact resistance IK08 Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years

A modern luminaire suitable for both indoor and outdoor use. This round ceiling light fixture features a motion sensor, the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and lowpressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the PROLUMEN catalogue as well!









Dome light PROLUMEN AL08 D250 white 230V 12W 1068lm 120° IP54 830

Product code 15089

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 12W Maximum output 12W/1m Luminous flux 1068lumens Luminaire's efficiency Im79 89W Correlated colour temperature warm white 3000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 48.0mm Diameter 250.0mm Weight 800g Package weight 930g In box 20pcs Casing colour white Casing material plastic Impact resistance IK08 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Premium-class LED ceiling light. With a classic round design. This surfacemounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch

lighting solution from the LED house













Dome light PROLUMEN AL08 D250 with motion sensor white 230V 12W 968lm 120° IP54 930

Product code 17104

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 12W Maximum output 12W/1m Luminous flux 968lumens Luminaire's efficiency Im79 81W Correlated colour temperature warm white 3000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 48.0mm Diameter 250.0mm Weight 800g Package weight 930g In box 20pcs Casing colour white Casing material plastic Impact resistance IK08 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Premium-class LED ceiling light. With a classic round design. This surfacemounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house













Dome light PROLUMEN AL08 D300 white 230V 18W 1710lm 120° IP54 830

Product code 16581

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 18W Maximum output 18W/1m Luminous flux 1710lumens Luminaire's efficiency Im79 95W Correlated colour temperature warm white 3000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 40.0mm Diameter 300.0mm Weight 800g Package weight 930g In package 1pc In box 10pcs Casing colour white Casing material plastic Impact resistance IK08 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Premium-class LED ceiling light. With a classic round design. This surfacemounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your


everyday life and choose a top-notch lighting solution from the LED house













Dome light PROLUMEN AL08 D300 white 230V 18W 1800lm 120° IP54 840

Product code 13448

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 18W Maximum output 18W/1m Luminous flux 1800lumens Luminaire's efficiency Im79 100W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 48.0mm Diameter 300.0mm Weight 980g Package weight 1110g In box 10pcs Casing colour white Casing material plastic Impact resistance IK08 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Premium-class LED ceiling light. With a classic round design. This surfacemounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house













Dome light PROLUMEN AL08 D300 with motion sensor white 230V 25W 2550lm 120° IP54 940

Product code 15302

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 25W Maximum output 25W/1m Luminous flux 2550lumens Luminaire's efficiency Im79 102W Correlated colour temperature pure white 4000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 40.0mm Diameter 300.0mm Weight 800g Package weight 930g In box 10pcs Casing colour white Casing material plastic Impact resistance IK08 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Premium-class LED ceiling light. With a classic round design. This surfacemounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house











10/40 8.12.2025

Dome light PROLUMEN AL08 D400 white 230V 30W 3000lm 120° IP54 830

Product code 14989

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 30W Maximum output 30W/1m Luminous flux 3000lumens Luminaire's efficiency Im79 100W Correlated colour temperature warm white 3000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 52.0mm Diameter 400.0mm Weight 1400g Package weight 1700g In package 1pc In box 10pcs Casing colour white Casing material plastic Impact resistance IK08 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Premium-class LED ceiling light. With a classic round design. This surfacemounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch

lighting solution from the LED house













Dome light PROLUMEN AL127 D250 black 230V 12W 1260lm 120° IP54 DALI 940

Product code 17805 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 12W Maximum output 12W/1m Luminous flux 1260lumens Luminaire's efficiency Im79 105W Correlated colour temperature pure white 4000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 40000h Llmf tm21 L80B10 @25°C 50.000h Height 58.0mm Diameter 250.0mm Weight 1920g In package 1pc In box 20pcs Casing colour black Casing material plastic Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN AL127 D400 white 230V 25W 2400lm 120° IP54 DALI 940

Product code 16975 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 25W Maximum output 25W/1m Luminous flux 2400lumens Luminaire's efficiency Im79 96W Correlated colour temperature pure white 4000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 40000h Height 58.0mm Diameter 400.0mm Weight 1920g In package 1pc In box 10pcs Casing colour white Casing material plastic Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN AL181 D250 white round 230V 12W 1260lm 110° IP44 930

Product code 18301

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 12W Maximum output 12W/1m Luminous flux 1260lumens Luminaire's efficiency Im79 105W Correlated colour temperature warm white 3000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Height 69.0mm Diameter 250.0mm Weight 750g In package 1pc In box 12pcs Casing colour white Casing material plastic Shape round Work environment indoor use Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years









Dome light PROLUMEN AL181 D300 white round 230V 15W 1620lm 110° IP44 930

Product code 18302

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 15W Maximum output 15W/1m Luminous flux 1620lumens Luminaire's efficiency Im79 108W Correlated colour temperature warm white 3000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 71.0mm Diameter 300.0mm Weight 750g In package 1pc In box 6pcs Casing colour white Casing material plastic Shape round Work environment indoor use Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years








15/40 8.12.2025

Dome light PROLUMEN AL37 white 230V 25W 2800lm 100° 930

Product code 14710

Brand PROLUMEN Supply voltage 230V Output 25W Maximum output 25W/1m Luminous flux 2800lumens Luminaire's efficiency Im79 112W Correlated colour temperature warm white 3000K Lens angle 100 Cri 90 Lifespan 50000h Height 33.0mm Diameter 400.0mm Weight 1440g Casing colour white Certificates CE, RoHS Warranty 5 years

Compact LED ceiling light for living rooms, bedrooms, and other indoor spaces. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The light temperature of 3000K adds warm white light to the room. From the LED house product range, you can find several other ceiling lights that complement this luminaire to create unique lighting effects in your space!

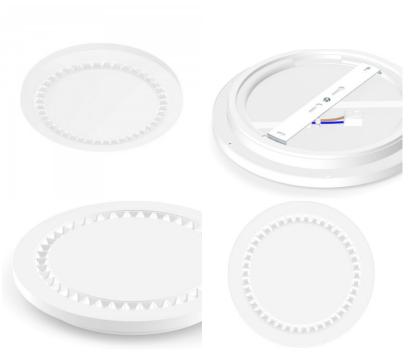

Dome light PROLUMEN AL45 D270 white round 230V 12W 1200lm 120° IP65 840





Product code 15787

Brand PROLUMEN Supply voltage 230V Output 12W Maximum output 12W/1m Luminous flux 1200lumens Luminaire's efficiency Im79 100W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP65 Lifespan 50000h Height 70.0mm Diameter 270.0mm Package weight 755g In box 10pcs Casing colour white Casing material plastic Polishing matt Shape round Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years







Dome light PROLUMEN AL45 D320 white round 230V 25W 2500lm 120° IP65 840

Product code 15545

Brand PROLUMEN Supply voltage 230V Output 25W Maximum output 25W/1m Luminous flux 2500lumens Luminaire's efficiency Im79 100W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP65 Lifespan 50000h Height 70.0mm Diameter 320.0mm In box 6pcs Casing colour white Casing material plastic Polishing matt Shape round Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years







Dome light PROLUMEN AL45 D520 round 230V 35W 3500lm 120° IP65 940

Product code 15786

Brand PROLUMEN Supply voltage 230V Output 35W Maximum output 35W/1m Luminous flux 3500lumens Luminaire's efficiency lm79 100W Correlated colour temperature pure white 4000K Lens angle 120 Cri 90 Protection class IP65 Lifespan 50000h Height 85.0mm Diameter 520.0mm In box 6pcs Casing material plastic Polishing matt Shape round Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years







Dome light PROLUMEN AL45 D520 white round 230V 40W 4000lm CRI80 120° IP65 3000K, 4000K, 5700K 3CCT

Product code 15857

Brand PROLUMEN Supply voltage 230V Output 40W Maximum output 40W/1m Luminous flux 4000lumens Luminaire's efficiency Im79 100W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 120 Cri 80 Protection class IP65 Lifespan 50000h Height 85.0mm Diameter 520.0mm Weight 2400g In box 6pcs Casing colour white Casing material plastic Polishing matt Shape round Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years









Dome light PROLUMEN AL47 D300 white round 230V 18W 1800lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17980 TRIAC dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 18W Maximum output 18W/1m Luminous flux 1800lumens Luminaire's efficiency Im79 100W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 58.0mm Diameter 300.0mm In box 6pcs Casing colour white Casing material plastic Polishing matt Shape round Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE

Warranty 5 years







Dome light PROLUMEN AL47 D300 white round 230V 25W 2500lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17979 TRIAC dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 25W Maximum output 25W/1m Luminous flux 2500lumens Luminaire's efficiency Im79 100W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 58.0mm Diameter 300.0mm In box 6pcs Casing colour white Casing material plastic Polishing matt Shape round Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years







Dome light PROLUMEN AL47 D400 white round 230V 30W 3400lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17978 TRIAC dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 30W Maximum output 30W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 113W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 66.0mm Diameter 400.0mm In box 6pcs Casing colour white Casing material plastic Polishing matt Shape round Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE

Warranty 5 years



Dome light PROLUMEN AL66 D250 black 230V 12W 1000lm CRI80 110° IP65 3000K, 4000K, 5700K 3CCT



23/40 8.12.2025

Product code 18040

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 12W Maximum output 12W/1m Luminous flux 1000lumens Luminaire's efficiency Im79 83W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 110 Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Height 74.0mm Diameter 250.0mm In package 1pc In box 12pcs Casing colour black Casing material aluminium + plastic Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years









Dome light PROLUMEN AL96 D200 black 230V 12W 1000lm 120° IP65 830

Product code 16034

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 12W Maximum output 12W/1m Luminous flux 1000lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 3000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Height 60.0mm Diameter 200.0mm In package 1pc In box 12pcs Casing colour black Casing material plastic Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN AL96 D275 black 230V 18W 1650lm 110° IP65 830

Product code 16005

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 18W Maximum output 18W/1m Luminous flux 1650lumens Luminaire's efficiency Im79 92W Correlated colour temperature warm white 3000K Lens angle 110 Cri 80 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Height 60.0mm Diameter 275.0mm In package 1pc In box 12pcs Casing colour black Casing material plastic Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN AL96 D350 black 230V 30W 2560lm 120° IP65 930

Product code 17233

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 30W Maximum output 30W/1m Luminous flux 2560lumens Luminaire's efficiency Im79 85W Correlated colour temperature warm white 3000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Height 60.0mm Diameter 350.0mm In package 1pc In box 6pcs Casing colour black Casing material plastic Impact resistance IK10 Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years








Dome light PROLUMEN AL96 D350 black 230V 30W 2560lm 120° IP65 DALI 930

Product code 17015 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 30W Maximum output 30W/1m Luminous flux 2560lumens Luminaire's efficiency Im79 85W Correlated colour temperature warm white 3000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Height 60.0mm Diameter 350.0mm In package 1pc In box 6pcs Casing colour black Casing material plastic Impact resistance IK10 Work environment indoor / outdoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN AL96 D350 black 230V 30W 2918lm 120° IP65 940

Product code 18273

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 30W Maximum output 30W/1m Luminous flux 2918lumens Luminaire's efficiency Im79 97W Correlated colour temperature pure white 4000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 3 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 60.0mm Diameter 350.0mm In package 1pc In box 6pcs Casing colour black Casing material plastic Impact resistance IK10 Work environment indoor / outdoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN Marui D450 white 230V 30W 3600lm 120° IP20 DALI 830

Product code 18177 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 30W Maximum output 30W/1m Luminous flux 3600lumens Luminaire's efficiency Im79 120W Correlated colour temperature warm white 3000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Height 85.0mm Diameter 450.0mm Casing colour white Casing material aluminium + plastic Power supply **BOKE** Impact resistance IK02 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN Marui D450 white 230V 30W 3600lm 120° IP20 DALI 840

Product code 18127 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 30W Maximum output 30W/1m Luminous flux 3600lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Height 85.0mm Diameter 450.0mm Casing colour white Casing material aluminium + plastic Power supply **BOKE** Impact resistance IK02 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN Marui D600 white 230V 40W 4800lm 120° IP20 DALI 830

Product code 19507 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 40W Maximum output 40W/1m Luminous flux 4800lumens Luminaire's efficiency Im79 120W Correlated colour temperature warm white 3000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Height 85.0mm Diameter 600.0mm Casing colour white Casing material aluminium + plastic Power supply **BOKE** Impact resistance IK02 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







Dome light PROLUMEN Marui D900 white 230V 60W 7200lm 120° IP20 DALI 840

Product code 18126 DALI dimmable

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Dimmable DALI Output 60W Maximum output 60W/1m Luminous flux 7200lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Height 85.0mm Diameter 900.0mm Casing colour white Casing material aluminium + plastic Power supply **BOKE** Impact resistance IK02 Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years



Dome light Trio Lighting Arco RGBW black round 22W 2500lm IP20 2700K-6000K warm + cold white





Product code 19931

Brand Trio Lighting
Output 22W
Luminous flux 2500lumens
Luminaire's efficiency Im79 114W
Correlated colour temperature warm
+ cold white 2700K-6000K
Protection class IP20
Height 8.0mm
Diameter 49.0mm
Weight 1200g
Package weight 1600g
Casing colour black
Shape round
Warranty 3 years

ARCO inspires with its integrated Rainbow effect that reflects the rainbow in all its colours. In addition to the RGB colour changer, the light colour and brightness can be easily adjusted via remote control. In the simple and modern look, the ceiling light easily finds a place in any living room. In addition, the luminaire features modern LED technology, which is characterised by high light quality and energy efficiency. Compared to conventional halogen lamps, up to 80% of energy costs can be saved. In addition, LED light sources have a long service life, produce less heat and protect the environment.











34/40 8.12.2025

Dome light Trio Lighting DOHA black 230V 29W 3260lm CRI80 IP20 2200K, 3000K, 4000K 3CCT

Product code 19384

Brand Trio Lighting Supply voltage 230V Power factor 0.90 Output 29W Maximum output 29W/1m Luminous flux 3260lumens Luminaire's efficiency Im79 112W Correlated colour temperature 3CCT 2200K, 3000K, 4000K Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 30000h Height 55.0mm Diameter 450.0mm Weight 2500g Casing colour black Casing material metal Operation temperature -20 ~ 45°C Warranty 5 years



Dome light Trio Lighting Glace black / white round 21.5W 2600lm CRI80 IP20 TRIAC 2700K-6500K WARM TO COLD

Product code 19974 TRIAC dimmable

Brand Trio Lighting Dimmable TRIAC Output 21.5W Maximum output 21.5W/1m Luminous flux 2600lumens Luminaire's efficiency Im79 121W Correlated colour temperature WARM TO COLD 2700K-6500K Cri 80 Protection class IP20 Lifespan 20000h Height 45.0mm Diameter 380.0mm Weight 1300g Casing colour black / white Shape round No. of switches 15000pcs Warranty 5 years

Integrated dimmer IP20 Light color infinitely variable Memory function Night light Not suitable for external dimmer Remote control Dimmable via switch Timer Wall- and ceiling mounting













Dome light WEGA white E27 IP44

Product code 18041


Maximum output 75W/1m Socket E27 Protection class IP44 Casing colour white




Dome light Zoe black round 230V 12W 770lm 115° IP44 840

Product code 16078

Supply voltage 230V Output 12W Maximum output 12W/1m Luminous flux 770lumens Luminaire's efficiency Im79 64W Correlated colour temperature pure white 4000K Lens angle 115 Cri 80 Protection class IP44 Lifespan 25000h Height 80.0mm Diameter 300.0mm Weight 440g In box 5pcs Casing colour black Casing material metal + plastic Shape round No. of switches 15000pcs Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years









Dome light Zoe black round 230V 24W 1540lm 115° IP44 840

Product code 16080

Supply voltage 230V Output 24W Maximum output 24W/1m Luminous flux 1540lumens Luminaire's efficiency Im79 64W Correlated colour temperature pure white 4000K Lens angle 115 Cri 80 Protection class IP44 Lifespan 25000h Height 80.0mm Diameter 300.0mm Weight 540g In box 5pcs Casing colour black Casing material metal + plastic Shape round No. of switches 15000pcs Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE

LED ceiling light with modern design. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Warranty 3 years







Dome light Zoe LX with motion sensor white round 230V 24W 1712lm 115° IP44 840

Product code 16732

Supply voltage 230V Output 24W Maximum output 24W/1m Luminous flux 1712lumens Luminaire's efficiency lm79 71W Correlated colour temperature pure white 4000K Lens angle 115 Cri 80 Protection class IP44 Lifespan 25000h Height 80.0mm Diameter 300.0mm Weight 650g In box 5pcs Casing colour white Casing material metal + plastic Shape round No. of switches 15000pcs Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years





Dome light Zoe white round 230V 12W 856lm 115° IP44 840

Product code 16075

Supply voltage 230V Output 12W Maximum output 12W/1m Luminous flux 856lumens Luminaire's efficiency Im79 71W Correlated colour temperature pure white 4000K Lens angle 115 Cri 80 Protection class IP44 Lifespan 25000h Height 80.0mm Diameter 300.0mm Weight 440g In box 5pcs Casing colour white Casing material metal + plastic Shape round No. of switches 15000pcs Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years





Dome light Zoe white round 230V 24W 1712lm 115° IP44 840

Product code 16077

Supply voltage 230V Output 24W Maximum output 24W/1m Luminous flux 1712lumens Luminaire's efficiency Im79 71W Correlated colour temperature pure white 4000K Lens angle 115 Cri 80 Protection class IP44 Lifespan 25000h Height 80.0mm Diameter 300.0mm Weight 540g In box 5pcs Casing colour white Casing material metal + plastic Shape round No. of switches 15000pcs Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years





Dome light Zoe with motion sensor white round 230V 19W 1284lm 115° IP44 840

Product code 18271

Supply voltage 230V Output 19W Maximum output 19W/1m Luminous flux 1284lumens Luminaire's efficiency Im79 68W Correlated colour temperature pure white 4000K Lens angle 115 Cri 80 Protection class IP44 Lifespan 25000h Height 80.0mm Diameter 300.0mm Weight 540g In box 5pcs Casing colour white Casing material metal + plastic Shape round No. of switches 15000pcs Impact resistance IK06 Work environment indoor / outdoor Operation temperature -20 ~ +40°C Certificates CE Warranty 3 years