

Dome light Deko-Light Motion liikumis- ja hämaranduriga white 20W 1500lm 110° IP65 3000K warm white

Product code 20173

Brand [Deko-Light](#)

Output voltage 220-240V

Output 20W

Luminous flux 1500lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature warm
white 3000K

Lens angle 110

Protection class IP65

Lifespan 25000h

Height 54.0mm

Diameter 200.0mm

Casing colour white

Casing material aluminium

Work environment outdoor use

Operation temperature -25 kuni 45
°C°C



Dome light E6 172x172 white square 230V 16W 1130lm 160° IP20 830

Product code 14145

Supply voltage 230V
Output 16W
Maximum output 16W/1m
Rated current 125mA
Luminous flux 1130lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature warm white 3000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 34.5mm
Width 172.0mm
Length 172.0mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium + plastic
Polishing matt
Shape square
No. of switches 12500pcs
Work environment indoor use
Operation temperature -20~+40°C
Certificates CE, RoHS



Surface-mounted square [ceiling light](#).
The LED light fixture fits into any interior with its minimalist design and can be installed on both walls and ceilings. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Dome light E6 D176 white round 230V 12W 1190lm 160° 830

Product code 13524

Supply voltage 230V
Output 12W
Maximum output 12W/1m
Rated current 100mA
Luminous flux 1190lumens
Luminaire's efficiency lm79 99W
Correlated colour temperature warm white 3000K
Lens angle 160
Cri 80
Lifespan 20000h
Height 34.5mm
Diameter 176.5mm
Weight 476 g
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium + plastic
Shape round
No. of switches 12500pcs
Operation temperature -20°C~40°C



Surface-mounted [ceiling light](#). The LED light fixture fits into any interior with its minimalist design and can be installed on both walls and ceilings. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Dome light EMOS NEXXO 120x120 white square 230V 7.6W 680lm 120° IP40/20 840

Product code 17949

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 7.6W

Maximum output 7.6W/1m

Rated current 500mA

Luminous flux 680lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure
white 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 40.0mm

Width 120.0mm

Length 120.0mm

Weight 427 g

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other [EMOS NEXXO ceiling lights!](#)

Dome light EMOS NEXXO 170x170 white square 230V 12.5W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16633

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 12.5W

Maximum output 12.5W/1m

Rated current 300mA

Luminous flux 1100lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Width 170.0mm

Length 170.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other [EMOS NEXXO ceiling lights!](#)

Dome light EMOS NEXXO 225x225 white square 230V 21W 1900lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16888

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 21W

Maximum output 21W/1m

Rated current 500mA

Luminous flux 1900lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Width 225.0mm

Length 225.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other [EMOS NEXXO ceiling lights!](#)

Dome light EMOS NEXXO 300x300 white square 230V 28,5W 2700lm CRI80 120° IP40/20 3000K, 4000K, 5000K 3CCT

Product code 22234

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 28,5W

Maximum output 28.5W/1m

Rated current 700mA

Luminous flux 2700lumens

Correlated colour temperature 3CCT

3000K, 4000K, 5000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Width 300.0mm

Length 300.0mm

Weight 427 g

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other [EMOS NEXXO ceiling lights!](#)

Dome light EMOS NEXXO D120 white round 230V 7.6W 680lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 17047

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 7.6W

Maximum output 7.6W/1m

Rated current 300mA

Luminous flux 680lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 40.0mm

Diameter 120.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Dome light EMOS NEXXO D170 black round 230V 12.50W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 18280

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 12.50W

Maximum output 12.50W/1m

Rated current 300mA

Luminous flux 1100lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Diameter 170.0mm

In package 1pc

In box 8pcs

Casing colour black

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Dome light EMOS NEXXO D170 white round 230V 12.5W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16890

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 12.5W

Maximum output 12.5W/1m

Rated current 300mA

Luminous flux 1100lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Diameter 170.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Dome light EMOS NEXXO D225 white round 230V 21W 1900lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16889

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 21W

Maximum output 21W/1m

Rated current 500mA

Luminous flux 1900lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Diameter 225.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Dome light EMOS NEXXO D300 white round 230V 28.5W 2700lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 17048

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 28.5W

Maximum output 28.5W/1m

Rated current 700mA

Luminous flux 2700lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Diameter 300.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Dome light LED-PLAF-14NW white 1120lm IP54 840

Product code 22094


Maximum output 14W/1m
Luminous flux 1120lumens
Correlated colour temperature pure white 4000K
Cri 80
Protection class IP54
Height 48.0mm
Diameter 190.0mm
Casing colour white
Impact resistance IK10
Work environment outdoor use
Warranty 5 years



LED dome light module LMM1842 230V 18W 1700lm 180° IP20 842

Product code 16303

Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1700lumens
Luminaire's efficiency lm79 94W
Correlated colour temperature pure white 4200K
Lens angle 180
Cri 80
Protection class IP20
Lifespan 25000h
Height 25.0mm
Diameter 215.0mm
Weight 100 g
Package weight 150 g
In box 20pcs
No. of switches 15000pcs
Work environment indoor use
Operation temperature -25 ~ +50°C

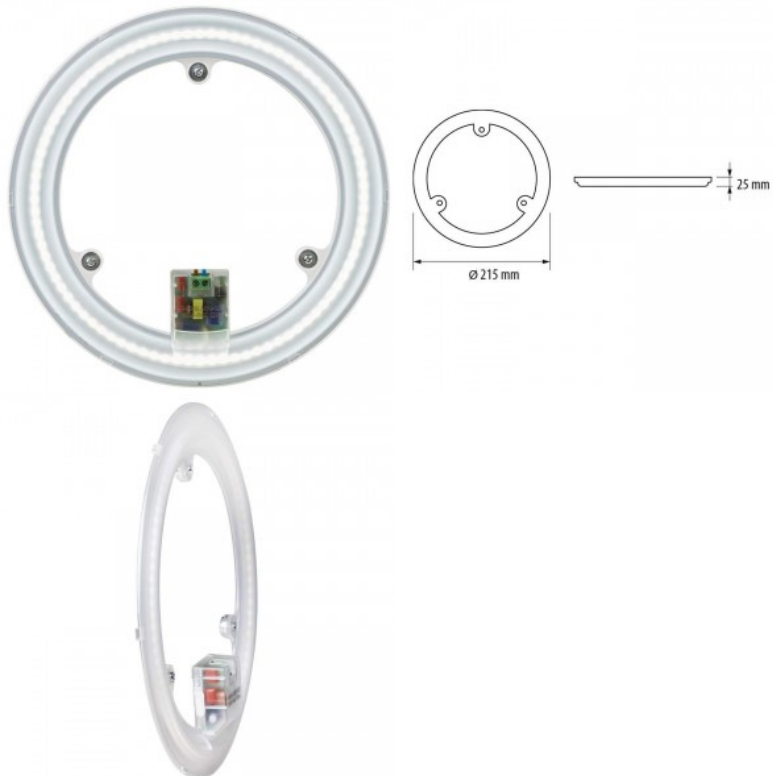

Ceiling light module. Suitable for indoor use only, protection class IP20. LED luminaire with a 4200K light temperature provides clear light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Maytoni Onda white round 12W 800lm CRI90 120° IP20 TRIAC 2200K, 3000K, 4000K 3CCT

Product code 20185 TRIAC dimmable

Brand Maytoni
 Dimmable TRIAC
 Output 12W
 Luminous flux 800lumens
 Luminaire's efficiency lm79 67W
 Correlated colour temperature 3CCT
 2200K, 3000K, 4000K
 Lens angle 120°
 Cri 90
 Protection class IP20
 Lifespan 30000h
 Height 66.0mm
 Diameter 85.0mm
 Weight 290 g
 Package weight 320 g
 Casing colour white
 Casing material metal
 Shape round
 Warranty 5 years

The Onda luminaire embodies adaptability and versatility. Its sleek metal housing is available in white, classic black, or a sophisticated black and matte gold combination. Thanks to its adjustable swivel mechanism, the light can be directed precisely where it's needed. Onda offers a choice of wattages and color temperatures, including biodynamic models. With a wide 120° beam angle and a high color rendering index (CRI >90), it delivers comfortable, natural illumination that enhances any environment. Compatible with both DALI and Triac dimming systems, Onda is ready to integrate seamlessly into the smart homes of tomorrow - where comfort, control, and performance go hand in hand.



Dome light Nairos G2 black 230V 12W 1140lm CRI80 90° IP65

3000K, 4000K, 6000K 3CCT

Product code 20086

Supply voltage 230V
 Power factor 0.70
 Output 12W
 Maximum output 12W/1m
 Luminous flux 1140lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6000K
 Lens angle 90
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 50.0mm
 Diameter 200.0mm
 Weight 400 g
 In box 20pcs
 Casing colour black
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years



A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

Dome light Nairos G2 black 230V 18W 1710lm CRI80 120° IP65 3000K, 4000K, 6000K 3CCT

Product code 20641

Supply voltage 230V
 Power factor 0.70
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1710lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6000K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 55.0mm
 Diameter 300.0mm
 Weight 700 g
 In box 10pcs
 Casing colour black
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years



A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

Dome light Nairos G2 black 230V 24W 2280lm CRI80 120° IP65 3000K, 4000K, 6000K 3CCT

Product code 17906

Supply voltage 230V
 Power factor 0.70
 Output 24W
 Maximum output 24W/1m
 Luminous flux 2280lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6000K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 55.0mm
 Diameter 300.0mm
 Weight 700 g
 In box 10pcs
 Casing colour black
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years



A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

Dome light Nairos G2 MW white 230V 12W 1140lm CRI80 120° IP65 3000K, 4000K, 6500K 3CCT

Product code 20651

Supply voltage 230V
 Power factor 0.70
 Output 12W
 Maximum output 12W/1m
 Luminous flux 1140lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6500K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 55.0mm
 Diameter 300.0mm
 Weight 700 g
 In box 10pcs
 Casing colour white
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years



A practical and energy-efficient solution for both indoor and outdoor use. It provides clear and even light and is well suited for bathrooms, hallways, staircases, garages, or terraces. The built-in motion and dusk sensor automatically switches the light on when needed, making everyday use convenient and helping to save energy. The durable housing protects the luminaire from moisture and dust, while the simple design fits well into various environments.

Dome light Nairos G2 MW white 230V 18W 1890lm CRI80 120° IP65 3000K, 4000K, 6500K 3CCT

Product code 20750

Supply voltage 230V
 Power factor 0.70
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1890lumens
 Luminaire's efficiency lm79 105W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6500K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 55.0mm
 Diameter 300.0mm
 Weight 700 g
 In box 10pcs
 Casing colour white
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years



A practical and energy-efficient solution for both indoor and outdoor use. It provides clear and even light and is well suited for bathrooms, hallways, staircases, garages, or terraces. The built-in motion and dusk sensor automatically switches the light on when needed, making everyday use convenient and helping to save energy. The durable housing protects the luminaire from moisture and dust, while the simple design fits well into various environments.

Dome light Nairos G2 white 230V 12W 1260lm CRI80 120° IP65 3000K, 4000K, 6500K 3CCT

Product code 20632

Supply voltage 230V
 Power factor 0.70
 Output 12W
 Maximum output 12W/1m
 Luminous flux 1260lumens
 Luminaire's efficiency lm79 105W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6500K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 50.0mm
 Diameter 200.0mm
 Weight 700 g
 In box 20pcs
 Casing colour white
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years



A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

Dome light Nairos G2 white 230V 18W 1890lm CRI80 120° IP65 3000K, 4000K, 6500K 3CCT

Product code 20629

Supply voltage 230V
 Power factor 0.70
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1890lumens
 Luminaire's efficiency lm79 105W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6500K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 55.0mm
 Diameter 300.0mm
 Weight 700 g
 In box 10pcs
 Casing colour white
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years




A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

Dome light Nairos LX with motion sensor white round 230V 24W 2520lm CRI80 120° IP65 3000K, 4000K, 6000K 3CCT

Product code 17523

Supply voltage 230V
 Power factor 0.70
 Output 24W
 Maximum output 24W/1m
 Luminous flux 2520lumens
 Luminaire's efficiency lm79 105W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6000K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 55.0mm
 Diameter 300.0mm
 Weight 650 g
 In box 5pcs
 Casing colour white
 Casing material metal + plastic
 Shape round
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years

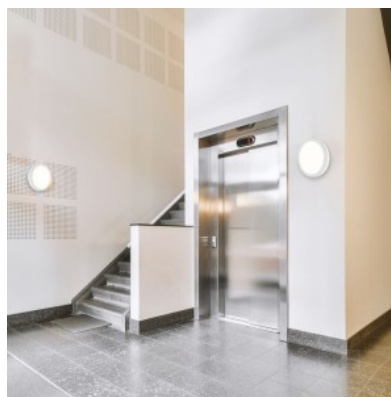

A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features a motion sensor, the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options:
 Power: 12W, 18W, 24W, 36W
 (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

Dome light Optonica Microwave sensoriga white 13W 1040lm 120° IP65 2700K warm white

Product code 22018

Brand [Optonica](#)
Output 13W
Luminous flux 1040lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 2700K
Lens angle 120
Protection class IP65
Lifespan 25000h
Height 113.0mm
Diameter 320.0mm
Casing colour white
Casing material plastic
Work environment indoor use



Dome light Optonica Microwave sensoriga white 18W 1800lm 120° IP54 3000K-6500K

Product code 22017


Brand [Optonica](#)
Output 18W
Luminous flux 1800lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature
3000K-6500K
Lens angle 120
Protection class IP54
Lifespan 25000h
Height 51.0mm
Diameter 220.0mm
Casing colour white
Casing material plastic
Work environment indoor use



Dome light Prolumen AL08 D250 white 230V 12W 1068lm 120° IP54 830

Product code 15089

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 12W
 Maximum output 12W/1m
 Luminous flux 1068lumens
 Luminaire's efficiency lm79 89W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 48.0mm
 Diameter 250.0mm
 Weight 800 g
 Package weight 930 g
 In box 20pcs
 Casing colour white
 Casing material plastic
 Impact resistance IK08
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years


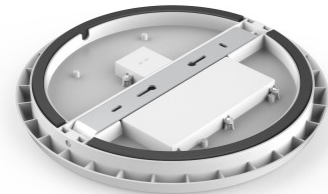


Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
 Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL08 D250 with motion sensor white 230V 12W 968lm 120° IP54 930

Product code 17104

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 12W
 Maximum output 12W/1m
 Luminous flux 968lumens
 Luminaire's efficiency lm79 81W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 90
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 48.0mm
 Diameter 250.0mm
 Weight 800 g
 Package weight 930 g
 In box 20pcs
 Casing colour white
 Casing material plastic
 Impact resistance IK08
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years

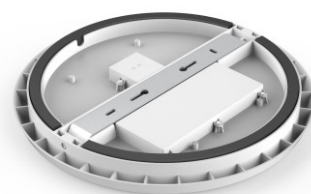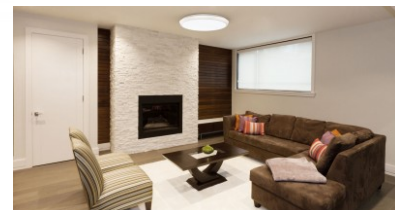


Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
 Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL08 D300 white 230V 18W 1710lm 120° IP54 830

Product code 16581

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1710lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 40.0mm
 Diameter 300.0mm
 Weight 800 g
 Package weight 930 g
 In package 1pc
 In box 10pcs
 Casing colour white
 Casing material plastic
 Impact resistance IK08
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years

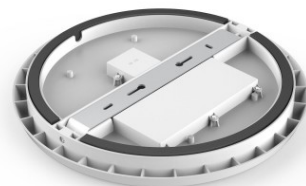


Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
 Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL08 D300 white 230V 18W 1800lm 120° IP54 840

Product code 13448

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1800lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 4000K
 Lens angle 120
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 48.0mm
 Diameter 300.0mm
 Weight 980 g
 Package weight 1.11 kg
 In box 10pcs
 Casing colour white
 Casing material plastic
 Impact resistance IK08
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years

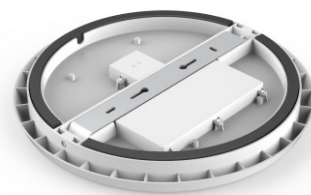


Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
 Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL08 D300 with motion sensor white 230V 25W 2550lm 120° IP54 940

Product code 15302

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 25W
 Maximum output 25W/1m
 Luminous flux 2550lumens
 Luminaire's efficiency lm79 102W
 Correlated colour temperature pure white 4000K
 Lens angle 120
 Cri 90
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 40.0mm
 Diameter 300.0mm
 Weight 800 g
 Package weight 930 g
 In box 10pcs
 Casing colour white
 Casing material plastic
 Impact resistance IK08
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years

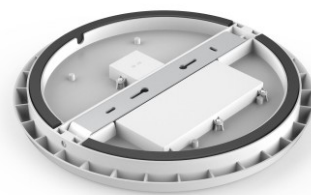


Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
 Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL08 D400 white 230V 30W 3000lm 120° IP54 830

Product code 14989

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 30W
 Maximum output 30W/1m
 Luminous flux 3000lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 52.0mm
 Diameter 400.0mm
 Weight 1.4 kg
 Package weight 1.7 kg
 In package 1pc
 In box 10pcs
 Casing colour white
 Casing material plastic
 Impact resistance IK08
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years

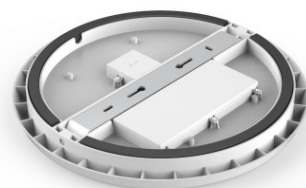

Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
 Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL127 D250 black 230V 12W 1260lm 120° IP54 DALI 940

Product code 17805 DALI dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 12W
Maximum output 12W/1m
Luminous flux 1260lumens
Luminaire's efficiency lm79 105W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 58.0mm
Diameter 250.0mm
Weight 1.92 kg
In package 1pc
In box 20pcs
Casing colour black
Casing material plastic
Operation temperature -20° - +45°C
Certificates CE, RoHS
Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light Prolumen AL127 D400 white 230V 25W 2400lm 120° IP54 DALI 940

Product code 16975 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 25W

Maximum output 25W/1m

Luminous flux 2400lumens

Luminaire's efficiency lm79 96W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 40000h

Height 58.0mm

Diameter 400.0mm

Weight 1.92 kg

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light Prolumen AL181 D250 white round 230V 12W 1260lm 110° IP44 930

Product code 18301

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 12W

Maximum output 12W/1m

Luminous flux 1260lumens

Luminaire's efficiency lm79 105W

Correlated colour temperature warm
white 3000K

Lens angle 110

Cri 90

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 50000h

Height 69.0mm

Diameter 250.0mm

Weight 750 g

In package 1pc

In box 12pcs

Casing colour white

Casing material plastic

Shape round

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE, RoHS

Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light Prolumen AL181 D300 white round 230V 15W 1620lm 110° IP44 930

Product code 18302

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Output 15W
Maximum output 15W/1m
Luminous flux 1620lumens
Luminaire's efficiency lm79 108W
Correlated colour temperature warm white 3000K
Lens angle 110
Cri 90
Sdcm - macadam ellipses 6
Protection class IP44
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 71.0mm
Diameter 300.0mm
Weight 750 g
In package 1pc
In box 6pcs
Casing colour white
Casing material plastic
Shape round
Work environment indoor use
Operation temperature -20° - +45°C
Certificates CE, RoHS
Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light Prolumen AL199-16 black 230V 19W 1860lm 120° IP40 830

Product code 21899

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 19W

Maximum output 19W/1m

Luminous flux 1860lumens

Luminaire's efficiency lm79 98W

Correlated colour temperature warm
white 3000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP40

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 86.0mm

Diameter 300.0mm

Installation opening diameter 225mm

In package 1pc

In box 4pcs

Casing colour black

Casing material plastic

Impact resistance IK03

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Dome light Prolumen AL199-16 black 230V 40W 4450lm 120° IP40 830

Product code 21897

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 40W

Maximum output 40W/1m

Luminous flux 4450lumens

Luminaire's efficiency lm79 111W

Correlated colour temperature warm
white 3000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP40

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 86.0mm

Diameter 400.0mm

Installation opening diameter 285mm

In package 1pc

In box 4pcs

Casing colour black

Casing material plastic

Impact resistance IK03

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Dome light Prolumen AL37 white 230V 25W 2800lm 100° 930

Product code 14710

Brand [Prolumen](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Luminous flux 2800lumens

Luminaire's efficiency lm79 112W

Correlated colour temperature warm white 3000K

Lens angle 100

Cri 90

Lifespan 50000h

Height 33.0mm

Diameter 400.0mm


Weight 1.44 kg

Casing colour white

Certificates CE, RoHS

Warranty 5 years

Compact LED ceiling light for living rooms, bedrooms, and other indoor spaces. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The light temperature of 3000K adds warm white light to the room. From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

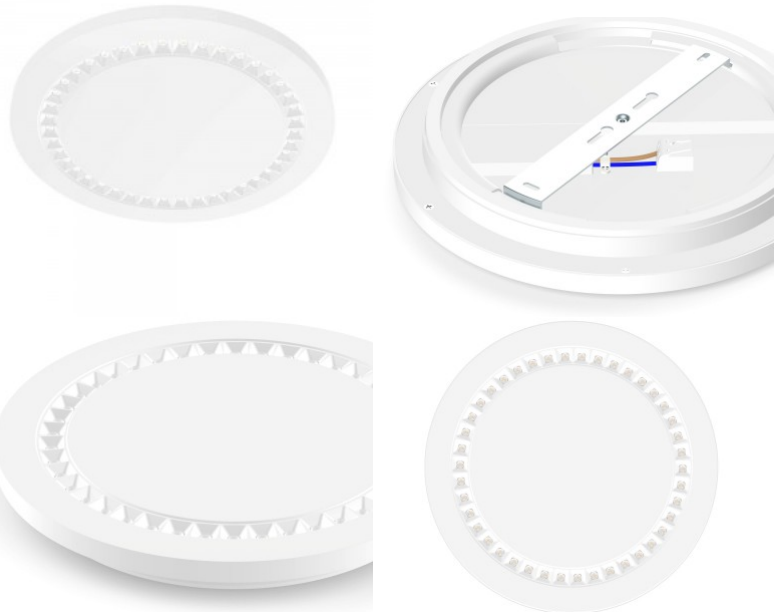

Dome light Prolumen AL45 D270 white round 230V 12W 1200lm 120° IP65 840

Product code 15787

Brand [Prolumen](#)

Supply voltage 230V

Output 12W

Maximum output 12W/1m

Luminous flux 1200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 50000h

Height 70.0mm

Diameter 270.0mm

Package weight 755 g

In box 10pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light Prolumen AL45 D320 white round 230V 25W 2500lm 120° IP65 840

Product code 15545

Brand [Prolumen](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 50000h

Height 70.0mm

Diameter 320.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light Prolumen AL45 D520 round 230V 35W 3500lm 120° IP65 940

Product code 15786

Brand [Prolumen](#)

Supply voltage 230V

Output 35W

Maximum output 35W/1m

Luminous flux 3500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 90

Protection class IP65

Lifespan 50000h

Height 85.0mm

Diameter 520.0mm

In box 6pcs

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light Prolumen AL45 D520 white round 230V 40W 4000lm CRI80 120° IP65 3000K, 4000K, 5700K 3CCT

Product code 15857

Brand [Prolumen](#)

Supply voltage 230V

Output 40W

Maximum output 40W/1m

Luminous flux 4000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature 3CCT
3000K, 4000K, 5700K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 50000h

Height 85.0mm

Diameter 520.0mm

Weight 2.4 kg

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light Prolumen AL47 D300 white round 230V 18W 1800lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17980 TRIAC dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 18W

Maximum output 18W/1m

Luminous flux 1800lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 58.0mm

Diameter 300.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Dome light Prolumen AL47 D300 white round 230V 25W 2500lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17979 TRIAC dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 25W

Maximum output 25W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 58.0mm

Diameter 300.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Dome light Prolumen AL47 D400 white round 230V 30W 3400lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17978 TRIAC dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Luminous flux 3400lumens

Luminaire's efficiency lm79 113W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 66.0mm

Diameter 400.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Dome light Prolumen AL66 D250 black 230V 12W 1000lm CRI80 110° IP65 3000K, 4000K, 5700K 3CCT

Product code 18040

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 12W

Maximum output 12W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature 3CCT
3000K, 4000K, 5700K

Lens angle 110

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 74.0mm

Diameter 250.0mm

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminium + plastic

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL87-11(G2.0) with motion sensor white 230V 25W 2900lm 120° IP54 930

Product code 22199

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 1225W/1m
Luminous flux 2900lumens
Luminaire's efficiency lm79 116W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 65.0mm
Diameter 275.0mm
In box 12pcs
Casing colour white
Casing material plastic
Impact resistance IK08
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Dome light Prolumen AL96 D200 black 230V 12W 1000lm 120° IP65 830

Product code 16034

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 12W

Maximum output 12W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature warm white 3000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 60.0mm

Diameter 200.0mm

In package 1pc

In box 12pcs

Casing colour black

Casing material plastic

Impact resistance IK10

Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL96 D275 black 230V 18W 1650lm 110° IP65 830

Product code 16005

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Output 18W
Maximum output 18W/1m
Luminous flux 1650lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm white 3000K
Lens angle 110
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 275.0mm
In package 1pc
In box 12pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL96 D275 white 230V 18W 1650lm 110° IP65 830

Product code 22292

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Output 18W
Maximum output 18W/1m
Luminous flux 1650lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm
white 3000K
Lens angle 110
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 275.0mm
In package 1pc
In box 12pcs
Casing colour white
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor
use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL96 D350 black 230V 30W 2560lm 120° IP65 930

Product code 17233

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 2560lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 350.0mm
In package 1pc
In box 6pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL96 D350 black 230V 30W 2560lm 120° IP65 DALI 930

Product code 17015 DALI dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 30W
Maximum output 30W/1m
Luminous flux 2560lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 350.0mm
In package 1pc
In box 6pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen AL96 D350 black 230V 30W 2918lm 120° IP65 940

Product code 18273

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 2918lumens
Luminaire's efficiency lm79 97W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 3
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 60.0mm
Diameter 350.0mm
In package 1pc
In box 6pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Prolumen DL52 white 230V 18W 1584lm 100° IP54 930

Product code 15610

Brand [Prolumen](#)
 Supply voltage 230V
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1584lumens
 Luminaire's efficiency lm79 88W
 Correlated colour temperature warm white 3000K
 Lens angle 100
 Cri 90
 Protection class IP54
 Lifespan 50000h
 Height 68.0mm
 Diameter 170.0mm
 Weight 474 g
 Package weight 537 g
 In package 1pc
 In box 24pcs
 Casing colour white
 Casing material aluminium
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The light temperature of the luminaire is 3000K, providing warm white light to the room. For homes, we recommend warm white ceiling lights for bedrooms, living rooms, and dining areas. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

Dome light Prolumen Marui D450 white 230V 30W 3600lm 120° IP20 DALI 830

Product code 18177 DALI dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 30W
Maximum output 30W/1m
Luminous flux 3600lumens
Luminaire's efficiency lm79 120W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP20
Lifespan 50000h
Height 85.0mm
Diameter 450.0mm
Casing colour white
Casing material aluminium + plastic
Power supply [BOKE](#)
Impact resistance IK02
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Dome light Prolumen Marui D450 white 230V 30W 3600lm 120° IP20 DALI 840

Product code 18127 DALI dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 30W
Maximum output 30W/1m
Luminous flux 3600lumens
Luminaire's efficiency lm79 120W
Correlated colour temperature pure
white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP20
Lifespan 50000h
Height 85.0mm
Diameter 450.0mm
Casing colour white
Casing material aluminium + plastic
Power supply [BOKE](#)
Impact resistance IK02
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Dome light Prolumen Marui D600 white 230V 40W 4800lm 120° IP20 DALI 830

Product code 19507 DALI dimmable

Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 40W
Maximum output 40W/1m
Luminous flux 4800lumens
Luminaire's efficiency lm79 120W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP20
Lifespan 50000h
Height 85.0mm
Diameter 600.0mm
Casing colour white
Casing material aluminium + plastic
Power supply [BOKE](#)
Impact resistance IK02
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Dome light Prolumen Marui D900 white 230V 60W 7200lm 120° IP20 DALI 840

Product code 18126 DALI dimmable


Brand [Prolumen](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 60W
Maximum output 60W/1m
Luminous flux 7200lumens
Luminaire's efficiency lm79 120W
Correlated colour temperature pure
white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP20
Lifespan 50000h
Height 85.0mm
Diameter 900.0mm
Casing colour white
Casing material aluminium + plastic
Power supply [BOKE](#)
Impact resistance IK02
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Dome light SIGARO SQUARE white square 230V 18W 1800lm 120° IP40 840

Product code 15913


Supply voltage 230V
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1800lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 4000K
 Lens angle 120
 Cri 80
 Protection class IP40
 Lifespan 25000h
 Height 30.0mm
 Width 225.0mm
 Length 225.0mm
 Weight 300 g
 In box 20pcs
 Casing colour white
 Casing material plastic
 Polishing matt
 Shape square
 No. of switches 15000pcs
 Impact resistance IK03
 Work environment indoor use
 Operation temperature -20 ~ 40°C
 Certificates CE
 Warranty 3 years

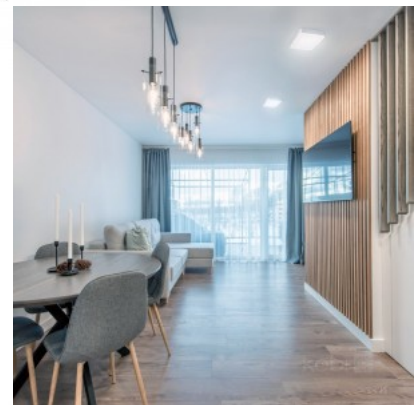

Dome light SIGARO SQUARE white square 230V 24W 2400lm 120° IP40 840

Product code 15914

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 2400lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP40
Lifespan 25000h
Height 30.0mm
Width 225.0mm
Length 225.0mm
Weight 320 g
In box 20pcs
Casing colour white
Casing material plastic
Polishing matt
Shape square
No. of switches 15000pcs
Impact resistance IK03
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 3 years

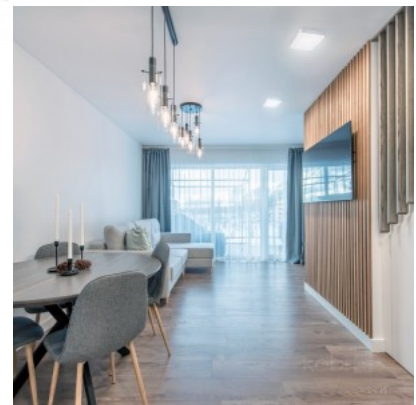

Dome light Trio Lighting Arco RGBW black round 22W 2500lm IP20 2700K-6000K warm + cold white

Product code 19931

Brand [Trio Lighting](#)

Output 22W

Luminous flux 2500lumens

Luminaire's efficiency lm79 114W

Correlated colour temperature warm

+ cold white 2700K-6000K

Protection class IP20

Height 8.0mm

Diameter 49.0mm

Weight 1.2 kg

Package weight 1.6 kg

Casing colour black

Shape round

Warranty 3 years



ARCO inspires with its integrated Rainbow effect that reflects the rainbow in all its colours. In addition to the RGB colour changer, the light colour and brightness can be easily adjusted via remote control. In the simple and modern look, the ceiling light easily finds a place in any living room. In addition, the luminaire features modern LED technology, which is characterised by high light quality and energy efficiency. Compared to conventional halogen lamps, up to 80% of energy costs can be saved. In addition, LED light sources have a long service life, produce less heat and protect the environment.

Dome light Trio Lighting DOHA black 230V 29W 3260lm CRI80 IP20 2200K, 3000K, 4000K 3CCT

Product code 19384

Brand [Trio Lighting](#)

Supply voltage 230V

Power factor 0.90

Output 29W

Maximum output 29W/1m

Luminous flux 3260lumens

Luminaire's efficiency lm79 112W

Correlated colour temperature 3CCT
2200K, 3000K, 4000K

Cri 80

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 30000h

Height 55.0mm

Diameter 450.0mm

Weight 2.5 kg

Casing colour black

Casing material metal

Operation temperature -20 ~ 45°C

Warranty 5 years



Dome light Trio Lighting Nando nickel 13,5W 1290lm IP44 3000K warm white

Product code 19988

Brand [Trio Lighting](#)

Output 13,5W

Maximum output 13.5W/1m

Luminous flux 1290lumens

Correlated colour temperature warm
white 3000K

Protection class IP44

Height 110.0mm

Diameter 250.0mm

Casing colour nickel

Warranty 5 years



Dome light Trio Lighting Nando white 42W 5200lm CRI80 IP20 Dip Switch 2700K-6000K warm + cold white

**Product code 21920 Dip Switch
dimnable**

Brand [Trio Lighting](#)
Dimmable Dip Switch
Output 42W
Luminous flux 5200lumens
Luminaire's efficiency lm79 124W
Correlated colour temperature warm
+ cold white 2700K-6000K
Cri 80
Protection class IP20
Lifespan 10000h
Height 9.0mm
Diameter 70.0mm
Weight 2.2 kg
Package weight 2.9 kg
Casing colour white
Casing material plastic
No. of switches 25000pcs
Warranty 5 years



Dome light Trio Lighting Rotunda white 24W 2500lm IP20 switch dimmer 2700K-6000K warm + cold white

Product code 22153 switch dimmer dimmable

Brand [Trio Lighting](#)

Dimmable switch dimmer

Output 24W

Luminous flux 2500lumens

Luminaire's efficiency lm79 104W

Correlated colour temperature warm

+ cold white 2700K-6000K

Protection class IP20

Lifespan 30000h

Height 105.0mm

Diameter 380.0mm

Weight 600 g

Package weight 1.1 kg


Casing colour white

Casing material plastic

No. of switches 15000pcs

Work environment indoor use

Warranty 5 years

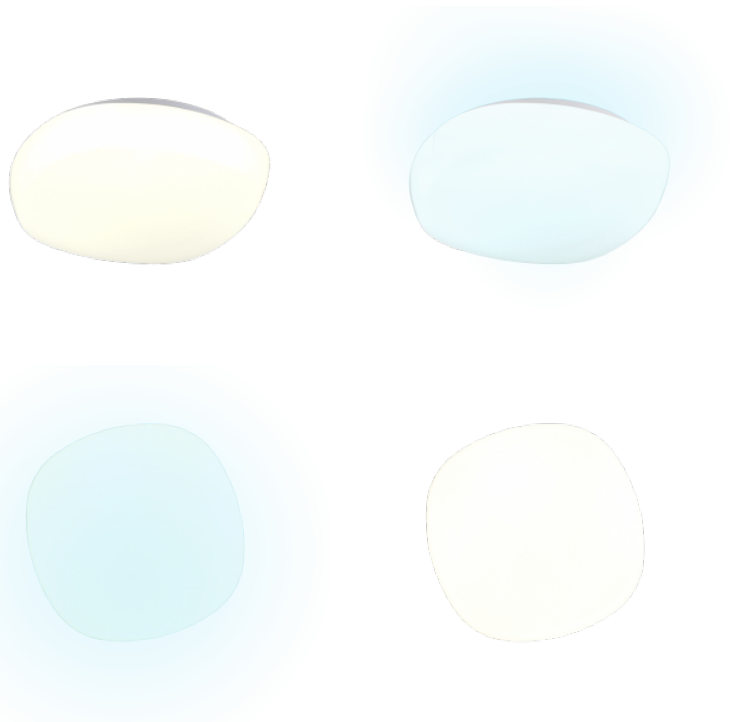

The ROTUNDA ceiling light impresses with its minimalist, discreet design and modern lighting technology that can be fully customised to your needs. Both the brightness and the light colour can be conveniently adjusted using the remote control - from atmospheric, feel-good light to functional illumination. Alternatively, the brightness can also be easily adjusted in three stages using the existing light switch. The integrated memory function saves the last selected setting, ensuring the perfect light at all times. Whether in the bedroom, hallway or other living areas - ROTUNDA creates a pleasant and calm atmosphere. The combination of white metal and plastic emphasises the discreet, modern character of the light. In addition, the luminaires feature modern LED technology, which stands for a high quality of light. LED light sources are characterized by a long service life and low heat generation.

Dome light Trio Lighting Waco white round 51W 12400lm CRI80 IP20 DIMMABLE 2300K, 3000K, 4000K 3CCT

Product code 20165 DIMMABLE dimmable

Brand [Trio Lighting](#)
 Dimmable DIMMABLE
 Output 51W
 Luminous flux 12400lumens
 Luminaire's efficiency lm79 243W
 Correlated colour temperature 3CCT
 2300K, 3000K, 4000K
 Cri 80
 Protection class IP20
 Lifespan 30000h
 Height 6.0mm
 Diameter 750.0mm
 Weight 5.26 kg
 Package weight 6.91 kg
 Casing colour white
 Casing material plastic
 Shape round
 Work environment indoor use
 Warranty 5 years

The WACO ceiling light rounds off your living concept in the truest sense of the word. The minimalist design is timeless and adds a touch of elegance and modernity to your kitchen or bedroom, for example. Using a DIP switch, the light colour can be adjusted from warm to neutral white via a switch directly on the luminaire. The light is also infinitely dimmable using an external trailing edge phase dimmer, which you can purchase separately from a specialist retailer. In the simple colour of white matte, as well as the combination of metal and acrylic, the lamp fits into almost any interior style. In addition, the luminaire features modern LED technology, which is characterised by high light quality and energy efficiency. Compared to conventional halogen lamps, up to 80% of energy costs can be saved. In addition, LED light sources have a long service life, produce less heat and protect the environment.



Dome light WEGA white E27 IP44

Product code 18041

Maximum output 75W/1m
Socket E27
Protection class IP44
Casing colour white



Dome light Zoe black round 230V 12W 770lm 115° IP44 840

Product code 16078

Supply voltage 230V
Output 12W
Maximum output 12W/1m
Luminous flux 770lumens
Luminaire's efficiency lm79 64W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 440 g
In box 5pcs
Casing colour black
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



LED ceiling light with modern design. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe black round 230V 24W 1540lm 115° IP44 840

Product code 16080

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 1540lumens
Luminaire's efficiency lm79 64W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 540 g
In box 5pcs
Casing colour black
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



LED ceiling light with modern design. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe LX with motion sensor white round 230V 24W 1712lm 115° IP44 840

Product code 16732

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 1712lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 650 g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe white round 230V 12W 856lm 115° IP44 840

Product code 16075

Supply voltage 230V
Output 12W
Maximum output 12W/1m
Luminous flux 856lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 440 g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe white round 230V 24W 1712lm 115° IP44 840

Product code 16077

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 1712lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 540 g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe with motion sensor white round 230V 19W 1284lm 115° IP44 840

Product code 18271

Supply voltage 230V
Output 19W
Maximum output 19W/1m
Luminous flux 1284lumens
Luminaire's efficiency lm79 68W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 540 g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Impact resistance IK06
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)