

Dome light DOHA black 230V 29W 3260lm CRI80 IP20 2200K, 3000K, 4000K 3CCT

Product code 19384

Supply voltage 230V
Power factor 0.90
Output 29W
Maximum output 29W/1m
Luminous flux 3260lumens
Luminaire's efficiency lm79 112W
Correlated colour temperature 3CCT
2200K, 3000K, 4000K
Cri 80
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 30000h
Height 55.0mm
Diameter 450.0mm
Weight 2500g
Casing colour black
Casing material metal
Operation temperature -20 ~ 45°C
Warranty 5 years




LED dome light module LMM1842 230V 18W 1700lm 180° IP20 842

Product code 16303

Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1700lumens
Luminaire's efficiency lm79 94W
Correlated colour temperature pure white 4200K
Lens angle 180
Cri 80
Protection class IP20
Lifespan 25000h
Height 25.0mm
Diameter 215.0mm
Weight 100g
Package weight 150g
In box 20pcs
No. of switches 15000pcs
Work environment indoor use
Operation temperature -25 ~ +50°C

Ceiling light module. Suitable for indoor use only, protection class IP20. LED luminaire with a 4200K light temperature provides clear light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

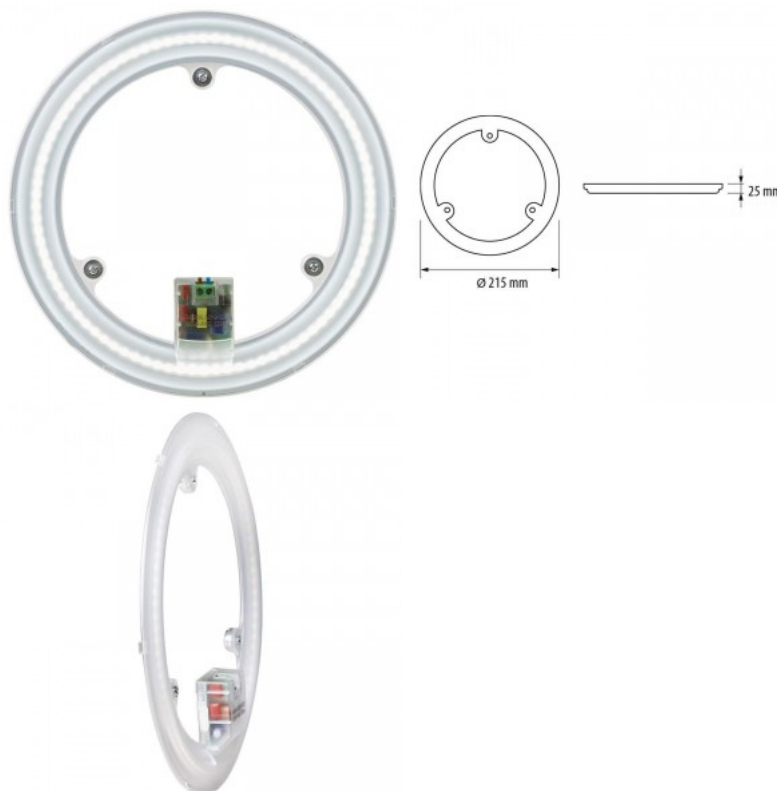

Dome light Nairos G2 black 230V 24W 2280lm CRI80 120° IP65 3000K, 4000K, 6000K 3CCT

Product code 17906

Supply voltage 230V
 Power factor 0.70
 Output 24W
 Maximum output 24W/1m
 Luminous flux 2280lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature 3CCT
 3000K, 4000K, 6000K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 30000h
 Height 55.0mm
 Diameter 300.0mm
 Weight 700g
 In box 10pcs
 Casing colour black
 Casing material plastic
 No. of switches 20000pcs
 Impact resistance IK08
 Work environment indoor / outdoor
 use
 Operation temperature -20 ~ +40°C
 Certificates CE
 Warranty 3 years




A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

Dome light Nairos LX with motion sensor white round 230V 24W 2520lm CRI80 120° IP65 3000K, 4000K, 6000K 3CCT

Product code 17523

Supply voltage 230V
Power factor 0.70
Output 24W
Maximum output 24W/1m
Luminous flux 2520lumens
Luminaire's efficiency lm79 105W
Correlated colour temperature 3CCT
3000K, 4000K, 6000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 30000h
Height 55.0mm
Diameter 300.0mm
Weight 650g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 20000pcs
Impact resistance IK08
Work environment indoor / outdoor
use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years

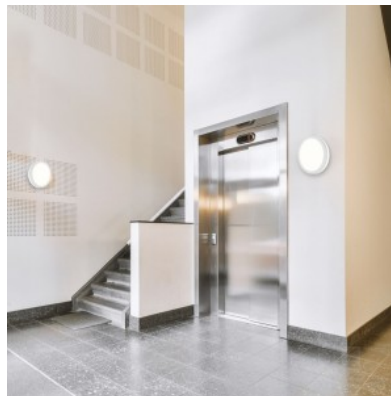

A modern luminaire suitable for both indoor and outdoor use. This round [ceiling light fixture](#) features a motion sensor, the option to choose between 3000K, 4000K, and 6500K light temperatures, and can be mounted on both walls and ceilings. With an IP65 protection rating, this luminaire is protected against fine dust and low-pressure jets of water. This allows the luminaire to be used in stairwells, on terraces, in corridors, as well as in office spaces. Nairos LX models are available with the following options: Power: 12W, 18W, 24W, 36W (dimensions may vary according to power) Color: black, white Color temperatures: 3000/4000/6500K. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!


Dome light PROLUMEN AL08 D250 white 230V 12W 1068lm 120° IP54 830

Product code 15089

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 12W
Maximum output 12W/1m
Luminous flux 1068lumens
Luminaire's efficiency lm79 89W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 40000h
Height 48.0mm
Diameter 250.0mm
Weight 800g
Package weight 930g
In box 20pcs
Casing colour white
Casing material plastic
Impact resistance IK08
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)




Dome light PROLUMEN AL08 D250 with motion sensor white 230V 12W 968lm 120° IP54 930

Product code 17104

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 12W
Maximum output 12W/1m
Luminous flux 968lumens
Luminaire's efficiency lm79 81W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 40000h
Height 48.0mm
Diameter 250.0mm
Weight 800g
Package weight 930g
In box 20pcs
Casing colour white
Casing material plastic
Impact resistance IK08
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years




Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



Dome light PROLUMEN AL08 D300 white 230V 18W 1710lm 120° IP54 830

Product code 16581

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1710lumens
 Luminaire's efficiency lm79 95W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 40000h
 Height 40.0mm
 Diameter 300.0mm
 Weight 800g
 Package weight 930g
 In package 1pc
 In box 10pcs
 Casing colour white
 Casing material plastic
 Impact resistance IK08
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years

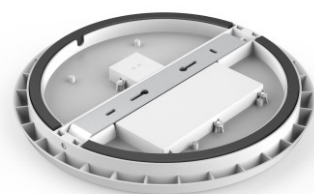

Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
 Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)


Dome light PROLUMEN AL08 D300 white 230V 18W 1800lm 120° IP54 840

Product code 13448

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 18W
Maximum output 18W/1m
Luminous flux 1800lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 40000h
Height 48.0mm
Diameter 300.0mm
Weight 980g
Package weight 1110g
In box 10pcs
Casing colour white
Casing material plastic
Impact resistance IK08
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)




Dome light PROLUMEN AL08 D300 with motion sensor white 230V 25W 2550lm 120° IP54 940

Product code 15302

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 2550lumens
Luminaire's efficiency lm79 102W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 40000h
Height 40.0mm
Diameter 300.0mm
Weight 800g
Package weight 930g
In box 10pcs
Casing colour white
Casing material plastic
Impact resistance IK08
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years




Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



Dome light PROLUMEN AL08 D400 white 230V 30W 3000lm 120° IP54 830

Product code 14989

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 3000lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 40000h
Height 52.0mm
Diameter 400.0mm
Weight 1400g
Package weight 1700g
In package 1pc
In box 10pcs
Casing colour white
Casing material plastic
Impact resistance IK08
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years

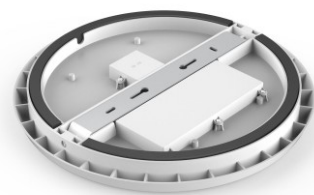

Premium-class LED ceiling light. With a classic round design. This surface-mounted luminaire can be installed on both ceilings and walls. Ideal luminaire for illuminating shops, staircases, parking lots, restrooms, warehouses. The IP54 protection class means that this luminaire is protected against ordinary dust and splashing from any direction. AL08 models can be ordered with the following features: Power: 12W, 15W, 25W
Color: black, white Light temperatures: 3000/4000/5000/5700K or with adjustable light 3000-4000-5700K. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (40,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light PROLUMEN AL127 D250 black 230V 12W 1260lm 120° IP54 DALI 940

Product code 17805 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 12W
Maximum output 12W/1m
Luminous flux 1260lumens
Luminaire's efficiency lm79 105W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 58.0mm
Diameter 250.0mm
Weight 1920g
In package 1pc
In box 20pcs
Casing colour black
Casing material plastic
Operation temperature -20° - +45°C
Certificates CE, RoHS
Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light PROLUMEN AL127 D400 white 230V 25W 2400lm 120° IP54 DALI 940

Product code 16975 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 25W

Maximum output 25W/1m

Luminous flux 2400lumens

Luminaire's efficiency lm79 96W

Correlated colour temperature pure
white 4000K

Lens angle 120

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 40000h

Height 58.0mm

Diameter 400.0mm

Weight 1920g

In package 1pc

In box 10pcs

Casing colour white

Casing material plastic

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light PROLUMEN AL181 D250 white round 230V 12W 1260lm 110° IP44 930

Product code 18301

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 12W

Maximum output 12W/1m

Luminous flux 1260lumens

Luminaire's efficiency lm79 105W

Correlated colour temperature warm
white 3000K

Lens angle 110

Cri 90

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 50000h

Height 69.0mm

Diameter 250.0mm

Weight 750g

In package 1pc

In box 12pcs

Casing colour white

Casing material plastic

Shape round

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE, RoHS

Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light PROLUMEN AL181 D300 white round 230V 15W 1620lm 110° IP44 930

Product code 18302

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 15W
Maximum output 15W/1m
Luminous flux 1620lumens
Luminaire's efficiency lm79 108W
Correlated colour temperature warm
white 3000K
Lens angle 110
Cri 90
Sdcm - macadam ellipses 6
Protection class IP44
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 71.0mm
Diameter 300.0mm
Weight 750g
In package 1pc
In box 6pcs
Casing colour white
Casing material plastic
Shape round
Work environment indoor use
Operation temperature -20° - +45°C
Certificates CE, RoHS
Warranty 5 years



Ceiling-mounted LED light fitting, which is well-suited for general lighting in various rooms such as corridors, staircases, offices, technical rooms, and living spaces. Its timeless design makes it ideal for use in both new and renovated interiors, providing reliable and even lighting for everyday use.

Dome light PROLUMEN AL37 white 230V 25W 2800lm 100° 930

Product code 14710

Brand [PROLUMEN](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Luminous flux 2800lumens

Luminaire's efficiency lm79 112W

Correlated colour temperature warm

white 3000K

Lens angle 100

Cri 90

Lifespan 50000h

Height 33.0mm

Diameter 400.0mm


Weight 1440g

Casing colour white

Certificates CE, RoHS

Warranty 5 years

Compact LED ceiling light for living rooms, bedrooms, and other indoor spaces. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The light temperature of 3000K adds warm white light to the room. From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

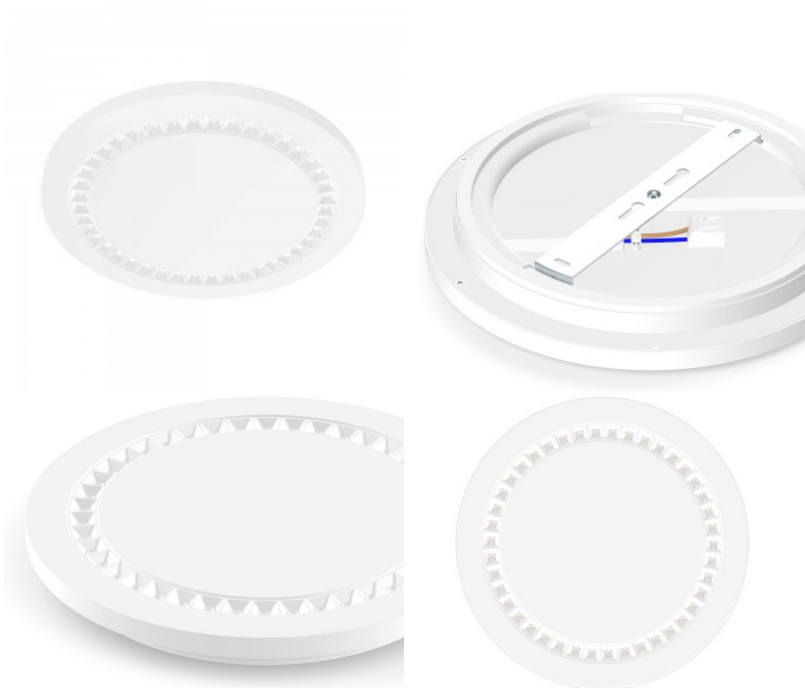

Dome light PROLUMEN AL45 D270 white round 230V 12W 1200lm 120° IP65 840

Product code 15787

Brand [PROLUMEN](#)

Supply voltage 230V

Output 12W

Maximum output 12W/1m

Luminous flux 1200lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 50000h

Height 70.0mm

Diameter 270.0mm

Package weight 755g

In box 10pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light PROLUMEN AL45 D320 white round 230V 25W 2500lm 120° IP65 840

Product code 15545

Brand [PROLUMEN](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 50000h

Height 70.0mm

Diameter 320.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light PROLUMEN AL45 D520 round 230V 35W 3500lm 120° IP65 940

Product code 15786

Brand [PROLUMEN](#)

Supply voltage 230V

Output 35W

Maximum output 35W/1m

Luminous flux 3500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 90

Protection class IP65

Lifespan 50000h

Height 85.0mm

Diameter 520.0mm

In box 6pcs

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light PROLUMEN AL45 D520 white round 230V 40W 4000lm CRI80 120° IP65 3000K, 4000K, 5700K 3CCT

Product code 15857

Brand [PROLUMEN](#)

Supply voltage 230V

Output 40W

Maximum output 40W/1m

Luminous flux 4000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature 3CCT
3000K, 4000K, 5700K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 50000h

Height 85.0mm

Diameter 520.0mm

Weight 2400g

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Classic LED ceiling light with a round design. Thanks to the IP65 protection class, this luminaire can be used both indoors and outdoors. The luminaire is protected against ordinary dust and splashes from any direction. Options with different light intensities available! 1200lm for example for bedrooms, hallways, smaller office spaces 2500lm for example for living rooms, kitchens, office spaces 3500lm for example for retail spaces, workshops, larger office spaces 4000lm for example for open-plan living areas, retail spaces, indoor parking lots. Possibility to order in light temperatures: 3000K (warm white) and 4000K (daylight white). Possible wattages: 12W, 18W, 25W, 30W, 35W, 40W.

Dome light PROLUMEN AL47 D300 white round 230V 18W 1800lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17980 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 18W

Maximum output 18W/1m

Luminous flux 1800lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 58.0mm

Diameter 300.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Dome light PROLUMEN AL47 D300 white round 230V 25W 2500lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17979 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 25W

Maximum output 25W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 58.0mm

Diameter 300.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Dome light PROLUMEN AL47 D400 white round 230V 30W 3400lm CRI80 120° IP54 TRIAC 3000K, 3500K, 4000K 3CCT

Product code 17978 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Luminous flux 3400lumens

Luminaire's efficiency lm79 113W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 66.0mm

Diameter 400.0mm

In box 6pcs

Casing colour white

Casing material plastic

Polishing matt

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Dome light PROLUMEN AL66 D250 black 230V 12W 1000lm CRI80 110° IP65 3000K, 4000K, 5700K 3CCT

Product code 18040

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 12W

Maximum output 12W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature 3CCT
3000K, 4000K, 5700K

Lens angle 110

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 74.0mm

Diameter 250.0mm

In package 1pc

In box 12pcs

Casing colour black

Casing material plastic

Impact resistance IK10

Work environment indoor / outdoor
use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light PROLUMEN AL96 D200 black 230V 12W 1000lm 120° IP65 830

Product code 16034

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 12W
Maximum output 12W/1m
Luminous flux 1000lumens
Luminaire's efficiency lm79 83W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 200.0mm
In package 1pc
In box 12pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor
use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light PROLUMEN AL96 D275 black 230V 18W 1650lm 110° IP65 830

Product code 16005

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 18W
Maximum output 18W/1m
Luminous flux 1650lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm
white 3000K
Lens angle 110
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 275.0mm
In package 1pc
In box 12pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor
use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light PROLUMEN AL96 D350 black 230V 30W 2560lm 120° IP65 930

Product code 17233

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 2560lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 350.0mm
In package 1pc
In box 6pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor
use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light PROLUMEN AL96 D350 black 230V 30W 2560lm 120° IP65 DALI 930

Product code 17015 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 30W
Maximum output 30W/1m
Luminous flux 2560lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 60.0mm
Diameter 350.0mm
In package 1pc
In box 6pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor
use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light PROLUMEN AL96 D350 black 230V 30W 2918lm 120° IP65 940

Product code 18273

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 2918lumens
Luminaire's efficiency lm79 97W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 90
Sdcm - macadam ellipses 3
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 60.0mm
Diameter 350.0mm
In package 1pc
In box 6pcs
Casing colour black
Casing material plastic
Impact resistance IK10
Work environment indoor / outdoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Contemporary designed LED ceiling light. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and shade cover of the luminaire are separable, maintenance is made particularly easy! The IP65 protection class means that the luminaire is water and dust resistant, making it suitable for both indoor and outdoor use. Additionally, our recommendation is to install it in offices, shops, schools, hotels, stairwells, living rooms and corridors. The luminaire adds warm white light (3000K) to the room, and thanks to CRI90, the colours of illuminated areas remain very true and natural. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light PROLUMEN Marui D450 white 230V 30W 3600lm 120° IP20 DALI 830

Product code 18177 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3600lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature warm
white 3000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP20

Lifespan 50000h

Height 85.0mm

Diameter 450.0mm

Casing colour white

Casing material aluminum + plastic

Power supply [BOKE](#)

Impact resistance IK02

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Dome light PROLUMEN Marui D450 white 230V 30W 3600lm 120° IP20 DALI 840

Product code 18127 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 3600lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature pure
white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 5

Protection class IP20

Lifespan 50000h

Height 85.0mm

Diameter 450.0mm

Casing colour white

Casing material aluminum + plastic

Power supply [BOKE](#)

Impact resistance IK02

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Dome light PROLUMEN Marui D900 white 230V 60W 7200lm 120° IP20 DALI 840

Product code 18126 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 60W
Maximum output 60W/1m
Luminous flux 7200lumens
Luminaire's efficiency lm79 120W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP20
Lifespan 50000h
Height 85.0mm
Diameter 900.0mm
Casing colour white
Casing material aluminum + plastic
Power supply [BOKE](#)
Impact resistance IK02
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Dome light WEGA white E27 IP44

Product code 18041

Maximum output 75W/1m
Socket E27
Protection class IP44
Casing colour white



Dome light Zoe black round 230V 12W 770lm 115° IP44 840

Product code 16078

Supply voltage 230V
Output 12W
Maximum output 12W/1m
Luminous flux 770lumens
Luminaire's efficiency lm79 64W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 440g
In box 5pcs
Casing colour black
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



LED ceiling light with modern design. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe black round 230V 24W 1540lm 115° IP44 840

Product code 16080

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 1540lumens
Luminaire's efficiency lm79 64W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 540g
In box 5pcs
Casing colour black
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



LED ceiling light with modern design. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe LX with motion sensor black round 230V 24W 1540lm 115° IP44 840

Product code 16735

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 1540lumens
Luminaire's efficiency lm79 64W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 650g
In box 5pcs
Casing colour black
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



LED ceiling light with modern design. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe LX with motion sensor white round 230V 24W 1712lm 115° IP44 840

Product code 16732

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 1712lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 650g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe white round 230V 12W 856lm 115° IP44 840

Product code 16075

Supply voltage 230V
Output 12W
Maximum output 12W/1m
Luminous flux 856lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 440g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe white round 230V 18W 1284lm 115° IP44 840

Product code 16076

Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1284lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 450g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe white round 230V 24W 1712lm 115° IP44 840

Product code 16077

Supply voltage 230V
Output 24W
Maximum output 24W/1m
Luminous flux 1712lumens
Luminaire's efficiency lm79 71W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 540g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Dome light Zoe with motion sensor white round 230V 19W 1284lm 115° IP44 840

Product code 18271

Supply voltage 230V
Output 19W
Maximum output 19W/1m
Luminous flux 1284lumens
Luminaire's efficiency lm79 68W
Correlated colour temperature pure white 4000K
Lens angle 115
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Diameter 300.0mm
Weight 540g
In box 5pcs
Casing colour white
Casing material metal + plastic
Shape round
No. of switches 15000pcs
Impact resistance IK06
Work environment indoor / outdoor use
Operation temperature -20 ~ +40°C
Certificates CE
Warranty 3 years



Modern designed LED ceiling light for both indoor and outdoor use. The luminaire is surface-mountable, suitable for both walls and ceilings. As the base and cover of the luminaire are separable, maintenance and installation are made exceptionally easy! The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)