


Plaster light fixture Art of Light NEVE white square 230V 35W GU10

Product code 14746


Brand Art of Light
Supply voltage 230V
Output 35W
Maximum output 35W/1m
Socket GU10
Height 27.0mm
Width 100.0mm
Length 100.0mm
Installation opening diameter 103 x 103mm
Casing colour white
Casing material gypsum
Polishing matt
Shape square
Work environment indoor use
Certificates CE

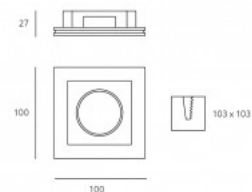

Plaster light fixture Art of Light TORSO white 230V 35W GU10

Product code 14748

Brand Art of Light
Supply voltage 230V
Output 35W
Maximum output 35W/1m
Socket GU10
Height 60.0mm
Width 117.0mm
Length 214.0mm
Installation opening diameter 217 x 120mm
Casing colour white
Casing material gypsum
Polishing matt
Work environment indoor use
Certificates CE

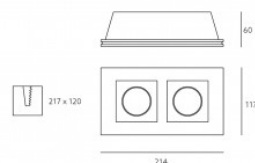

Plaster light fixture Art of Light VIMPERGA white 230V 9W 810lm 3000K warm white

Product code 14741

Brand Art of Light
Supply voltage 230V
Output 9W
Maximum output 9W/1m
Luminous flux 810lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm
white 3000K
Height 85.0mm
Diameter 180.0mm
Installation opening diameter 183mm
Casing colour white
Casing material gypsum
Polishing matt
Work environment indoor use
Certificates ce



LED downlight DL 200 gray round 36W 3192lm 60° IP67 RGB+4000K RGBW pure white

Product code 19113


Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 3192lumens
Luminaire's efficiency lm79 89W
Correlated colour temperature RGBW
pure white RGB+4000K
Lens angle 60
Sdcm - macadam ellipses 6
Protection class IP67
Lifespan 100000h
Height 80.0mm
Diameter 240.0mm
Installation opening diameter 200mm
In box 30pcs
Casing colour gray
Casing material aluminum
Shape round
Impact resistance IK10
Work environment indoor / outdoor
use
Certificates CE, RoHS



LED downlight E6 D170 motion sensor white round 230V 12W 750lm 120° IP20 830

Product code 14790

Supply voltage 230V
Output 12W
Maximum output 12W/1m
Rated current 100mA
Luminous flux 750lumens
Luminaire's efficiency lm79 63W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 20000h
Height 42.0mm
Diameter 170.0mm
Installation opening diameter 155mm
In box 20pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
No. of switches 12500pcs
Work environment indoor use
Operation temperature -10°C - 40°C
Certificates CE, RoHS

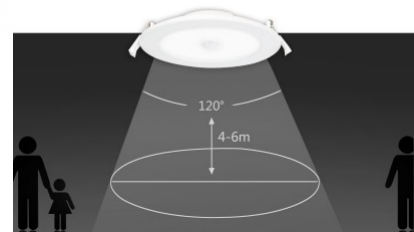

A built-in highly sensitive infrared ray induction probe can recognize the change of human infrared spectrum, which responds promptly even when people are 4 or 6 meters away, with a induction angle of 120 degrees. It can last for 60 seconds

LED panel E6 white square 230V 6W 320lm 160° IP20 830

Product code 14147

Supply voltage 230V
Output 6W
Maximum output 6W/1m
Rated current 50mA
Luminous flux 320lumens
Luminaire's efficiency lm79 53W
Correlated colour temperature warm
white 3000K
Lens angle 160
Cri 80
Protection class IP20
Lifespan 20000h
Height 32.0mm
Width 115.0mm
Length 115.0mm
Installation opening diameter
100-110mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape square
No. of switches 12500pcs
Work environment indoor use
Operation temperature -20~+40°C
Certificates CE, RoHS



LED downlight ECO DLH1-8 D230 white 230V 24W 2880lm 120° IP44 940

Product code 17451

Brand ECO
 Supply voltage 230V
 Power factor 0.90
 Output 24W
 Maximum output 24W/1m
 Luminous flux 2880lumens
 Luminaire's efficiency lm79 120W
 Correlated colour temperature pure white 4000K
 Lens angle 120
 Source of light [SAMSUNG LED](#)
 Cri 90
 Sdcm - macadam ellipses 5
 Protection class IP44
 Lifespan 50000h
 Height 39.0mm
 Diameter 230.0mm
 Installation opening diameter 210mm
 In package 1pc
 In box 10pcs
 Casing colour white
 Casing material aluminum + plastic
 Polishing matt
 Power supply [PHILIPS](#)
 Work environment indoor use
 Operation temperature -20 - +45°C
 Certificates CE, RoHS
 Warranty 3 years



A minimalist LED downlight, suitable for wet rooms due to its IP44 protection rating. The luminaire is recessed and can be installed, for example, into walls, ceilings, or other surfaces with minimal protrusion. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Ceiling light EMOS NEXXO 120x120 black square 230V 7W 480lm CRI82 110° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16721

Brand [EMOS](#)
Supply voltage 230V
Power factor 0.50
Output 7W
Maximum output 7W/1m
Rated current 300mA
Luminous flux 480lumens
Luminaire's efficiency lm79 69W
Correlated colour temperature 3CCT
3000K, 3500K, 4000K
Lens angle 110
Cri 82
Protection class IP40/20
Lifespan 30000h
Height 21.0mm
Width 120.0mm
Length 120.0mm
Installation opening diameter
105x105mm
In package 1pc
In box 8pcs
Casing colour black
Casing material metal + plastic
Polishing matt
Shape square
Power supply [LIFUD](#)
Work environment indoor use
Certificates CE, RoHS
Warranty 3 years



EMOS NEXXO PROFI LED square luminaire is a stylish and functional lighting solution that is perfect for various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable! This luminaire has an ideal color rendering index (CRI) of 82 for workspaces and offices. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the [LED house product range!](#)

Ceiling light EMOS NEXXO 170x170 black square 230V 12.5W 1050lm CRI82 110° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16720

Brand [EMOS](#)
Supply voltage 230V
Power factor 0.50
Output 12.5W
Maximum output 12.5W/1m
Rated current 300mA
Luminous flux 1050lumens
Luminaire's efficiency lm79 84W
Correlated colour temperature 3CCT
3000K, 3500K, 4000K
Lens angle 110
Cri 82
Protection class IP40/20
Lifespan 30000h
Height 21.0mm
Width 170.0mm
Length 170.0mm
Installation opening diameter
155x155mm
In package 1pc
In box 8pcs
Casing colour black
Casing material metal + plastic
Polishing matt
Shape square
Power supply [LIFUD](#)
Work environment indoor use
Certificates CE, RoHS
Warranty 3 years



EMOS NEXXO PROFI LED square luminaire is a stylish and functional lighting solution that is perfect for various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable! This luminaire has an ideal color rendering index (CRI) of 82 for workspaces and offices. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the [LED house product range!](#)

Ceiling light EMOS NEXXO 225x225 black square 230V 18W 1600lm CRI82 110° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16722

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Rated current 300mA

Luminous flux 1600lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 110°

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Width 225.0mm

Length 225.0mm

Installation opening diameter

205x205mm

In package 1pc

In box 8pcs

Casing colour black

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



EMOS NEXXO PROFI LED square luminaire is a stylish and functional lighting solution that is perfect for various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable! This luminaire has an ideal color rendering index (CRI) of 82 for workspaces and offices. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the [LED house product range!](#)

LED panel EMOS NEXXO D120 black round 230V 7W 480lm CRI80 110° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16567

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 7W

Maximum output 7W/1m

Luminous flux 480lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 120.0mm

Installation opening diameter 105mm

Weight 150g

Package weight 200g

In package 1pc

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED panel EMOS NEXXO D120 white round 230V 7W 450lm 110° IP40/20 830

Product code 17937

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 7W

Maximum output 7W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 64W

Correlated colour temperature warm
white 3000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 120.0mm

Installation opening diameter 105mm

Weight 450g

Package weight 500g

In package 1pc

In box 8pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED panel EMOS NEXXO D120 white round 230V 7W 450lm 110° IP40/20 840

Product code 18009

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 7W

Maximum output 7W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 64W

Correlated colour temperature pure
white 4000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 120.0mm

Installation opening diameter 105mm

Weight 450g

Package weight 500g

In package 1pc

In box 8pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED panel EMOS NEXXO D170 black round 230V 12.5W 1050lm CRI80 110° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16568

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 12.5W

Maximum output 12.5W/1m

Luminous flux 1050lumens

Luminaire's efficiency lm79 84W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 170.0mm

Installation opening diameter 155mm

Weight 300g

Package weight 350g

In package 1pc

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED panel EMOS NEXXO D170 white round 230V 12.5W 1000lm 110° IP40/20 830

Product code 18037

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 12.5W

Maximum output 12.5W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature warm
white 3000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 170.0mm

Installation opening diameter 155mm

Weight 450g

Package weight 500g

In package 1pc

In box 8pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED panel EMOS NEXXO D225 black round 230V 18W 1600lm CRI80 110° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 16569

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Luminous flux 1600lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 225.0mm

Installation opening diameter 205mm

Weight 450g

Package weight 500g

In package 1pc

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED panel EMOS NEXXO D225 white round 230V 18W 1500lm 110° IP40/20 830

Product code 17190

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Luminous flux 1500lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature warm
white 3000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 225.0mm

Installation opening diameter 205mm

Weight 450g

Package weight 500g

In package 1pc

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED panel EMOS NEXXO D225 white round 230V 18W 1600lm 110° IP40/20 840

Product code 17965

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Luminous flux 1600lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure
white 4000K

Lens angle 110

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 225.0mm

Installation opening diameter 205mm

Weight 450g

Package weight 500g

In package 1pc

In box 8pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Certificates CE

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

Ceiling light EMOS NEXXO D300 white round 230V 25W 2100lm 110° IP40/20 830

Product code 18008

Brand [EMOS](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Rated current 300mA

Luminous flux 2100lumens

Luminaire's efficiency lm79 84W

Correlated colour temperature warm white 3000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 300.0mm

Installation opening diameter 280mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

Ceiling light EMOS NEXXO D300 white round 230V 25W 2100lm 110° IP40/20 840

Product code 17963

Brand [EMOS](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Rated current 300mA

Luminous flux 2100lumens

Luminaire's efficiency lm79 84W

Correlated colour temperature pure white 4000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 300.0mm

Installation opening diameter 280mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

Ceiling light EMOS NEXXO PROFI 225x225 silvery square 230V 18W 1600lm CRI82 110° IP40/20 3000K, 3500K, 4000K 3CCT

Product code 17318

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Rated current 300mA

Luminous flux 1600lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature 3CCT

3000K, 3500K, 4000K

Lens angle 110°

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Width 225.0mm

Length 225.0mm

Installation opening diameter

205x205mm

In package 1pc

In box 8pcs

Casing colour silvery

Casing material aluminum

Shape square

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



EMOS NEXXO PROFI LED square luminaire is a stylish and functional lighting solution that is perfect for various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable! This luminaire has an ideal color rendering index (CRI) of 82 for workspaces and offices. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the [LED house product range](#)!

Ceiling light EMOS NEXXO PROFI 225x225 white square 230V 18W 1500lm 110° IP40/20 830

Product code 17317

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Rated current 300mA

Luminous flux 1500lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature warm
white 3000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Width 225.0mm

Length 225.0mm

Installation opening diameter
205x205mm

In package 1pc

In box 8pcs

Casing colour white

Casing material aluminum

Shape square

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



The EMOS NEXXO PROFI LED square ceiling light is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The light's light temperature is 3000K, adding a warm white light to your rooms. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

LED downlight EMOS SIMMI gray round 230V 5W 450lm 100° IP20 830

Product code 16572

Brand [EMOS](#)
 Supply voltage 230V
 Power factor 0.50
 Output 5W
 Maximum output 5W/1m
 Luminous flux 450lumens
 Luminaire's efficiency lm79 90W
 Correlated colour temperature warm white 3000K
 Lens angle 100
 Cri 80
 Protection class IP20
 Lifespan 25000h
 Height 25.0mm
 Diameter 80.0mm
 Installation opening diameter 68-70mm
 Weight 100g
 Package weight 150g
 In package 1pc
 Casing colour gray
 Casing material aluminum + plastic
 Polishing matt
 Shape round
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 3 years



Adjustable LED light fixture. This small luminaire is well-suited for various living spaces, such as the living room and kitchen. The luminaire can be installed recessed into the wall, ceiling, or even into a flat surface. From the LED House selection, you can find this model available in both warm white (3000K) and daylight (4000K) options. The IP20 protection class indicates that the luminaire is suitable for indoor environments. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight EMOS SIMMI gray round 230V 5W 450lm 100° IP20 840

Product code 16573

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 5W

Maximum output 5W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature pure white 4000K

Lens angle 100

Cri 80

Protection class IP20

Lifespan 25000h

Height 25.0mm

Diameter 80.0mm

Installation opening diameter 68-70mm

Weight 100g

Package weight 150g

In package 1pc

Casing colour gray

Casing material aluminum + plastic

Polishing matt

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Adjustable LED light fixture. This small luminaire is well-suited for various living spaces, such as the living room and kitchen. The luminaire can be installed recessed into the wall, ceiling, or even into a flat surface. From the LED House selection, you can find this model available in both warm white (3000K) and daylight (4000K) options. The IP20 protection class indicates that the luminaire is suitable for indoor environments. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight EMOS SIMMI white round 230V 5W 450lm 100° IP20 830

Product code 16570

Brand [EMOS](#)
 Supply voltage 230V
 Power factor 0.50
 Output 5W
 Maximum output 5W/1m
 Luminous flux 450lumens
 Luminaire's efficiency lm79 90W
 Correlated colour temperature warm white 3000K
 Lens angle 100
 Cri 80
 Protection class IP20
 Lifespan 25000h
 Height 25.0mm
 Diameter 90.0mm
 Installation opening diameter 68-70mm
 Weight 50g
 Package weight 100g
 In package 1pc
 Casing colour white
 Casing material aluminum + plastic
 Polishing matt
 Shape round
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 3 years



Adjustable LED light fixture. This small luminaire is well-suited for various living spaces, such as the living room and kitchen. The luminaire can be installed recessed into the wall, ceiling, or even into a flat surface. From the LED House selection, you can find this model available in both warm white (3000K) and daylight (4000K) options. The IP20 protection class indicates that the luminaire is suitable for indoor environments. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight EMOS SIMMI white round 230V 5W 450lm 100° IP20 840

Product code 16571

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 5W

Maximum output 5W/1m

Luminous flux 450lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature pure white 4000K

Lens angle 100

Cri 80

Protection class IP20

Lifespan 25000h

Height 25.0mm

Diameter 90.0mm

Installation opening diameter

68-70mm

Weight 50g

Package weight 100g

In package 1pc

Casing colour white

Casing material aluminum + plastic

Polishing matt

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Adjustable LED light fixture. This small luminaire is well-suited for various living spaces, such as the living room and kitchen. The luminaire can be installed recessed into the wall, ceiling, or even into a flat surface. From the LED House selection, you can find this model available in both warm white (3000K) and daylight (4000K) options. The IP20 protection class indicates that the luminaire is suitable for indoor environments. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED panel EMOS VIXXO D155 white round 230V 13,5W 1250lm 120° IP65 840

Product code 18038

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 13,5W

Maximum output 13,5W/1m

Luminous flux 1250lumens

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP65

Lifespan 30000h

Height 20.0mm

Diameter 155.0mm

Installation opening diameter 135mm

Weight 315g

Package weight 400g

In package 1pc

In box 8pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Certificates CE

Warranty 3 years



The EMOS VIXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range](#)!

Plaster light fixture FIORE white square 230V 35W GU10

Product code 14749

Supply voltage 230V
Output 35W
Maximum output 35W/1m
Socket GU10
Height 55.0mm
Width 120.0mm
Length 120.0mm
Installation opening diameter 123 x 123mm
Casing colour white
Casing material gypsum
Polishing matt
Shape square
Work environment indoor use
Certificates CE



Plaster light fixture KAMEA white square 230V 35W GU10

Product code 14742

Supply voltage 230V
Output 35W
Maximum output 35W/1m
Socket GU10
Height 66.0mm
Width 204.0mm
Length 204.0mm
Installation opening diameter 207 x 207mm
Casing colour white
Casing material gypsum
Polishing matt
Shape square
Work environment indoor use
Certificates CE



LED downlight NEXEYE white 230V 15W 1600lm 110° IP44 840

Product code 17856

Supply voltage 230V
Power factor 0.90
Output 15W
Maximum output 15W/1m
Luminous flux 1600lumens
Luminaire's efficiency lm79 107W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Protection class IP44
Height 45.0mm
Diameter 140.0mm
Installation opening diameter 130mm
Weight 340g
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminum
No. of switches 30000pcs
Work environment indoor / outdoor use
Operation temperature -20° - +40°C
Certificates CE
Warranty 5 years



NEXEYE recessed light. This light can be ordered with the following specifications: Power: 30W/20W/15W
Dimming: DALI The recessed version of the NEXEYE light has an IP44 protection rating, making it suitable for use in damp spaces.

LED downlight NEXEYE white 230V 15W 1600lm 110° IP44 DALI 840

Product code 17853 DALI dimmable

Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 15W
Maximum output 15W/1m
Luminous flux 1600lumens
Luminaire's efficiency lm79 107W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Protection class IP44
Height 45.0mm
Diameter 140.0mm
Installation opening diameter 130mm
Weight 340g
In package 1pc
In box 24pcs
Casing colour white
Casing material aluminum
No. of switches 30000pcs
Work environment indoor / outdoor use
Operation temperature -20° - +40°C
Certificates CE
Warranty 5 years



NEXEYE recessed light. This light can be ordered with the following specifications: Power: 30W/20W/15W
Dimming: DALI The recessed version of the NEXEYE light has an IP44 protection rating, making it suitable for use in damp spaces.

LED downlight NEXEYE white 230V 20W 2200lm 110° IP44 840

Product code 17855

Supply voltage 230V
Power factor 0.90
Output 20W
Maximum output 20W/1m
Luminous flux 2200lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Protection class IP44
Height 51.0mm
Diameter 190.0mm
Installation opening diameter 170mm
Weight 780g
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminum
No. of switches 30000pcs
Work environment indoor / outdoor use
Operation temperature -20° - +40°C
Certificates CE
Warranty 5 years



NEXEYE recessed light. This light can be ordered with the following specifications: Power: 30W/20W/15W
Dimming: DALI The recessed version of the NEXEYE light has an IP44 protection rating, making it suitable for use in damp spaces.

LED downlight NEXEYE white 230V 20W 2200lm 110° IP44 DALI 840

Product code 17852 DALI dimmable

Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 20W
Maximum output 20W/1m
Luminous flux 2200lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Protection class IP44
Height 51.0mm
Diameter 190.0mm
Installation opening diameter 170mm
Weight 580g
In package 1pc
In box 16pcs
Casing colour white
Casing material aluminum
No. of switches 30000pcs
Work environment indoor / outdoor use
Operation temperature -20° - +40°C
Certificates CE
Warranty 5 years



NEXEYE recessed light. This light can be ordered with the following specifications: Power: 30W/20W/15W
Dimming: DALI The recessed version of the NEXEYE light has an IP44 protection rating, making it suitable for use in damp spaces.

LED downlight NEXEYE white 230V 30W 3300lm 110° IP44 840

Product code 17854

Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 3300lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Protection class IP44
Height 51.0mm
Diameter 228.0mm
Installation opening diameter 210mm
Weight 780g
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminum
No. of switches 30000pcs
Work environment indoor / outdoor use
Operation temperature -20° - +40°C
Certificates CE
Warranty 5 years



NEXEYE recessed light. This light can be ordered with the following specifications: Power: 30W/20W/15W
Dimming: DALI The recessed version of the NEXEYE light has an IP44 protection rating, making it suitable for use in damp spaces.

LED downlight NEXEYE white 230V 30W 3300lm 110° IP44 DALI 840

Product code 17851 DALI dimmable

Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 30W
Maximum output 30W/1m
Luminous flux 3300lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature pure white 4000K
Lens angle 110
Cri 80
Protection class IP44
Height 51.0mm
Diameter 228.0mm
Installation opening diameter 210mm
Weight 760g
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminum
No. of switches 30000pcs
Work environment indoor / outdoor use
Operation temperature -20° - +40°C
Certificates CE
Warranty 5 years



NEXEYE recessed light. This light can be ordered with the following specifications: Power: 30W/20W/15W
Dimming: DALI The recessed version of the NEXEYE light has an IP44 protection rating, making it suitable for use in damp spaces.

LED downlight PREMIUM SIGARO white round 230V 6W 600lm 120° IP40 840

Product code 18065

Brand PREMIUM
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 600lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP40
Lifespan 25000h
Height 26.0mm
Diameter 117.0mm
Installation opening diameter 100mm
Weight 50g
In box 40pcs
Casing colour white
Casing material plastic
Polishing matt
Shape round
No. of switches 15000pcs
Impact resistance IK03
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 3 years



LED downlight PROLUMEN Angers D145 black 230V 15W 1350lm 95° IP20 TRIAC 930

Product code 18241 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.80

Dimmable TRIAC

Output 15W

Maximum output 15W/1m

Luminous flux 1350lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature warm
white 3000K

Lens angle 95

Source of light OSRAM LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 49.0mm

Diameter 145.0mm

Installation opening diameter
125-130mm

In box 20pcs

Casing colour black

Casing material aluminum

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED ceiling light, ideal for commercial space lighting. A higher than usual indicator, CRI90, ensures excellent color rendition and reflection of light colors. This luminaire model is available in both warm white (3000K) and daylight (4000K) options. The luminaire is designed for indoor use only, with an IP20 protection class. In LED House's selection, this model also comes with DALI and TRIAC dimming options! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED downlight PROLUMEN Angers D145 white 230V 15W 1350lm 95° IP20 930

Product code 16107

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.80
Output 15W
Maximum output 15W/1m
Luminous flux 1350lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm
white 3000K
Lens angle 95
Source of light OSRAM LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 49.0mm
Diameter 145.0mm
Installation opening diameter
125-130mm
In box 30pcs
Casing colour white
Casing material aluminum
Power supply [PHILIPS](#)
Work environment indoor use
Certificates CE
Warranty 5 years



Recessed LED ceiling light, ideal for commercial space lighting. A higher than usual indicator, CRI90, ensures excellent color rendition and reflection of light colors. This luminaire model is available in both warm white (3000K) and daylight (4000K) options. The luminaire is designed for indoor use only, with an IP20 protection class. In LED House's selection, this model also comes with DALI and TRIAC dimming options! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Angers D145 white 230V 15W 1350lm 95° IP20 TRIAC 930

Product code 16804 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.80
Dimmable TRIAC
Output 15W
Maximum output 15W/1m
Luminous flux 1350lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm
white 3000K
Lens angle 95
Source of light OSRAM LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 49.0mm
Diameter 145.0mm
Installation opening diameter
125-130mm
In box 20pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE
Warranty 5 years



Recessed LED ceiling light, ideal for commercial space lighting. A higher than usual indicator, CRI90, ensures excellent color rendition and reflection of light colors. This luminaire model is available in both warm white (3000K) and daylight (4000K) options. The luminaire is designed for indoor use only, with an IP20 protection class. In LED House's selection, this model also comes with DALI and TRIAC dimming options! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Baston white round 230V 8W 520lm 20° IP20 TRIAC 930

Product code 19067 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 8W
Maximum output 8W/1m
Luminous flux 520lumens
Luminaire's efficiency lm79 65W
Correlated colour temperature warm white 3000K
Lens angle 20
Source of light [PHILIPS LED](#)
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 85.0mm
Diameter 75.0mm
Installation opening diameter 60mm
In box 24pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Power supply [AIDIMMING](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



Minimalistic LED under-cabinet light, perfect for over kitchen countertops. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to TRIAC technology, the luminaire can also be dimmed. The transmitted light temperature is 3000K (warm white), while maintaining CRI90, ensuring that areas and objects under the light beam are displayed with the most truthful and natural colours. As the luminaire's protection class is determined as IP20, it can only be used indoors. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Bazar 173x322 black 230V 66.4W 8300lm 37° IP20 930

Product code 18243

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 66.4W

Maximum output 66.4W/1m

Luminous flux 8300lumens

Luminaire's efficiency lm79 125W

Correlated colour temperature warm
white 3000K

Lens angle 37°

Cri 90

Sdcm - macadam ellipses 2

En62471 1

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 60.000h

Height 145.0mm

Width 322.0mm

Length 173.0mm

Weight 1830g

Casing colour black

Casing material aluminum


Polishing matt

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years

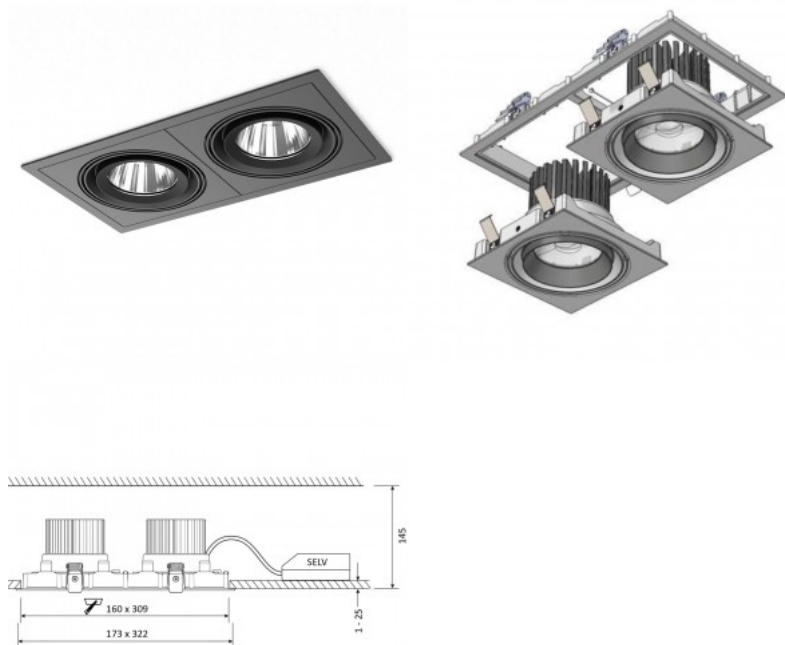

LED downlight PROLUMEN Bazar 173x322 black 230V 66.4W 8300lm 37° IP20 940

Product code 18242

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 66.4W

Maximum output 66.4W/1m

Luminous flux 8300lumens

Luminaire's efficiency lm79 125W

Correlated colour temperature pure
white 4000K

Lens angle 37

Cri 90

Sdcm - macadam ellipses 2

En62471 1

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 60.000h

Height 145.0mm

Width 322.0mm

Length 173.0mm

Weight 1830g

Casing colour black

Casing material aluminum


Polishing matt

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years

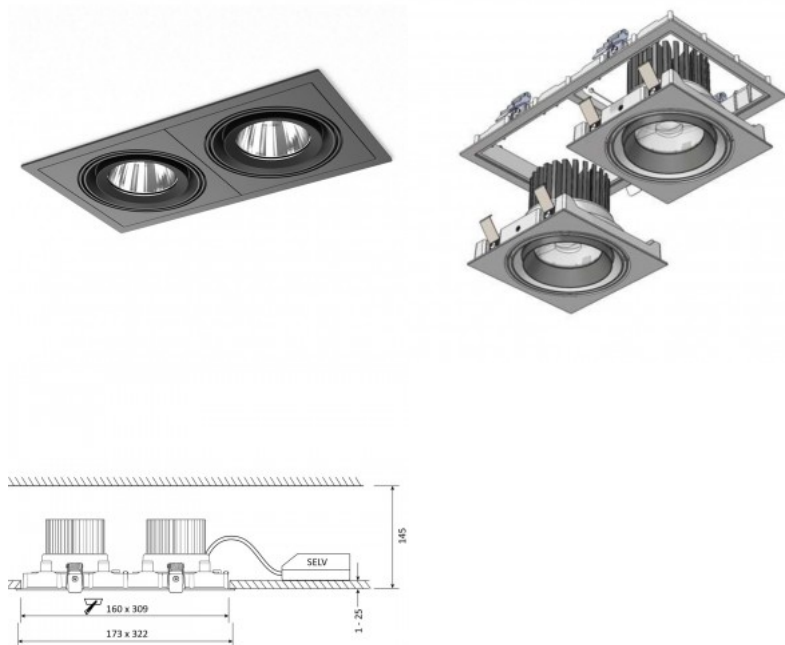

LED downlight PROLUMEN Bon 2x12W black square 230V 24W 1920lm 38° IP20 TRIAC 930

Product code 16008 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable TRIAC
Output 24W
Maximum output 24W/1m
Luminous flux 1920lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 3000K
Lens angle 38
Source of light [CREE LED](#)
Cri 90
Protection class IP20
Lifespan 50000h
Length 170.0mm
Casing colour black
Casing material aluminum
Polishing matt
Shape square
Power supply [AIDIMMING](#)
Work environment indoor use
Certificates CE
Warranty 5 years



Recessed ceiling light with two light beams. The IP20 protection class indicates that the luminaire is for indoor use only. A higher than usual indicator, CRI90, ensures excellent color rendition and reflection of light colors, and the luminaire adds warm white (3000K) light to the room. The luminaire can be installed recessed into the wall, ceiling, or even into a flat surface. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Caen white 230V 15W 1150lm 24° IP20 927

Product code 17025

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 15W

Maximum output 15W/1m

Luminous flux 1150lumens

Luminaire's efficiency lm79 77W

Correlated colour temperature warm white 2700K

Lens angle 24

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 128.0mm

Diameter 110.0mm

Installation opening diameter 95mm

Casing colour white

Casing material aluminum

Power supply [PHILIPS](#)

Work environment indoor use

Certificates CE

Warranty 5 years



Functional LED under-cabinet light with adjustable light direction. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The protruding part can be pushed into the recessed part or pulled out and directed in the desired direction. The luminaire is also available in LED House's selection with DALI dimming technology. The transmitted light temperature is 2700K/3000K (warm white), while maintaining CRI90, ensuring that areas and objects under the light beam are displayed with the most truthful and natural colors. As the luminaire's protection class is determined as IP20, it can only be used indoors. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Caen white 230V 15W 1150lm 24° IP20 DALI 927

Product code 17864 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 15W
Maximum output 15W/1m
Luminous flux 1150lumens
Luminaire's efficiency lm79 77W
Correlated colour temperature warm
white 2700K
Lens angle 24
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 128.0mm
Diameter 110.0mm
Installation opening diameter 95mm
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE
Warranty 5 years



Functional LED under-cabinet light with adjustable light direction. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The protruding part can be pushed into the recessed part or pulled out and directed in the desired direction. The luminaire is also available in LED House's selection with DALI dimming technology. The transmitted light temperature is 2700K/3000K (warm white), while maintaining CRI90, ensuring that areas and objects under the light beam are displayed with the most truthful and natural colors. As the luminaire's protection class is determined as IP20, it can only be used indoors. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Caen white 230V 20W 1400lm 50° IP20 DALI 927

Product code 17024 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 20W
Maximum output 20W/1m
Luminous flux 1400lumens
Luminaire's efficiency lm79 70W
Correlated colour temperature warm white 2700K
Lens angle 50
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 128.0mm
Diameter 110.0mm
Installation opening diameter 95mm
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE
Warranty 5 years



Functional LED under-cabinet light with adjustable light direction. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The protruding part can be pushed into the recessed part or pulled out and directed in the desired direction. The luminaire is also available in LED House's selection with DALI dimming technology. The transmitted light temperature is 2700K/3000K (warm white), while maintaining CRI90, ensuring that areas and objects under the light beam are displayed with the most truthful and natural colors. As the luminaire's protection class is determined as IP20, it can only be used indoors. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Caen white 230V 20W 1500lm 50° IP20 930

Product code 16789

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Output 20W
 Maximum output 20W/1m
 Luminous flux 1500lumens
 Luminaire's efficiency lm79 75W
 Correlated colour temperature warm white 3000K
 Lens angle 50
 Source of light CITIZEN LED
 Cri 90
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 128.0mm
 Diameter 110.0mm
 Installation opening diameter 95mm
 Casing colour white
 Casing material aluminum
 Power supply [PHILIPS](#)
 Work environment indoor use
 Certificates CE
 Warranty 5 years



Functional LED under-cabinet light with adjustable light direction. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The protruding part can be pushed into the recessed part or pulled out and directed in the desired direction. The luminaire is also available in LED House's selection with DALI dimming technology. The transmitted light temperature is 2700K/3000K (warm white), while maintaining CRI90, ensuring that areas and objects under the light beam are displayed with the most truthful and natural colors. As the luminaire's protection class is determined as IP20, it can only be used indoors. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea black round 230V 10W 860lm 60° IP54 TRIAC 930

Product code 18010 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.98
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 860lumens
Luminaire's efficiency lm79 86W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 54.0mm
Diameter 86.0mm
Installation opening diameter 75mm
In package 1pc
In box 18pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Minimalistic LED under-cabinet light suitable for damp environments or outdoor use. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to DALI technology, the luminaire can also be dimmed. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea black round 230V 15W 1300lm 38° IP54 930

Product code 16167

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 15W
Maximum output 15W/1m
Luminous flux 1300lumens
Luminaire's efficiency lm79 87W
Correlated colour temperature warm
white 3000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 64.0mm
Diameter 100.0mm
Installation opening diameter 90mm
In package 1pc
In box 36pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Power supply [MEAN WELL](#)
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Functional LED under-cabinet light
suitable for use in damp environments
such as sauna anterooms or
bathrooms. The luminaire is recessed.
It can be installed, for example, into
the wall, ceiling, or countertop. The
luminaire is also available in LED
House's selection with DALI dimming
technology. The transmitted light
temperature is 3000K (warm white),
while maintaining CRI90, ensuring
that areas and objects under the light
beam are displayed with the most
truthful and natural colors. With
proper use, the luminaire is energy-
efficient, environmentally friendly, and
has a very long lifespan (50,000
hours). Illuminate your world with LED
House professionals - [check out our
project portfolio here!](#)

LED downlight PROLUMEN Chelsea black round 230V 25W 2300lm 38° IP54 DALI 930

Product code 17105 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 2300lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm
white 3000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 83.0mm
Diameter 136.0mm
Installation opening diameter 125mm
In package 1pc
In box 18pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Functional LED under-cabinet light
suitable for use in damp environments
such as sauna anterooms or
bathrooms. The luminaire is recessed.
It can be installed, for example, into
the wall, ceiling, or countertop. The
luminaire is also available in LED
House's selection with DALI dimming
technology. The transmitted light
temperature is 3000K (warm white),
while maintaining CRI90, ensuring
that areas and objects under the light
beam are displayed with the most
truthful and natural colors. With
proper use, the luminaire is energy-
efficient, environmentally friendly, and
has a very long lifespan (50,000
hours). Illuminate your world with LED
House professionals - [check out our
project portfolio here!](#)

LED downlight PROLUMEN Chelsea black round 230V 45W 3800lm 38° IP54 DALI 930

Product code 16973 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 45W
Maximum output 45W/1m
Luminous flux 3800lumens
Luminaire's efficiency lm79 84W
Correlated colour temperature warm
white 3000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 109.0mm
Diameter 180.0mm
Installation opening diameter 165mm
In package 1pc
In box 12pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Functional LED under-cabinet light suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The luminaire is also available in LED House's selection with DALI dimming technology. The transmitted light temperature is 3000K (warm white), while maintaining CRI90, ensuring that areas and objects under the light beam are displayed with the most truthful and natural colors. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea white round 230V 10W 860lm 60° IP54 DALI 930

Product code 17825 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 10W
Maximum output 10W/1m
Luminous flux 860lumens
Luminaire's efficiency lm79 86W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 54.0mm
Diameter 86.0mm
Installation opening diameter 75mm
In package 1pc
In box 18pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Minimalistic LED under-cabinet light suitable for damp environments or outdoor use. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to DALI technology, the luminaire can also be dimmed. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea white round 230V 10W 860lm 60° IP54 TRIAC 930

Product code 17875 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.98
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 860lumens
Luminaire's efficiency lm79 86W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 54.0mm
Diameter 86.0mm
Installation opening diameter 75mm
In package 1pc
In box 18pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Minimalistic LED under-cabinet light suitable for damp environments or outdoor use. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to DALI technology, the luminaire can also be dimmed. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea white round 230V 15W 1300lm 38° IP54 940

Product code 17214

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 15W

Maximum output 15W/1m

Luminous flux 1300lumens

Luminaire's efficiency lm79 87W

Correlated colour temperature pure white 4000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP54

Lifespan 50000h

Height 64.0mm

Diameter 100.0mm

Installation opening diameter 90mm

In package 1pc

In box 36pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor / outdoor use

Certificates CE, RoHS

Warranty 5 years



Minimalistic LED under-cabinet light suitable for damp environments or outdoor use. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to DALI technology, the luminaire can also be dimmed. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea white round 230V 15W 1300lm 60° IP54 DALI 930

Product code 17826 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 15W
Maximum output 15W/1m
Luminous flux 1300lumens
Luminaire's efficiency lm79 87W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 64.0mm
Diameter 100.0mm
Installation opening diameter 90mm
In package 1pc
In box 24pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Minimalistic LED under-cabinet light suitable for damp environments or outdoor use. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to DALI technology, the luminaire can also be dimmed. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea white round 230V 20W 1700lm CRI90 38° IP20 1-10V 2700-6500K WARM TO COLD

Product code 18583 1-10V dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.98
Dimmable 1-10V
Output 20W
Maximum output 20W/1m
Luminous flux 1700lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature WARM
TO COLD 2700-6500K
Lens angle 38
Source of light SANAN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 83.0mm
Diameter 136.0mm
Installation opening diameter 125mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Minimalistic LED under-cabinet light suitable for damp environments or outdoor use. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to DALI technology, the luminaire can also be dimmed. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Chelsea white round 230V 25W 2300lm 38° IP54 DALI 940

Product code 17732 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 2300lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature pure white 4000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Height 83.0mm
Diameter 136.0mm
Installation opening diameter 125mm
In package 1pc
In box 18pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor / outdoor use
Certificates CE, RoHS
Warranty 5 years




Minimalistic LED under-cabinet light suitable for damp environments or outdoor use. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop, with minimal protrusion and as inconspicuous to the eye as possible. Thanks to DALI technology, the luminaire can also be dimmed. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL102 2.5 black round 230V 13W 1010lm 36° IP65 TRIAC 930

Product code 15782 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 13W
Maximum output 13W/1m
Luminous flux 1010lumens
Luminaire's efficiency lm79 78W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 49.5mm
Diameter 110.0mm
Installation opening diameter 89mm
In box 30pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years

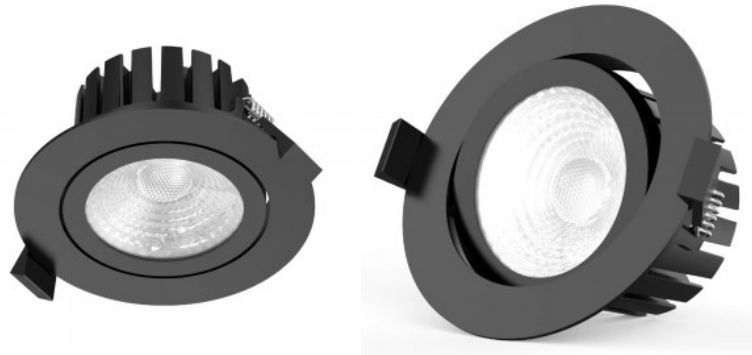

Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The luminaire is also available in LED House's selection with TRIAC dimming technology. The transmitted light temperature is 3000K (warm white), while maintaining CRI90, ensuring that areas and objects under the light beam are displayed with the most truthful and natural colours. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL102 2.5 white round 230V 13W 1010lm 36° IP65 TRIAC 930

Product code 15542 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 13W
Maximum output 13W/1m
Luminous flux 1010lumens
Luminaire's efficiency lm79 78W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 49.5mm
Diameter 110.0mm
Installation opening diameter 89mm
In box 30pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The luminaire is also available in LED House's selection with TRIAC dimming technology. The transmitted light temperature is 3000K (warm white). With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL102 2.5 white round 230V 8W 530lm 36° IP65 TRIAC 930

Product code 15050 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 8W
Maximum output 8W/1m
Luminous flux 530lumens
Luminaire's efficiency lm79 66W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 30.0mm
Diameter 80.0mm
Installation opening diameter 68mm
In box 50pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The luminaire is also available in LED House's selection with TRIAC dimming technology. The transmitted light temperature is 3000K (warm white). With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL102B 2.5 white round 230V 10W 870lm 36° IP65 TRIAC 830

Product code 15080 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 870lumens
Luminaire's efficiency lm79 87W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light [CREE LED](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 40.0mm
Diameter 90.0mm
Installation opening diameter 74.5mm
In box 50pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The luminaire is also available in LED House's selection with TRIAC dimming technology. The transmitted light temperature is 3000K (warm white). With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL102B 2.5 white round 230V 10W 950lm 36° IP65 TRIAC 840

Product code 17731 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 950lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature pure white 4000K
Lens angle 36
Source of light [CREE LED](#)
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 40.0mm
Diameter 90.0mm
Installation opening diameter 74.5mm
In box 50pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The luminaire is also available in LED House's selection with TRIAC dimming technology. The transmitted light temperature is 3000K (warm white). With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL108-6 180x180 square 35W 3135lm 45° IP20 DALI 927

Product code 17062 DALI dimmable

Brand [PROLUMEN](#)

Dimmable DALI

Output 35W

Maximum output 35W/1m

Luminous flux 3135lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature warm white 2700K

Lens angle 45

Cri 90

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 129.0mm

Width 180.0mm

Length 180.0mm

Installation opening diameter

165x165mm

Casing material aluminum

Polishing matt


Shape square

Impact resistance IK05

Work environment indoor use

Certificates CE

Warranty 5 years

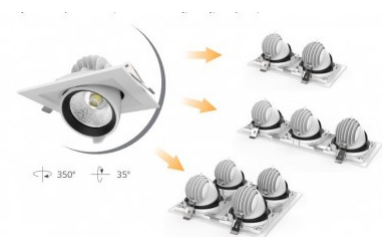

Directional LED light fixture for commercial spaces. The IP20 protection class indicates that the luminaire is intended for indoor use only. All light beams of the luminaire are adjustable. This feature is beneficial for those whose illuminated area may be in motion and the light direction may need to be adjusted accordingly. This model is available at LED Houses in both warm white (2700K) and daylight (4000K) versions. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL108-6 360x360 4x35W square 140W 14000lm 45° IP20 940

Product code 15395

Brand [PROLUMEN](#)

Output 140W

Maximum output 140W/1m

Luminous flux 14000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 45

Cri 90

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 155.0mm

Width 360.0mm

Length 360.0mm

Casing material aluminum

Polishing matt


Shape square

Impact resistance IK05

Work environment indoor use

Certificates CE

Warranty 5 years

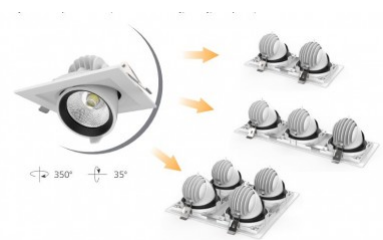

Directional LED light fixture for commercial spaces. The IP20 protection class indicates that the luminaire is intended for indoor use only. All light beams of the luminaire are adjustable. This feature is beneficial for those whose illuminated area may be in motion and the light direction may need to be adjusted accordingly. This model is available at LED Houses in both warm white (2700K) and daylight (4000K) versions. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL113A-6 360x360 4x25W white square 100W 10000lm 36° IP20 940

Product code 15500

Brand [PROLUMEN](#)

Output 100W

Maximum output 100W/1m

Luminous flux 10000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 155.0mm

Width 360.0mm

Length 360.0mm

Casing colour white

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK05

Work environment indoor use

Certificates CE

Warranty 5 years



Directional LED light fixture for commercial spaces. The IP20 protection class indicates that the luminaire is intended for indoor use only. All light beams of the luminaire are adjustable. This feature is beneficial for those whose illuminated area may be in motion and the light direction may need to be adjusted accordingly. The luminaire emits daylight (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL113A-6 black square 230V 25W 2700lm 36° IP20 830

Product code 15523

Brand [PROLUMEN](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Luminous flux 2700lumens

Luminaire's efficiency lm79 108W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 80

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 110.0mm

Width 175.0mm

Length 175.0mm

In box 18pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK05

Work environment indoor use

Certificates CE

Warranty 5 years



Functional LED under-cabinet light for commercial spaces. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. The transmitted light temperature is 3000K (warm white).

With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN CL117B 3 white round 230V 8W 700lm 45° IP54 TRIAC 930

Product code 15615 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 8W

Maximum output 8W/1m

Luminous flux 700lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature warm white 3000K

Lens angle 45

Cri 90

Sdcm - macadam ellipses 3

Protection class IP54

Lifespan 50000h

Height 49.0mm

Diameter 95.0mm

Installation opening diameter 80mm

In package 1pc

In box 50pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



A minimalist-style LED downlight, perfect for both corridors and bathrooms. With an IP54 protection rating, this luminaire can be installed in slightly more humid areas, protected from ordinary dust and splashes from any direction. The luminaire is recessed and can be installed, for example, in the wall, ceiling, or surface, with a minimal protruding part. Thanks to TRIAC technology, the luminaire can be dimmed. The transmitted light temperature is 3000K (SOFT WHITE), maintaining CRI90, ensuring true and natural colours for shaded areas and objects. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL216 white round 230V 13W 1110lm CRI90 90° IP44 3000K, 4000K, 5700K 3CCT

Product code 17350

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 13W

Maximum output 13W/1m

Luminous flux 1110lumens

Luminaire's efficiency lm79 85W

Correlated colour temperature 3CCT

3000K, 4000K, 5700K

Lens angle 90

Cri 90

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 50000h

Height 48.0mm

Diameter 152.0mm

Installation opening diameter 125mm

In package 1pc

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Functional LED downlight that can also be used in moist environments, such as in the anteroom of a sauna or in a bathroom. The luminaire is recessed. It can be installed, for example, in a wall, ceiling, or flat surface. Maintains areas and objects under the light beam with as true and natural colours as possible, with a CRI90 rating. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Valgustage oma maailm LED House professionaalide abiga - [vaata siit ka meie projektide portfooliot!!](#)

LED downlight PROLUMEN CL304 black round 230V 8W 800lm CRI90 45° IP20 TRIAC 3000K, 4000K, 5700K 3CCT

Product code 16713 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 8W
Maximum output 8W/1m
Luminous flux 800lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 45
Cri 90
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 84.0mm
Diameter 106.0mm
Installation opening diameter
90-95mm
Package weight 230g
In box 30pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE, RoHS
Warranty 5 years




Directional LED luminaire. This small luminaire fits well in various living spaces, such as the living room and kitchen. The luminaire can be recessed into the wall, ceiling, or surface. The luminaire's light temperature can be adjusted with a switch located on the luminaire. You can choose between warm white (3000K), daylight (4000K), and cool white (5700K) light. Thanks to TRIAC technology, the luminaire can also be dimmed. The IP20 protection class indicates that the luminaire is suitable for indoor use. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL59-3 white 230V 13W 830lm 90° IP44 DALI 940

Product code 16287 DALI dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Dimmable DALI
 Output 13W
 Maximum output 13W/1m
 Luminous flux 830lumens
 Luminaire's efficiency lm79 64W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Cri 90
 Sdcm - macadam ellipses 6
 Protection class IP44
 Lifespan 50000h
 Height 38.0mm
 Diameter 110.0mm
 Installation opening diameter 90-100mm
 In box 24pcs
 Casing colour white
 Casing material aluminum
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years

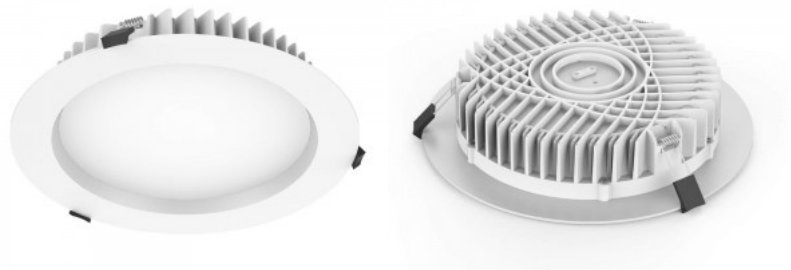

Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL59-3 white 230V 13W 850lm 90° IP44 930

Product code 14919

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 13W
Maximum output 13W/1m
Luminous flux 850lumens
Luminaire's efficiency lm79 65W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 90
Sdcm - macadam ellipses 6
Protection class IP44
Lifespan 50000h
Height 38.0mm
Diameter 110.0mm
Installation opening diameter 90-100mm
In box 24pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years




Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED downlight PROLUMEN CL59-4 white 230V 18W 1320lm 90° IP44 930

Product code 14917

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 18W
Maximum output 18W/1m
Luminous flux 1320lumens
Luminaire's efficiency lm79 73W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 90
Sdcm - macadam ellipses 6
Protection class IP44
Lifespan 50000h
Height 45.0mm
Diameter 145.0mm
Installation opening diameter 120-130mm
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years

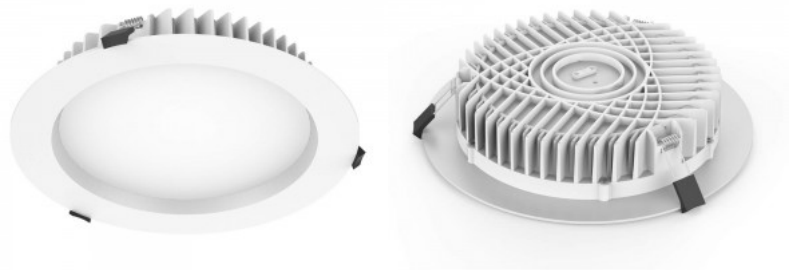

Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED downlight PROLUMEN CL59-4 white 230V 18W 1360lm 90° IP44 940

Product code 14928

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Luminous flux 1360lumens

Luminaire's efficiency lm79 76W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 90

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 50000h

Height 45.0mm

Diameter 145.0mm

Installation opening diameter 113.5mm

In package 1pc

In box 30pcs


Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

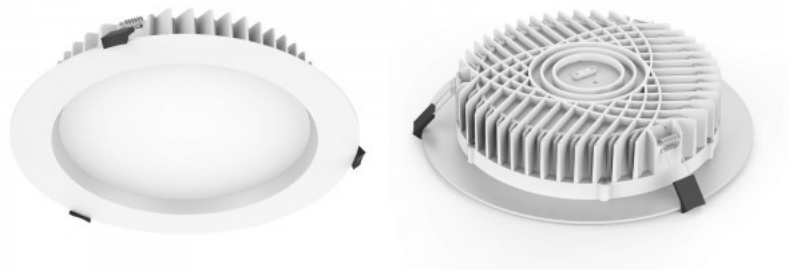


Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL59-5 white 230V 25W 1850lm 90° IP44 830

Product code 14918

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 1850lumens
Luminaire's efficiency lm79 74W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 80
Sdcm - macadam ellipses 6
Protection class IP44
Lifespan 50000h
Height 45.0mm
Diameter 170.0mm
Installation opening diameter 140-150mm
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years

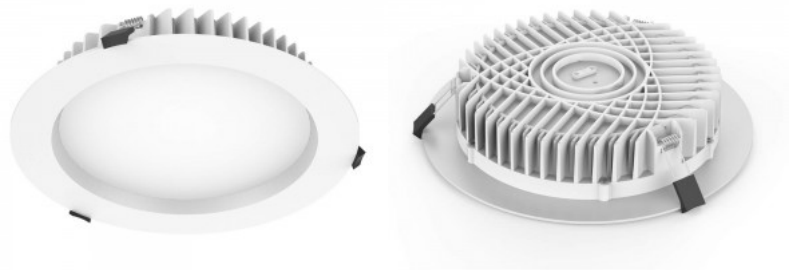

Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL59-5 white 230V 25W 1900lm 90° IP44 940

Product code 14926

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 25W

Maximum output 25W/1m

Luminous flux 1900lumens

Luminaire's efficiency lm79 76W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 90

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 50000h

Height 45.0mm

Diameter 170.0mm

Installation opening diameter 140-150mm

In package 1pc

In box 12pcs


Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

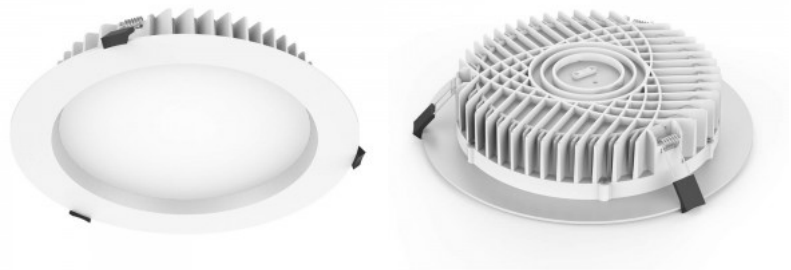

Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED downlight PROLUMEN CL59-5- white 230V 25W 1900lm 90° IP44 DALI 940

Product code 14927 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 1900lumens
Luminaire's efficiency lm79 76W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 90
Sdcm - macadam ellipses 6
Protection class IP44
Lifespan 50000h
Height 45.0mm
Diameter 170.0mm
Installation opening diameter 140-150mm
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL59-8 white 230V 18W 1430lm 90° IP44 940

Product code 15966

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 18W
Maximum output 18W/1m
Luminous flux 1430lumens
Luminaire's efficiency lm79 79W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 90
Sdcm - macadam ellipses 6
Protection class IP44
Lifespan 50000h
Height 45.0mm
Diameter 228.0mm
Installation opening diameter 210mm
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years




Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED downlight PROLUMEN CL59-8 white 230V 35W 3500lm 90°

IP44 940

Product code 14889

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Output 35W
 Maximum output 35W/1m
 Luminous flux 3500lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Cri 90
 Sdcm - macadam ellipses 6
 Protection class IP44
 Lifespan 50000h
 Height 45.0mm
 Width 228.0mm
 Length 228.0mm
 Diameter 228.0mm
 Installation opening diameter 192mm
 Weight 880g
 Package weight 1340g
 In package 1pc
 In box 10pcs
 Casing colour white
 Casing material aluminum
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years

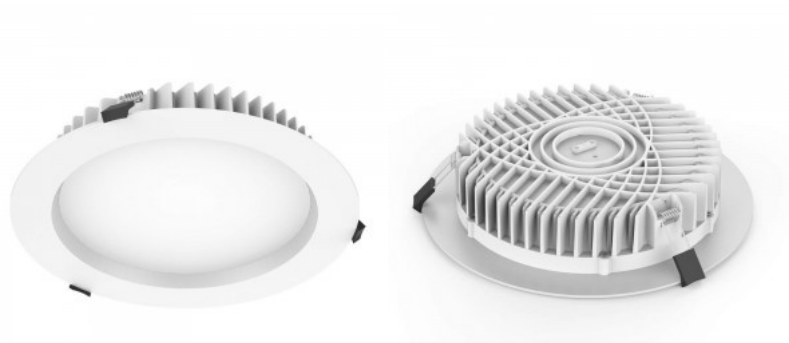


Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL59-8 white 230V 35W 3500lm 90° IP44 DALI 940

Product code 14925 DALI dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Dimmable DALI
 Output 35W
 Maximum output 35W/1m
 Luminous flux 3500lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Cri 90
 Sdcm - macadam ellipses 6
 Protection class IP44
 Lifespan 50000h
 Height 45.0mm
 Width 228.0mm
 Length 228.0mm
 Diameter 228.0mm
 Installation opening diameter 192mm
 Weight 880g
 Package weight 1340g
 In package 1pc
 In box 10pcs
 Casing colour white
 Casing material aluminum
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years

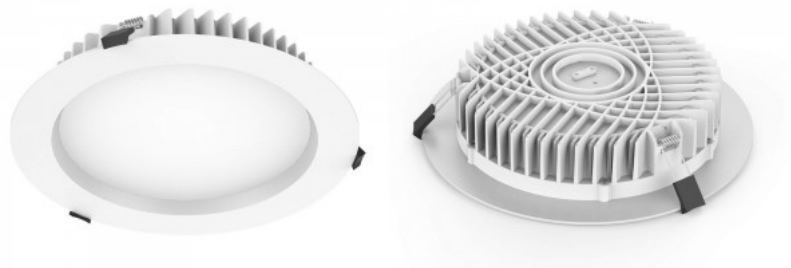

Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL59-8-25 white 230V 25W 2500lm 90° IP44 940

Product code 15214

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 25W

Maximum output 25W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 90

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 50000h

Height 45.0mm

Diameter 228.0mm

Installation opening diameter 200-210mm

Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED downlight PROLUMEN CL59A-4 white 230V 12W 1300lm 100° IP54 830

Product code 17832

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 12W
Maximum output 12W/1m
Luminous flux 1300lumens
Luminaire's efficiency lm79 108W
Correlated colour temperature warm
white 3000K
Lens angle 100
Cri 80
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 50000h
Height 45.0mm
Diameter 145.0mm
Installation opening diameter 120mm
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN CL76-3 white round 230V 10W 600lm CRI90 36° IP54 2000-3000K DIM TO WARM

Product code 15188

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 10W
Maximum output 10W/1m
Luminous flux 600lumens
Luminaire's efficiency lm79 60W
Correlated colour temperature DIM TO WARM 2000-3000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B50 @25°C 50.000h
Height 55.0mm
Diameter 95.0mm
Installation opening diameter 82mm
In box 24pcs
Casing colour white
Casing material aluminum
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years

Recessed LED downlight with directional light beam. The light has a dimming feature; when dimmed, the light temperature changes from daylight to warm white. The light's protection class IP54 means it is protected against normal dust and splashes of water from all directions. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalog](#) as well!



LED downlight PROLUMEN CL99-2 white 230V 60W 3800lm 36° IP20 930

Product code 14131

Brand [PROLUMEN](#)

Supply voltage 230V

Output 60W

Maximum output 60W/1m

Luminous flux 3800lumens

Luminaire's efficiency lm79 63W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Protection class IP20

Lifespan 40000h

Height 110.0mm

Width 175.0mm

Length 350.0mm

Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Project sales, minimum order quantity! LED recessed light with multiple directional light beams. CL99 models in color temperatures of 3000K (warm white) and 4000K (daylight white). Protection class IP20 indicates that the luminaire is for indoor use. The color rendering index CRI90 keeps the colors of illuminated areas and objects true and natural. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalog](#) as well!

LED downlight PROLUMEN CL99-2 white 230V 60W 4000lm 36° IP20 940

Product code 16868

Brand [PROLUMEN](#)

Supply voltage 230V

Output 60W

Maximum output 60W/1m

Luminous flux 4000lumens

Luminaire's efficiency lm79 67W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Protection class IP20

Lifespan 40000h

Height 110.0mm

Width 175.0mm

Length 330.0mm

Installation opening diameter

310x160mm

Package weight 2420g

In box 6pcs


Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Project sales, minimum order quantity! LED recessed light with multiple directional light beams. CL99 models in color temperatures of 3000K (warm white) and 4000K (daylight white). Protection class IP20 indicates that the luminaire is for indoor use. The color rendering index CRI90 keeps the colors of illuminated areas and objects true and natural. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalog](#) as well!

LED downlight PROLUMEN CL99-2 white 230V 60W 5800lm 36° 940

Product code 17346

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 60W

Maximum output 60W/1m

Luminous flux 5800lumens

Luminaire's efficiency lm79 97W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Lifespan 40000h

Height 110.0mm

Width 175.0mm

Length 330.0mm

In package 1pc

In box 6pcs

Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Project sales, minimum order quantity! LED recessed light with multiple directional light beams. CL99 models in color temperatures of 3000K (warm white) and 4000K (daylight white). Protection class IP20 indicates that the luminaire is for indoor use. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalog](#) as well!

LED downlight PROLUMEN CL99-3 white 230V 90W 36° IP20 940

Product code 16366

Brand [PROLUMEN](#)
Supply voltage 230V
Output 90W
Maximum output 90W/1m
Correlated colour temperature pure white 4000K
Lens angle 36
Cri 90
Protection class IP20
Lifespan 40000h
Height 110.0mm
Width 175.0mm
Length 475.0mm
Casing colour white
Casing material aluminum
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Project sales, minimum order quantity! LED recessed light with multiple directional light beams. CL99 models in color temperatures of 3000K (warm white) and 4000K (daylight white). Protection class IP20 indicates that the luminaire is for indoor use. The color rendering index CRI90 keeps the colors of illuminated areas and objects true and natural. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalog](#) as well!

LED downlight PROLUMEN Colmar white round 230V 20W 2000lm 90° IP20 940

Product code 16068

Brand [PROLUMEN](#)

Supply voltage 230V

Output 20W

Maximum output 20W/1m

Luminous flux 2000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure
white 4000K

Lens angle 90

Source of light OSRAM LED

Cri 90

Protection class IP20

Lifespan 50000h

Height 77.0mm

Diameter 123.0mm

Installation opening diameter 115mm

Weight 450g

Package weight 500g

In package 1pc

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



LED downlight PROLUMEN D200 white 230V 15W 1350lm 120° IP20 TRIAC 840

Product code 17939 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 15W

Maximum output 15W/1m

Luminous flux 1350lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 40000h

Height 21.0mm

Width 200.0mm

Length 200.0mm

Diameter 200.0mm

Installation opening diameter 182mm

Package weight 460g

In package 1pc

In box 20pcs

Casing colour white


Casing material aluminum

Work environment indoor use

Operation temperature -20°C ~45°C

Certificates CE, RoHS

Warranty 5 years

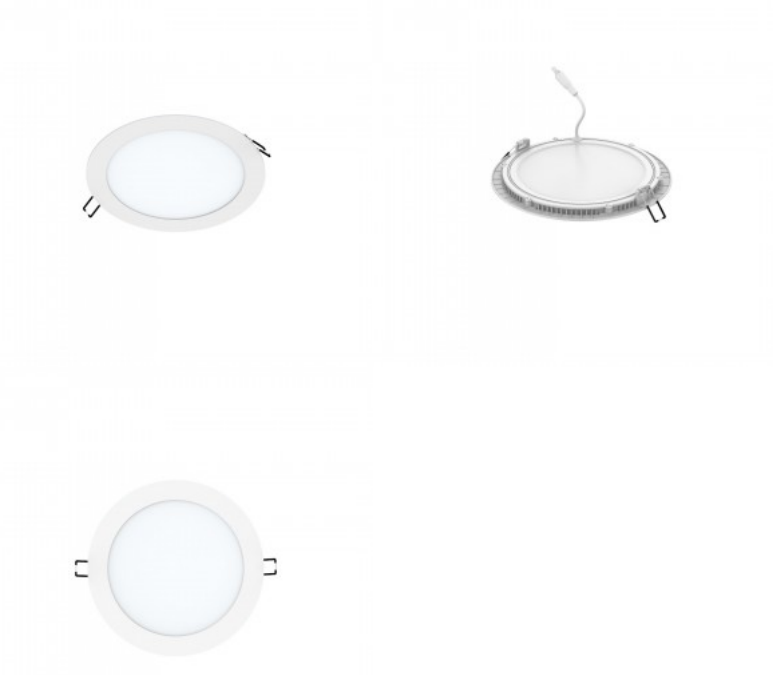

The ultra-slim LED panel is ideal for various indoor spaces, offering flexible size options to suit different needs. High-quality components ensure even and efficient lighting, while the aluminum frame aids in heat dissipation, extending the fixture's lifespan. The external driver supports dimming, allowing you to adjust the brightness as needed. Its minimalist design makes it an excellent choice for installation in tight or limited spaces.

LED downlight PROLUMEN Dahlia white round 230V 10W 1050lm 36° DALI 930

Product code 17612 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 10W

Maximum output 10W/1m

Luminous flux 1050lumens

Luminaire's efficiency lm79 105W

Correlated colour temperature warm
white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Lifespan 50000h

Height 50.0mm

Diameter 80.0mm

Installation opening diameter 75mm

In package 1pc

In box 24pcs

Casing colour white

Shape round

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED luminaire. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN Derby white round 230V 8W 700lm 36° IP20 930

Product code 15992

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Output 8W
 Maximum output 8W/1m
 Luminous flux 700lumens
 Luminaire's efficiency lm79 88W
 Correlated colour temperature warm white 3000K
 Lens angle 36
 Source of light [PHILIPS LED](#)
 Cri 90
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Height 35.0mm
 Diameter 85.0mm
 Installation opening diameter 75mm
 In package 1pc
 In box 36pcs
 Casing colour white
 Casing material aluminum
 Polishing matt
 Shape round
 Power supply [LIFUD](#)
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years

Recessed LED downlight with adjustable light beam. Warm white light with a color temperature of 3000K. Protection class IP20 means that the luminaire is for indoor use only. The color rendering index CRI90 keeps the areas and objects illuminated by the light true to natural colors. Proper use results in the luminaire being energy-efficient, environmentally friendly, and with a very long lifespan (50,000 hours). Option to order with lenses of 15°/24°/36°/50° angles. Also available with a color temperature of 4000K if needed. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalog](#) as well!



LED downlight PROLUMEN DL103 2.5 black round 230V 10W 660lm 36° IP65 TRIAC 930

Product code 17641 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 660lumens

Luminaire's efficiency lm79 66W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 50.0mm

Diameter 90.0mm

Installation opening diameter 75mm

In box 50pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 2.5 black round 230V 10W 860lm 36° IP65 TRIAC 840

Product code 16841 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 860lumens
Luminaire's efficiency lm79 86W
Correlated colour temperature pure white 4000K
Lens angle 36
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 40000h
Llmf tm21 L80B50 @25°C 50.000h
Height 50.0mm
Diameter 90.0mm
Installation opening diameter 75mm
In box 50pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 2.5 black round 230V 10W 950lm 36° IP65 TRIAC 940

Product code 17607 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 950lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 5

Protection class IP65

Lifespan 40000h

Llmf tm21 L80B50 @25°C 50.000h

Height 50.0mm

Diameter 90.0mm

Installation opening diameter 75mm

In box 50pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 -+45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 2.5 black round 230V 5W 365lm 36° IP65 TRIAC 930

Product code 17640 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 5W

Maximum output 5W/1m

Luminous flux 365lumens

Luminaire's efficiency lm79 73W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 40.0mm

Diameter 80.0mm

Installation opening diameter 67mm

In package 1pc

In box 50pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 2.5 black round 230V 5W 400lm 36° IP65 TRIAC 940

Product code 18183 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 5W

Maximum output 5W/1m

Luminous flux 400lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 40.0mm

Diameter 80.0mm

Installation opening diameter 67mm

In package 1pc

In box 50pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 2.5 white round 230V 10W 750lm 36° IP65 TRIAC 940

Product code 15320 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 750lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 50.0mm

Diameter 90.0mm

Installation opening diameter 75mm

In package 1pc

In box 50pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moisture environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 2.5 white round 230V 5W 365lm 36° IP65 TRIAC 930

Product code 17606 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 5W
Maximum output 5W/1m
Luminous flux 365lumens
Luminaire's efficiency lm79 73W
Correlated colour temperature warm
white 3000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 3
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 40.0mm
Diameter 80.0mm
Installation opening diameter 67mm
In package 1pc
In box 50pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20° - +45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moisture environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 3 black round 230V 13W 1010lm 36° IP65 TRIAC 940

Product code 17639 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 13W

Maximum output 13W/1m

Luminous flux 1010lumens

Luminaire's efficiency lm79 78W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 65.0mm

Diameter 110.0mm

Installation opening diameter 90mm

In box 30pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 3 black round 230V 13W 880lm 36° IP65 TRIAC 930

Product code 15522 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 13W

Maximum output 13W/1m

Luminous flux 880lumens

Luminaire's efficiency lm79 68W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 65.0mm

Diameter 110.0mm

Installation opening diameter 89.8mm

In box 30pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 3 white round 230V 13W 1010lm 36° IP65 TRIAC 940

Product code 16117 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 13W
Maximum output 13W/1m
Luminous flux 1010lumens
Luminaire's efficiency lm79 78W
Correlated colour temperature pure white 4000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 65.0mm
Diameter 110.0mm
Installation opening diameter 90mm
In box 30pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20 - +45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moist environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103 3 white round 230V 13W 880lm 36° IP65 TRIAC 930

Product code 15813 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 13W
Maximum output 13W/1m
Luminous flux 880lumens
Luminaire's efficiency lm79 68W
Correlated colour temperature warm
white 3000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 65.0mm
Diameter 110.0mm
Installation opening diameter 90mm
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20 - +45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moisture environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103B 2.5 white round 230V 10W 660lm 36° IP65 TRIAC 930

Product code 14996 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 660lumens
Luminaire's efficiency lm79 66W
Correlated colour temperature warm
white 3000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 50.0mm
Diameter 90.0mm
Installation opening diameter 75mm
In box 50pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20 - +45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL103B-2.5 black round 230V 10W 660lm 60° IP65 DALI 930

Product code 18281 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 10W
Maximum output 10W/1m
Luminous flux 660lumens
Luminaire's efficiency lm79 66W
Correlated colour temperature warm
white 3000K
Lens angle 60
Cri 90
Sdcm - macadam ellipses 3
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 49.4mm
Diameter 90.0mm
Installation opening diameter
75-80mm
In box 50pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20 - +45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. From the LED House product range, you can also find this model with TRIAC technology, which allows dimming functionality. In addition, you can choose between two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL104B 2.5 black square 230V 10W 870lm 36° IP65 930

Product code 15633

Brand [PROLUMEN](#)

Supply voltage 230V

Output 10W

Maximum output 10W/1m

Luminous flux 870lumens

Luminaire's efficiency lm79 87W

Correlated colour temperature warm

white 3000K

Lens angle 36

Cri 90

Protection class IP65

Lifespan 50000h

Height 49.0mm

Width 90.0mm

Length 90.0mm

Installation opening diameter 74mm

In box 50pcs


Casing colour black

Shape square

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

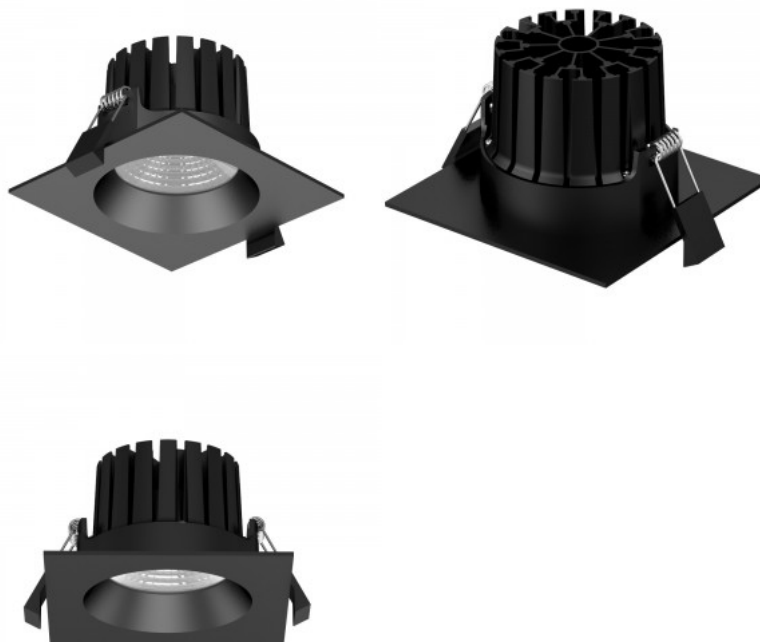

Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL104B 2.5 white square 230V 10W 870lm 36° IP65 830

Product code 14923

Brand [PROLUMEN](#)

Supply voltage 230V

Output 10W

Maximum output 10W/1m

Luminous flux 870lumens

Luminaire's efficiency lm79 87W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 80

Protection class IP65

Lifespan 50000h

In box 50pcs

Casing colour white

Shape square

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

Recessed LED luminaire. The IP65 protection class means that the luminaire is protected against fine dust and low-pressure jets. Thanks to this feature, this luminaire is suitable for outdoor use and in moister environments. The light temperature is 3000K (warm white). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!



LED downlight PROLUMEN DL138A UGR19 white round 230V 18W 1530lm 90° IP54 DALI 930

Product code 16151 DALI dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Dimmable DALI
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1530lumens
 Luminaire's efficiency lm79 85W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Cri 90
 Ugr 19
 Protection class IP54
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 95.0mm
 Diameter 172.0mm
 Installation opening diameter 146mm
 Weight 351g
 Package weight 505g
 In package 1pc
 In box 12pcs
 Casing colour white
 Casing material aluminum + plastic
 Polishing matt
 Shape round
 Work environment indoor use
 Certificates CE, RoHS
 Warranty 5 years



Recessed LED ship light.
 Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL138A UGR19 white round 230V 25W 2500lm 90° IP54 DALI 940

Product code 16152 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 2500lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure
white 4000K
Lens angle 90
Cri 90
Ugr 19
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 98.0mm
Diameter 228.0mm
Installation opening diameter 200mm
Weight 540g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light.
Recommended uses: corridors, public
areas such as commercial spaces,
schools, sports halls, and commercial
premises. The IP54 protection class
means that the luminaire is protected
against normal dust and splashes
from any direction. From the LED
House range, you can find this
luminaire model in two light
temperatures: 3000K (warm white)
and 4000K (daylight). If you haven't
found the perfect light fixture from
our product range yet, then browse
through the [PROLUMEN catalogue](#) as
well!

LED downlight PROLUMEN DL178-3 white 230V 10W 1100lm 36° IP54 940

Product code 18147

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 10W
Maximum output 10W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature pure white 4000K
Lens angle 36
Cri 90
Ugr 22
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 54.0mm
Diameter 110.0mm
Installation opening diameter 90-95mm
Weight 408g
In box 36pcs
Casing colour white
Casing material aluminum
Impact resistance IK06
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light.
Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-3 white 230V 10W 1100lm 60° IP54 940

Product code 18113

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 10W
Maximum output 10W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature pure white 4000K
Lens angle 60
Cri 90
Ugr 22
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 54.0mm
Diameter 110.0mm
Installation opening diameter 90-95mm
Weight 408g
In box 36pcs
Casing colour white
Casing material aluminum
Impact resistance IK06
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light.
Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-3 white 230V 13W 980lm 60° IP54 930

Product code 16380

Brand [PROLUMEN](#)

Supply voltage 230V

Output 13W

Maximum output 13W/1m

Luminous flux 980lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature warm white 3000K

Lens angle 60°

Cri 90

Protection class IP54

Lifespan 50000h

Lmf tm21 L80B10 @25°C 50.000h

Height 54.0mm

Diameter 110.0mm

Installation opening diameter

90-95mm

Weight 408g

In box 36pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-3 white 230V 13W 980lm 60° IP54 DALI 930

Product code 16379 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 13W

Maximum output 13W/1m

Luminous flux 980lumens

Luminaire's efficiency lm79 75W

Correlated colour temperature warm white 3000K

Lens angle 60°

Cri 90

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 54.0mm

Diameter 110.0mm

Installation opening diameter

90-95mm

Weight 408g

In box 36pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-4 UGR19 white 230V 10W 1100lm 60° IP54 TRIAC 930

Product code 17609 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 78.0mm
Diameter 145.0mm
Installation opening diameter 120mm
Weight 475g
In package 1pc
In box 18pcs
Casing colour white
Casing material aluminum
Impact resistance IK06
Work environment indoor use
Operation temperature -20 - +45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light.
Recommended uses: corridors, public
areas such as commercial spaces,
schools, sports halls, and commercial
premises. The IP54 protection class
means that the luminaire is protected
against normal dust and splashes
from any direction. From the LED
House range, you can find this
luminaire model in two light
temperatures: 3000K (warm white)
and 4000K (daylight). If you haven't
found the perfect light fixture from
our product range yet, then browse
through the [PROLUMEN catalogue](#) as
well!

LED downlight PROLUMEN DL178-4 UGR19 white 230V 10W 1150lm 60° IP54 930

Product code 15548

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 10W

Maximum output 10W/1m

Luminous flux 1150lumens

Luminaire's efficiency lm79 115W

Correlated colour temperature warm
white 3000K

Lens angle 60

Cri 90

Ugr 19

Sdcm - macadam ellipses 3

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter 120mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-4 UGR19 white 230V 18W 2000lm 36° IP54 930

Product code 15245

Brand [PROLUMEN](#)

Supply voltage 230V

Output 18W

Maximum output 18W/1m

Luminous flux 2000lumens

Luminaire's efficiency lm79 111W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter 100mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-4 UGR19 white 230V 18W 2000lm 36° IP54 940

Product code 15984

Brand [PROLUMEN](#)

Supply voltage 230V

Output 18W

Maximum output 18W/1m

Luminous flux 2000lumens

Luminaire's efficiency lm79 111W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter 100mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!



LED downlight PROLUMEN DL178-4 UGR19 white 230V 18W 2250lm 60° IP54 TRIAC 930

Product code 17579 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 18W

Maximum output 18W/1m

Luminous flux 2250lumens

Luminaire's efficiency lm79 125W

Correlated colour temperature warm
white 3000K

Lens angle 60

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter 100mm

Weight 475g

In package 1pc

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-4 UGR19 white 230V 25W 2500lm 36° IP54 DALI 930

Product code 17213 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 25W

Maximum output 25W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter 100mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-4 UGR19 white 230V 25W 2600lm 36° IP54 930

Product code 16006

Brand [PROLUMEN](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Luminous flux 2600lumens

Luminaire's efficiency lm79 104W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter 100mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-4 UGR19 white 230V 25W 2700lm 36° IP54 940

Product code 15405

Brand [PROLUMEN](#)

Supply voltage 230V

Output 25W

Maximum output 25W/1m

Luminous flux 2700lumens

Luminaire's efficiency lm79 108W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter 100mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!



LED downlight PROLUMEN DL178-4 UGR19 white round 230V 10W 1100lm 60° IP54 DALI 840

Product code 16175 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 10W
Maximum output 10W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature pure white 4000K
Lens angle 60
Source of light CITIZEN LED
Cri 80
Ugr 19
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 78.0mm
Diameter 145.0mm
Installation opening diameter 125-135mm
Weight 475g
In box 18pcs
Casing colour white
Casing material aluminum
Shape round
Impact resistance IK06
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light.
Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-4 UGR19 white round 230V 18W 2100lm 60° IP54 DALI 940

Product code 16993 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 18W

Maximum output 18W/1m

Luminous flux 2100lumens

Luminaire's efficiency lm79 117W

Correlated colour temperature pure white 4000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 78.0mm

Diameter 145.0mm

Installation opening diameter

125-135mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Shape round

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-8 UGR19 white 230V 35W 3500lm 60° IP54 940

Product code 15880

Brand [PROLUMEN](#)

Supply voltage 230V

Output 35W

Maximum output 35W/1m

Luminous flux 3500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 60

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 99.0mm

Diameter 228.0mm

Installation opening diameter 200mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-8 UGR19 white 230V 35W 3500lm 60° IP54 DALI 940

Product code 17739 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 35W

Maximum output 35W/1m

Luminous flux 3500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 60

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 99.0mm

Diameter 228.0mm

Installation opening diameter 200mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL178-8 UGR19 white 230V 35W 3600lm 60° IP54 930

Product code 16018

Brand [PROLUMEN](#)

Supply voltage 230V

Output 35W

Maximum output 35W/1m

Luminous flux 3600lumens

Luminaire's efficiency lm79 103W

Correlated colour temperature warm
white 3000K

Lens angle 60

Cri 90

Ugr 19

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 99.0mm

Diameter 228.0mm

Installation opening diameter 200mm

Weight 475g

In box 18pcs

Casing colour white

Casing material aluminum

Impact resistance IK06

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

Recessed LED ship light.

Recommended uses: corridors, public areas such as commercial spaces, schools, sports halls, and commercial premises. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. From the LED House range, you can find this luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!



LED luminaire PROLUMEN DL197-6 UGR19 black square 230V 18W 1650lm 60° IP44 DALI 940

Product code 16984 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 18W
Maximum output 18W/1m
Luminous flux 1650lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature pure white 4000K
Lens angle 60
Cri 90
Ugr 19
Protection class IP44
Lifespan 50000h
Llmf tm21 L70B50 @25°C 50.000h
Height 102.0mm
Width 190.0mm
Length 190.0mm
Installation opening diameter 170x170mm
In package 1pc
Casing colour black
Casing material aluminum + plastic
Shape square
Impact resistance IK06
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



This [recessed LED light](#) is splash-proof, making it suitable for use in more humid rooms. The integrated DALI Dim technology allows adjusting the brightness of the light as needed. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED luminaire PROLUMEN DL197-6 UGR19 black square 230V 25W 2200lm 60° IP44 DALI 940

Product code 16986 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 2200lumens
Luminaire's efficiency lm79 88W
Correlated colour temperature pure white 4000K
Lens angle 60
Cri 90
Ugr 20
Protection class IP44
Lifespan 50000h
Llmf tm21 L70B50 @25°C 50.000h
Height 102.0mm
Width 190.0mm
Length 190.0mm
Installation opening diameter 170x170mm
In package 1pc
Casing colour black
Casing material aluminum + plastic
Shape square
Impact resistance IK06
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



This [recessed LED light](#) is splash-proof, making it suitable for use in more humid rooms. The integrated DALI Dim technology allows adjusting the brightness of the light as needed. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED luminaire PROLUMEN DL197-6 UGR19 white square 230V 18W 1600lm 60° IP44 930

Product code 16011

Brand [PROLUMEN](#)
Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1600lumens
Luminaire's efficiency lm79 89W
Correlated colour temperature warm
white 3000K
Lens angle 60
Cri 90
Ugr 19
Protection class IP44
Lifespan 50000h
Llmf tm21 L70B50 @25°C 50.000h
Height 102.0mm
Diameter 190.0mm
Installation opening diameter 170mm
In package 1pc
Casing colour white
Casing material aluminum + plastic
Shape square
Impact resistance IK06
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



This [recessed LED light](#) is splash-proof, making it suitable for use in more humid rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN DL210-3 white 230V 13W 1100lm 100° IP54 830

Product code 18247

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 13W

Maximum output 13W/1m

Luminous flux 1100lumens

Luminaire's efficiency lm79 85W

Correlated colour temperature warm white 3000K

Lens angle 100

Cri 80

Sdcm - macadam ellipses 3

Protection class IP54

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 30.0mm

Diameter 145.0mm

Installation opening diameter 120-130mm

In box 30pcs

Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Classic recessed LED luminaire with a round minimalist design. From the LED House collection, you can find this luminaire model in two different light temperatures: 3000K warm white and 4000K daylight. The IP44 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN DL22 8 white round 230V 35W 3600lm 36° IP20 930

Product code 15310

Brand [PROLUMEN](#)
Supply voltage 230V
Output 35W
Maximum output 35W/1m
Luminous flux 3600lumens
Luminaire's efficiency lm79 103W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light CITIZEN LED
Cri 90
Protection class IP20
Lifespan 50000h
Height 87.0mm
Diameter 225.0mm
Installation opening diameter 200mm
Weight 1360g
Package weight 1526g
In box 12pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Stylishly designed LED ship light for indoor spaces requiring stronger illumination. From the LED House range, you can find the DL22-8 luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). Additionally, it is possible to choose with DALI technology, which allows dimming of the light beam. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL22 8 white round 230V 35W 3800lm 36° IP20 840

Product code 14641

Brand [PROLUMEN](#)
Supply voltage 230V
Output 35W
Maximum output 35W/1m
Luminous flux 3800lumens
Luminaire's efficiency lm79 109W
Correlated colour temperature pure white 4000K
Lens angle 36
Source of light CITIZEN LED
Cri 80
Protection class IP20
Lifespan 50000h
Height 87.0mm
Diameter 225.0mm
Installation opening diameter 200mm
Weight 1360g
Package weight 1526g
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Stylishly designed LED ship light for indoor spaces requiring stronger illumination. From the LED House range, you can find the DL22-8 luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). Additionally, it is possible to choose with DALI technology, which allows dimming of the light beam. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL22-8 white round 230V 45W 4100lm 60° IP44 DALI 930

Product code 17224 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 45W
Maximum output 45W/1m
Luminous flux 4100lumens
Luminaire's efficiency lm79 91W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Protection class IP44
Lifespan 50000h
Height 87.0mm
Diameter 225.0mm
Installation opening diameter 200mm
Weight 1360g
Package weight 1526g
In box 12pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Stylishly designed LED ship light for indoor spaces requiring stronger illumination. From the LED House range, you can find the DL22-8 luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). Additionally, it is possible to choose with DALI technology, which allows dimming of the light beam. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL22-8 white round 230V 45W 4200lm 60° IP54/20 TRIAC 830

Product code 17935 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable TRIAC
Output 45W
Maximum output 45W/1m
Luminous flux 4200lumens
Luminaire's efficiency lm79 93W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 80
Sdcm - macadam ellipses 6
Protection class IP54/20
Lifespan 50000h
Height 75.0mm
Diameter 225.0mm
Installation opening diameter 200mm
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Stylishly designed LED ship light for indoor spaces requiring stronger illumination. From the LED House range, you can find the DL22-8 luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). Additionally, it is possible to choose with DALI technology, which allows dimming of the light beam. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL22-8 white round 230V 45W 4725lm 60° IP20 940

Product code 15270

Brand [PROLUMEN](#)
Supply voltage 230V
Output 45W
Maximum output 45W/1m
Luminous flux 4725lumens
Luminaire's efficiency lm79 105W
Correlated colour temperature pure white 4000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Protection class IP20
Lifespan 50000h
Height 87.0mm
Diameter 225.0mm
Installation opening diameter 200mm
Weight 1360g
Package weight 1526g
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Stylishly designed LED ship light for indoor spaces requiring stronger illumination. From the LED House range, you can find the DL22-8 luminaire model in two light temperatures: 3000K (warm white) and 4000K (daylight). Additionally, it is possible to choose with DALI technology, which allows dimming of the light beam. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL268 3 white round 230V 10W

600lm 60° IP54 TRIAC 830

Product code 16812 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 600lumens

Luminaire's efficiency lm79 60W

Correlated colour temperature warm
white 3000K

Lens angle 60

Cri 80

Protection class IP54

Lifespan 50000h

Height 55.0mm

Diameter 108.0mm

Installation opening diameter
90-95mm

In package 1pc

In box 36pcs

Casing colour white

Shape round

Impact resistance IK06

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Powerful and weather-resistant luminaire. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. The DL268 model is available from LED House with both DALI and TRIAC technology. This feature allows dimming of the light beam as needed. The high colour rendering index maintains true and natural colours of objects and areas under the light, and for this model, you can choose a light temperature of either 3000K (warm white) or 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL268 4 white round 230V 10W 700lm 60° IP54 DALI 930

Product code 17014 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 10W
Maximum output 10W/1m
Luminous flux 700lumens
Luminaire's efficiency lm79 70W
Correlated colour temperature warm
white 3000K
Lens angle 60
Cri 90
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 50000h
Llmf tm21 L70B50 @25°C 50.000h
Height 77.0mm
Diameter 145.0mm
Installation opening diameter
125-135mm
In box 36pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Impact resistance IK06
Work environment indoor use
Certificates CE
Warranty 5 years



Powerful and weather-resistant luminaire. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. The DL268 model is available from LED House with both DALI and TRIAC technology. This feature allows dimming of the light beam as needed. The high colour rendering index maintains true and natural colours of objects and areas under the light, and for this model, you can choose a light temperature of either 3000K (warm white) or 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL268 6 white round 230V 25W 2800lm 60° IP54 840

Product code 17737

Brand [PROLUMEN](#)
Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 2800lumens
Luminaire's efficiency lm79 112W
Correlated colour temperature pure white 4000K
Lens angle 60
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 50000h
Height 90.0mm
Diameter 172.0mm
Installation opening diameter 150-165mm
In package 1pc
Casing colour white
Shape round
Impact resistance IK06
Work environment indoor use
Operation temperature -20° - +45°C
Certificates CE, RoHS
Warranty 5 years



Powerful and weather-resistant luminaire. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. The DL268 model is available from LED House with both DALI and TRIAC technology. This feature allows dimming of the light beam as needed. The high colour rendering index maintains true and natural colours of objects and areas under the light, and for this model, you can choose a light temperature of either 3000K (warm white) or 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL268 8 white round 230V 18W 1800lm 80° IP54 930

Product code 16026

Brand [PROLUMEN](#)

Supply voltage 230V

Output 18W

Maximum output 18W/1m

Luminous flux 1800lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm
white 3000K

Lens angle 80

Cri 90

Protection class IP54

Lifespan 50000h

Height 107.0mm

Diameter 228.0mm

Installation opening diameter 200mm

Weight 1130g

Package weight 1360g

In package 1pc

In box 12pcs

Casing colour white

Shape round

Impact resistance IK06

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Powerful and weather-resistant luminaire. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. The DL268 model is available from LED House with both DALI and TRIAC technology. This feature allows dimming of the light beam as needed. The high colour rendering index maintains true and natural colours of objects and areas under the light, and for this model, you can choose a light temperature of either 3000K (warm white) or 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL268 8 white round 230V 35W 3400lm 60° IP54 940

Product code 17146

Brand [PROLUMEN](#)
Supply voltage 230V
Output 35W
Maximum output 35W/1m
Luminous flux 3400lumens
Luminaire's efficiency lm79 97W
Correlated colour temperature pure white 4000K
Lens angle 60
Cri 90
Protection class IP54
Lifespan 50000h
Height 107.0mm
Diameter 228.0mm
Installation opening diameter 200-210mm
Weight 1130g
Package weight 1360g
In package 1pc
In box 12pcs
Casing colour white
Shape round
Impact resistance IK06
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Powerful and weather-resistant luminaire. The IP54 protection class means that the luminaire is protected against normal dust and splashes from any direction. The DL268 model is available from LED House with both DALI and TRIAC technology. This feature allows dimming of the light beam as needed. The high colour rendering index maintains true and natural colours of objects and areas under the light, and for this model, you can choose a light temperature of either 3000K (warm white) or 4000K (daylight). If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL284 white round 230V 13W 1350lm 36° IP65 930

Product code 19303

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 13W
Maximum output 13W/1m
Luminous flux 1350lumens
Luminaire's efficiency lm79 104W
Correlated colour temperature warm white 3000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 51.0mm
Diameter 110.0mm
Installation opening diameter 90-95mm
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum
Shape round
Impact resistance IK10
Work environment indoor / outdoor use
Certificates CE, RoHS
Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL284 white round 230V 18W 1950lm 36° IP65 930

Product code 17383

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Luminous flux 1950lumens

Luminaire's efficiency lm79 108W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 64.0mm

Diameter 150.0mm

Installation opening diameter
125-140mm

In package 1pc

In box 12pcs

Casing colour white

Casing material aluminum

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Certificates CE, RoHS

Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL284 white round 230V 18W 1950lm 38° IP65 930

Product code 17385

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Maximum output 18W/1m

Luminous flux 1950lumens

Luminaire's efficiency lm79 108W

Correlated colour temperature warm
white 3000K

Lens angle 38

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 81.0mm

Diameter 235.0mm

Installation opening diameter
200-220mm

In package 1pc

In box 6pcs

Casing colour white

Casing material aluminum

Shape round

Impact resistance IK10

Work environment indoor / outdoor
use

Certificates CE, RoHS

Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL284 white round 230V 25W 2750lm 38° IP65 930

Product code 17384

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 2750lumens
Luminaire's efficiency lm79 110W
Correlated colour temperature warm
white 3000K
Lens angle 38
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 69.0mm
Diameter 172.0mm
Installation opening diameter
150-165mm
In box 12pcs
Casing colour white
Casing material aluminum
Shape round
Impact resistance IK10
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL284A, SMD white round 230V 10W 950lm 75° IP65 DALI 830

Product code 18234 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 10W
Maximum output 10W/1m
Luminous flux 950lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature warm white 3000K
Lens angle 75
Cri 80
Sdcm - macadam ellipses 3
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 51.0mm
Diameter 110.0mm
Installation opening diameter 90-95mm
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Shape round
Impact resistance IK06
Work environment indoor / outdoor use
Certificates CE, RoHS
Warranty 5 years



Functional LED underlight, suitable for use in damp environments such as sauna anterooms or bathrooms. The luminaire is recessed. It can be installed, for example, into the wall, ceiling, or countertop. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL326 black round 230V 6W 600lm 36° IP40 930

Product code 18167

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 6W
Maximum output 6W/1m
Luminous flux 600lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 3
Protection class IP40
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 36.0mm
Diameter 85.0mm
Installation opening diameter 72mm
In box 36pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Impact resistance IK03
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Ultra-slim recessed LED downlight that provides a wide and uniform light beam. Its protected front panel makes it suitable for use even in humid environments. The fixture comes with an external driver, ensuring flicker-free illumination and compatibility with various dimming solutions. Its modern and compact design allows installation in different indoor spaces such as offices, shops, schools, hotels, and public areas. The luminaire offers an energy-efficient and long-lasting lighting solution for everyday use.

LED downlight PROLUMEN DL326 white round 230V 6W 600lm 36° IP40 930

Product code 18166

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 6W
Maximum output 6W/1m
Luminous flux 600lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm white 3000K
Lens angle 36
Cri 90
Sdcm - macadam ellipses 3
Protection class IP40
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 36.0mm
Diameter 85.0mm
Installation opening diameter 72mm
In box 36pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Impact resistance IK03
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Ultra-slim recessed LED downlight that provides a wide and uniform light beam. Its protected front panel makes it suitable for use even in humid environments. The fixture comes with an external driver, ensuring flicker-free illumination and compatibility with various dimming solutions. Its modern and compact design allows installation in different indoor spaces such as offices, shops, schools, hotels, and public areas. The luminaire offers an energy-efficient and long-lasting lighting solution for everyday use.

LED downlight PROLUMEN DL341 black round 230V 6W 480lm 36° IP65 TRIAC 830

Product code 16310 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 6W
Maximum output 6W/1m
Luminous flux 480lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 3000K
Lens angle 36
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 46.0mm
Diameter 80.0mm
Installation opening diameter 68mm
In package 1pc
In box 30pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Cutting-edge downlight! Waterproof, recessed, suitable for both indoor and outdoor environments. The luminaire emits warm white light (3000K) and has a color rendering index (CRI) of 90, preserving the natural colors of surfaces and objects within the light beam. Furthermore, the luminaire is equipped with TRIAC technology, enabling dimming functionality for users to create the desired ambiance in their spaces. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL341 black round 230V 6W 480lm 60° IP54 TRIAC 930

Product code 17386 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 6W
Maximum output 6W/1m
Luminous flux 480lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 3000K
Lens angle 60
Cri 90
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP54
Lifespan 50000h
Height 51.0mm
Diameter 110.0mm
Installation opening diameter
90-95mm
In package 1pc
In box 30pcs
Casing colour black
Casing material aluminum
Shape round
Impact resistance IK10
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 5 years



Cutting-edge downlight! Waterproof, recessed, suitable for both indoor and outdoor environments. The luminaire emits warm white light (3000K) and has a color rendering index (CRI) of 90, preserving the natural colors of surfaces and objects within the light beam. Furthermore, the luminaire is equipped with TRIAC technology, enabling dimming functionality for users to create the desired ambiance in their spaces. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL341-3 black round 230V 10W 950lm 60° IP54 940

Product code 18115

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 10W
Maximum output 10W/1m
Luminous flux 950lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature pure white 4000K
Lens angle 60
Cri 90
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 51.0mm
Diameter 102.0mm
Installation opening diameter 90-95mm
In package 1pc
In box 30pcs
Casing colour black
Casing material aluminum
Shape round
Impact resistance IK10
Work environment indoor / outdoor use
Certificates CE, RoHS
Warranty 5 years




Cutting-edge downlight! Waterproof, recessed, suitable for both indoor and outdoor environments. The luminaire emits warm white light (3000K) and has a color rendering index (CRI) of 90, preserving the natural colors of surfaces and objects within the light beam. Furthermore, the luminaire is equipped with TRIAC technology, enabling dimming functionality for users to create the desired ambiance in their spaces. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL350 black round 230V 10W 1000lm 36° IP40 TRIAC 930

Product code 17387 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 10W
Maximum output 10W/1m
Luminous flux 1000lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 36
Cri 90
Ugr 16
Sdcm - macadam ellipses 6
Protection class IP40
Lifespan 50000h
Height 72.0mm
Diameter 90.0mm
Installation opening diameter
75-83mm
Weight 280g
In package 1pc
In box 40pcs
Casing colour black
Casing material aluminum
Shape round
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE
Warranty 5 years

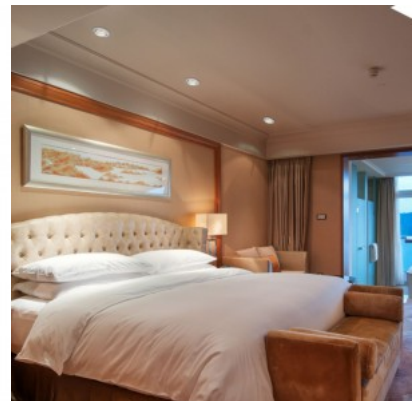

Classic DL350 recessed LED downlight. IP40 protection class allows the luminaire to be used indoors only. Adds warm white (3000K) light to the room, which can be directed as desired, and CRI90 ensures that the colors in the room appear true and clear in the light. With TRIAC technology, the LED luminaire can be dimmed and brightened, creating cozy light for a pleasant dinner or brighter light for work. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalog](#) as well!

LED downlight PROLUMEN DL361 3 white round 230V 10W 1000lm 36° IP44 TRIAC 930

Product code 18143 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 4

Protection class IP44

Lifespan 50000h

In box 30pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light for commercial spaces. It provides warm white light (3000K) to the space while maintaining a high color rendering index (CRI90), keeping the tones under the light natural and true. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL361-2.5 UGR<19 white round 230V 7W 550lm 36° IP44 DALI 930

Product code 18161 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 7W

Maximum output 7W/1m

Rated current 160mA

Luminous flux 550lumens

Luminaire's efficiency lm79 79W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Ugr 19

Sdcm - macadam ellipses 3

Protection class IP44

Lifespan 50000h

Height 56.0mm

Diameter 85.0mm

Installation opening diameter 70mm

In box 30pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



Recessed LED ship light for commercial spaces. It provides warm white light (3000K) to the space while maintaining a high color rendering index (CRI90), keeping the tones under the light natural and true. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL361-6 white round 230V 25W 2500lm 36° IP44/20 930

Product code 17196

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 2500lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light [BRIDGELUX LED](#)
Cri 90
Ugr 14
Sdcm - macadam ellipses 4
Protection class IP44/20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 120.0mm
Diameter 190.0mm
Installation opening diameter
160-170mm
Weight 700g
Package weight 850g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum + plastic
Shape round
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light for commercial spaces. It provides warm white light (3000K) to the space while maintaining a high color rendering index (CRI90), keeping the tones under the light natural and true. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL361-8 white round 230V 25W 2500lm 36° IP44/20 930

Product code 17900

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 2500lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light [BRIDGELUX LED](#)
Cri 90
Ugr 14
Sdcm - macadam ellipses 4
Protection class IP44/20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 142.0mm
Diameter 240.0mm
Installation opening diameter 200mm
Weight 700g
Package weight 850g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum + plastic
Shape round
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light for commercial spaces. It provides warm white light (3000K) to the space while maintaining a high color rendering index (CRI90), keeping the tones under the light natural and true. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL361-8 white round 230V 25W 2500lm 36° IP44/20 940

Product code 17901

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 2500lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 36
Source of light [BRIDGELUX LED](#)
Cri 90
Ugr 14
Sdcm - macadam ellipses 4
Protection class IP44/20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 142.0mm
Diameter 240.0mm
Installation opening diameter 200mm
Weight 700g
Package weight 850g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum + plastic
Shape round
Work environment indoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years



Recessed LED ship light for commercial spaces. It provides warm white light (3000K) to the space while maintaining a high color rendering index (CRI90), keeping the tones under the light natural and true. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL399-6-18W white round 230V 18W 2300lm 36° IP54 DALI 940

Product code 18123 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.80

Dimmable DALI

Output 18W

Maximum output 18W/1m

Luminous flux 2300lumens

Luminaire's efficiency lm79 128W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 103.0mm

Diameter 180.0mm

Installation opening diameter 160mm

In package 1pc

In box 18pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor / outdoor use

Certificates CE, RoHS

Warranty 5 years



LED downlight PROLUMEN DL399-6-25W white round 230V 25W 3100lm 38° IP54 DALI 940

Product code 17733 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 25W

Maximum output 25W/1m

Luminous flux 3100lumens

Luminaire's efficiency lm79 124W

Correlated colour temperature pure white 4000K

Lens angle 38

Cri 90

Protection class IP54

Lifespan 50000h

Height 103.0mm

Diameter 180.0mm

Installation opening diameter 160mm

In package 1pc

In box 18pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor / outdoor use

Certificates CE, RoHS

Warranty 5 years



LED downlight PROLUMEN DL416 2 white round 230V 7W 550lm 36° IP54 TRIAC 930

Product code 18148 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 7W

Maximum output 7W/1m

Luminous flux 550lumens

Luminaire's efficiency lm79 79W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 5

Protection class IP54

Lifespan 50000h

Height 50.0mm

Diameter 70.0mm

Installation opening diameter 60mm

In box 30pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



LED downlight PROLUMEN DL416 2.5 white round 230V 10W 800lm 36° IP54 TRIAC 930

Product code 18145 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 800lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature warm

white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 5

Protection class IP54

Lifespan 50000h

Height 59.0mm

Diameter 85.0mm

Installation opening diameter 75mm

In box 30pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



LED downlight PROLUMEN DL416 3 white round 230V 13W 1230lm 36° IP54 TRIAC 930

Product code 18146 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 13W

Maximum output 13W/1m

Luminous flux 1230lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature warm
white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 5

Protection class IP54

Lifespan 50000h

Height 69.0mm

Diameter 100.0mm

Installation opening diameter 90mm

In box 30pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 - +45°C

Certificates CE, RoHS

Warranty 5 years



LED downlight PROLUMEN DL422-5 white 230V 20W 2200lm 100° IP54 830

Product code 18072

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm
white 3000K

Lens angle 100

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 60.0mm

Diameter 170.0mm

Installation opening diameter 150mm

In box 12pcs

Casing colour white

Casing material polycarbonate

Work environment indoor use

Operation temperature -20° - +40°C

Certificates CE, RoHS

Warranty 5 years



Classic recessed LED luminaire with a round minimalist design. The IP54 protection class means that the luminaire is protected against >1.0mm dust particles and splashes from any direction. An ideal luminaire for corridors or dressing rooms. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN DL88 2,5 white round 230V 10W 780lm 24° IP20 TRIAC 930

Product code 15929 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Maximum output 10W/1m

Luminous flux 780lumens

Luminaire's efficiency lm79 78W

Correlated colour temperature warm white 3000K

Beam angle 24

Cri 90

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Llmf tm21 L70B50 @25°C 50.000h

Height 89.0mm

Diameter 85.0mm

Installation opening diameter 68mm

In package 1pc

In box 24pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Warranty 5 years



LED ceiling light with deep recess and minimalist design for home or office. You can find the DL88 model in the LED House selection with TRIAC and DALI technology, allowing users to dim and brighten the light according to their preferences. The selection includes downlights with warm white (2700K, 3000K) light. IP20 protection class allows this light fixture to be used only in dry indoor spaces. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL88 2.5 white round 230V 10W 780lm 24° IP20 DALI 930

Product code 15930 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 10W
Maximum output 10W/1m
Luminous flux 780lumens
Luminaire's efficiency lm79 78W
Correlated colour temperature warm
white 3000K
Lens angle 24
Cri 90
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 50000h
Llmf tm21 L70B50 @25°C 50.000h
Height 89.0mm
Diameter 85.0mm
Installation opening diameter 68mm
In package 1pc
In box 24pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Warranty 5 years



LED ceiling light with deep recess and minimalist design for home or office. You can find the DL88 model in the LED House selection with TRIAC and DALI technology, allowing users to dim and brighten the light according to their preferences. The selection includes downlights with warm white (2700K, 3000K) light. IP20 protection class allows this light fixture to be used only in dry indoor spaces. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL88 3 white round 230V 13W 1170lm 60° IP20 930

Product code 14963

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 13W
Maximum output 13W/1m
Luminous flux 1170lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm
white 3000K
Lens angle 60
Cri 90
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 50000h
Llmf tm21 L70B50 @25°C 50.000h
Height 98.0mm
Diameter 110.0mm
Installation opening diameter 86mm
In package 1pc
In box 24pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Warranty 5 years



LED ceiling light with deep recess and minimalist design for home or office. You can find the DL88 model in the LED House selection with TRIAC and DALI technology, allowing users to dim and brighten the light according to their preferences. The selection includes downlights with warm white (2700K, 3000K) light. IP20 protection class allows this light fixture to be used only in dry indoor spaces. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

LED downlight PROLUMEN DL96 white round 230V 18W 1980lm 90° IP54 TRIAC 830

Product code 14551 TRIAC dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Dimmable TRIAC
 Output 18W
 Maximum output 18W/1m
 Luminous flux 1980lumens
 Luminaire's efficiency lm79 110W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP54
 Lifespan 50000h
 Height 40.0mm
 Diameter 190.0mm
 Installation opening diameter 158mm
 In box 24pcs
 Casing colour white
 Casing material plastic
 Polishing matt
 Shape round
 Work environment indoor use
 Certificates CE, RoHS, SAA
 Warranty 5 years




Low UGR recessed LED luminaire. Ideal also for more humid spaces! This luminaire is suitable for example in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL96 ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. In addition, a dimmable version (TRIAC) is also available, allowing the user to adjust the brightness of the light beam as desired. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



LED downlight PROLUMEN DL97-4 white round 230V 15W 1420lm 90° IP54 TRIAC 930

Product code 14914 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 15W
Maximum output 15W/1m
Luminous flux 1420lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 90
Sdcm - macadam ellipses 3
Protection class IP54
Lifespan 40000h
Height 38.0mm
Diameter 145.0mm
Installation opening diameter 120mm
Weight 390g
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature 20°C~45°C
Certificates CE, RoHS, SAA
Warranty 5 years

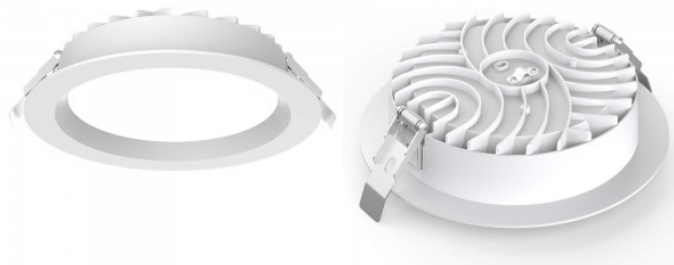


Recessed LED luminaire. Ideal for more humid spaces too! Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL96 ideal for illuminating bathrooms and other more humid spaces. This luminaire is suitable, for example, in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. In addition, a dimmable version (DALI) is also available, allowing the user to adjust the brightness of the light beam as desired. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). For project sales, minimum quantity on order is required. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL97-6 white round 230V 25W 2420lm 90° IP54 930

Product code 14908

Brand [PROLUMEN](#)
Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 2420lumens
Luminaire's efficiency lm79 97W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 90
Protection class IP54
Lifespan 40000h
Diameter 190.0mm
Installation opening diameter 155mm
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature 20°C~45°C
Certificates CE, RoHS, SAA
Warranty 5 years


Recessed LED luminaire. Ideal for more humid spaces too! Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL96 ideal for illuminating bathrooms and other more humid spaces. This luminaire is suitable, for example, in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. In addition, a dimmable version (DALI) is also available, allowing the user to adjust the brightness of the light beam as desired. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). For project sales, minimum quantity on order is required. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

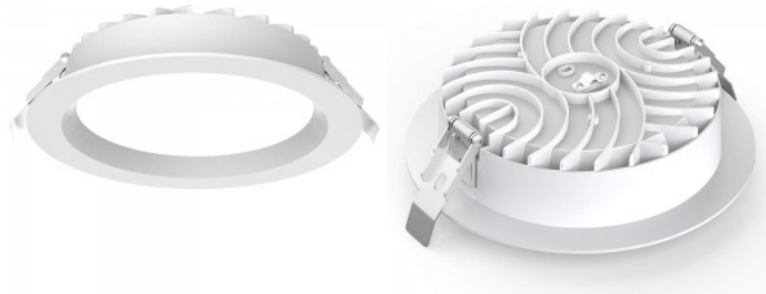

LED downlight PROLUMEN DL97-6 white round 230V 25W 2420lm 90° IP54 DALI 940

Product code 16291 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 2420lumens
Luminaire's efficiency lm79 97W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 90
Protection class IP54
Lifespan 40000h
Diameter 190.0mm
Installation opening diameter 155mm
In box 10pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature 20°C~45°C
Certificates CE, RoHS, SAA
Warranty 5 years

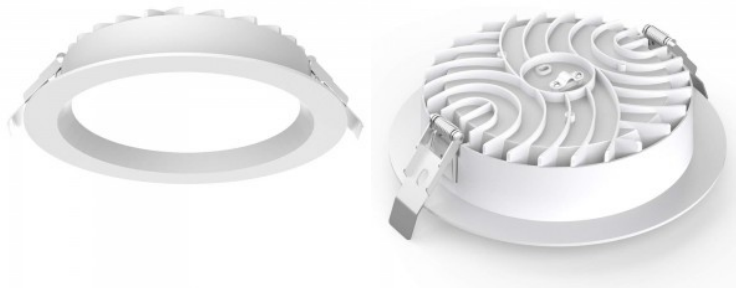

Recessed LED luminaire. Ideal for more humid spaces too! Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL96 ideal for illuminating bathrooms and other more humid spaces. This luminaire is suitable, for example, in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. In addition, a dimmable version (DALI) is also available, allowing the user to adjust the brightness of the light beam as desired. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). For project sales, minimum quantity on order is required. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A CCT UGR19 white round 230V 18W 1800lm CRI90 90° IP54 3000K, 4000K, 6000K 3CCT

Product code 15015

Brand [PROLUMEN](#)
Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1800lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature 3CCT
3000K, 4000K, 6000K
Lens angle 90
Cri 90
Ugr 19
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 95.0mm
Diameter 172.0mm
Installation opening diameter 155mm
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire for corridor lighting. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98A ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. High CRI level keeps the colours of illuminated areas and objects true and natural. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A D145 white 230V 13W 1300lm 90° IP54 930

Product code 16373

Brand [PROLUMEN](#)
Supply voltage 230V
Output 13W
Maximum output 13W/1m
Rated current 180mA
Luminous flux 1300lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 90
Ugr 25
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 82.0mm
Diameter 145.0mm
Installation opening diameter 125mm
Weight 351g
Package weight 280g
In package 24pcs
In box 1pc
Casing colour white
Casing material aluminum + plastic
Work environment indoor use
Operation temperature -20-45°C
Certificates CE,RoHS
Warranty 5 years



Recessed LED luminaire for corridor lighting. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98A ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. High CRI level keeps the colours of illuminated areas and objects true and natural. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A D145 white 230V 13W 1300lm 90° IP54 DALI 930

Product code 17621 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 13W
Maximum output 13W/1m
Rated current 180mA
Luminous flux 1300lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 90
Ugr 25
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 82.0mm
Diameter 145.0mm
Installation opening diameter 125mm
Weight 351g
Package weight 280g
In package 24pcs
In box 1pc
Casing colour white
Casing material aluminum + plastic
Work environment indoor use
Operation temperature -20-45°C
Certificates CE,RoHS
Warranty 5 years



Recessed LED luminaire for corridor lighting. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98A ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. High CRI level keeps the colours of illuminated areas and objects true and natural. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A UGR19 black 230V 13W 1460lm 90° IP54 940

Product code 16140

Brand [PROLUMEN](#)
Supply voltage 230V
Output 13W
Maximum output 13W/1m
Luminous flux 1460lumens
Luminaire's efficiency lm79 112W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 90
Ugr 19
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 82.0mm
Diameter 145.0mm
Installation opening diameter 125-135mm
Weight 351g
Package weight 280g
In package 24pcs
In box 1pc
Casing colour black
Casing material aluminum + plastic
Work environment indoor use
Certificates CE,RoHS
Warranty 5 years



Recessed LED luminaire. Ideal also for more humid spaces! This luminaire is suitable for example in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98 ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A UGR19 black 230V 18W 1580lm 90° IP54 930

Product code 15101

Brand [PROLUMEN](#)
Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1580lumens
Luminaire's efficiency lm79 88W
Correlated colour temperature warm
white 3000K
Lens angle 90
Cri 90
Ugr 19
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 95.0mm
Diameter 172.0mm
Installation opening diameter 146mm
Weight 351g
Package weight 505g
In package 12pcs
In box 1pc
Casing colour black
Casing material aluminum + plastic
Work environment indoor use
Certificates CE,RoHS
Warranty 5 years



Recessed LED luminaire. Ideal also for more humid spaces! This luminaire is suitable for example in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98 ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A UGR19 black 230V 18W 1890lm 90° IP54 940

Product code 15707

Brand [PROLUMEN](#)
Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1890lumens
Luminaire's efficiency lm79 105W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 90
Ugr 19
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 95.0mm
Diameter 172.0mm
Installation opening diameter 146mm
Weight 351g
Package weight 505g
In package 12pcs
In box 1pc
Casing colour black
Casing material aluminum + plastic
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire. Ideal also for more humid spaces! This luminaire is suitable for example in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98 ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A UGR19 black 230V 25W 2500lm 90° IP54 840

Product code 16097

Brand [PROLUMEN](#)
Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 2500lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Ugr 19
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 98.0mm
Diameter 228.0mm
Installation opening diameter 200mm
Weight 351g
Package weight 505g
In package 12pcs
In box 1pc
Casing colour black
Casing material aluminum + plastic
Work environment indoor use
Certificates CE,RoHS
Warranty 5 years



Recessed LED luminaire. Ideal also for more humid spaces! This luminaire is suitable for example in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98 ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A UGR19 white round 230V 18W 1530lm 90° IP54 930

Product code 14493

Brand [PROLUMEN](#)
Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1530lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature warm
white 3000K
Lens angle 90
Cri 90
Ugr 19
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 95.0mm
Diameter 172.0mm
Installation opening diameter 146mm
Weight 351g
Package weight 505g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire for corridor lighting. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98A ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. High CRI level keeps the colours of illuminated areas and objects true and natural. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A UGR19 white round 230V 18W 1530lm 90° IP54 TRIAC 930

Product code 16802 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable TRIAC
Output 18W
Maximum output 18W/1m
Luminous flux 1530lumens
Luminaire's efficiency lm79 85W
Correlated colour temperature warm
white 3000K
Lens angle 90
Cri 90
Ugr 19
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 95.0mm
Diameter 172.0mm
Installation opening diameter 146mm
Weight 351g
Package weight 505g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire for corridor lighting. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98A ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. High CRI level keeps the colours of illuminated areas and objects true and natural. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A UGR19 white round 230V 25W 2500lm 90° IP54 840

Product code 14136

Brand [PROLUMEN](#)
Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 2500lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Ugr 19
Protection class IP54
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 98.0mm
Diameter 228.0mm
Installation opening diameter 200mm
Weight 540g
In package 1pc
In box 12pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire for corridor lighting. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98A ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. High CRI level keeps the colours of illuminated areas and objects true and natural. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98A-3 UGR19 white round 230V 6W 600lm 90° IP54 DIMMABLE 830

**Product code 15136 DIMMABLE
dimmable**

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DIMMABLE
Output 6W
Maximum output 6W/1m
Luminous flux 600lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 90
Cri 80
Ugr 19
Protection class IP54
Lifespan 50000h
Lmf tm21 L80B10 @25°C 50.000h
Height 70.0mm
Diameter 110.0mm
Installation opening diameter 90mm
In box 24pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



Recessed LED luminaire for corridor lighting. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98A ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. High CRI level keeps the colours of illuminated areas and objects true and natural. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN DL98B UGR19 black 230V 18W 1800lm 90° IP54 840

Product code 15586

Brand [PROLUMEN](#)
Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1800lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Ugr 19
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 95.0mm
Diameter 172.0mm
Installation opening diameter 155mm
In box 12pcs
Casing colour black
Casing material aluminum + plastic
Work environment indoor use
Certificates CE,RoHS
Warranty 5 years

Recessed LED luminaire. Ideal also for more humid spaces! This luminaire is suitable for example in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98 ideal for illuminating bathrooms and other more humid spaces. You can find this luminaire model in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



LED downlight PROLUMEN DL98B UGR19 white 230V 18W 1800lm 90° IP54 840

Product code 14736

Brand [PROLUMEN](#)
Supply voltage 230V
Output 18W
Maximum output 18W/1m
Luminous flux 1800lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Ugr 19
Sdcm - macadam ellipses 5
Protection class IP54
Lifespan 40000h
Llmf tm21 L80B10 @25°C 50.000h
Height 95.0mm
Diameter 172.0mm
Installation opening diameter 155mm
In package 24pcs
Casing colour white
Casing material aluminum + plastic
Work environment indoor use
Certificates CE,RoHS
Warranty 5 years



Recessed LED luminaire. Ideal for even more humid spaces! This luminaire is suitable for example in shopping centers, bedrooms, conference rooms, classrooms, living rooms, kitchens, bathrooms, and many other spaces. Protection class IP54 means that the luminaire is protected against normal dust and splashes from any direction - this feature makes DL98 ideal for illuminating bathrooms and other more humid spaces. The luminaire adds daylight (4000K) to the room, and the high color rendering index keeps the colors of the areas and objects beneath the light true and natural. This luminaire creates a calm environment for the eye and is also low UGR level! With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Gimbal COB D114 black round 230V 12W 1100lm 38° IP20 TRIAC 930

Product code 18027 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 12W
Maximum output 12W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm
white 3000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 90.0mm
Diameter 114.0mm
Installation opening diameter 100mm
In box 18pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gimbal COB D114 black round 230V 12W 1100lm 60° IP20 930

Product code 16187

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 12W

Maximum output 12W/1m

Luminous flux 1100lumens

Luminaire's efficiency lm79 92W

Correlated colour temperature warm white 3000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 90.0mm

Diameter 114.0mm

Installation opening diameter 100mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Gimbal COB D114 white 230V 12W 1100lm 38° IP20 DALI 940

Product code 16909 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 12W

Maximum output 12W/1m

Luminous flux 1100lumens

Luminaire's efficiency lm79 92W

Correlated colour temperature pure white 4000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 90.0mm

Diameter 114.0mm

Installation opening diameter 100mm

In box 18pcs

Casing colour white

Casing material aluminum

Polishing matt

Impact resistance IK05

Work environment indoor use

Certificates CE

Warranty 5 years

Directional recessed LED luminaire suitable for use in commercial and warehouse spaces. This recessed luminaire model features dimming capability, allowing users to adjust the brightness of the light according to their preferences. A high color rendering index (CRI90) keeps the colors of the areas and objects beneath the lighting true and natural. Gimbal models are available in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



LED downlight PROLUMEN Gimbal COB D114 white 230V 12W 1100lm 38° IP20 TRIAC 930

Product code 15811 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 12W
Maximum output 12W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm white 3000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 90.0mm
Diameter 114.0mm
Installation opening diameter 100mm
In box 18pcs
Casing colour white
Casing material aluminum
Polishing matt
Power supply [PHILIPS](#)
Impact resistance IK05
Work environment indoor use
Certificates CE
Warranty 5 years



Directional recessed LED luminaire suitable for use in commercial and warehouse spaces. This recessed luminaire model features dimming capability, allowing users to adjust the brightness of the light according to their preferences. A high color rendering index (CRI90) keeps the colors of the areas and objects beneath the lighting true and natural. Gimbal models are available in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Gimbal COB D138 black 230V 25W 2500lm 38° IP20 930

Product code 16069

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 25W

Maximum output 25W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 120.0mm

Diameter 138.0mm

Installation opening diameter 130mm

Weight 920g

In box 18pcs

Casing colour black

Casing material aluminum

Polishing matt

Power supply [PHILIPS](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gimbal COB D138 black round 230V 20W 2000lm 38° IP20 TRIAC 930

Product code 18028 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 20W
Maximum output 20W/1m
Luminous flux 2000lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 120.0mm
Diameter 138.0mm
Installation opening diameter 130mm
In box 18pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gimbal COB D138 white 230V 25W 2500lm 38° IP20 930

Product code 15772

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Output 25W
 Maximum output 25W/1m
 Luminous flux 2500lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature warm white 3000K
 Lens angle 38
 Source of light CITIZEN LED
 Cri 90
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Llmf tm21 L80B50 @25°C 50.000h
 Height 120.0mm
 Diameter 138.0mm
 Installation opening diameter 128-130mm
 In box 18pcs
 Casing colour white
 Casing material aluminum
 Polishing matt
 Power supply [PHILIPS](#)
 Impact resistance IK05
 Work environment indoor use
 Certificates CE
 Warranty 5 years



Directional recessed LED luminaire suitable for use in commercial and warehouse spaces. This recessed luminaire model features dimming capability, allowing users to adjust the brightness of the light according to their preferences. A high color rendering index (CRI90) keeps the colors of the areas and objects beneath the lighting true and natural. Gimbal models are available in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Gimbal COB D138 white 230V 25W 2550lm 38° IP20 DALI 940

Product code 16910 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 2550lumens
Luminaire's efficiency lm79 102W
Correlated colour temperature pure white 4000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 120.0mm
Diameter 138.0mm
Installation opening diameter 128mm
Casing colour white
Casing material aluminum
Polishing matt
Power supply [PHILIPS](#)
Impact resistance IK05
Work environment indoor use
Certificates CE
Warranty 5 years



Directional recessed LED luminaire suitable for use in commercial and warehouse spaces. This recessed luminaire model features dimming capability, allowing users to adjust the brightness of the light according to their preferences. A high color rendering index (CRI90) keeps the colors of the areas and objects beneath the lighting true and natural. Gimbal models are available in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

LED downlight PROLUMEN Gimbal COB D165 black round 230V 30W 3000lm 24° IP20 930

Product code 16042

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 3000lumens
Luminaire's efficiency lm79 100W
Correlated colour temperature warm
white 3000K
Lens angle 24
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 145.0mm
Diameter 165.0mm
Installation opening diameter 155mm
In box 8pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Power supply [PHILIPS](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gimbal COB D165 black round 230V 30W 3000lm 38° IP20 930

Product code 16073

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 30W

Maximum output 30W/1m

Luminous flux 3000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 145.0mm

Diameter 165.0mm

Installation opening diameter 155mm

In box 8pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [PHILIPS](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gimbal COB D165 black round 230V 30W 3000lm 38° IP20 TRIAC 930

Product code 16805 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Luminous flux 3000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm
white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 145.0mm

Diameter 165.0mm

Installation opening diameter 155mm

In box 8pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gimbal COB D165 black round 230V 35W 3300lm 38° IP20 930

Product code 15985

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 35W
Maximum output 35W/1m
Luminous flux 3300lumens
Luminaire's efficiency lm79 94W
Correlated colour temperature warm white 3000K
Lens angle 38
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 145.0mm
Diameter 165.0mm
Installation opening diameter 155mm
Casing colour black
Casing material aluminum
Polishing matt
Shape round
Power supply [PHILIPS](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Gimbal COB D165 white 230V 30W 3000lm 38° IP20 930

Product code 16072

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 30W

Maximum output 30W/1m

Luminous flux 3000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm white 3000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 145.0mm

Diameter 165.0mm

Installation opening diameter 155mm

Casing colour white

Casing material aluminum

Polishing matt

Power supply [PHILIPS](#)

Impact resistance IK05

Work environment indoor use

Certificates CE

Warranty 5 years

Directional recessed LED luminaire suitable for use in commercial and warehouse spaces. This recessed luminaire model features dimming capability, allowing users to adjust the brightness of the light according to their preferences. A high color rendering index (CRI90) keeps the colors of the areas and objects beneath the lighting true and natural. Gimbal models are available in the LED House product range with both warm white (3000K) and daylight white (4000K) light. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



LED downlight PROLUMEN Gimbal COB D175 black round 230V 50W 4500lm 60° IP20 930

Product code 16186

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 50W

Maximum output 50W/1m

Luminous flux 4500lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature warm
white 3000K

Lens angle 60

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 155.0mm

Diameter 190.0mm

Installation opening diameter 175mm

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Power supply [PHILIPS](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gimbal D190 black 230V 40W 3800lm 38° IP20 940

Product code 19408

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 40W

Maximum output 40W/1m

Luminous flux 3800lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature pure
white 4000K

Lens angle 38

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 155.0mm

Diameter 190.0mm

Installation opening diameter 175mm

In box 8pcs

Casing colour black

Casing material aluminum

Polishing matt

Work environment indoor use

Certificates CE

Warranty 5 years



Improve the quality of light in your
everyday life and choose a top-notch
lighting solution from [the LED house
product range!](#)

LED downlight PROLUMEN Gloucester DL248A-105 -DIM black square 230V 23W 1412lm 36° IP20 TRIAC 930

Product code 15681 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 23W

Maximum output 23W/1m

Luminous flux 1412lumens

Luminaire's efficiency lm79 61W

Correlated colour temperature warm
white 3000K

Lens angle 36

Source of light [CREE LED](#)

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 51.0mm

Width 105.0mm

Length 105.0mm

Weight 430g

Package weight 17400g

In package 1pc

In box 30pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-105 -DIM black square 230V 9W 482lm 36° IP20 TRIAC 930

Product code 15677 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 9W

Maximum output 9W/1m

Luminous flux 482lumens

Luminaire's efficiency lm79 54W

Correlated colour temperature warm white 3000K

Lens angle 36

Source of light [CREE LED](#)

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 51.0mm

Width 45.0mm

Length 105.0mm

Weight 210g

Package weight 16400g

In package 1pc

In box 50pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-147 -DIM black square 230V 13W 797lm 36° IP20 TRIAC 930

Product code 16195 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 13W

Maximum output 13W/1m

Luminous flux 797lumens

Luminaire's efficiency lm79 61W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 51.0mm

Width 45.0mm

Length 105.0mm

Weight 210g

Package weight 16400g

In package 1pc

In box 50pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-147 black square 230V 13W 797lm 36° IP20 DALI 930

Product code 18286 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 13W

Maximum output 13W/1m

Luminous flux 797lumens

Luminaire's efficiency lm79 61W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Ugr 19

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B50 @25°C 50.000h

Height 51.0mm

Width 45.0mm

Length 105.0mm

Weight 210g

Package weight 16400g

In package 1pc

In box 50pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Power supply [BOKE](#)

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-280 -DIM black square 230V 25W 1420lm 36° IP20 TRIAC 930

Product code 15682 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 25W

Maximum output 25W/1m

Luminous flux 1420lumens

Luminaire's efficiency lm79 57W

Correlated colour temperature warm white 3000K

Lens angle 36

Source of light [CREE LED](#)

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 51.0mm

Width 45.0mm

Length 280.0mm

Weight 510g

Package weight 13500g

In package 1pc

In box 20pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-413 -DIM black square 230V 37W 2146lm 36° IP20 TRIAC 930

Product code 15683 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 37W

Maximum output 37W/1m

Luminous flux 2146lumens

Luminaire's efficiency lm79 58W

Correlated colour temperature warm white 3000K

Lens angle 36

Source of light [CREE LED](#)

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 51.0mm

Width 45.0mm

Length 413.0mm

Weight 710g

Package weight 19100g

In package 1pc

In box 20pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-413 black square 230V 37W 2146lm 36° IP20 DALI 930

Product code 16154 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 37W

Maximum output 37W/1m

Luminous flux 2146lumens

Luminaire's efficiency lm79 58W

Correlated colour temperature warm
white 3000K

Lens angle 36

Source of light [CREE LED](#)

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 51.0mm

Width 45.0mm

Length 413.0mm

Weight 710g

Package weight 19100g

In package 1pc

In box 20pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-45 black square 230V 4W 163lm 36° IP20 930

Product code 15674

Brand [PROLUMEN](#)

Supply voltage 230V

Output 4W

Maximum output 4W/1m

Luminous flux 163lumens

Luminaire's efficiency lm79 41W

Correlated colour temperature warm

white 3000K

Lens angle 36

Source of light [CREE LED](#)

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 42.0mm

Width 45.0mm

Length 45.0mm

Diameter 90.0mm

Installation opening diameter 74mm

Weight 120g

Package weight 14200g

In package 1pc

In box 75pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-75 -DIM black square 230V 11W 582lm 36° IP20 TRIAC 930

Product code 15679 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 11W

Maximum output 11W/1m

Luminous flux 582lumens

Luminaire's efficiency lm79 53W

Correlated colour temperature warm white 3000K

Lens angle 36

Source of light [CREE LED](#)

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 51.0mm

Width 75.0mm

Length 75.0mm

Weight 220g

Package weight 19800g

In package 1pc

In box 60pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment indoor use

Operation temperature -20°C~45°C

Certificates CE, RoHS

Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Gloucester DL248A-76 black square 230V 6W 326lm 36° IP20 930

Product code 15676

Brand [PROLUMEN](#)
Supply voltage 230V
Output 6W
Maximum output 6W/1m
Luminous flux 326lumens
Luminaire's efficiency lm79 54W
Correlated colour temperature warm
white 3000K
Lens angle 36
Source of light [CREE LED](#)
Cri 90
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 50000h
Height 51.0mm
Width 45.0mm
Length 76.0mm
Weight 160g
Package weight 17200g
In package 1pc
In box 75pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape square
Impact resistance IK06
Work environment indoor use
Operation temperature -20°C~45°C
Certificates CE, RoHS
Warranty 5 years



Recessed light fixture. The displayed image showcases various versions of the Gloucester model. Contact our sales team and together we will select the one that best suits you!

LED downlight PROLUMEN Linan black square 230V 12W 1000lm 38° IP20 TRIAC 927

Product code 15937 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 12W

Maximum output 12W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature warm
white 2700K

Lens angle 38

Source of light [CREE LED](#)

Cri 90

Ugr 19

Protection class IP20

Lifespan 50000h

Height 115.0mm

Width 89.0mm

Length 89.0mm

Installation opening diameter
82x82mm

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Power supply [AIDIMMING](#)

Work environment indoor use

Certificates CE

Warranty 5 years



LED downlight PROLUMEN MLH white 230V 15W 1200lm 24° IP20 DALI 927

Product code 15933 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 15W
Maximum output 15W/1m
Luminous flux 1200lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 2700K
Lens angle 24
Source of light [CREE LED](#)
Cri 90
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 100.0mm
Diameter 105.0mm
Installation opening diameter 95mm
Weight 599g
Package weight 45g
Casing colour white
Casing material aluminum
Polishing matt
Power supply [AIDIMMING](#)
Work environment indoor use
Certificates CE
Warranty 3 years



A deep-recessed LED spotlight suitable for both home and office. Integrated DALI Dim technology allows adjusting the brightness of the light as needed. The IP20 protection class indicates that the luminaire is intended for indoor use. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN MLH white 230V 15W 1200lm 36° IP20 DALI 927

Product code 15934 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 15W
Maximum output 15W/1m
Luminous flux 1200lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 2700K
Lens angle 36
Source of light [CREE LED](#)
Cri 90
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 100.0mm
Diameter 105.0mm
Installation opening diameter 95mm
Weight 598g
Package weight 45g
Casing colour white
Casing material aluminum
Polishing matt
Power supply [AIDIMMING](#)
Work environment indoor use
Certificates CE
Warranty 3 years



A deep-recessed LED spotlight suitable for both home and office. Integrated DALI Dim technology allows adjusting the brightness of the light as needed. The IP20 protection class indicates that the luminaire is intended for indoor use. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Muret white round 230V 12W 1100lm 60° IP20 TRIAC 930

Product code 16197 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 12W
Maximum output 12W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 65.0mm
Diameter 115.0mm
Installation opening diameter 100mm
In box 30pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Power supply [AIDIMMING](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



Recessed LED ceiling light. The luminaire is equipped with TRIAC dimming technology, allowing the user to easily adjust the lighting according to their preference. Available in 12W, 24W, 32W, 40W, and 50W power options upon request. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes honeycomb 165x165 white square 230V 30W 2500lm 36° IP20 DALI 927

Product code 17063 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 30W

Maximum output 30W/1m

Luminous flux 2500lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature warm white 2700K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 100.0mm

Width 165.0mm

Length 165.0mm

Installation opening diameter 153x153mm

Casing colour white

Casing material aluminum

Polishing matt

Shape square

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes honeycomb black square 230V 12W 1080lm 36° IP20 TRIAC 930

Product code 17050 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 12W
Maximum output 12W/1m
Luminous flux 1080lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm white 3000K
Lens angle 36
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 70.0mm
Width 115.0mm
Length 115.0mm
Installation opening diameter 100mm
In box 36pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape square
Power supply [AIDIMMING](#)
Work environment indoor use
Operation temperature -20°C~40°C
Certificates CE,RoHS
Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes honeycomb black square 230V 12W 1080lm 36° IP20 TRIAC 930

Product code 18159 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 12W

Maximum output 12W/1m

Luminous flux 1080lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature warm
white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 70.0mm

Width 115.0mm

Length 115.0mm

In box 36pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. The luminaire features multiple light beams and a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes honeycomb white square 230V 12W 1000lm 36° IP20 DALI 927

Product code 17073 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 12W

Maximum output 12W/1m

Luminous flux 1000lumens

Luminaire's efficiency lm79 83W

Correlated colour temperature warm
white 2700K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 70.0mm

Width 115.0mm

Length 115.0mm

Installation opening diameter 100mm

In box 36pcs

Casing colour white

Casing material aluminum

Polishing matt

Shape square

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes honeycomb white square 230V 12W 1080lm 36° IP20 TRIAC 930

Product code 16071 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 12W
Maximum output 12W/1m
Luminous flux 1080lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm white 3000K
Lens angle 36
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 70.0mm
Width 115.0mm
Length 115.0mm
Installation opening diameter 100mm
In box 36pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape square
Power supply [AIDIMMING](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes honeycomb white square 230V 12W 1230lm 36° IP20 TRIAC 940

Product code 16114 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 12W
Maximum output 12W/1m
Luminous flux 1230lumens
Luminaire's efficiency lm79 103W
Correlated colour temperature pure white 4000K
Lens angle 36
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 70.0mm
Width 115.0mm
Length 115.0mm
Installation opening diameter 100mm
Casing colour white
Casing material aluminum
Polishing matt
Shape square
Power supply [AIDIMMING](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes 2x12W honeycomb white square 230V 24W 2160lm 36° IP20 TRIAC 930

Product code 16089 TRIAC dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Dimmable TRIAC
 Output 24W
 Maximum output 24W/1m
 Luminous flux 2160lumens
 Luminaire's efficiency lm79 90W
 Correlated colour temperature warm white 3000K
 Lens angle 36
 Source of light CITIZEN LED
 Cri 90
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Height 70.0mm
 Width 115.0mm
 Length 230.0mm
 Installation opening diameter 215x100mm
 Casing colour white
 Casing material aluminum
 Polishing matt
 Shape square
 Power supply [AIDIMMING](#)
 Work environment indoor use
 Operation temperature -20 ~ 40°C
 Certificates CE
 Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. The luminaire features multiple light beams and a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes 2x12W honeycomb white square 230V 24W 2310lm 36° IP20 TRIAC 940

Product code 16116 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 24W

Maximum output 24W/1m

Luminous flux 2310lumens

Luminaire's efficiency lm79 96W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 70.0mm

Width 115.0mm

Length 230.0mm

Installation opening diameter 215x100mm

Casing colour white

Casing material aluminum

Polishing matt

Shape square

Power supply [AIDIMMING](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. The luminaire features multiple light beams and a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes 2x12W honeycomb black square 230V 24W 2160lm 36° IP20 930

Product code 16153

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 24W
Maximum output 24W/1m
Luminous flux 2160lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm white 3000K
Lens angle 36
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 70.0mm
Width 115.0mm
Length 230.0mm
Installation opening diameter 215x100mm
Casing colour black
Casing material aluminum
Polishing matt
Shape square
Power supply [PHILIPS](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. The luminaire features multiple light beams and a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes 2x12W honeycomb black square 230V 24W 2160lm 36° IP20 TRIAC 930

Product code 18158 TRIAC dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Dimmable TRIAC
 Output 24W
 Maximum output 24W/1m
 Luminous flux 2160lumens
 Luminaire's efficiency lm79 90W
 Correlated colour temperature warm white 3000K
 Lens angle 36
 Source of light CITIZEN LED
 Cri 90
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Height 70.0mm
 Width 115.0mm
 Length 230.0mm
 Installation opening diameter 215x100mm
 In box 18pcs
 Casing colour black
 Casing material aluminum
 Polishing matt
 Shape square
 Power supply [PHILIPS](#)
 Work environment indoor use
 Operation temperature -20 ~ 40°C
 Certificates CE
 Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. The luminaire features multiple light beams and a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Nantes 3x12W honeycomb black square 230V 36W 3240lm 36° IP20 TRIAC 930

Product code 18160 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 36W
Maximum output 36W/1m
Luminous flux 3240lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm white 3000K
Lens angle 36
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 70.0mm
Width 115.0mm
Length 350.0mm
Installation opening diameter 215x100mm
In box 12pcs
Casing colour black
Casing material aluminum
Polishing matt
Shape square
Power supply [PHILIPS](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years



A recessed LED light with adjustable direction, suitable for illuminating commercial spaces and other large areas that require strong, product-enhancing lighting. The luminaire features multiple light beams and a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN NSK white 230V 15W 1200lm 60° IP20 DALI 927

Product code 15932 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 15W
Maximum output 15W/1m
Luminous flux 1200lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 2700K
Lens angle 60
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 100.0mm
Diameter 75.0mm
Installation opening diameter 70mm
Weight 429g
Package weight 33g
Casing colour white
Casing material aluminum
Polishing matt
Power supply [AIDIMMING](#)
Work environment indoor use
Certificates CE
Warranty 3 years



A deep-recessed LED [recessed light](#) is suitable for illuminating office buildings or commercial spaces. The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. The IP20 protection class means the light can only be used in dry indoor areas, as it is not protected against water and moisture. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range](#)!

LED downlight PROLUMEN NSK white 230V 15W 1350lm 60° IP20 DALI 930

Product code 16412 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 15W
Maximum output 15W/1m
Luminous flux 1350lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm
white 3000K
Lens angle 60
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 100.0mm
Diameter 75.0mm
Installation opening diameter 70mm
Weight 429g
Package weight 33g
Casing colour white
Casing material aluminum
Polishing matt
Power supply [AIDIMMING](#)
Work environment indoor use
Certificates CE



A deep-recessed LED [recessed light](#) is suitable for illuminating office buildings or commercial spaces. The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. The IP20 protection class means the light can only be used in dry indoor areas, as it is not protected against water and moisture. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 10W 900lm 36° IP20 930

Product code 17320

Brand [PROLUMEN](#)
Supply voltage 230V
Output 10W
Maximum output 10W/1m
Luminous flux 900lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm white 3000K
Lens angle 36
Source of light CITIZEN LED
Cri 97
Protection class IP20
Lifespan 50000h
Height 96.0mm
Diameter 82.0mm
Installation opening diameter 75mm
In package 1pc
Casing colour white
Power supply [PHILIPS](#)
Work environment indoor use
Certificates CE
Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 10W 900lm 36° IP20 940

Product code 17323

Brand [PROLUMEN](#)

Supply voltage 230V

Output 10W

Maximum output 10W/1m

Luminous flux 900lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 97

Protection class IP20

Lifespan 50000h

Height 96.0mm

Width 82.0mm

Length 82.0mm

Installation opening diameter

75x75mm

In package 1pc

Casing colour white

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED downlight. The luminaire can be dimmed using DALI/TRIAC technology to adjust brightness. The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 10W 900lm 36° IP20 DALI 930

Product code 17366 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 10W
Maximum output 10W/1m
Luminous flux 900lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm white 3000K
Lens angle 36
Source of light CITIZEN LED
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Height 96.0mm
Diameter 82.0mm
Installation opening diameter 75mm
In package 1pc
Casing colour white
Power supply [PHILIPS](#)
Work environment indoor use
Certificates CE
Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 20W 2000lm 24° IP20 DALI 930

Product code 17827 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm
white 3000K

Lens angle 24

Source of light CITIZEN LED

Cri 90

Protection class IP20

Lifespan 50000h

Height 119.0mm

Diameter 105.0mm

Installation opening diameter 95mm

In package 1pc

Casing colour white

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 20W 2200lm 36° IP20 930

Product code 17321

Brand [PROLUMEN](#)

Supply voltage 230V

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature warm
white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 97

Protection class IP20

Lifespan 50000h

Height 119.0mm

Diameter 105.0mm

Installation opening diameter 95mm

In package 1pc

Casing colour white

Power supply [PHILIPS](#)

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 20W 2200lm IP20 940

Product code 17324

Brand [PROLUMEN](#)

Supply voltage 230V

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure white 4000K

Cri 97

Protection class IP20

Lifespan 50000h

Height 119.0mm

Width 105.0mm

Length 105.0mm

Installation opening diameter 95x95mm

In package 1pc

Casing colour white

Power supply [PHILIPS](#)

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED downlight. The luminaire can be dimmed using DALI/TRIAC technology to adjust brightness. The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 6W 470lm 36° IP20 930

Product code 17319

Brand [PROLUMEN](#)

Supply voltage 230V

Output 6W

Maximum output 6W/1m

Luminous flux 470lumens

Luminaire's efficiency lm79 78W

Correlated colour temperature warm white 3000K

Lens angle 36

Source of light CITIZEN LED

Cri 97

Protection class IP20

Lifespan 50000h

Height 80.0mm

Diameter 62.0mm

Installation opening diameter 55mm

In package 1pc

Casing colour white

Power supply [PHILIPS](#)

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Orly white 230V 6W 470lm 36° IP20 DALI 940

Product code 17322 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 6W

Maximum output 6W/1m

Luminous flux 470lumens

Luminaire's efficiency lm79 78W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 97

Protection class IP20

Lifespan 50000h

Height 80.0mm

Width 62.0mm

Length 62.0mm

Installation opening diameter 55x55mm

In package 1pc

Casing colour white

Work environment indoor use

Certificates CE

Warranty 5 years



Recessed LED downlight. The luminaire can be dimmed using DALI/TRIAC technology to adjust brightness. The luminaire adds daylight (4000K) to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Rennes 3 LED black 230V 12W 1100lm 50° IP20 TRIAC 930

Product code 16843 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 12W

Maximum output 12W/1m

Luminous flux 1100lumens

Luminaire's efficiency lm79 92W

Correlated colour temperature warm
white 3000K

Lens angle 50

Source of light [CREE LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 56.0mm

Width 51.0mm

Length 127.0mm

Installation opening diameter

120x43mm

In box 36pcs

Casing colour black

Power supply [PHILIPS](#)

Certificates CE

Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Rennes 5 LED black 230V 20W 1900lm 50° IP20 TRIAC 930

Product code 16842 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 20W
Maximum output 20W/1m
Luminous flux 1900lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature warm
white 3000K
Lens angle 50
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 56.0mm
Width 51.0mm
Length 203.0mm
Installation opening diameter
196x43mm
In box 24pcs
Casing colour black
Power supply [PHILIPS](#)
Certificates CE
Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Rennes black 230V 12W 1100lm 50° IP20 930

Product code 17790

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 12W
Maximum output 12W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm white 3000K
Lens angle 50
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 45.0mm
Width 53.0mm
Length 130.0mm
Installation opening diameter 120x43mm
In box 36pcs
Casing colour black
Power supply [TRIDONIC](#)
Certificates CE
Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Rennes black 230V 20W 1900lm 50° IP20 930

Product code 16790

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 20W
Maximum output 20W/1m
Luminous flux 1900lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature warm white 3000K
Lens angle 50
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 56.0mm
Width 51.0mm
Length 203.0mm
Installation opening diameter 196x43mm
In box 24pcs
Casing colour black
Power supply [PHILIPS](#)
Certificates CE
Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Rennes white 230V 12W 1100lm 50° IP20 930

Product code 16788

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 12W
Maximum output 12W/1m
Luminous flux 1100lumens
Luminaire's efficiency lm79 92W
Correlated colour temperature warm white 3000K
Lens angle 50
Source of light [CREE LED](#)
Cri 90
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 56.0mm
Width 51.0mm
Length 127.0mm
Installation opening diameter 120x43mm
In box 36pcs
Casing colour white
Power supply [PHILIPS](#)
Certificates CE
Warranty 5 years



Recessed LED downlight. The luminaire adds warm white (3000K) light to the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Ripon with honeycomb white round 230V 8W 720lm 36° IP20 TRIAC 930

Product code 15961 TRIAC dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Dimmable TRIAC
 Output 8W
 Maximum output 8W/1m
 Luminous flux 720lumens
 Luminaire's efficiency lm79 90W
 Correlated colour temperature warm white 3000K
 Lens angle 36
 Source of light [PHILIPS LED](#)
 Cri 90
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Height 70.0mm
 Diameter 84.0mm
 Installation opening diameter 75mm
 In box 36pcs
 Casing colour white
 Casing material aluminum
 Polishing matt
 Shape round
 Power supply [AIDIMMING](#)
 Work environment indoor use
 Operation temperature -20 ~ 40°C
 Certificates CE
 Warranty 5 years



[Recessed LED downlight](#) for a corridor or kitchen. The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. Additionally, the light features a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN Ripon , honeycomb white round 230V 8W 870lm 36° IP20 TRIAC 940

Product code 16115 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 8W

Maximum output 8W/1m

Luminous flux 870lumens

Luminaire's efficiency lm79 109W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light [PHILIPS LED](#)

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 70.0mm

Diameter 84.0mm

Installation opening diameter 75mm

Weight 300g

Package weight 350g

In package 1pc

Casing colour white

Casing material aluminum

Polishing matt

Shape round

Power supply [AIDIMMING](#)

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



[Recessed LED downlight](#) for a corridor or kitchen. The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. Additionally, the light features a honeycomb filter to reduce glare. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

LED downlight PROLUMEN SPO white 230V 25W 2000lm 24° IP20 DALI 927

Product code 15936 DALI dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 2000lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm
white 2700K
Lens angle 24
Source of light [CREE LED](#)
Cri 90
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 146.0mm
Diameter 132.0mm
Installation opening diameter 115mm
Weight 1000g
Package weight 65g
Casing colour white
Casing material aluminum
Polishing matt
Power supply [AIDIMMING](#)
Work environment indoor use
Certificates CE



A [recessed LED light](#) with an extendable and adjustable head. The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. The IP20 protection class means the light can only be used in dry indoor areas, as it is not protected against water and moisture. Enhance your everyday lighting quality and choose a top-notch lighting solution from the [LED house product range](#)!

LED downlight PROLUMEN SPO white 230V 25W 2000lm 24° IP20 DALI 940

Product code 15969 DALI dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable DALI

Output 25W

Maximum output 25W/1m

Luminous flux 2000lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature pure
white 4000K

Lens angle 24

Source of light [CREE LED](#)

Cri 90

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 146.0mm

Diameter 132.0mm

Installation opening diameter 115mm

Casing colour white

Casing material aluminum

Polishing matt

Power supply [AIDIMMING](#)

Work environment indoor use

Certificates CE

Warranty 3 years



A [recessed LED light](#) with an extendable and adjustable head. The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. The IP20 protection class means the light can only be used in dry indoor areas, as it is not protected against water and moisture. Enhance your everyday lighting quality and choose a top-notch lighting solution from the [LED house product range](#)!

LED downlight PROLUMEN T2511 white 230V 12W 1000lm IP20 DALI 927

Product code 15935 DALI dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Dimmable DALI
 Output 12W
 Maximum output 12W/1m
 Luminous flux 1000lumens
 Luminaire's efficiency lm79 83W
 Correlated colour temperature warm white 2700K
 Source of light [CREE LED](#)
 Cri 90
 Protection class IP20
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 70.0mm
 Diameter 85.0mm
 Installation opening diameter 75mm
 Weight 313g
 Package weight 28g
 Casing colour white
 Casing material aluminum
 Polishing matt
 Power supply [AIDIMMING](#)
 Work environment indoor use
 Certificates CE
 Warranty 3 years




A [recessed LED light](#) suitable for residential or office interiors, providing diffused light directed to one side. The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. The IP20 protection class means the light can only be used in dry indoor areas, as it is not protected against water and moisture. Enhance your everyday lighting quality and choose a top-notch lighting solution from the [LED house product range](#)!

LED downlight PROLUMEN Toulouse white square 230V 12W 1080lm 55° IP20 TRIAC 930

Product code 16070 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Dimmable TRIAC
Output 12W
Maximum output 12W/1m
Luminous flux 1080lumens
Luminaire's efficiency lm79 90W
Correlated colour temperature warm
white 3000K
Lens angle 55°
Source of light CITIZEN LED
Cri 90
Protection class IP20
Lifespan 50000h
Height 60.0mm
Width 115.0mm
Length 115.0mm
Installation opening diameter 100mm
Weight 427g
Package weight 475g
In package 1pc
Casing colour white
Casing material aluminum
Polishing matt
Shape square
Power supply [AIDIMMING](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years

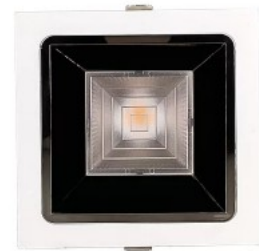

[Recessed LED light](#) The luminaire is equipped with dimming technology, allowing the user to easily adjust the light intensity to their preference. The IP20 protection class means the light can only be used in dry indoor areas, as it is not protected against water and moisture. Enhance your everyday lighting quality and choose a top-notch lighting solution from the [LED house product range!](#)