



### Ceiling light 3224 black square GU10 IP20

#### **Product code 14895**

Socket GU10
Protection class IP20
Height 110.0mm
Width 85.0mm
Length 85.0mm
Casing colour black
Polishing matt
Shape square
Work environment indoor use

Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!




### Ceiling light Art of Light NAOS white 230V 35W GU10

#### **Product code 14744**

Brand Art of Light
Supply voltage 230V
Output 35W
Maximum output 35W/1m
Socket GU10
Height 135.0mm
Width 90.0mm
Length 90.0mm
Casing colour white
Casing material gypsum
Polishing matt
Work environment indoor use
Certificates CE

Gypsum frame.

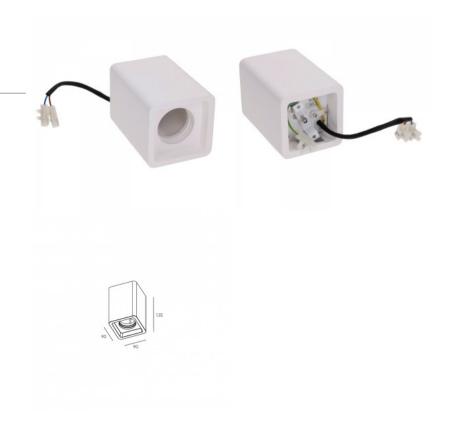




2/85 5.08.2025

### Ceiling light Cube 40x40 white 230V 5W 450lm CRI92 36° IP20

#### **Product code 18079**

Supply voltage 230V
Output 5W
Maximum output 5W/1m
Luminous flux 450lumens
Luminaire's efficiency Im79 90W
Lens angle 36
Cri 92
Protection class IP20
Lifespan 40000h
Height 70.0mm
Width 40.0mm
Length 40.0mm
Casing colour white
Casing material aluminum
Warranty 3 years





## Ceiling light E6 172x172 white square 230V 16W 1130lm 160° IP20 830

#### Product code 14145

Supply voltage 230V Output 16W Maximum output 16W/1m Rated current 125mA Luminous flux 1130lumens Luminaire's efficiency Im79 71W Correlated colour temperature warm white 3000K Lens angle 160 Cri 80 Protection class IP20 Lifespan 20000h Height 34.5mm Width 172.0mm Length 172.0mm In package 1pc In box 20pcs Casing colour white Casing material aluminum + plastic Polishing matt Shape square No. of switches 12500pcs Work environment indoor use Operation temperature -20~+40°C Certificates CE, RoHS








5.08.2025



### Ceiling light E6 D176 white round 230V 12W 1190lm 160° 830

#### Product code 13524

Supply voltage 230V Output 12W Maximum output 12W/1m Rated current 100mA Luminous flux 1190lumens Luminaire's efficiency Im79 99W Correlated colour temperature warm white 3000K Lens angle 160 Cri 80 Lifespan 20000h Height 34.5mm Diameter 176.5mm Weight 476g In package 1pc In box 20pcs Casing colour white Casing material aluminum + plastic Shape round No. of switches 12500pcs Operation temperature -20°C~40°C





### Ceiling light EMOS NEXXO 120x120 white square 230V 7.6W 680lm 120° IP40/20 840



4/85 5.08.2025

#### **Product code 17949**

**Brand EMOS** Supply voltage 230V Power factor 0.90 Output 7.6W Maximum output 7.6W/1m Rated current 500mA Luminous flux 680lumens Luminaire's efficiency Im79 89W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 40.0mm Width 120.0mm Length 120.0mm Weight 427g In package 1pc In box 8pcs Casing colour white Casing material metal + plastic Polishing matt Shape square Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS Warranty 3 years

Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other EMOS NEXXO ceiling lights!









# Ceiling light EMOS NEXXO 170x170 white square 230V 12.5W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

#### **Product code 16633**


**Brand EMOS** Supply voltage 230V Power factor 0.50 Output 12.5W Maximum output 12.5W/1m Rated current 300mA Luminous flux 1100lumens Luminaire's efficiency Im79 88W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 42.0mm Width 170.0mm Length 170.0mm In package 1pc In box 8pcs Casing colour white Casing material metal + plastic Polishing matt Shape square Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS

Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other EMOS NEXXO ceiling lights!

Warranty 3 years









# Ceiling light EMOS NEXXO 225x225 white square 230V 21W 1900lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

#### **Product code 16888**

**Brand EMOS** Supply voltage 230V Power factor 0.90 Output 21W Maximum output 21W/1m Rated current 500mA Luminous flux 1900lumens Luminaire's efficiency Im79 90W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 42.0mm Width 225.0mm Length 225.0mm In package 1pc In box 8pcs Casing colour white Casing material metal + plastic Polishing matt Shape square Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS

Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other EMOS NEXXO ceiling lights!

Warranty 3 years









# Ceiling light EMOS NEXXO D120 white round 230V 7.6W 680lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

#### **Product code 17047**

**Brand EMOS** Supply voltage 230V Power factor 0.50 Output 7.6W Maximum output 7.6W/1m Rated current 300mA Luminous flux 680lumens Luminaire's efficiency Im79 89W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 40.0mm Diameter 120.0mm In package 1pc In box 8pcs Casing colour white Casing material metal + plastic Polishing matt Shape round Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS Warranty 3 years









# Ceiling light EMOS NEXXO D170 black round 230V 12.50W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

#### **Product code 18280**

**Brand EMOS** Supply voltage 230V Power factor 0.50 Output 12.50W Maximum output 12.50W/1m Rated current 300mA Luminous flux 1100lumens Luminaire's efficiency Im79 88W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 42.0mm Diameter 170.0mm In package 1pc In box 8pcs Casing colour black Casing material metal + plastic Polishing matt Shape round Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS Warranty 3 years







# Ceiling light EMOS NEXXO D170 white round 230V 12.5W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

#### **Product code 16890**

**Brand EMOS** Supply voltage 230V Power factor 0.50 Output 12.5W Maximum output 12.5W/1m Rated current 300mA Luminous flux 1100lumens Luminaire's efficiency Im79 88W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 42.0mm Diameter 170.0mm In package 1pc In box 8pcs Casing colour white Casing material metal + plastic Polishing matt Shape round Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS Warranty 3 years









# Ceiling light EMOS NEXXO D225 white round 230V 21W 1900lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

#### Product code 16889

**Brand EMOS** Supply voltage 230V Power factor 0.90 Output 21W Maximum output 21W/1m Rated current 500mA Luminous flux 1900lumens Luminaire's efficiency Im79 90W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 42.0mm Diameter 225.0mm In package 1pc In box 8pcs Casing colour white Casing material metal + plastic Polishing matt Shape round Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS Warranty 3 years









# Ceiling light EMOS NEXXO D300 white round 230V 28.5W 2700lm CRI80 120° IP40/20 3000K, 3500K, 4000K 3CCT

#### **Product code 17048**

**Brand EMOS** Supply voltage 230V Power factor 0.90 Output 28.5W Maximum output 28.5W/1m Rated current 700mA Luminous flux 2700lumens Luminaire's efficiency Im79 95W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Protection class IP40/20 Lifespan 30000h Height 42.0mm Diameter 300.0mm In package 1pc In box 8pcs Casing colour white Casing material metal + plastic Polishing matt Shape round Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS Warranty 3 years









### Ceiling light GLOBE ELEGANCE SMOKE S6 E27 IP20

#### Product code 18064

Socket E27
Protection class IP20
Work environment indoor use



# Ceiling light GTV ORIS PLUS white round 230V 13W 1020lm 120° IP44 830

#### Product code 18039

**Brand GTV** Supply voltage 230V Power factor 0.50 Output 13W Maximum output 13W/1m Luminous flux 1020lumens Luminaire's efficiency Im79 78W Correlated colour temperature warm white 3000K Lens angle 120 Cri 80 Protection class IP44 Lifespan 40000h Height 22.0mm Diameter 168.0mm Installation opening diameter 155mm Weight 350g Casing colour white Casing material aluminum Polishing matt Shape round No. of switches 20000pcs Impact resistance IK09 Work environment indoor use Warranty 3 years








## LED downlight LAHTI MINI 2X9W black 230V 18W 1050lm 35° IP20 TRIAC 930

#### Product code 16426 TRIAC dimmable

Supply voltage 230V Dimmable TRIAC Output 18W Maximum output 18W/1m Luminous flux 1050lumens Luminaire's efficiency Im79 58W Correlated colour temperature warm white 3000K Lens angle 35 Source of light PHILIPS LED Cri 90 Protection class IP20 Lifespan 30000h Height 82.0mm Width 78.0mm Length 161.0mm Weight 820g In box 12pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 2 years

LAHTI MINI surface-mounted LED luminaire. Modern and elegant, offering minimalist design that fits various interiors. This luminaire, with IP20 protection rating, is an ideal choice for home or office environments, providing warm white light at 3000K. With this LED lamp, you can keep colors true to life in living spaces, making it suitable as the main light source in a room! The lamp body is made of aluminum, in a matte black finish. The 18W LAHTI MINI is also dimmable (TRIAC). With proper use, the luminaire is energyefficient, environmentally friendly, and has a very long lifespan (50,000 hours). Elevate the quality of your everyday lighting and choose a topnotch lighting solution from the LED house product range!










## LED downlight LAHTI MINI 2X9W white 230V 18W 1050lm 35° IP20 TRIAC 930

#### Product code 16427 TRIAC dimmable

Supply voltage 230V Dimmable TRIAC Output 18W Maximum output 18W/1m Luminous flux 1050lumens Luminaire's efficiency Im79 58W Correlated colour temperature warm white 3000K Lens angle 35 Source of light PHILIPS LED Cri 90 Protection class IP20 Lifespan 30000h Height 82.0mm Width 78.0mm Length 161.0mm Weight 820g In box 12pcs Casing colour white Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 2 years

LAHTI MINI surface-mounted LED luminaire. Modern and elegant, offering minimalist design that fits various interiors. This luminaire, with IP20 protection rating, is an ideal choice for home or office environments, providing warm white light at 3000K. With this LED lamp, you can keep colors true to life in living spaces, making it suitable as the main light source in a room! The lamp body is made of aluminum, in a matte black finish. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Elevate the quality of your everyday lighting and choose a top-notch lighting solution from the LED house product range!







5/85 5.08,2025



## LED downlight LAHTI MINI black 230V 13.5W 850lm 35° IP20 TRIAC 930

#### Product code 16605 TRIAC dimmable

Supply voltage 230V Dimmable TRIAC Output 13.5W Maximum output 13.5W/1m Luminous flux 850lumens Luminaire's efficiency Im79 63W Correlated colour temperature warm white 3000K Lens angle 35 Source of light PHILIPS LED Cri 90 Protection class IP20 Lifespan 30000h Height 99.0mm Diameter 100.0mm Weight 580g In package 1pc In box 24pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS

Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Warranty 2 years











16/85 5.08.2025

## LED downlight LAHTI MINI black 230V 9W 550lm 35° IP20 TRIAC 930

#### Product code 16599 TRIAC dimmable

Supply voltage 230V Dimmable TRIAC Output 9W Maximum output 9W/1m Luminous flux 550lumens Luminaire's efficiency Im79 61W Correlated colour temperature warm white 3000K Lens angle 35 Cri 90 Protection class IP20 Lifespan 30000h Height 80.0mm Diameter 78.0mm Weight 450g Package weight 500g In package 1pc In box 24pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS

Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

Warranty 2 years













# LED downlight LAHTI MINI white 230V 10.5W 680lm 35° IP20 TRIAC 930

#### Product code 17046 TRIAC dimmable

Supply voltage 230V Dimmable TRIAC Output 10.5W Maximum output 10.5W/1m Luminous flux 680lumens Luminaire's efficiency Im79 65W Correlated colour temperature warm white 3000K Lens angle 35 Source of light PHILIPS LED Cri 90 Protection class IP20 Lifespan 30000h Height 99.0mm Diameter 100.0mm Weight 780g In box 24pcs Casing colour white Casing material aluminum No. of switches 20000pcs Work environment indoor use Certificates CE, RoHS Warranty 2 years

Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







# LED downlight LAHTI MINI white 230V 13.5W 850lm 35° IP20 TRIAC 930

#### Product code 16606 TRIAC dimmable

Supply voltage 230V Dimmable TRIAC Output 13.5W Maximum output 13.5W/1m Luminous flux 850lumens Luminaire's efficiency Im79 63W Correlated colour temperature warm white 3000K Lens angle 35 Source of light PHILIPS LED Cri 90 Protection class IP20 Lifespan 30000h Height 99.0mm Diameter 100.0mm Weight 580g In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 2 years

Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







# LED downlight LAHTI MINI white 230V 9W 550lm 35° IP20 TRIAC 930

#### Product code 16411 TRIAC dimmable

Supply voltage 230V Dimmable TRIAC Output 9W Maximum output 9W/1m Luminous flux 550lumens Luminaire's efficiency Im79 61W Correlated colour temperature warm white 3000K Lens angle 35 Source of light PHILIPS LED Cri 90 Protection class IP20 Lifespan 30000h Height 80.0mm Diameter 78.0mm Weight 410g In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 2 years

Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







### Ceiling light LENO black GU10 IP20

#### **Product code 17151**

Socket GU10
Protection class IP20
Height 123.0mm
Length 175.0mm
In box 10pcs
Casing colour black
Casing material aluminum
Polishing matt
Work environment indoor use

Striking surface-mounted <u>ceiling light</u>. Suitable for illuminating various indoor spaces. LED bulb is not included in the package! Can be installed on both walls and ceilings. Illuminate your world with LED House professionals - <u>check out our project portfolio here!</u>



### Ceiling light LENO white GU10 IP20


#### **Product code 17150**

Socket GU10
Protection class IP20
Height 123.0mm
Length 175.0mm
In box 10pcs
Casing colour white
Casing material aluminum
Polishing matt
Work environment indoor use

Striking surface-mounted <u>ceiling light</u>. Suitable for illuminating various indoor spaces. LED bulb is not included in the package! Can be installed on both walls and ceilings. Illuminate your world with LED House professionals - <u>check out our project portfolio here!</u>








### **Luminaire NUUK black 230V GU10 IP20**

#### **Product code 18034**


Supply voltage 230V
Maximum output 35W/1m
Socket GU10
Protection class IP20
In box 20pcs
Casing colour black
Casing material aluminum
Work environment indoor use

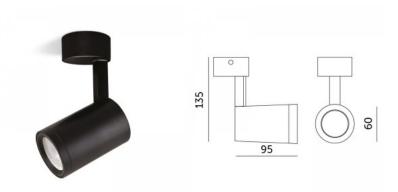

### Luminaire NUUK white 230V GU10 IP20

#### **Product code 18033**

Supply voltage 230V
Maximum output 35W/1m
Socket GU10
Protection class IP20
In box 20pcs
Casing colour white
Casing material aluminum
Work environment indoor use

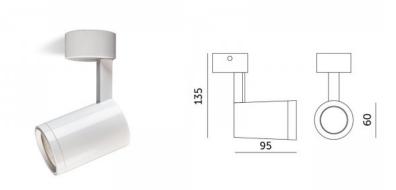

# LED downlight PROLUMEN DL115A black 18W 1890lm 90° IP54 940





#### **Product code 15519**

**Brand PROLUMEN** Output 18W Maximum output 18W/1m Luminous flux 1890lumens Luminaire's efficiency lm79 105W Correlated colour temperature pure white 4000K Lens angle 90 Cri 90 Protection class IP54 Lifespan 50000h Height 124.0mm Diameter 170.0mm In box 12pcs Casing colour black Casing material aluminum Polishing matt Impact resistance IK05 Work environment indoor use Certificates CE Warranty 5 years

Round-shaped surface-mounted LED ceiling light. Suitable for various spaces due to its simple design. This light fixture is intended for indoor use only, with an IP54 protection rating. It has an ideal color rendering index (CRI90) for workspaces and offices. LED lights with a color temperature of 4000K create neutral light, which is ideal for workspaces and kitchens, among other places. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







## LED downlight PROLUMEN DL115A white round 230V 25W 2330lm 60° IP54 930

#### **Product code 15892**

**Brand PROLUMEN** Supply voltage 230V Output 25W Maximum output 25W/1m Luminous flux 2330lumens Luminaire's efficiency Im79 93W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Protection class IP54 Lifespan 50000h Height 129.0mm Diameter 213.0mm Weight 800g Package weight 12500g In box 12pcs Casing colour white Casing material aluminum Shape round Work environment indoor use Certificates CE, RoHS Warranty 5 years

Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The warm light of the luminaire is perfect for bedrooms, living rooms, and other spaces with a softer atmosphere. The same model of recessed luminaire can also be found in the LED house product range with a black-colored housing!



## LED luminaire PROLUMEN DL115B white round 230V 25W 2330lm 90° IP54 TRIAC 930





#### **Product code 15873 TRIAC dimmable**

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 25W Maximum output 25W/1m Luminous flux 2330lumens Luminaire's efficiency Im79 93W Correlated colour temperature warm white 3000K Lens angle 90 Cri 90 Protection class IP54 Lifespan 50000h Height 129.0mm Diameter 213.0mm Weight 800g Package weight 12500g In box 12pcs Casing colour white Casing material aluminum Shape round Work environment indoor use Certificates CE, RoHS Warranty 5 years

Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. This luminaire is available in both warm white (3000K) and daylight (4000K) options. For homes, we recommend warm white lights for bedrooms, living rooms, and dining areas. Daylight white may be best suited for kitchens and offices! With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). From the LED house product range, you can find several other ceiling lights that complement this luminaire to create unique lighting effects in your space!







# LED luminaire PROLUMEN DL115B white round 230V 25W 2400lm 90° IP54 940

#### Product code 15872

**Brand PROLUMEN** Supply voltage 230V Output 25W Maximum output 25W/1m Luminous flux 2400lumens Luminaire's efficiency Im79 96W Correlated colour temperature pure white 4000K Lens angle 90 Cri 90 Protection class IP54 Lifespan 50000h Height 129.0mm Diameter 213.0mm Weight 800g Package weight 12500g In box 12pcs Casing colour white Casing material aluminum Shape round Work environment indoor use Certificates CE, RoHS Warranty 5 years

Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. This luminaire is available in both warm white (3000K) and daylight (4000K) options. For homes, we recommend warm white lights for bedrooms, living rooms, and dining areas. Daylight white may be best suited for kitchens and offices! With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). From the LED house product range, you can find several other ceiling lights that complement this luminaire to create unique lighting effects in your space!





26/85 5.08.2025



### Ceiling light PROLUMEN DL126 black 25W 36° IP20 DALI 930

#### Product code 19085 DALI dimmable

**Brand PROLUMEN** Dimmable DALI Output 25W Maximum output 25W/1m Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Protection class IP20 Casing colour black Casing material aluminum Work environment indoor use

Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wallmounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.



Ceiling light PROLUMEN DL126 white 230V 10W 850lm CRI80 36° IP20 TRIAC 3000K, 4000K, 5000K 3CCT





#### Product code 18042 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 10W Maximum output 10W/1m Luminous flux 850lumens Luminaire's efficiency Im79 85W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 36 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 248.0mm Diameter 65.0mm Casing colour white Casing material aluminum Impact resistance IK03 Work environment indoor use Operation temperature -20° - + 40°C Certificates CE, RoHS Warranty 5 years

Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wallmounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.








## Ceiling light PROLUMEN DL129 black 230V 10W 1030lm 24° IP20 TRIAC 930

#### Product code 15890 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 10W Maximum output 10W/1m Luminous flux 1030lumens Luminaire's efficiency Im79 103W Correlated colour temperature warm white 3000K Lens angle 24 Source of light CITIZEN LED Cri 90 Protection class IP20 Lifespan 50000h Height 110.0mm Width 90.0mm Length 90.0mm In box 24pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, Rohs Warranty 5 years

An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Thanks to CRI90, the LED light fixture is capable of rendering colors naturally, contributing to the overall atmosphere and feel of the space. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!








## Ceiling light PROLUMEN DL129 black 230V 10W 1030lm 36° IP20 TRIAC 940

#### Product code 15888 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 10W Maximum output 10W/1m Luminous flux 1030lumens Luminaire's efficiency lm79 103W Correlated colour temperature pure white 4000K Lens angle 36 Source of light CITIZEN LED Cri 90 Protection class IP20 Lifespan 50000h Height 110.0mm Width 90.0mm Length 90.0mm In box 24pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, Rohs Warranty 5 years

An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Thanks to CRI90, the LED light fixture is capable of rendering colors naturally, contributing to the overall atmosphere and feel of the space. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!





## Ceiling light PROLUMEN DL129 black 230V 10W 1030lm 60° IP20 TRIAC 930

#### Product code 15102 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 10W Maximum output 10W/1m Luminous flux 1030lumens Luminaire's efficiency Im79 103W Correlated colour temperature warm white 3000K Lens angle 60 Source of light CITIZEN LED Cri 90 Protection class IP20 Lifespan 50000h Height 110.0mm Width 90.0mm Length 90.0mm In box 24pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, Rohs Warranty 5 years

An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Thanks to CRI90, the LED light fixture is capable of rendering colors naturally, contributing to the overall atmosphere and feel of the space. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







## Ceiling light PROLUMEN DL129 white 230V 20W 2000lm 36° IP20 TRIAC 840

#### Product code 15891 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 20W Maximum output 20W/1m Luminous flux 2000lumens Luminaire's efficiency Im79 100W Correlated colour temperature pure white 4000K Lens angle 36 Source of light CITIZEN LED Cri 80 Protection class IP20 Height 122.0mm Width 115.0mm Length 115.0mm In box 18pcs Casing colour white Certificates CE, Rohs Warranty 5 years

An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Enhance the quality of light in your everyday life and choose a topnotch lighting solution from the LED house product range!







# LED downlight PROLUMEN DL176 white 15W 1500lm 36° IP54 DALI 930

#### Product code 16994 DALI dimmable

**Brand PROLUMEN** Dimmable DALI Output 15W Maximum output 15W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 100W Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Protection class IP54 Lifespan 50000h Height 133.8mm Diameter 100.4mm In package 1pc Casing colour white Casing material aluminum Polishing matt Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE Warranty 5 years

Surface-mounted LED ceiling light with a round shape. Suitable for various spaces due to its simple design. An environmentally friendly and stylish ceiling light that creates a cozy atmosphere with warm light in the room. The light fixture is designed for indoor use only, with a dust and water resistance rating of IP54. This light fixture has an ideal color rendering index (CRI90) for workspaces and offices. Integrated DALI Dim technology allows for adjusting the brightness of the light fixture according to needs. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range









## LED downlight PROLUMEN DL176 white 25W 2300lm 36° IP54 DALI 930

#### Product code 16233 DALI dimmable

**Brand PROLUMEN** Dimmable DALI Output 25W Maximum output 25W/1m Luminous flux 2300lumens Luminaire's efficiency Im79 92W Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Protection class IP54 Lifespan 50000h Height 144.0mm Diameter 120.0mm Weight 960g Package weight 1110g In package 1pc In box 12pcs Casing colour white Casing material aluminum Polishing matt Work environment indoor use Certificates CE Warranty 5 years

Surface-mounted LED ceiling light with a round shape. Suitable for various spaces due to its simple design. An environmentally friendly and stylish ceiling light that creates a cozy atmosphere with warm light in the room. The light fixture is designed for indoor use only, with a dust and water resistance rating of IP54. This light fixture has an ideal color rendering index (CRI90) for workspaces and offices. Integrated DALI Dim technology allows for adjusting the brightness of the light fixture according to needs. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range









## LED downlight PROLUMEN DL176 white 35W 3000lm 60° IP54 DALI 930

#### Product code 19084 DALI dimmable

**Brand PROLUMEN** Power factor 0.95 Dimmable DALI Output 35W Maximum output 35W/1m Luminous flux 3000lumens Luminaire's efficiency Im79 86W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Ugr 19 Protection class IP54 Lifespan 50000h Casing colour white Operation temperature -20 - +40°C Warranty 5 years

Surface-mounted LED ceiling light with a round shape. Suitable for various spaces due to its simple design. An environmentally friendly and stylish ceiling light that creates a cozy atmosphere with warm light in the room. The light fixture is designed for indoor use only, with a dust and water resistance rating of IP54. This light fixture has an ideal color rendering index (CRI90) for workspaces and offices. Integrated DALI Dim technology allows for adjusting the brightness of the light fixture according to needs. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range





# Ceiling light PROLUMEN DL207 black 230V 15W 1300lm 36° IP20 DALI 840



35/85 5.08.2025

#### Product code 19394 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature pure white 4000K Lens angle 36 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 186.0mm Diameter 85.0mm Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years

Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wallmounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.



### Ceiling light PROLUMEN DL207 black 230V 15W 1300lm 36°






#### **IP20 TRIAC 830**

#### Product code 16507 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 36 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 186.0mm Diameter 85.0mm Casing colour black Casing material aluminum Work environment indoor use Certificates CE. RoHS Warranty 5 years

Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wallmounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.







## Ceiling light PROLUMEN DL207 black 230V 15W 1300lm 36° IP20 TRIAC 840

#### Product code 19388 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature pure white 4000K Lens angle 36 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 186.0mm Diameter 85.0mm In box 12pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years








### Ceiling light PROLUMEN DL207 black 230V 15W 1300lm 60° IP20 TRIAC 930

#### Product code 19389 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 186.0mm Diameter 85.0mm Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years







### Ceiling light PROLUMEN DL207 black 230V 15W 1400lm 36° IP20 940

#### **Product code 16867**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 15W Maximum output 15W/1m Luminous flux 1400lumens Luminaire's efficiency Im79 93W Correlated colour temperature pure white 4000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 186.0mm Diameter 85.0mm Weight 750g Package weight 850g In package 1pc In box 12pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years








### Ceiling light PROLUMEN DL207 black 230V 25W 2300lm 36° IP20 TRIAC 830

#### Product code 18029 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 25W Maximum output 25W/1m Luminous flux 2300lumens Luminaire's efficiency Im79 92W Correlated colour temperature warm white 3000K Lens angle 36 Cri 80 Sdcm - macadam ellipses 5 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 211.0mm Diameter 85.0mm Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years








### Ceiling light PROLUMEN DL259 black 230V 16W 1550lm 36° IP20 TRIAC 930

#### Product code 15784 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 16W Maximum output 16W/1m Luminous flux 1550lumens Luminaire's efficiency Im79 97W Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 60.0mm Width 135.0mm Length 224.0mm Weight 910g Package weight 1010g In package 1pc In box 12pcs Casing colour black Casing material metal + plastic Polishing matt Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE, RoHS, SAA Warranty 5 years

A rectangular designed ceiling light with two directional light beams. This luminaire is suitable for indoor use only, with an IP20 protection class. Thanks to CRI90, the LED luminaire is capable of presenting colors naturally, contributing to the overall atmosphere and feel of the room. We recommend this warm white (3000K) light for both living spaces and work environments. From the LED house product range, you can find several other ceiling lights that complement this luminaire to create unique lighting effects in your space!







### Ceiling light PROLUMEN DL259 black 230V 8W 700lm 36° IP20 TRIAC 930

#### Product code 15783 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 8W Maximum output 8W/1m Luminous flux 700lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 60.0mm Width 135.0mm Length 135.0mm Weight 580g Package weight 630g In package 1pc In box 24pcs Casing colour black Casing material metal + plastic Polishing matt Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE, RoHS, SAA Warranty 5 years

Modern and minimalist lighting for every room! A square ceiling light with dimmable light beam (TRIAC). The direction of the light can be adjusted up to 23 degrees in any direction. Easy installation! Fits well with various design styles due to its minimalist design. LED light is ideal for kitchens, offices, bedrooms, shops, and many other spaces with different purposes. PROLUMEN LED lamps are durable, long-lasting, and environmentally friendly choice!







### Ceiling light PROLUMEN DL259 black 230V 8W 700lm 36° IP20 TRIAC 940

#### Product code 16181 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 8W Maximum output 8W/1m Luminous flux 700lumens Luminaire's efficiency Im79 88W Correlated colour temperature pure white 4000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 60.0mm Width 135.0mm Length 135.0mm Weight 580g Package weight 630g In package 1pc In box 24pcs Casing colour black Casing material metal + plastic Polishing matt Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE, RoHS, SAA Warranty 5 years

Modern and minimalist lighting for every room! A square ceiling light with dimmable light beam (TRIAC). The direction of the light can be adjusted up to 23 degrees in any direction. Easy installation! Fits well with various design styles due to its minimalist design. LED light is ideal for kitchens, offices, bedrooms, shops, and many other spaces with different purposes. PROLUMEN LED lamps are durable, long-lasting, and environmentally friendly choice!







## LED luminaire PROLUMEN DL269A-3 white round 230V 10W 940lm 60° IP65 TRIAC 940

#### Product code 18114 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 10W Maximum output 10W/1m Luminous flux 940lumens Luminaire's efficiency Im79 94W Correlated colour temperature pure white 4000K Lens angle 60 Cri 90 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 107.0mm Diameter 90.0mm In package 1pc In box 18pcs Casing colour white Casing material aluminum Shape round Impact resistance IK06 Work environment indoor / outdoor use Certificates CE, RoHS Warranty 5 years

Cylindrical PROLUMEN LED light for every interior! IP65 protection class means that the luminaire is water and dust resistant, making it suitable for outdoor use. The DL296B model is available in both warm white (3000K) and daylight (4000K) versions in the LED house range. Come and take a look around our showroom in Tallinn!







## LED luminaire PROLUMEN DL269B 3 black round 230V 15W 1300lm 70° IP65 830

#### **Product code 16432**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 70 Cri 80 Ugr 22 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Height 107.0mm Diameter 90.0mm Weight 600g Package weight 646g In package 1pc In box 12pcs Casing colour black Casing material aluminum Shape round Impact resistance IK08 Work environment indoor / outdoor use Certificates CE, RoHS Warranty 5 years

Cylindrical PROLUMEN LED light for every interior! IP65 protection class means that the luminaire is water and dust resistant, making it suitable for outdoor use. The DL296B model is available in both warm white (3000K) and daylight (4000K) versions in the LED house range. Come and take a look around our showroom in Tallinn!







## LED luminaire PROLUMEN DL269B 3 black round 230V 35W 2700lm 70° IP65 940

#### **Product code 17171**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 35W Maximum output 35W/1m Luminous flux 2700lumens Luminaire's efficiency Im79 77W Correlated colour temperature pure white 4000K Lens angle 70 Cri 90 Ugr 22 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Height 119.0mm Diameter 214.0mm Weight 600g Package weight 646g In package 1pc In box 6pcs Casing colour black Casing material aluminum Shape round Impact resistance IK08 Work environment indoor / outdoor use Certificates CE, RoHS Warranty 5 years

Cylindrical PROLUMEN LED light for every interior! IP65 protection class means that the luminaire is water and dust resistant, making it suitable for outdoor use. The DL296B model is available in both warm white (3000K) and daylight (4000K) versions in the LED house range. Come and take a look around our showroom in Tallinn!



## LED luminaire PROLUMEN DL269B 3 UGR19 white round 230V 10W 850lm 75° IP65 930





#### Product code 16157

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 10W Maximum output 10W/1m Luminous flux 850lumens Luminaire's efficiency Im79 85W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP65 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 107.0mm Diameter 90.0mm Weight 600g Package weight 646g In package 1pc In box 18pcs Casing colour white Casing material aluminum Shape round Impact resistance IK08 Work environment indoor / outdoor Certificates CE, RoHS

Surface-mounted LED ceiling light with a round shape. The IP65 protection class means that this luminaire is protected against fine dust and pressure splashes. This indicates that the luminaire is water and dust resistant, making it suitable for outdoor use as well. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. From the LED house product range, you can find several other ceiling lights that complement this luminaire to create unique lighting effects in your space!







# LED luminaire PROLUMEN DL269B 5 UGR19 white round 230V 18W 1600lm 75° IP65 930

#### **Product code 16156**

**Brand PROLUMEN** Supply voltage 230V Output 18W Maximum output 18W/1m Luminous flux 1600lumens Luminaire's efficiency Im79 89W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Protection class IP65 Lifespan 50000h Height 115.0mm Diameter 130.0mm Weight 920g Package weight 1010g In package 1pc In box 12pcs Casing colour white Casing material aluminum Shape round Impact resistance IK08 Work environment indoor / outdoor Certificates CE, RoHS Warranty 5 years







# LED luminaire PROLUMEN DL269B 5 UGR19 white round 230V 18W 1600lm 75° IP65 DALI 930

#### Product code 16155 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable DALI Output 18W Maximum output 18W/1m Luminous flux 1600lumens Luminaire's efficiency Im79 89W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Protection class IP65 Lifespan 50000h Height 115.0mm Diameter 130.0mm Weight 920g Package weight 1010g In package 1pc In box 12pcs Casing colour white Casing material aluminum Shape round Impact resistance IK08 Work environment indoor / outdoor LISE Certificates CE. RoHS Warranty 5 years







# LED luminaire PROLUMEN DL269B 8 UGR19 white round 230V 25W 2400lm 75° IP65 DALI 930

#### Product code 15925 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable DALI Output 25W Maximum output 25W/1m Luminous flux 2400lumens Luminaire's efficiency Im79 96W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Protection class IP65 Lifespan 50000h Height 119.0mm Diameter 214.0mm Weight 2200g Package weight 2480g In package 1pc In box 6pcs Casing colour white Casing material aluminum Shape round Impact resistance IK08 Work environment indoor / outdoor LISE Certificates CE. RoHS Warranty 5 years








# LED luminaire PROLUMEN DL269B 8 UGR19 white round 230V 35W 3000lm 60° IP65 DALI 930

#### Product code 19083 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable DALI Output 35W Maximum output 35W/1m Luminous flux 3000lumens Luminaire's efficiency Im79 86W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Ugr 19 Protection class IP65 Lifespan 50000h Height 119.0mm Diameter 214.0mm Weight 2200g Package weight 2480g In package 1pc In box 6pcs Casing colour white Casing material aluminum Shape round Impact resistance IK08 Work environment indoor / outdoor LISE Certificates CE. RoHS Warranty 5 years







### LED downlight PROLUMEN DL322A black round 230V 14W 1300lm 36° IP20 830

#### **Product code 16313**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 14W Maximum output 14W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 93W Correlated colour temperature warm white 3000K Lens angle 36 Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 96.0mm Diameter 120.0mm In package 1pc In box 24pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Stylish round LED ceiling light, matte black. The direction of the light fixture can be adjusted by rotating the light beam around its axis within a range of 340 degrees. We recommend this warm white (3000K) light fixture for both living spaces and work environments. This LED ceiling lamp is designed as ambient lighting - suitable for use in hotels, homes, offices, shops, and many other spaces. Enhance the quality of light in your everyday life and choose a topnotch lighting solution from the LED house product range!





5.08.2025

# LED downlight PROLUMEN DL340A white 230V 15W 1469lm 36° IP40 930

#### **Product code 17244**

HOUSE

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output voltage 40V Output 15W Maximum output 15W/1m Rated current 250mA Luminous flux 1469lumens Luminaire's efficiency Im79 98W Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Uar 19 Sdcm - macadam ellipses 3 Protection class IP40 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 108.0mm Diameter 100.0mm Weight 540g Package weight 600g In package 1pc In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

Modern matte white surface-mounted light. The aluminum matte white body allows for easy adjustment of the light direction. The light fixture rotates within a 360-degree radius, and horizontally, the direction can be adjusted up to 90 degrees. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. With an IP40 protection rating, this surface-mounted light is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light fixture is capable of presenting colors in a natural way, contributing to the overall atmosphere and feeling of the room. Upgrade the quality of light in your everyday life and choose a topnotch lighting solution from the LED house product range!







### LED downlight PROLUMEN DL340A white 230V 15W 1563lm 36° IP40 940

#### **Product code 18151**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output voltage 40V Output 15W Maximum output 15W/1m Rated current 250mA Luminous flux 1563lumens Luminaire's efficiency Im79 104W Correlated colour temperature pure white 4000K Lens angle 36 Cri 90 Uar 19 Sdcm - macadam ellipses 3 Protection class IP40 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 108.0mm Diameter 100.0mm Weight 540g Package weight 600g In package 1pc In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

Modern matte white surface-mounted light. The aluminum matte white body allows for easy adjustment of the light direction. The light fixture rotates within a 360-degree radius, and horizontally, the direction can be adjusted up to 90 degrees. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. With an IP40 protection rating, this surface-mounted light is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light fixture is capable of presenting colors in a natural way, contributing to the overall atmosphere and feeling of the room. Upgrade the quality of light in your everyday life and choose a topnotch lighting solution from the LED house product range!







### Ceiling light PROLUMEN DL38 black round 230V 15W 1300lm 60° IP54 TRIAC 830

#### Product code 15109 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 60 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 100.0mm Diameter 90.0mm Weight 520g Package weight 630g In package 1pc In box 40pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS

LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).







### Ceiling light PROLUMEN DL38 black round 230V 15W 1300lm 60° IP54 TRIAC 840

#### Product code 15309 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature pure white 4000K Lens angle 60 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 100.0mm Diameter 90.0mm Weight 520g Package weight 630g In package 1pc In box 24pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years








### LED luminaire PROLUMEN DL38 black round 230V 25W 2700lm 45° IP54 TRIAC 830

#### Product code 15543 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 25W Maximum output 25W/1m Luminous flux 2700lumens Luminaire's efficiency Im79 108W Correlated colour temperature warm white 3000K Lens angle 45 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 110.0mm Diameter 120.0mm Weight 750g Package weight 860g In box 18pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE. RoHS

LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).







# LED luminaire PROLUMEN DL38 black round 230V 35W 3400lm 36° IP54 TRIAC 940

#### Product code 14586 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 35W Maximum output 35W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 97W Correlated colour temperature pure white 4000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 160.0mm Weight 1300g Package weight 1458g In box 12pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE. RoHS

LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).







# LED luminaire PROLUMEN DL38 black round 230V 35W 3400lm 60° IP54 TRIAC 930

#### Product code 15442 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 35W Maximum output 35W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 97W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 160.0mm Weight 1300g Package weight 1458g In box 12pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE. RoHS

LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).







## LED luminaire PROLUMEN DL38 white 230V 10W 1500lm 60° IP54 DALI 930

#### Product code 17370 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 10W Maximum output 10W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 150W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 110.0mm In package 1pc In box 18pcs Casing colour white Casing material aluminum Work environment indoor / outdoor Operation temperature -20 ~ 45°C Certificates CE, RoHS

LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).







### Ceiling light PROLUMEN DL38 white 230V 10W 800lm 60° IP54 TRIAC 930

#### Product code 15281 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 10W Maximum output 10W/1m Luminous flux 800lumens Luminaire's efficiency Im79 80W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 100.0mm Diameter 90.0mm Weight 474g Package weight 537g In package 1pc In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







### Ceiling light PROLUMEN DL38 white 230V 15W 1300lm 60° IP54 TRIAC 840

#### Product code 14874 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature pure white 4000K Lens angle 60 Cri 80 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 100.0mm Diameter 90.0mm Weight 474g Package weight 537g In package 1pc In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







## Ceiling light PROLUMEN DL38 white 230V 15W 1300lm 60° IP54 TRIAC 930

#### Product code 15267 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 15W Maximum output 15W/1m Luminous flux 1300lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 60 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 110.0mm Diameter 120.0mm Weight 520g Package weight 630g In package 1pc In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







# LED luminaire PROLUMEN DL38 white 230V 25W 2300lm 45° IP54 DALI 940

#### Product code 15328 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 25W Maximum output 25W/1m Luminous flux 2300lumens Luminaire's efficiency Im79 92W Correlated colour temperature pure white 4000K Lens angle 45 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 110.0mm Diameter 120.0mm Weight 750g Package weight 860g In box 18pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







# LED luminaire PROLUMEN DL38 white 230V 25W 2300lm 45° IP54 TRIAC 940

#### Product code 15327 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 25W Maximum output 25W/1m Luminous flux 2300lumens Luminaire's efficiency Im79 92W Correlated colour temperature pure white 4000K Lens angle 45 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 110.0mm Diameter 120.0mm Weight 750g Package weight 860g In box 18pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







# LED luminaire PROLUMEN DL38 white 230V 25W 2700lm 45° IP54 TRIAC 930

#### Product code 14935 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 25W Maximum output 25W/1m Luminous flux 2700lumens Luminaire's efficiency Im79 108W Correlated colour temperature warm white 3000K Lens angle 45 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 110.0mm Diameter 120.0mm Weight 750g Package weight 860g In box 18pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







### LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 930

#### **Product code 15564**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 35W Maximum output 35W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 97W Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 160.0mm Weight 1300g Package weight 1458g In box 12pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







# LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 940

#### **Product code 15563**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 35W Maximum output 35W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 97W Correlated colour temperature pure white 4000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 160.0mm Weight 1300g Package weight 1458g In box 12pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







### LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 DALI 930

#### Product code 15567 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 35W Maximum output 35W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 97W Correlated colour temperature warm white 3000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 160.0mm Weight 1300g Package weight 1458g In box 12pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







### LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 DALI 940

#### Product code 14929 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 35W Maximum output 35W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 97W Correlated colour temperature pure white 4000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 160.0mm Weight 1300g Package weight 1458g In box 12pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years





5.08.2025



### LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° **IP54 TRIAC 940**

#### Product code 14508 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 35W Maximum output 35W/1m Luminous flux 3400lumens Luminaire's efficiency Im79 97W Correlated colour temperature pure white 4000K Lens angle 36 Cri 90 Sdcm - macadam ellipses 6 Protection class IP54 Lifespan 50000h Height 120.0mm Diameter 160.0mm Weight 1300g Package weight 1458g In box 12pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).



Ceiling light PROLUMEN DL52 white 230V 18W 1584lm 100°





#### **IP54 930**

#### **Product code 15610**

**Brand PROLUMEN** Supply voltage 230V Output 18W Maximum output 18W/1m Luminous flux 1584lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 100 Cri 90 Protection class IP54 Lifespan 50000h Height 68.0mm Diameter 170.0mm Weight 474g Package weight 537g In package 1pc In box 24pcs Casing colour white Casing material aluminum Work environment indoor use Certificates CE. RoHS Warranty 5 years

Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The light temperature of the luminaire is 3000K, providing warm white light to the room. For homes, we recommend warm white ceiling lights for bedrooms, living rooms, and dining areas. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). From the LED house product range, you can find several other <u>ceiling lights</u> that complement this luminaire to create unique lighting effects in your space!







## Ceiling light PROLUMEN Lunel black 230V GU10 IP20

#### **Product code 16403**

Brand PROLUMEN
Supply voltage 230V
Maximum output 5W/1m
Socket GU10
Protection class IP20
Height 95.0mm
Diameter 54.0mm
In package 1pc
In box 30pcs
Casing colour black
Casing material aluminum
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years

With its elegant design, the compact GU10 ceiling light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated ceiling light is an ideal choice for home or office environments. You can choose this Lunel series light as a ceiling light, surface-mounted black or white light, and also as a recessed <u>light</u>. As a ceiling light, it attaches to the 3F rail. The maximum height of the bulb is 75mm. With proper use, the light fixture is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Come and take a look around our showroom in Tallinn!







## Ceiling light PROLUMEN Lunel black 230V GU10 IP20

#### **Product code 16404**

**Brand PROLUMEN** Supply voltage 230V Maximum output 5W/1m Socket GU10 Protection class IP20 Height 95.0mm Diameter 54.0mm Installation opening diameter 65-70mm In package 1pc In box 30pcs Casing colour black Casing material aluminum Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE Warranty 5 years

With its elegant design, the compact and recessed GU10 ceiling light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated ceiling light is an ideal choice for home or office environments. You can choose this Lunel series light as a ceiling light, surface-mounted black or white light, and also as a recessed light. As a ceiling light, it attaches to the 3F rail. The maximum height of the bulb is 75mm. Come and take a look around our showroom in Tallinn!





## Ceiling light PROLUMEN Lunel white 230V GU10 IP20

#### **Product code 16830**

Brand PROLUMEN
Supply voltage 230V
Maximum output 5W/1m
Socket GU10
Protection class IP20
Height 95.0mm
Diameter 54.0mm
In package 1pc
In box 30pcs
Casing colour white
Casing material aluminum
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 5 years

With its elegant design, the compact GU10 ceiling light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated ceiling light is an ideal choice for home or office environments. You can choose this Lunel series light as a ceiling light, surface-mounted black or white light, and also as a recessed <u>light</u>. As a ceiling light, it attaches to the 3F rail. The maximum height of the bulb is 75mm. Come and take a look around our showroom in Tallinn!



Ceiling light PROLUMEN Newcastle with nickel ring surface mounted black 230V 15W 1500lm 40° IP20 940



#### Product code 16207

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 15W Maximum output 15W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 100W Correlated colour temperature pure white 4000K Lens angle 40 Source of light CITIZEN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 152.0mm Diameter 75.0mm In package 1pc In box 24pcs Casing colour black Casing material aluminum Polishing matt Power supply **LIFUD** Work environment indoor use Certificates CE, RoHS Warranty 5 years

The LED pendant light Newcastle is a stylish and functional pendant light that fits into modern interiors. It has a modern and eye-catching appearance, made of high-quality and durable materials, ensuring a long lifespan. The light fixture is available in both surface-mounted and pendant versions. External housings are available in black and white, with internal rims in black, silver, and nickel - explore more in the LED house product range! Option to order with different light temperatures: Very warm white 2700K Warm white 3000K Daylight 4000K Option to order with different lens optics 20°/40°. Come and take a look at our showroom in Tallinn!







## LED downlight PROLUMEN Newcastle with silver ring surface mounted black round 230V 20W 2000lm 40° IP20 DALI 940

#### Product code 16288 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 20W Maximum output 20W/1m Luminous flux 2000lumens Luminaire's efficiency lm79 100W Correlated colour temperature pure white 4000K Lens angle 40 Source of light CITIZEN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 152.0mm Diameter 115.0mm In box 18pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE Warranty 5 years

The LED pendant light Newcastle is a stylish and functional pendant light that fits into modern interiors. It has a modern and eye-catching appearance, made of high-quality and durable materials, ensuring a long lifespan. The light fixture is available in both surface-mounted and pendant versions. External housings are available in black and white, with internal rims in black, silver, and nickel - explore more in the LED house product range! Option to order with different light temperatures: Very warm white 2700K Warm white 3000K Daylight 4000K Option to order with different lens optics 20°/40°. Come and take a look at our showroom in Tallinn!







## Ceiling light PROLUMEN RD01 white 230V 45W 3550lm 120° IP20 840

#### **Product code 15344**

**Brand PROLUMEN** Supply voltage 230V Output 45W Maximum output 45W/1m Luminous flux 3550lumens Luminaire's efficiency Im79 79W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP20 Lifespan 40000h Height 114.4mm Width 145.0mm Length 235.0mm Weight 1899g Package weight 2100g In package 1pc Casing colour white Polishing matt Work environment indoor use Warranty 5 years

Recessed LED ceiling light, designed to fit shopping centers, hotels, schools, staircases, and many other diverse indoor spaces. Suitable for installation in dry indoor areas. Illuminate your world with the help of LED House professionals - see our project portfolio here!







# Ceiling light PROLUMEN RD01-C white 230V 40W 3800lm CRI90 90° IP20 3000K, 4000K, 6000K 3CCT

#### **Product code 15017**

**Brand PROLUMEN** Supply voltage 230V Output 40W Maximum output 40W/1m Luminous flux 3800lumens Luminaire's efficiency Im79 95W Correlated colour temperature 3CCT 3000K, 4000K, 6000K Lens angle 90 Cri 90 Protection class IP20 Lifespan 40000h Casing colour white Polishing matt Work environment indoor use Warranty 5 years

CCT selectable ceiling light with a button. Project sales, minimum order quantity required. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Come and visit our showroom in Tallinn!







## Ceiling light PROLUMEN TL13 white 230V 20W 1600lm CRI80 IP20 TRIAC

#### Product code 14618 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Dimmable TRIAC Output 20W Maximum output 20W/1m Luminous flux 1600lumens Luminaire's efficiency Im79 80W Cri 80 Protection class IP20 Lifespan 40000h Height 148.0mm Width 449.0mm Length 117.5mm Diameter 65.0mm In box 6pcs Casing colour white Casing material aluminum + plastic Polishing matt Work environment indoor use Certificates CE, RoHS, SAA Warranty 5 years








## Ceiling light SIGARO SQUARE white square 230V 18W 1800lm 120° IP40 840

#### **Product code 15913**

Supply voltage 230V Output 18W Maximum output 18W/1m Luminous flux 1800lumens Luminaire's efficiency lm79 100W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP40 Lifespan 25000h Height 30.0mm Width 225.0mm Length 225.0mm Weight 300g In box 20pcs Casing colour white Casing material plastic Polishing matt Shape square No. of switches 15000pcs Impact resistance IK03 Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE Warranty 3 years

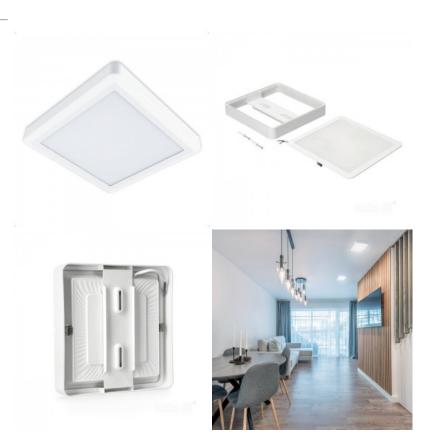

## Ceiling light SIGARO SQUARE white square 230V 24W 2400lm 120° IP40 840

#### **Product code 15914**

Supply voltage 230V Output 24W Maximum output 24W/1m Luminous flux 2400lumens Luminaire's efficiency Im79 100W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Protection class IP40 Lifespan 25000h Height 30.0mm Width 225.0mm Length 225.0mm Weight 320g In box 20pcs Casing colour white Casing material plastic Polishing matt Shape square No. of switches 15000pcs Impact resistance IK03 Work environment indoor use Operation temperature -20 ~ 40°C Certificates CE Warranty 3 years




### Ceiling light SISYR black round GU10 IP20

#### Product code 16309

Maximum output 35W/1m Socket GU10 Protection class IP20 Height 140.0mm Diameter 90.0mm In box 20pcs Casing colour black Casing material aluminum Polishing matt Shape round Work environment indoor use

Cylindrical housing for GU10 light bulb.









### LED downlight Taurus black 230V 5W 450lm IP20 830

#### **Product code 19382**

Supply voltage 230V Output 5W Maximum output 5W/1m Luminous flux 450lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Cri 80 Protection class IP20 Lifespan 20000h Height 100.0mm Diameter 80.0mm Weight 400g Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS



### LED downlight Taurus white 230V 5W 450lm IP20 830

#### **Product code 19383**

Supply voltage 230V Output 5W Maximum output 5W/1m Luminous flux 450lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Cri 80 Protection class IP20 Lifespan 20000h Height 100.0mm Diameter 80.0mm Weight 400g Casing colour white Casing material aluminum Work environment indoor use Certificates CE, RoHS







### LED downlight Taurus x 2 white 230V 10W 900lm IP20 830

#### **Product code 19386**

Supply voltage 230V Output 10W Maximum output 10W/1m Luminous flux 900lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Cri 80 Protection class IP20 Lifespan 20000h Height 100.0mm Width 80.0mm Length 180.0mm Weight 90g Casing colour white Casing material metal Work environment indoor use Certificates CE, RoHS



### LED downlight Taurus x 3 white 230V 15W 1350lm IP20 830

#### **Product code 19385**

Certificates CE, RoHS

Supply voltage 230V Output 15W Maximum output 15W/1m Luminous flux 1350lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Cri 80 Protection class IP20 Lifespan 10000h Height 100.0mm Width 80.0mm Length 270.0mm Weight 1300g Casing colour white Casing material metal Work environment indoor use







## **Ceiling light Tube white GU10**

#### **Product code 15358**

Socket GU10
Height 125.0mm
Diameter 96.0mm
Casing colour white
Casing material aluminum
Polishing matt
Work environment indoor use

Round surface-mounted housing for GU10 bulb.





## Ceiling light Tube white round GU10 IP20

#### **Product code 17149**

Socket GU10
Protection class IP20
Height 122.0mm
Diameter 94.0mm
In box 20pcs
Casing colour white
Casing material aluminum
Polishing matt
Shape round
Work environment indoor use

Round surface-mounted housing for GU10 bulb.



