Regulator LEDVANCE MCU DALI-2 EXC TW white 230V IP20 DALI

Product code 18112 **DALI dimmable**



Brand LEDVANCE
Supply voltage 230V
Dimmable DALI
Protection class IP20
Height 51.0mm
Width 71.0mm
Length 71.0mm
Weight 22 g
In package 1pc
Casing colour white
Work environment indoor use
Operation temperature 0 - +35°C
Certificates CE, RoHS

Dimmer LTECH EBOX-TD 230V

Product code 15120



Brand LTECH
Supply voltage 230V
Maximum output 200W/1m
Rated current 1200mA
Height 21.0mm
Width 55.0mm
Length 55.0mm
Weight 70 g
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS

Dimmer rotary switch IP20 DALI

Product code 20104 DALI dimmable

Dimmable DALI
Protection class IP20
Height 26.0mm
Width 71.0mm
Length 71.0mm


Rotary light dimmer for DALI systems, allowing you to adjust both brightness and the color temperature from warm to cool. The built-in power supply makes installation easy, and the device is suitable for home or office, where you want to conveniently control lighting according to mood.




Switch SIEMENS 5TC8211-0 4-100 W 230V 100W TRIAC / PUSH

Product code 14444 TRIAC / PUSH dimmable

Brand SIEMENS
Supply voltage 230V
Dimmable TRIAC / PUSH
Output voltage 230V
Output 100W
Maximum output 100W/1m
Height 12.0mm
Width 45.0mm
Length 45.0mm
Weight 23 g
Operation temperature 0°C~40°C
Certificates CE, RoHS



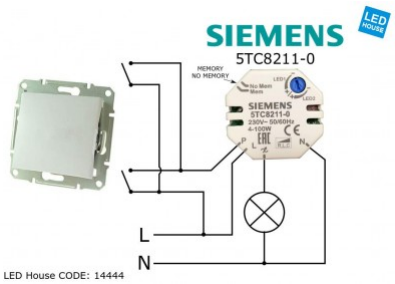

Dimmer SIEMENS 5TC8212-0 for led strip 12-48V 96-384W

Product code 14441

Brand SIEMENS
Supply voltage 12-48V
Output 96-384W
Maximum output 384W/1m
Rated current 8000mA
Height 12.0mm
Width 45.0mm
Length 45.0mm
Weight 23 g
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 0o C~40o C°C
Certificates CE, RoHS
Warranty 2 years



Cover plate SIEMENS Delta i-system aluminum IP20

Product code 19569

Brand SIEMENS
Protection class IP20
Height 55.0mm
Minimum length 55.0mm
Casing colour aluminum
Casing material plastic
Work environment indoor use

DELTA i-system aluminum-metallic
Cover plate for dimmer with rotary knob 55x 55 mm



Cover plate SIEMENS Delta i-system aluminum IP20

Product code 18818

Brand SIEMENS
Protection class IP20
Height 55.0mm
Width 55.0mm
Casing colour aluminum
Casing material plastic
Work environment indoor use

DELTA i-system aluminum-metallic Cover plate for dimmer with rotary knob 55x 55 mm



Cover plate SIEMENS Delta i-system carbon IP20

Product code 18819

Brand SIEMENS
Protection class IP20
Height 55.0mm
Width 55.0mm
Casing colour carbon
Casing material plastic
Work environment indoor use

DELTA i-system carbon metallic Cover plate for dimmer with rotary knob 55x 55 mm



Cover plate SIEMENS Delta i-system carbon IP20

Product code 18821

Brand SIEMENS
Protection class IP20
Height 55.0mm
Width 55.0mm
Casing colour carbon
Casing material plastic
Work environment indoor use

Delta i-system Rotary Dimmer Cover Carbon Metallic



Cover plate SIEMENS Delta i-system cream IP20

Product code 19568

Brand SIEMENS
Protection class IP20
Height 55.0mm
Width 55.0mm
Casing colour cream
Casing material plastic
Work environment indoor use

DELTA i-system electrical white Cover plate for dimmer with rotary knob 55x 55 mm



Cover plate SIEMENS Delta i-system cream IP20

Product code 18817

Brand SIEMENS
Protection class IP20
Height 55.0mm
Width 55.0mm
Casing colour cream
Casing material plastic
Work environment indoor use



Cover plate SIEMENS Delta i-system Soft black IP20

Product code 22089

Brand SIEMENS
Protection class IP20
Height 68.0mm
Width 68.0mm
Length 40.0mm
Casing colour black
Casing material thermoplastic
Work environment indoor use



© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

Cover plate SIEMENS Delta i-system white IP20

Product code 18820

Brand SIEMENS
Protection class IP20
Height 55.0mm
Width 55.0mm
Casing colour white
Casing material plastic
Work environment indoor use



Cover plate SIEMENS Delta Profil aluminum IP20

Product code 23035

Brand SIEMENS
Protection class IP20
Height 65.0mm
Width 65.0mm
Casing colour aluminum
Casing material plastic
Work environment indoor use



Cover plate SIEMENS Delta Profil white IP20

Product code 19526

Brand SIEMENS
Protection class IP20
Height 65.0mm
Width 65.0mm
Casing colour white
Casing material plastic
Work environment indoor use

DELTA profil, titanium white Cover plate for dimmer with rotary knob 65x 65 mm



Cover plate SIEMENS Delta Style carbon IP20

Product code 23051

Brand SIEMENS
Protection class IP20
Height 68.0mm
Width 68.0mm
Casing colour carbon
Casing material plastic
Work environment indoor use



Cover plate SIEMENS Delta Style matte gold IP20

Product code 23072

Brand SIEMENS
Protection class IP20
Height 68.0mm
Width 68.0mm
Casing colour matte gold
Casing material plastic
Work environment indoor use



Cover plate SIEMENS Delta Style platinum IP20

Product code 22110

Brand SIEMENS
Protection class IP20
Height 68.0mm
Width 68.0mm
Casing colour platinum
Casing material plastic
Work environment indoor use



© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

Cover plate SIEMENS Delta Style white IP20

Product code 22978


Brand SIEMENS
Protection class IP20
Height 68.0mm
Width 68.0mm
Casing colour white
Casing material plastic
Work environment indoor use



Dimmer SIEMENS dimmer elekt. 0-10v vedrulüliti IP20

Product code 18915

Brand SIEMENS
Protection class IP20
Work environment indoor use

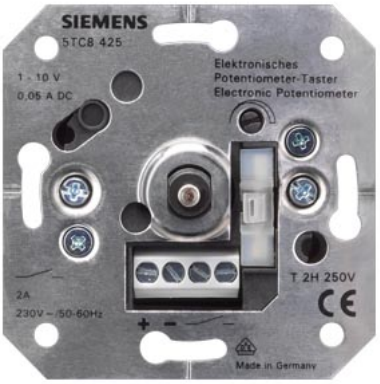

Dimmer SIEMENS Dimmer switch insert for LED, 3–85W IP20


Product code 19376

Brand SIEMENS
Protection class IP20
Work environment indoor use

Rotary dimmer with pushbutton on/off for LED lamps 3-85W and incandescent and halogen lamps with magnetic trafo 20-250W/VA




Dimmer SIEMENS Dimmerlüliti elekt. trafole 10-600w IP20

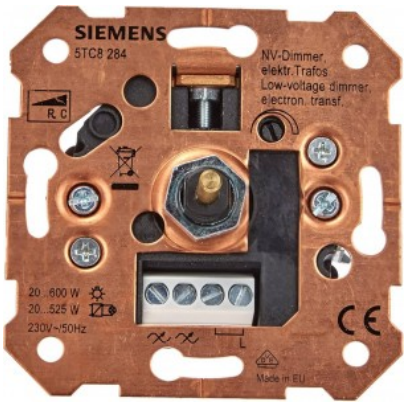

Product code 18846

Brand SIEMENS
Protection class IP20
Work environment indoor use

Device insert SIEMENS Dimmerlüliti elektroonilisele trafole 60-800w IP20

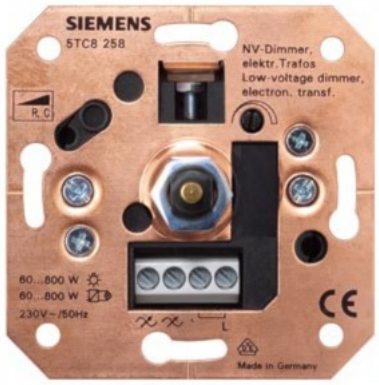

Product code 18845

Brand SIEMENS
Protection class IP20
Work environment indoor use

Dimmer SIEMENS Dimmerlüliti hõõglambile 60-400w IP20



Product code 18844

Brand SIEMENS
Protection class IP20
Work environment indoor use

Dimmer SIEMENS Rotary dimmer 500W IP20

Product code 23046

Brand SIEMENS
Protection class IP20
Height 70.7mm
Length 52.5mm
Work environment indoor use


Rotary dimmer with two-way switch for incandescent and halogen lamps with magnetic trafo 20-500W/VA,



Dimmer SIEMENS universal dimmer with electric memory max 400W IP20

Product code 18816

Brand SIEMENS
Protection class IP20
Work environment indoor use

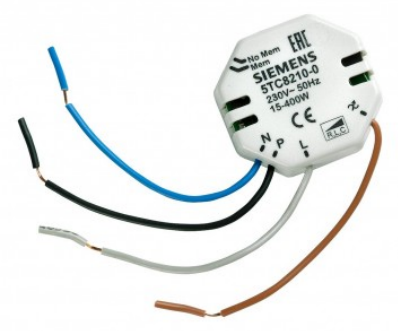

Dimmer SKYDANCE DA-4S Push to DALI (4 address) IP20 PUSH

Product code 19403 PUSH dimmable

Brand SKYDANCE
Dimmable PUSH
Protection class IP20
Height 25.0mm
Width 52.0mm
Length 52.0mm
Weight 46 g
In package 1pc
In box 100pcs
Casing material plastic
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE, RoHS
Warranty 5 years



Dimmer SKYDANCE DA-M RF to DALI 24V IP20 RF

Product code 17471 RF dimmable

Brand SKYDANCE
Supply voltage 24V
Dimmable RF
Rated current 15mA
Protection class IP20
Height 27.0mm
Width 52.0mm
Length 52.0mm
In package 1pc
In box 100pcs
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE, RoHS
Warranty 5 years

Through this device, you can control DALI devices with the SKYDANCE remote.



Dimmer SKYDANCE DA-P Push to DALI 230V IP20 PUSH

Product code 19402 PUSH dimmable

Brand SKYDANCE
Supply voltage 230V
Dimmable PUSH
Protection class IP20
Height 25.0mm
Width 52.0mm
Length 52.0mm
Weight 61 g
In package 1pc
In box 100pcs
Casing material plastic
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE, RoHS
Warranty 5 years



© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

Dimmer SKYDANCE DT-C DALI-TRIAC 100-240V IP20 DALI

Product code 19395 DALI dimmable

Brand SKYDANCE
Supply voltage 100-240V
Dimmable DALI
Maximum output 360W/1m
Rated current 1500mA
Protection class IP20
Height 25.0mm
Width 52.0mm
Length 52.0mm
Weight 59 g
In package 1pc
In box 100pcs
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE, RoHS
Warranty 5 years



Regulator SKYDANCE KL V + RF2.4G 100-240V IP20 0-10V / RF

Product code 15715 0-10V / RF dimmable

Brand SKYDANCE
Supply voltage 100-240V
Dimmable 0-10V / RF
Protection class IP20
Weight 100 g
Package weight 160 g
Work environment indoor use
Certificates CE
Warranty 5 years




Regulator SKYDANCE KS white 100-240V IP20 TRIAC

Product code 15483 TRIAC dimmable

Brand SKYDANCE
Supply voltage 100-240V
Dimmable TRIAC
Maximum output 240W/1m
Rated current 1000mA
Protection class IP20
Height 48.0mm
Width 86.0mm
Length 86.0mm
Installation opening diameter 51mm
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



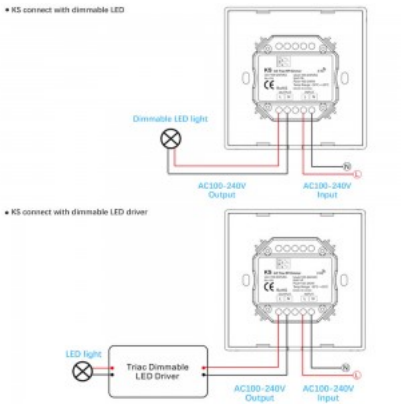

Dimmer SKYDANCE L1 230V IP20 0-10V / PUSH / RF

Product code 16651 0-10V / PUSH / RF dimmable

Brand SKYDANCE
Supply voltage 230V
Dimmable 0-10V / PUSH / RF
Maximum output 200W/1m
Rated current 1500mA
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Weight 48 g
Package weight 61 g
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS
Warranty 5 years



Dimmer SKYDANCE L1(WZ) 230V IP20 0-10V / PUSH / RF

Product code 17929 0-10V / PUSH / RF dimmable

Brand SKYDANCE
Supply voltage 230V
Dimmable 0-10V / PUSH / RF
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Weight 48 g
Package weight 60 g
Casing material plastic
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RED
Warranty 5 years



The L1(WZ) dimmer allows you to control the lighting by adjusting its brightness and turning it on/off. This can be done through the Tuya app on your smartphone, or it can be controlled with the Philips HUE system or voice commands (Amazon Alexa, Google Assistant, Tmall Genie, Xiaodu). The dimmer supports two different outputs (0-10V or 1-10V), which can be selected using a simple switch. It allows smooth brightness adjustment without flickering.

Regulator SKYDANCE PK1 RF2.4G battery powered IP20 RF

Product code 15719 RF dimmable

Brand SKYDANCE
Dimmable RF
Protection class IP20
Height 23.0mm
Width 86.0mm
Length 86.0mm
In package 1pc
Work environment indoor use
Operation temperature -30~55°C
Battery CR2032
Certificates CE
Warranty 5 years



Dimmer SKYDANCE S1-B RF/ PUSH 230V IP20 TRIAC / PUSH / RF

Product code 15734 TRIAC / PUSH / RF dimmable

Brand SKYDANCE
Supply voltage 230V
Dimmable TRIAC / PUSH / RF
Maximum output 200W/1m
Rated current 1500mA
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Weight 48 g
Package weight 61 g
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS
Warranty 5 years



Dimmer SKYDANCE S1-B(WT) Wifi/RF/ PUSH 230V IP20 TRIAC / PUSH / RF

Product code 17763 TRIAC / PUSH / RF dimmable

Brand SKYDANCE
Supply voltage 230V
Dimmable TRIAC / PUSH / RF
Maximum output 200W/1m
Rated current 1500mA
Protection class IP20
Height 40.0mm
Width 60.0mm
Length 60.0mm
Package weight 61 g
In box 100pcs
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS
Warranty 5 years

Wifi + RF Push dimmer, 1-channel output for single-color dimmable LED lamps. Connectable to the Tuya smart app.



Dimmer SKYDANCE S1-B(WZ) RF/ PUSH/ZIGBEE 230V IP20 TRIAC / PUSH / RF

Product code 16434 **TRIAC / PUSH / RF dimmable**

Brand SKYDANCE
Supply voltage 230V
Dimmable TRIAC / PUSH / RF
Maximum output 200W/1m
Rated current 1500mA
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Weight 48 g
Package weight 61 g
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS
Warranty 5 years



Dimmer SKYDANCE S1-L 100-240V IP20 0-10V / RF

Product code 20123 **0-10V / RF dimmable**

Brand SKYDANCE
Supply voltage 100-240V
Dimmable 0-10V / RF
Rated current 2000mA
Protection class IP20
Height 27.0mm
Width 45.0mm
Length 175.0mm
Casing material plastic
Operation temperature -20~55°C
Certificates CE, EMC, LVD, RED
Warranty 5 years



Dimmer SKYDANCE SS-A (2 Switch → RF Converter) 230V IP20 RF

Product code 19978 RF dimmable

Brand SKYDANCE
Supply voltage 230V
Dimmable RF
Rated current 10mA
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Weight 62 g
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS
Warranty 5 years



The SS-A is a smart AC power supply (100–240 VAC) with a 2-switch input RF signal converter, allowing traditional switches to control smart LED lighting systems. This device converts switch signals into a 2.4 GHz radio frequency control signal, which can be used to control one or two zones via RF controllers or dimmers.

Dimmer SKYDANCE SS-B(WT) 230V IP20 PUSH / RF

Product code 22025 PUSH / RF dimmable

Brand SKYDANCE
Supply voltage 230V
Dimmable PUSH / RF
Maximum output 360W/1m
Rated current 1500mA
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Package weight 51 g
Casing material plastic
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS
Warranty 5 years



Dimmer SKYDANCE V1-K 12-48V IP20 RF

Product code 17849 RF dimmable

Brand SKYDANCE
Supply voltage 12-48V
Dimmable RF
Output voltage 12-48V
Rated current 20000mA
Protection class IP20
Height 38.0mm
Width 75.0mm
Length 107.0mm
Weight 165 g
In package 1pc
Work environment indoor use
Operation temperature -30° - +55°C
Certificates CE, EMC
Warranty 5 years



Create ambiance and perfect lighting in your space with a LED dimmer that offers various features and an excellent user experience! The dimmer features a rotary knob allowing you to dim the light beam from 0-100%. Dimming is smooth, without flickering. Light up your world just the way you want it!

Dimmer SKYDANCE V1-KS 12-48V IP20 RF

Product code 17297 RF dimmable

Brand SKYDANCE
Supply voltage 12-48V
Dimmable RF
Output voltage 12-48V
Rated current 8000mA
Protection class IP20
Height 32.0mm
Width 55.0mm
Length 66.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -20 ~55°C
Certificates CE, EMC
Warranty 5 years



Create ambiance and perfect lighting in your space with a LED dimmer that offers various features and an excellent user experience! The dimmer features a rotary knob allowing you to dim the light beam from 0-100%. Dimming is smooth, without flickering. Light up your world just the way you want it!

Dimmer SKYDANCE V4-S RF/ PUSH 12-24V IP20 PUSH / RF

Product code 17960 PUSH / RF dimmable

Brand SKYDANCE
Supply voltage 12-24V
Dimmable PUSH / RF
Maximum output 288W/1m
Rated current 12000mA
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Work environment indoor use
Operation temperature -30℃~55℃°C
Certificates CE, RoHS
Warranty 5 years



A versatile and convenient LED controller suitable for single-color, dual-color, RGB, and RGBW lighting. Compatible with various remote controls, it allows smooth dimming and dynamic lighting modes. The device supports signal transmission to other controllers and synchronizes multiple lighting systems. It can easily connect to an external switch for on/off control and brightness adjustment. Designed for easy installation in standard wall boxes, it offers a practical and reliable lighting solution.

Dimmer THPG Bakelite 3-100 W black

Product code 22662

Brand THPG
Diameter 70.0mm
Casing colour black
Casing material bakelite
Work environment indoor use

Universal dimmer for the switch system Bakelite. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-220 W or 3-100 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Bakelite.



Dimmer THPG Bakelite 3-100 WPRO LED black

Product code 22663

Brand THPG
Diameter 70.0mm
Casing colour black
Casing material bakelite
Work environment indoor use

Universal dimmer for the switch system Bakelite. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-350 W or 3-130 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Bakelite.



© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

Dimmer THPG Bakelite 3-35 W black

Product code 22486

Brand THPG
Diameter 70.0mm
Casing colour black
Casing material bakelite
Work environment indoor use

- Central insert and dimmer head made of porcelain - AC 230V, 50Hz - suitable for LED lamps, incandescent, HV and LV halogen lamps with magnetic transformer - 7-110 W/VA output. 3-35 W LED power - Rotary dimmer with pressure switch and soft grid - Optimisation option for flicker-free dimming of LED lamps - No standby consumption thanks to genuine on/off switch Short-circuit/overload protection thanks to fine-wire fuse - Overheating protection thanks to thermal fuse



Dimmer THPG Duroplast 3-100W 7-220W/VA white

Product code 22667

Brand THPG
Diameter 70.0mm
Casing colour white
Casing material porcelain
Work environment indoor use

Universal dimmer for the switch system Duroplast. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-220 W or 3-100 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Duroplast.



© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

Dimmer THPG Duroplast 3-130W 7-350 W/VA white



Product code 22668

Brand THPG
Diameter 70.0mm
Casing colour white
Casing material porcelain
Work environment indoor use

Universal dimmer for the switch system Duroplast. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-350 W or 3-130 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Duroplast.

Dimmer THPG Duroplast 3-35W 7-110W/VA white



Product code 22666

Brand THPG
Diameter 70.0mm
Casing colour white
Casing material porcelain
Work environment indoor use

Dimmer for the switch system Duroplast. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with a power of 7-110 W or 3-35 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of Duroplast.

© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

Dimmer THPG Porcelain 3-35 W 7-110 W/VA white

Product code 22513

Brand THPG
Diameter 70.0mm
Casing colour white
Casing material porcelain
Work environment indoor use



Rotary dimmer for the switch system Porcelain white. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with a power of 7-110 W or 3-35 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of transparent glazed porcelain. - Central insert and dimmer head made of porcelain - AC 230V, 50Hz - suitable for LED lamps, incandescent, HV and LV halogen lamps with magnetic transformer - 7-110 W/VA output. 3-35 W LED power - Rotary dimmer with pressure switch and soft grid - Optimisation option for flicker-free dimming of LED lamps - No standby consumption thanks to genuine on/off switch Short-circuit/overload protection thanks to fine-wire fuse - Overheating protection thanks to thermal fuse

Dimmer THPG Porcelain 3-130W 7-350W/VA white

Product code 22515

Brand THPG
Diameter 70.0mm
Casing colour white
Casing material porcelain
Work environment indoor use

Universal dimmer for the switch system Porcelain white. For flicker-free dimming of LED, incandescent, HV and LV halogen lamps with an output of 7-350 W or 3-130 W (LED). Thanks to the real on/off switch, there is no standby consumption. The central insert and push-button are made of transparent glazed porcelain. - AC 230V, 50Hz - Central insert and dimmer head made of porcelain - Phase control or trailing edge phase control selectable - Suitable for LED lamps, incandescent, HV and LV halogen lamps - 7-350 W/VA output. 3-130 W LED power - Rotary dimmer with pressure switch and soft grid - Optimisation option for flicker-free dimming of LED lamps - No standby consumption thanks to genuine on/off switch - Short-circuit/overload protection thanks to fine-wire fuse - Overheating protection thanks to thermal fuse



Dimmer THPG Portselan 3-100W 7-200W/VA white

Product code 22485

Brand THPG
Diameter 70.0mm
Casing colour white
Casing material porcelain
Work environment indoor use



© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee