

Dimmer for led strip 12-24V 96-192W

Product code 14441

Supply voltage 12-24V
Output 96-192W
Height 12.0mm
Width 45.0mm
Length 45.0mm
Weight 23g
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature 0o C~40o C°C
Certificates CE, RoHS
Warranty 2 years



Dimmer LTECH EBOX-TD 230V

Product code 15120

Brand LTECH
Supply voltage 230V
Maximum output 200W/1m
Rated current 1200mA
Height 21.0mm
Width 55.0mm
Length 55.0mm
Weight 70g
Work environment indoor use
Operation temperature -30°C~55°C°C
Certificates CE, RoHS



Dimmer SKYDANCE DA-M (RF to DALI) 24V IP20

Product code 17471 RF dimmable

Brand [SKYDANCE](#)

Supply voltage 24V

Dimmable RF

Rated current 15mA

Protection class IP20

Height 27.0mm

Width 52.0mm

Length 52.0mm

In package 1pc

In box 100pcs

Work environment indoor use

Operation temperature -20 - +50°C

Certificates CE, RoHS

Warranty 5 years



Through this device, you can control DALI devices with the SKYDANCE remote.

Adjuster SKYDANCE KL 0-10V + RF2.4G 100-240V IP20

Product code 15715 0-10V / RF dimmable

Brand [SKYDANCE](#)

Supply voltage 100-240V

Dimmable 0-10V / RF

Protection class IP20

Weight 100g

Package weight 160g

Work environment indoor use

Certificates CE

Warranty 5 years



Adjuster SKYDANCE KS (TRIAC) white 100-240V IP20

Product code 15483 TRIAC dimmable

Brand [SKYDANCE](#)

Supply voltage 100-240V

Dimmable TRIAC

Maximum output 240W/1m

Rated current 1000mA

Protection class IP20

Height 48.0mm

Width 86.0mm

Length 86.0mm


Installation opening diameter 51mm

Casing colour white

Work environment indoor use

Certificates CE

Warranty 5 years

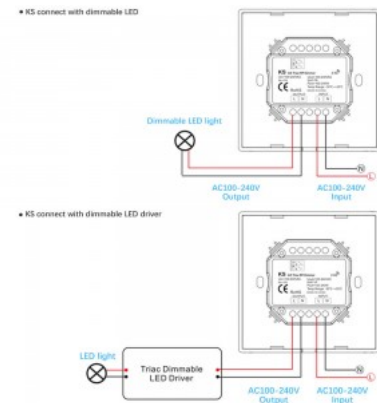

Dimmer SKYDANCE L1 0/1-10V (RF/ PUSH) 230V IP20

Product code 16651 0-10V / PUSH / RF dimmable

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable 0-10V / PUSH / RF

Maximum output 200W/1m

Rated current 1500mA

Protection class IP20

Height 26.0mm

Width 52.0mm

Length 52.0mm

Weight 48g

Package weight 61g

Work environment indoor use

Operation temperature -30°C~55°C

Certificates CE, RoHS

Warranty 5 years



Dimmer SKYDANCE L1(WZ) (0/1-10V/RF/PUSH) 230V IP20

Product code 17929 0-10V / PUSH / RF dimmable

Brand [SKYDANCE](#)
 Supply voltage 230V
 Dimmable 0-10V / PUSH / RF
 Protection class IP20
 Height 26.0mm
 Width 52.0mm
 Length 52.0mm
 Weight 48g
 Package weight 60g
 Casing material plastic
 Work environment indoor use
 Operation temperature -30°C~55°C
 Certificates CE, RED
 Warranty 5 years



The L1(WZ) dimmer allows you to control the lighting by adjusting its brightness and turning it on/off. This can be done through the Tuya app on your smartphone, or it can be controlled with the Philips HUE system or voice commands (Amazon Alexa, Google Assistant, Tmall Genie, Xiaodu). The dimmer supports two different outputs (0-10V or 1-10V), which can be selected using a simple switch. It allows smooth brightness adjustment without flickering.

Adjuster SKYDANCE PK1 RF2.4G (battery powered) IP20

Product code 15719 RF dimmable

Brand [SKYDANCE](#)
 Dimmable RF
 Protection class IP20
 Height 23.0mm
 Width 86.0mm
 Length 86.0mm
 In package 1pc
 Work environment indoor use
 Operation temperature -30~55°C
 Battery CR2032
 Certificates CE
 Warranty 5 years



Dimmer SKYDANCE S1-B (RF/ PUSH) 230V IP20

**Product code 15734 TRIAC / PUSH /
RF dimmable**

Brand [SKYDANCE](#)
Supply voltage 230V
Dimmable TRIAC / PUSH / RF
Maximum output 200W/1m
Rated current 1500mA
Protection class IP20
Height 26.0mm
Width 52.0mm
Length 52.0mm
Weight 48g
Package weight 61g
Work environment indoor use
Operation temperature -30°C~55°C
Certificates CE, RoHS
Warranty 5 years



Dimmer SKYDANCE S1-B(WT) (Wifi/RF/ PUSH) 230V IP20

**Product code 17763 TRIAC / PUSH /
RF dimmable**

Brand [SKYDANCE](#)
Supply voltage 230V
Dimmable TRIAC / PUSH / RF
Maximum output 200W/1m
Rated current 1500mA
Protection class IP20
Height 40.0mm
Width 60.0mm
Length 60.0mm
Package weight 61g
In box 100pcs
Work environment indoor use
Operation temperature -30°C~55°C
Certificates CE, RoHS
Warranty 5 years



Wifi + RF Push dimmer, 1-channel
output for single-color dimmable LED
lamps. Connectable to the Tuya smart
app.

Dimmer SKYDANCE S1-B(WZ) (RF/ PUSH/ZIGBEE) 230V IP20

Product code 16434 TRIAC / PUSH / RF dimmable

Brand [SKYDANCE](#)
 Supply voltage 230V
 Dimmable TRIAC / PUSH / RF
 Maximum output 200W/1m
 Rated current 1500mA
 Protection class IP20
 Height 26.0mm
 Width 52.0mm
 Length 52.0mm
 Weight 48g
 Package weight 61g
 Work environment indoor use
 Operation temperature -30°C~55°C
 Certificates CE, RoHS
 Warranty 5 years



Dimmer SKYDANCE V1-K 12-48V IP20

Product code 17849 RF dimmable

Brand [SKYDANCE](#)
 Supply voltage 12-48V
 Dimmable RF
 Output voltage 12-48V
 Rated current 20000mA
 Protection class IP20
 Height 38.0mm
 Width 75.0mm
 Length 107.0mm
 Weight 165g
 In package 1pc
 Work environment indoor use
 Operation temperature -30° - +55°C
 Certificates CE, EMC
 Warranty 5 years



Create ambiance and perfect lighting in your space with a LED dimmer that offers various features and an excellent user experience! The dimmer features a rotary knob allowing you to dim the light beam from 0-100%. Dimming is smooth, without flickering. Light up your world just the way you want it!

Dimmer SKYDANCE V1-KS 12-48V IP20

Product code 17297 RF dimmable

Brand [SKYDANCE](#)

Supply voltage 12-48V

Dimmable RF

Output voltage 12-48V

Rated current 8000mA

Protection class IP20

Height 32.0mm

Width 55.0mm

Length 66.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -20 ~55°C

Certificates CE, EMC

Warranty 5 years



Create ambiance and perfect lighting in your space with a LED dimmer that offers various features and an excellent user experience! The dimmer features a rotary knob allowing you to dim the light beam from 0-100%. Dimming is smooth, without flickering. Light up your world just the way you want it!

Dimmer Star Trading 399-21 white 230V 200W IP20

Product code 15193

Brand [Star Trading](#)

Supply voltage 230V

Output 200W

Protection class IP20

Height 108.0mm

Width 55.0mm

Length 55.0mm

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature +5 ~ +35°C

Warranty 2 years

