
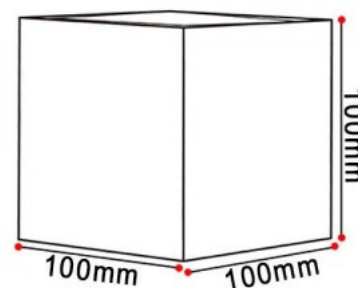


Facade luminaire A100 black 230V 12W 840lm IP65 830

Product code 15037

Supply voltage 230V
Output 12W
Luminous flux 840lumens
Luminaire's efficiency lm79 70W
Correlated colour temperature warm white 3000K
Cri 80
Protection class IP65
Lifespan 25000h
Height 100.0mm
Width 100.0mm
Weight 500g
Casing colour black
Casing material aluminum
Polishing matt
Work environment outdoor use
Certificates CE, RoHS

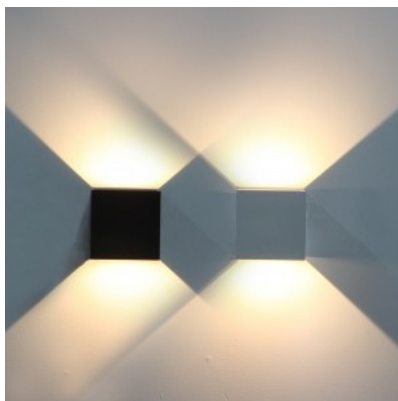

An impressive facade light, with beams of light illuminating both sides. A square-shaped wall light is well-suited for illuminating the walls of private houses with mood lighting in the garden.

Facade luminaire AS200 white 230V 7W 560lm IP44 830

Product code 15182

Supply voltage 230V
Output 7W
Luminous flux 560lumens
Luminaire's efficiency lm79 80W
Correlated colour temperature warm white 3000K
Cri 80
Protection class IP44
Lifespan 25000h
Height 80.0mm
Width 100.0mm
Length 200.0mm
In package 1pc
Casing colour white
Casing material aluminum
Work environment outdoor use
Certificates CE, RoHS



Facade luminaire KYOTO/W single socket black 230V E27 IP44

Product code 15733

Supply voltage 230V
Maximum output 40W/1m
Socket E27
Protection class IP44
Height 186.0mm
Length 115.0mm
Diameter 84.0mm
Casing colour black
Casing material metal
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire KYOTO/W two sockets black 230V E27 IP44

Product code 15732

Supply voltage 230V
Maximum output 80W/1m
Socket E27
Protection class IP44
Height 350.0mm
Length 115.0mm
Diameter 84.0mm
In package 1pc
Casing colour black
Casing material metal
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PORTO/R single socket black 230V GU10 IP44

Product code 15729

Supply voltage 230V
Maximum output 35W/1m
Socket GU10
Protection class IP44
Height 80.0mm
Width 68.0mm
Length 92.0mm
In package 1pc
Casing colour black
Casing material aluminum
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PORTO/R single socket white 230V GU10 IP44

Product code 16823

Supply voltage 230V
Maximum output 35W/1m
Socket GU10
Protection class IP44
Height 80.0mm
Width 68.0mm
Length 92.0mm
In package 1pc
Casing colour white
Casing material aluminum
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PORTO/R two sockets black 230V GU10 IP44

Product code 15728

Supply voltage 230V
Maximum output 70W/1m
Socket GU10
Protection class IP44
Height 150.0mm
Width 68.0mm
Length 92.0mm
In package 1pc
Casing colour black
Casing material aluminum
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PORTO/R two sockets white 230V GU10 IP44

Product code 16849

Supply voltage 230V
Maximum output 70W/1m
Socket GU10
Protection class IP44
Height 150.0mm
Width 68.0mm
Length 92.0mm
In package 1pc
Casing colour white
Casing material aluminum
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PORTO/SQ single socket black 230V GU10 IP44

Product code 16555

Supply voltage 230V
Maximum output 35W/1m
Socket GU10
Protection class IP44
Height 80.0mm
Width 68.0mm
Length 92.0mm
In package 1pc
Casing colour black
Casing material aluminum
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PORTO/SQ two sockets black 230V GU10 IP44

Product code 16556

Supply voltage 230V
Maximum output 70W/1m
Socket GU10
Protection class IP44
Height 150.0mm
Width 68.0mm
Length 92.0mm
In package 1pc
Casing colour black
Casing material aluminum
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PORTO/SQ two sockets white 230V GU10 IP44

Product code 16795


Supply voltage 230V
Maximum output 70W/1m
Socket GU10
Protection class IP44
Height 150.0mm
Width 68.0mm
Length 92.0mm
Casing colour white
Casing material aluminum
Work environment indoor / outdoor
use
Certificates CE, RoHS
Warranty 1 years



Facade luminaire PROLUMEN WL07 black 230V 8W 600lm 120° IP65 830

Product code 14552

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 8W
Luminous flux 600lumens
Luminaire's efficiency lm79 75W
Correlated colour temperature warm
white 3000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 2
Protection class IP65
Lifespan 50000h
Height 59.0mm
Width 140.0mm
Length 170.0mm
In package 1pc
In box 24pcs
Casing colour black
Casing material aluminum + plastic
Work environment outdoor use
Certificates CE, RoHS
Warranty 5 years

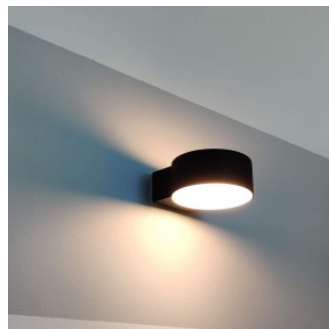

Two-way directional LED luminaire for both outdoor and indoor use. Stylish and functional LED lamp suitable for environments such as parks, hotels, corridors, and living rooms. Easily installable on a wall or any desired surface. The light beam falls through a hollow aperture on both sides, adding warm white light to the space.

Facade luminaire PROLUMEN WL105 black 230V 8W 500lm 90° IP65 830

Product code 16794 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 8W

Luminous flux 500lumens

Luminaire's efficiency lm79 63W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 50.0mm

Diameter 160.0mm

Package weight 611g

In package 1pc

In box 18pcs

Casing colour black

Casing material aluminum + plastic


Impact resistance IK06

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years

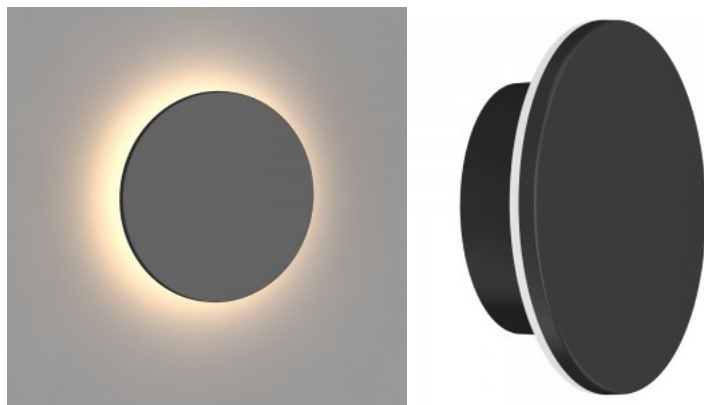

An impressive facade light, with beams of light illuminating both sides. A square-shaped wall light is well-suited for illuminating the walls of private houses with mood lighting in the garden.

Facade luminaire PROLUMEN WL105 black 230V 8W 550lm 90° IP65 940

Product code 16866 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 8W

Luminous flux 550lumens

Luminaire's efficiency lm79 69W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 50.0mm

Diameter 160.0mm

Package weight 611g

In package 1pc

In box 18pcs

Casing colour black

Casing material aluminum + plastic


Impact resistance IK06

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years

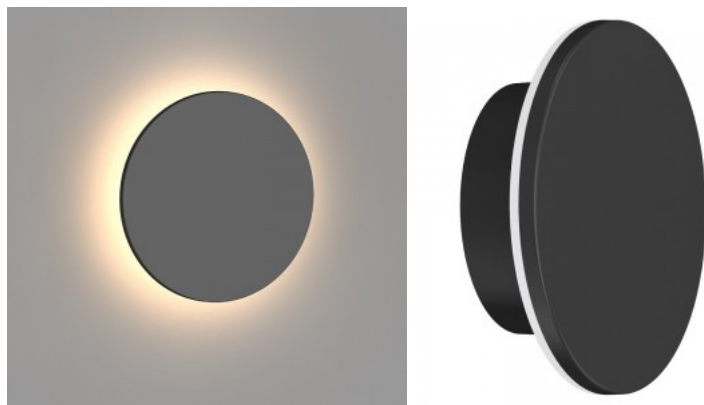

An impressive facade light, with beams of light illuminating both sides. A square-shaped wall light is well-suited for illuminating the walls of private houses with mood lighting in the garden.

Facade luminaire PROLUMEN WL20 black 230V 10W 800lm 110° IP65 930

Product code 15501

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 10W

Luminous flux 800lumens

Luminaire's efficiency lm79 80W

Correlated colour temperature warm white 3000K

Lens angle 110°

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 100.0mm

Width 96.8mm

Length 120.0mm

In package 1pc

In box 18pcs

Casing colour black

Casing material aluminum


Polishing matt

Impact resistance IK05

Work environment outdoor use

Certificates CE

Warranty 5 years

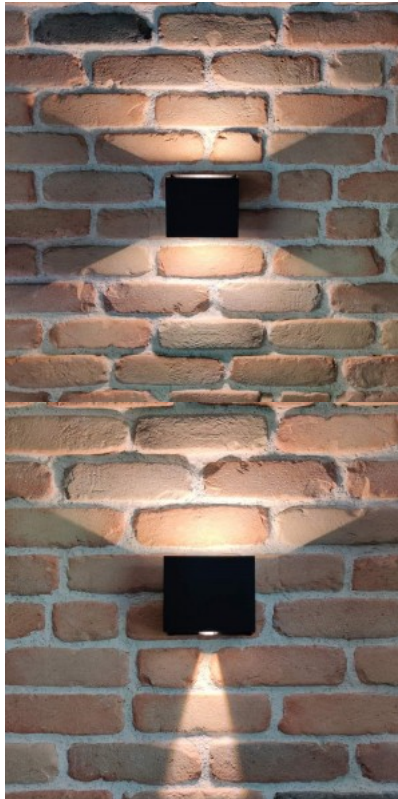

An impressive facade light, with beams of light illuminating both sides. A square-shaped wall light is well-suited for illuminating the walls of private houses with mood lighting in the garden.

Facade luminaire PROLUMEN WL28 black 230V 20W 2200lm 36° IP65 940

Product code 16200

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 20W

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 200.0mm

Diameter 76.0mm

Weight 900g

Package weight 1020g

In box 18pcs

Casing colour black

Casing material aluminum

Polishing matt

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Cylindrical facade light, suitable for any home garden.

Facade luminaire PROLUMEN WL28 black 230V 27W 3200lm 36° IP65 940

Product code 15505

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 27W

Luminous flux 3200lumens

Luminaire's efficiency lm79 119W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 230.0mm

Diameter 100.0mm

Weight 1200g

Package weight 1350g

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Impact resistance IK05

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Cylindrical facade light, suitable for any home garden.

Facade luminaire PROLUMEN WL46 black 230V 10W 530lm 50° IP65 930

Product code 17381

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 10W

Luminous flux 530lumens

Luminaire's efficiency lm79 53W

Correlated colour temperature warm white 3000K

Lens angle 50

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 78.0mm

Width 81.0mm

Length 204.0mm

Weight 5020g

In package 1pc

In box 24pcs

Casing colour black



Casing material aluminum + plastic

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years

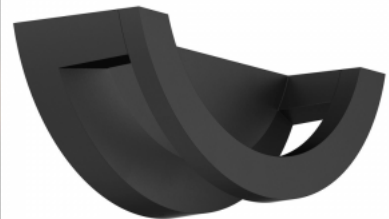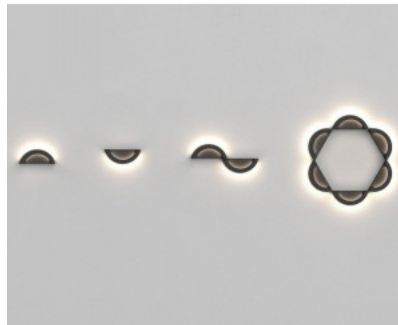

LED wall light with optical structure, allowing your creativity to soar! The luminaire can be installed as an individual wall light to create a charming ambiance or in groups to form various shapes. The light fixture adds warm white (3000K) illumination to the room, and the high CRI ensures the naturalness of colors in illuminated areas. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Facade luminaire PROLUMEN WL57 black 230V 10W 1000lm 90° IP65 830

Product code 16903

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 10W

Luminous flux 1000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 80.0mm

Width 108.0mm

Length 203.0mm

Weight 850g

Package weight 1020g

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Facade luminaire PROLUMEN WL57 black 230V 18W 2000lm 90° IP65 930

Product code 16118

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 18W

Luminous flux 2000lumens

Luminaire's efficiency lm79 111W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 80.0mm

Width 108.0mm

Length 203.0mm

Weight 850g

Package weight 1020g

In package 1pc

In box 6pcs

Casing colour black

Casing material aluminum

Polishing matt

Impact resistance IK06

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Facade luminaire PROLUMEN WL60 black round 230V 5W 130lm 60° IP65 930

Product code 16135

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 5W

Luminous flux 130lumens

Luminaire's efficiency lm79 26W

Correlated colour temperature warm
white 3000K

Lens angle 60

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Llmf tm21 L70B50 @25°C 50.000h

Height 78.0mm

Diameter 135.0mm

Weight 375g

Package weight 490g

In package 1pc

In box 18pcs

Casing colour black

Casing material aluminum + glass

Shape round

Impact resistance IK08

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Facade luminaire PROLUMEN WL60B-8W black 230V 8W 400lm 70° IP65 930

Product code 15958

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 8W

Luminous flux 400lumens

Luminaire's efficiency lm79 50W

Correlated colour temperature warm
white 3000K

Lens angle 70

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 78.0mm

Width 201.0mm

Length 201.0mm

Weight 850g

Package weight 1080g

In box 6pcs

Casing colour black

Casing material aluminum

Polishing matt

Impact resistance IK08

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years



Facade luminaire PROLUMEN WL73 2x25W black square 230V GU10 IP65

Product code 16670

Brand [PROLUMEN](#)

Supply voltage 230V

Maximum output 50W/1m

Socket GU10

Protection class IP65

Lifespan 50000h

Height 67.0mm

Width 95.0mm

Length 165.0mm

Weight 700g

Package weight 750g

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment outdoor use

Certificates CE

Warranty 5 years



Facade luminaire PROLUMEN WL73 black square 230V 16W 1350lm 100° IP65 930

Product code 16393

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 16W

Luminous flux 1350lumens

Luminaire's efficiency lm79 84W

Correlated colour temperature warm
white 3000K

Lens angle 100

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 67.0mm

Width 95.0mm

Length 165.0mm

Weight 760g

Package weight 810g

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment outdoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Facade luminaire PROLUMEN WL73 black square 230V GU10 IP65

Product code 16136

Brand [PROLUMEN](#)

Supply voltage 230V

Maximum output 25W/1m

Socket GU10

Protection class IP65

Lifespan 50000h

Height 67.0mm

Width 95.0mm

Length 165.0mm

Weight 700g

Package weight 750g

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape square

Impact resistance IK06

Work environment outdoor use

Certificates CE

Warranty 5 years



Facade luminaire PROLUMEN WL75 Up-Down black 230V 10W 756lm CRI90 120° IP65 3000K, 4000K, 5700K WW/DW/CW

Product code 17379

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 10W

Luminous flux 756lumens

Luminaire's efficiency lm79 76W

Correlated colour temperature

WW/DW/CW 3000K, 4000K, 5700K

Lens angle 120

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 104.0mm

Width 30.5mm

Length 175.0mm

Weight 570g

In package 1pc

In box 18pcs

Casing colour black

Casing material aluminum

Impact resistance IK08

Work environment outdoor use

Operation temperature -20 ~ 45°C

Certificates CE

Warranty 5 years




Minimalistic LED wall light with light spreading on both sides. Ideal decoration for both indoor corridors and outdoor walls. IP65 protection class ensures that the light is protected against fine dust and splashes. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Facade luminaire PROLUMEN WL75 Up-Down black 230V 10W 954lm CRI90 29x77° IP65 3000K, 4000K, 5700K WW/DW/CW

Product code 17378

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Output 10W
Luminous flux 954lumens
Luminaire's efficiency lm79 95W
Correlated colour temperature
WW/DW/CW 3000K, 4000K, 5700K
Lens angle 29x77
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 90.0mm
Width 30.5mm
Length 175.0mm
Weight 570g
In package 1pc
In box 18pcs
Casing colour black
Casing material aluminum
Impact resistance IK08
Work environment outdoor use
Operation temperature -20 ~ 45°C
Certificates CE
Warranty 5 years

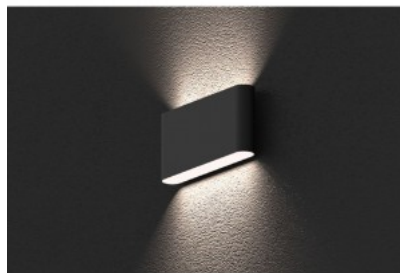

Minimalistic LED wall light with light spreading on both sides. Ideal decoration for both indoor corridors and outdoor walls. IP65 protection class ensures that the light is protected against fine dust and splashes. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Facade luminaire PROLUMEN WL85 up-down light (TRIAC) black 230V 2x7.5W 1700lm CRI90 45° IP65 3000K, 4000K, 5700K WW/DW/CW

Product code 17367 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 2x7.5W
Luminous flux 1700lumens
Correlated colour temperature
WW/DW/CW 3000K, 4000K, 5700K
Lens angle 45
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 179.0mm
Width 95.0mm
Diameter 70.0mm
Weight 520g
In package 1pc
In box 12pcs
Casing colour black
Casing material aluminum
Impact resistance IK06
Work environment outdoor use
Operation temperature -20 ~ 45°C
Certificates CE, RoHS
Warranty 5 years




Stylish LED wall light. The light beam falls in two directions, and the light temperature (3000K/4000K/5700K) can be selected by the user according to preference using the button on the luminaire. Additionally, the luminaire is equipped with TRIAC technology, allowing the light to be dimmed according to preference. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Facade luminaire PROLUMEN WL88 up-down light (TRIAC) black 230V 15W 1050lm CRI90 60x115x40° IP65 3000K, 4000K, 5700K WW/DW/CW

Product code 17376 TRIAC dimmable

Brand [PROLUMEN](#)
 Supply voltage 230V
 Power factor 0.90
 Dimmable TRIAC
 Output 15W
 Luminous flux 1050lumens
 Luminaire's efficiency lm79 70W
 Correlated colour temperature
 WW/DW/CW 3000K, 4000K, 5700K
 Lens angle 60x115x40
 Cri 90
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Height 60.0mm
 Width 100.0mm
 Length 300.0mm
 Weight 710g
 In package 1pc
 In box 12pcs
 Casing colour black
 Casing material aluminum
 Work environment outdoor use
 Operation temperature -20 ~ 45°C
 Certificates CE, RoHS
 Warranty 5 years

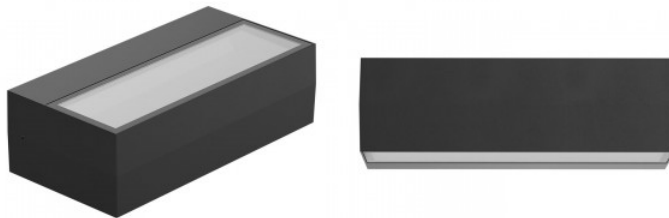

Modern wall light with light beam on both sides. The protection class of the luminaire is determined as IP65, which means it is protected against fine dust and splashes. In addition, the materials of the housing are chosen and prepared to ensure a long lifespan, even in outdoor conditions. The light temperature of the luminaire can be adjusted according to personal preferences. Options include 3000K (warm white), 4000K (daylight), and 5700K (cool white). WL88 is equipped with TRIAC technology, allowing the light to be dimmed and brightened. Additionally, this wall light has a colour rendering index (CRI) of 90, ensuring that the colours under the light remain natural and true. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Facade luminaire PROLUMEN WL90 (TRIAC) black 230V 8W 600lm 360° IP65 930

Product code 17373 TRIAC dimmable

Brand [PROLUMEN](#)
Supply voltage 230V
Power factor 0.90
Dimmable TRIAC
Output 8W
Luminous flux 600lumens
Luminaire's efficiency lm79 75W
Correlated colour temperature warm
white 3000K
Lens angle 360
Cri 90
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 230.0mm
Width 142.0mm
Length 100.0mm
In package 1pc
In box 12pcs
Casing colour black
Casing material aluminum + plastic
Polishing matt
Impact resistance IK08
Work environment outdoor use
Operation temperature -20 ~ 45°C
Warranty 5 years



Stylish wall light for indoor and outdoor use. IP65 protection class means that the luminaire is protected against dust ingress and water jets and can be used outdoors. All WL90 models feature high-quality LED chips (CRI90), ensuring that the luminaire's light beam maintains color accuracy in the room. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Facade luminaire PROLUMEN WL91 (TRIAC) black 230V 8W 750lm 45° IP65 930

Product code 17380 TRIAC dimmable

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 8W

Luminous flux 750lumens

Luminaire's efficiency lm79 94W

Correlated colour temperature warm white 3000K

Lens angle 45

Cri 90

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 202.0mm

Width 95.0mm

Length 121.0mm

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Impact resistance IK06


Work environment indoor / outdoor use

Operation temperature -20 ~ 45°C

Certificates SAA, RoHS, CE

Warranty 5 years

Modern wall light for indoor and outdoor use. The IP65 protection class means that the luminaire is protected against fine dust and water splashes and can be used in outdoor conditions. The light adds warm white illumination to the space, and thanks to the TRIAC technology, it is possible to adjust the brightness of the light beam. The WL91 model's LED chips have high-quality color rendering (CRI90), ensuring that the light does not distort the true colors in the room. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

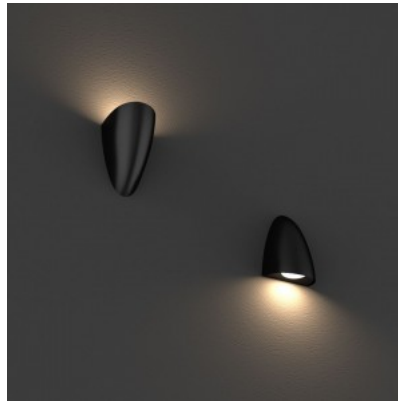

Facade luminaire QUERK 3 GU10 with two sockets black 230V IP54

Product code 17524

Supply voltage 230V
Maximum output 70W/1m
Protection class IP54
Height 260.0mm
Diameter 65.0mm
Weight 480g
In package 1pc
In box 10pcs
Casing colour black
Casing material aluminum + glass
Impact resistance IK06
Work environment indoor / outdoor use
Operation temperature -40 - +60°C
Certificates CE



A modern [facade luminaire](#) with two GU10 sockets.

LED flushed wall light SL42 silvery round 230V 3W 250lm IP44 830

Product code 14640

Supply voltage 230V
Output 3W
Luminous flux 250lumens
Luminaire's efficiency lm79 83W
Correlated colour temperature warm white 3000K
Cri 80
Protection class IP44
Lifespan 35000h
In package 1pc
Casing colour silvery
Casing material aluminum
Shape round
Work environment indoor use
Certificates CE, RoHS
Warranty 2 years

