

## LED floodlight PROLUMEN Highlander 230V 1500W 240000lm CRI70 IP65

**Product code 14484**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Output 1500W  
Luminous flux 240000lumens  
Luminaire's efficiency 160W  
Cri 70  
Protection class IP65  
Lifespan 50000h  
No. of switches 100000pcs  
Power supply [MEAN WELL](#)  
Certificates CE, RoHS, F, D  
Warranty 5 years



## LED street light PROLUMEN Shoebox 230V 300W 39000lm CRI70 IP65 4000K pure white

**Product code 14593**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Output 300W  
Luminous flux 39000lumens  
Luminaire's efficiency 130W  
Correlated colour temperature (cct)  
pure white 4000K  
Cri 70  
Protection class IP65  
Lifespan 50000h  
Weight 10000g  
Casing material aluminum  
Power supply [MEAN WELL](#)  
Work environment outdoor use  
Operation temperature -30° - +50°C  
Certificates CE, ROHS, ENEC  
Warranty 5 years




LM80

## LED floodlight PROLUMEN X Stadium F6 black 230V 600W 78084lm CRI80 5000K pure white

**Product code 14647**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Output 600W  
Luminous flux 78084lumens  
Luminaire's efficiency 130W  
Correlated colour temperature (cct)  
pure white 5000K  
Source of light [NICHIA LED](#)  
Cri 80  
Height 401.0mm  
Width 598.0mm  
Length 564.0mm  
Casing colour black  
Casing material Die-cast aluminum +  
Tempered Glass  
Power supply [MEAN WELL](#)  
Work environment outdoor use  
Certificates CE, ROHS, ENEC  
Warranty 5 years

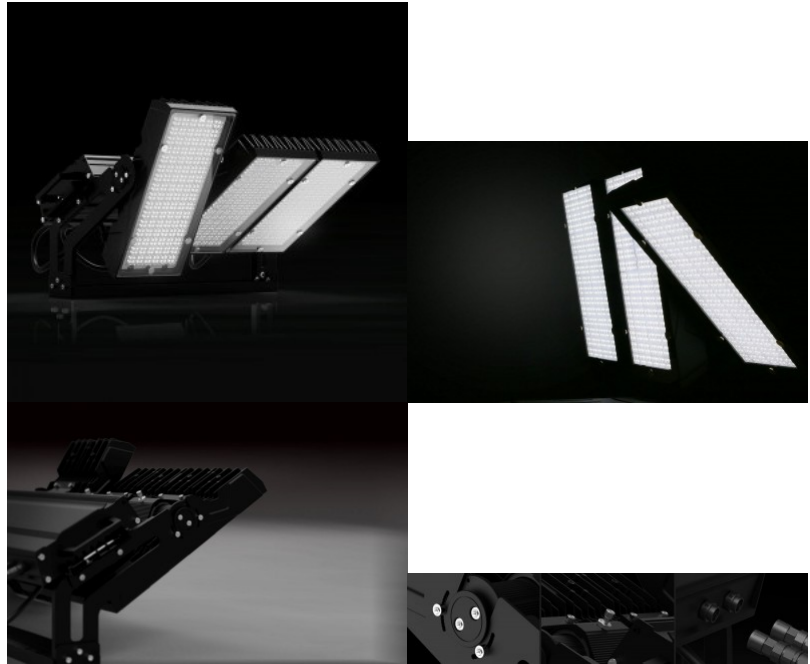

Beam angel for option: 15°, 65°x120°,  
30°, 30°x60°, 65°x120°

## LED floodlight PROLUMEN X Stadium F6 black 230V 900W 117000lm CRI80 5000K pure white

**Product code 14458**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Output 900W  
Luminous flux 117000lumens  
Luminaire's efficiency 130W  
Correlated colour temperature (cct)  
pure white 5000K  
Source of light [NICHIA LED](#)  
Cri 80  
Height 401.0mm  
Width 598.0mm  
Length 792.0mm  
Casing colour black  
Casing material Die-cast aluminum +  
Tempered Glass  
Work environment outdoor use  
Certificates CE, ROHS, ENEC  
Warranty 5 years



Beam angel for option: 15°, 65°x120°,  
30°, 30°x60°, 65°x120°

