

LED driver 1750mA 20-34V LPF-60-1750 230V 60W IP67

Product code 13291

Supply voltage 230V
Output voltage 20-34V
Output 60W
Maximum output 60W/1m
Rated current 1750mA
Protection class IP67
Height 32.0mm
Width 42.0mm
Length 163.0mm
Weight 399 g
Package weight 426 g
Casing material plastic
Work environment indoor use
Certificates CE, RoHS



LED driver 3000mA 30-42V LW-FL100W silver 230V 100W IP67

Product code 14107

Supply voltage 230V
Output voltage 30-42V
Output 100W
Maximum output 100W/1m
Rated current 3000mA
Protection class IP67
Height 45.0mm
Width 70.0mm
Length 164.0mm
Casing colour silver
Casing material aluminium
Work environment outdoor use
Warranty 2 years



LED driver 350mA 66-110V LPF-35-350 230V 35W IP67

Product code 12909

Supply voltage 230V
Output voltage 66-110V
Output 35W
Maximum output 35W/1m
Rated current 350mA
Protection class IP67
Height 28.0mm
Width 41.0mm
Length 147.0mm
Weight 227 g
Package weight 250 g
Casing material plastic
Work environment outdoor use
Certificates CE, RoHS



LED driver 950mA 25-40v PAN-TRAND 40W IP20 TRIAC

Product code 15167 TRIAC dimmable

Dimmable TRIAC
Output 40W
Maximum output 40W/1m
Protection class IP20



LED driver BOKE 1200mA 28-42V 230V 50W IP20

Product code 17161

Brand [BOKE](#)
Supply voltage 230V
Output voltage 28-42V
Output 50W
Maximum output 50W/1m
Rated current 1200mA
Protection class IP20
Lifespan 100000h
Height 29.0mm
Width 45.0mm
Length 135.0mm
Casing material plastic
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -20 - 60°C
Warranty 5 years



LED driver BOKE 200-550mA 50-216V 230V 80W IP20

Product code 17817

Brand [BOKE](#)
Supply voltage 230V
Power factor 0.95
Output voltage 216V
Output 80W
Maximum output 80W/1m
Rated current 550mA
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 30.0mm
Length 210.0mm
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -20° - +60°C
Certificates CE, ENEC, UKCA, RCM,
CCC, EL, RoHS
Warranty 5 years



LED driver BOKE 300-1050 mA 6-54V 230V 42W IP20 DALI / PUSH

Product code 22835 DALI / PUSH dimmable

Brand [BOKE](#)
Supply voltage 230V
Power factor 0.98
Dimmable DALI / PUSH
Output voltage 6-54V
Output 42W
Maximum output 42W/1m
Rated current 1050mA
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 43.5mm
Length 98.0mm
Casing material plastic
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -25°C-60°C
Warranty 5 years



LED driver BOKE 300-500mA 28-42V 230V 21W IP20

Product code 17159

Brand [BOKE](#)
Supply voltage 230V
Output voltage 28-42V
Output 21W
Maximum output 21W/1m
Rated current 500mA
Protection class IP20
Lifespan 100000h
Height 28.0mm
Width 45.0mm
Length 117.0mm
Casing material plastic
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -20 - 60°C
Warranty 5 years



LED driver BOKE 450-1100 mA 6-42V , 230V 42W IP20 DALI / PUSH

Product code 22304 DALI / PUSH dimmable

Brand [BOKE](#)
Supply voltage 230V
Dimmable DALI / PUSH
Output voltage 6-42V
Output 42W
Maximum output 42W/1m
Rated current 1100mA
Protection class IP20
Lifespan 50000h
Weight 170 g
Casing material plastic
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -20 - +45°C
Warranty 5 years



LED driver BOKE 500-1100mA 28-42V 230V 42W IP20

Product code 17160

Brand [BOKE](#)
Supply voltage 230V
Output voltage 28-42V
Output 42W
Maximum output 42W/1m
Rated current 1100mA
Protection class IP20
Lifespan 100000h
Height 28.0mm
Width 45.0mm
Length 117.0mm
Casing material plastic
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -20 - 60°C
Warranty 5 years



LED driver BOKE 700-1050mA 24-42V 230V 40W IP20 TRIAC

Product code 22332 TRIAC dimmable

Brand [BOKE](#)
 Supply voltage 230V
 Dimmable TRIAC
 Output voltage 24-42V
 Output 40W
 Maximum output 40W/1m
 Rated current 1200mA
 Protection class IP20
 Lifespan 100000h
 Height 29.0mm
 Width 44.0mm
 Length 137.5mm
 In box 32pcs
 Casing material plastic
 Power supply [BOKE](#)
 Work environment indoor use
 Operation temperature -20 - 60°C
 Warranty 5 years



Power supply Deko-Light 350mA 2-52 V/DC 0.7-18.0 W 50 / 60 Hz black 0.7-18.0W IP20

Product code 20192

Brand [Deko-Light](#)
 Output 0.7-18.0W
 Maximum output 18W/1m
 Protection class IP20
 Height 21.0mm
 Width 115.0mm
 Length 45.0mm
 Casing colour black
 Casing material plastic
 Work environment indoor use
 Certificates CE, RoHS



Power supply Deko-Light 500 mA(CV,DC)-IP,CV,V6-40-24 black 24V 40W IP67 No dim

**Product code 20082 No dim
dimmable**

Brand [Deko-Light](#)
Supply voltage 24V
Dimmable No dim
Output 40W
Maximum output 40W/1m
Protection class IP67
Lifespan 50000h
Height 30.5mm
Width 58.0mm
Length 176.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor / outdoor
use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years



Robust housing, flicker-free, secured
against short circuits and
overloads, overheating protection

Power supply Deko-Light Basic 500mA CC50018/18 W black 0.7-18.0W IP20

Product code 20198

Brand [Deko-Light](#)
Output 0.7-18.0W
Maximum output 18W/1m
Protection class IP20
Height 21.0mm
Width 115.0mm
Length 45.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS



Power supply Deko-Light Basic 700mA 2-26 V/DC 1.4-18.0 W black 0.7-18.0W IP20

Product code 20197

Brand [Deko-Light](#)

Output 0.7-18.0W

Protection class IP20

Height 21.0mm

Width 115.0mm

Length 45.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



Power supply Deko-Light CC, DC dim - OCTO, DIM, CC, RSM-12-350T black 12W IP65

Product code 20988

Brand [Deko-Light](#)

Output 12W

Protection class IP65

Lifespan 30000h

Height 24.0mm

Width 48.0mm

Length 50.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature to 50 °C

Certificates CE, RoHS



Can be dimmed using leading-edge/trailing-edge phase dimmers
Flicker-free Secured against short circuits and overloads Overheating protection

Power supply Deko-Light Flat CC,DC UT350mA 0,7-6 W black 0.7-18.0W IP20

Product code 20193

Brand [Deko-Light](#)

Output 0.7-18.0W

Maximum output 18W/1m

Protection class IP20

Height 11.0mm

Width 98.0mm

Length 46.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



Power supply Deko-Light Mini 0-170mA 100-240 V/AC 24 V/4 W black IP65

Product code 20194

Brand [Deko-Light](#)

Protection class IP65

Lifespan 30000h

Height 21.0mm

Width 53.0mm

Length 27.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



Power supply Deko-Light Mini 220-240 V/AC 500mA (CV,DC)- OCTO,CV black 12W IP65

Product code 20081

Brand [Deko-Light](#)

Output 12W

Maximum output 12W/1m

Protection class IP65

Lifespan 50000h

Height 24.0mm

Width 48.0mm

Length 50.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor / outdoor
use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



Flicker-free, secured against short
circuits and overloads.

Power supply Deko-Light Power supply unit (CV, DC) - BASIC, CV, Q8H-24-75 W black IP20 No dim

**Product code 20813 No dim
dimmable**

Brand [Deko-Light](#)

Dimmable No dim

Protection class IP20

Lifespan 50000h

Height 32.0mm

Width 184.0mm

Length 61.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor / outdoor
use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



Power supply Deko-Light Power supply unit (CV, DC) - IP, CV, V6-75-24, 100-240V, 75W black 75W IP20 No dim

Product code 20814 No dim dimmable

Brand [Deko-Light](#)

Dimmable No dim

Output 75W

Protection class IP20

Lifespan 50000h

Height 39.0mm

Width 186.0mm

Length 64.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor / outdoor use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



Robust housing Flicker-free Secured against short circuits and overloads Overheating protection

Power supply Deko-Light Power supply unit 22W 500mA 20-44V DC DIM black IP20 No dim

Product code 22299 No dim dimmable

Brand [Deko-Light](#)

Dimmable No dim

Protection class IP20

Lifespan 30000h

Height 28.0mm

Width 127.0mm

Length 44.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



Power supply Deko-Light RF-dimmer (CV, DC) - RF Single 12-24V RF 1ch 15A black IP20

Product code 22303

Brand [Deko-Light](#)

Protection class IP20

Height 25.0mm

Width 115.0mm

Length 57.0mm

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature -5 kuni 30
°C°C

Certificates CE



Flicker-free Secured against short
circuits and overloads Overheating
protection

Power supply Deko-Light Round CC, RS350 mA 3.2-8.0 W black No dim

**Product code 20195 No dim
dimmable**

Brand [Deko-Light](#)

Dimmable No dim

Lifespan 30000h

Height 22.0mm

Diameter 53.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



LED driver EMOS 200-350mA 25-40V, 230V 14W IP20 TRIAC

Product code 16645 TRIAC dimmable

Brand [EMOS](#)

Supply voltage 230V

Dimmable TRIAC

Output voltage 25-40V

Output 14W

Maximum output 14W/1m

Rated current 350mA

Protection class IP20

Height 31.0mm

Width 46.0mm

Length 97.0mm

Weight 114 g

Certificates CE

Warranty 5 years



Power supply Karizma Luce Casambi 42W300-1050CG-4W C KGP 300-1050mA 48V 42W IP20 3000K warm white

Product code 20830

Brand [Karizma Luce](#)

Supply voltage 48V

Output 42W

Correlated colour temperature warm
white 3000K

Protection class IP20


Height 45.0mm

Width 250.0mm

Length 31.0mm

Casing material aluminium

Work environment indoor use

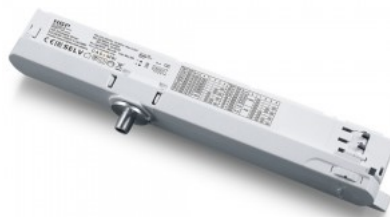

LED driver KGP 1200-2100mA 2.5-52V NFC 230V 80W IP20

Product code 18097

Brand [KGP](#)

Supply voltage 230V

Power factor 0.97

Output voltage 2.5-52V

Output 80W

Maximum output 80W/1m

Protection class IP20

Lifespan 100000h

Height 30.0mm

Width 63.0mm

Length 251.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 1200-2100mA 2.5-52V NFC 230V 80W IP20 DALI

Product code 18131 DALI dimmable

Brand [KGP](#)

Supply voltage 230V

Power factor 0.97

Dimmable DALI

Output voltage 2.5-52V

Output 80W

Maximum output 80W/1m

Protection class IP20

Lifespan 100000h

Height 30.0mm

Width 63.0mm

Length 251.0mm

In package 1pc

In box 30pcs

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 150-500mA NFC white 230V 10W IP20

Product code 19685

Brand [KGP](#)

Supply voltage 230V

Power factor 0.88

Output voltage 2.5-45V

Output 10W

Maximum output 10W/1m

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 40.0mm

Length 64.5mm

In package 1pc

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 150-500mA NFC white 230V 10W IP20 DALI

Product code 19075 DALI dimmable

Brand [KGP](#)

Supply voltage 230V

Power factor 0.88

Dimmable DALI

Output voltage 2.5-45V

Output 10W

Maximum output 10W/1m

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 40.0mm

Length 64.5mm

In package 1pc

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 150-600mA 25-42V NFC 230V 3,75-15W IP20

Product code 19301

Brand [KGP](#)

Supply voltage 230V

Power factor 0.97

Output voltage 25-42V

Output 3,75-15W

Maximum output 15W/1m

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 30.0mm

Length 103.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 200-350mA 26-42V TRIAC 230V 5.2-15W IP20 TRIAC

Product code 19657 TRIAC dimmable

Brand [KGP](#)

Supply voltage 230V

Power factor 0.92

Dimmable TRIAC

Output voltage 26-42V

Output 5.2-15W

Maximum output 15W/1m

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 41.0mm

Length 125.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 250-1050mA DALI NFC 230V 100W IP20 DALI

Product code 20210 DALI dimmable

Brand [KGP](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 100W

Maximum output 100W/1m

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 29.4mm

Length 280.0mm

In package 1pc

In box 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



LED driver KGP 300-1050mA 9-42V 230V 44.1W IP20

Product code 17575

Brand [KGP](#)

Supply voltage 230V

Power factor 0.95

Output voltage 9-42V

Output 44.1W

Maximum output 44.1W/1m

Rated current 1050mA

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 43.0mm

Length 131.2mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 500-700mA 230V 30W IP20 TRIAC

Product code 21076 TRIAC dimmable

Brand [KGP](#)

Supply voltage 230V

Power factor 0.92

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Protection class IP20

Lifespan 100000h

Height 30.0mm

Width 44.0mm

Length 137.5mm

In package 1pc

Casing material plastic


Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years

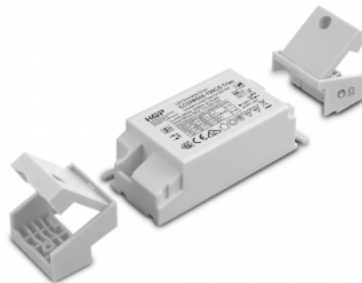

The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 700-1050mA 27-38V 230V 40W IP20 TRIAC

Product code 17593 TRIAC dimmable

Brand [KGP](#)

Supply voltage 230V

Power factor 0.92

Dimmable TRIAC

Output voltage 27-38V

Output 40W

Maximum output 40W/1m

Rated current 1050mA

Protection class IP20

Lifespan 50000h

Height 30.0mm

Width 44.0mm

Length 172.3mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP LC110W350-500 230V 110W IP20 No dim

**Product code 18313 No dim
dimmable**

Brand [KGP](#)
Supply voltage 230V
Power factor 0.95
Dimmable No dim
Output voltage 50V
Output 110W
Maximum output 110W/1m
Rated current 1800mA
Protection class IP20
Lifespan 50000h
Height 21.0mm
Width 30.0mm
Length 280.0mm
In package 1pc
In box 20pcs
Work environment indoor use
Operation temperature -25 - +50°C
Certificates CE, RoHS, ENEC, SAA,
UKCA
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP LC75W900-1800 230V 75WW IP20 No dim

**Product code 17556 No dim
dimmable**

Brand [KGP](#)

Supply voltage 230V

Power factor 0.95

Dimmable No dim

Output voltage 60V

Output 75WW

Maximum output 75W/1m

Rated current 1800mA

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 29.4mm

Length 280.0mm

In package 1pc

In box 20pcs

Work environment indoor use

Operation temperature -25 - +50°C

Certificates CE, RoHS, ENEC, SAA,
UKCA

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP Micro-DT6 100-700mA 48V 30W IP20

Product code 20548

Brand [KGP](#)

Supply voltage 48V

Power factor 0.95

Output voltage 42V

Output 30W

Maximum output 30W/1m

Rated current 700mA

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 29.4mm

Length 280.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



LED driver LIFUD 1000mA 27-42V LF-GDE042YF1000U 230V 42W IP20 0-10V

Product code 13930 0-10V dimmable

Brand LIFUD

Supply voltage 230V

Dimmable 0-10V

Output voltage 27-42V

Output 42W

Maximum output 42W/1m

Rated current 1000mA

Protection class IP20

Height 30.0mm

Width 65.0mm

Length 140.0mm

Weight 200 g

Casing material plastic

Work environment indoor use

Certificates CE, SELV, ENEC, F, M



LED driver LIFUD LF-GSD040YE 230V 40W IP20 DALI

Product code 18283 DALI dimmable

Brand LIFUD
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output voltage 25-42V
Output 40W
Maximum output 40W/1m
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 30.0mm
Length 245.0mm
Weight 185 g
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -30 - +50°C
Certificates ENEC, , CE,
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver LTECH DT6/DT8 2CH 1 230V 20W IP20 DALI

Product code 21025 DALI dimmable

Brand LTECH
Supply voltage 230V
Power factor 0.85
Dimmable DALI
Output voltage 9-42V
Output 20W
Maximum output 20W/1m
Rated current 700mA
Protection class IP20
Height 23.0mm
Width 40.0mm
Length 127.0mm
Weight 105 g
Operation temperature -20 ~ 50°C
Warranty 5 years



A high-quality constant current LED driver designed for professional lighting solutions where precise light control, smooth dimming, and color temperature adjustment are essential. The device supports DALI-2 control and is ideal for Tunable White luminaires. Thanks to NFC programming, configuration is fast and flexible — parameters can be adjusted without physical switches or opening the housing. This significantly simplifies installation and system setup for both designers and installers.

LED driver LTECH SE-12-100-400-W1DS 230V 12W IP20 DALI

Product code 16893 DALI dimmable

Brand LTECH
Supply voltage 230V
Power factor 0.85
Dimmable DALI
Output voltage 9-42V
Output 12W
Maximum output 12W/1m
Rated current 400mA
Protection class IP20
Height 20.0mm
Width 30.0mm
Length 135.0mm
Operation temperature -20 ~ 50°C
Warranty 5 years



DALI dimmable LED power supply that can be easily reconfigured. 0.9-12W 100mA / 9-42V / 0.9-4.2W 150mA / 9-42V / 1.35-6.3W 200mA / 9-42V / 1.8-8.4W 250mA / 9-42V / 2.25-10.5W 300mA / 9-40V / 2.7-12W 350mA / 9-34V / 3.15-11.9W 400mA / 9-30V / 3.6-12W

LED driver MEAN WELL 1450mA HLG-60H-42A 230V 60W IP65

Product code 14541

Brand [MEAN WELL](#)
Supply voltage 230V
Output voltage 42V
Output 60W
Maximum output 60W/1m
Rated current 1450mA
Protection class IP65
Warranty 3 years



LED driver Moso driver poseidon 230V 80W IP20 DALI

Product code 21473 DALI dimmable

Supply voltage 230V
Power factor 0.97
Dimmable DALI
Output 80W
Maximum output 80W/1m
Protection class IP20
Lifespan 100000h
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC,
SAA, RoHS
Warranty 5 years

LED driver SKYDANCE TE-12A-H 230V 12W IP20 TRIAC

Product code 22148 TRIAC dimmable

Brand [SKYDANCE](#)
Supply voltage 230V
Dimmable TRIAC
Output voltage 3-24V
Output 12W
Maximum output 12W/1m
Rated current 700mA
Protection class IP20
Height 20.0mm
Width 36.0mm
Length 111.0mm
Work environment indoor use
Operation temperature -20~50°C
Certificates CE
Warranty 5 years



LED driver SKYDANCE TE-36A 230V 36W IP20 TRIAC / PUSH

**Product code 16522 TRIAC / PUSH
dimnable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable TRIAC / PUSH

Output voltage 10-52V

Output 36W

Maximum output 36W/1m

Rated current 1200mA

Protection class IP20

Height 30.0mm

Width 44.0mm

Length 168.5mm

Work environment indoor use

Operation temperature -30~50°C

Certificates CE

Warranty 5 years

