LED driver 1750mA 20-34V LPF-60-1750 230V 60W IP67

Product code 13291

Supply voltage 230V
Output voltage 20-34V
Output 60W
Maximum output 60W/1m
Rated current 1750mA
Protection class IP67
Height 32.0mm
Width 42.0mm
Length 163.0mm
Weight 399 g
Package weight 426 g
Casing material plastic
Work environment indoor use
Certificates CE, RoHS



LED driver 3000mA 30-42V LW-FL100W silver 230V 100W IP67

Product code 14107

Supply voltage 230V
Output voltage 30-42V
Output 100W
Maximum output 100W/1m
Rated current 3000mA
Protection class IP67
Height 45.0mm
Width 70.0mm
Length 164.0mm
Casing colour silver
Casing material aluminium
Work environment outdoor use
Warranty 2 years



LED driver 350mA 66-110V LPF-35-350 230V 35W IP67

Product code 12909

Supply voltage 230V
Output voltage 66-110V
Output 35W
Maximum output 35W/1m
Rated current 350mA
Protection class IP67
Height 28.0mm
Width 41.0mm
Length 147.0mm
Weight 227 g
Package weight 250 g
Casing material plastic
Work environment outdoor use
Certificates CE, RoHS



LED driver BOKE 1200mA 28-42V 230V 50W IP20

Product code 17161

Brand BOKE
Supply voltage 230V
Output voltage 28-42V
Output 50W
Maximum output 50W/1m
Rated current 1200mA
Protection class IP20
Lifespan 100000h
Height 29.0mm
Width 45.0mm
Length 135.0mm
Casing material plastic
Power supply BOKE
Work environment indoor use
Operation temperature -20 - 60°C
Warranty 5 years



LED driver BOKE 200-550mA 50-216V 230V 80W IP20

Product code 17817

Brand BOKE
Supply voltage 230V
Power factor 0.95
Output voltage 216V
Output 80W
Maximum output 80W/1m
Rated current 550mA
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 30.0mm
Length 210.0mm
Power supply BOKE
Work environment indoor use
Operation temperature -20° - +60°C
Certificates CE, ENEC, UKCA, RCM, CCC, EL, RoHS
Warranty 5 years



LED driver BOKE 300-1050 mA 6-54V 230V 42W IP20 DALI / PUSH

Product code 22835 DALI / PUSH dimmable

Brand BOKE
Supply voltage 230V
Power factor 0.98
Dimmable DALI / PUSH
Output voltage 6-54V
Output 42W
Maximum output 42W/1m
Rated current 1050mA
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 43.5mm
Length 98.0mm
Casing material plastic
Power supply BOKE
Work environment indoor use
Operation temperature -25°C-60°C°C
Warranty 5 years



LED driver BOKE 300-500mA 28-42V 230V 21W IP20

Product code 17159

Brand BOKE
Supply voltage 230V
Output voltage 28-42V
Output 21W
Maximum output 21W/1m
Rated current 500mA
Protection class IP20
Lifespan 100000h
Height 28.0mm
Width 45.0mm
Length 117.0mm
Casing material plastic
Power supply BOKE
Work environment indoor use
Operation temperature -20 - 60°C
Warranty 5 years



LED driver BOKE 450–1100 mA 6-42V , 230V 42W IP20 DALI / PUSH

Product code 22304 DALI / PUSH dimmable

Brand BOKE
Supply voltage 230V
Dimmable DALI / PUSH
Output voltage 6-42V
Output 42W
Maximum output 42W/1m
Rated current 1100mA
Protection class IP20
Lifespan 50000h
Weight 170 g
Casing material plastic
Power supply BOKE
Work environment indoor use
Operation temperature -20 - +45°C
Warranty 5 years



LED driver BOKE 500-1100mA 28-42V 230V 42W IP20

Product code 17160



Brand BOKE
Supply voltage 230V
Output voltage 28-42V
Output 42W
Maximum output 42W/1m
Rated current 1100mA
Protection class IP20
Lifespan 100000h
Height 28.0mm
Width 45.0mm
Length 117.0mm
Casing material plastic
Power supply BOKE
Work environment indoor use
Operation temperature -20 - 60°C
Warranty 5 years

LED driver BOKE 700-1050mA 24-42V 230V 40W IP20 TRIAC

Product code 22332 TRIAC dimmable



Brand BOKE
Supply voltage 230V
Dimmable TRIAC
Output voltage 24-42V
Output 40W
Maximum output 40W/1m
Rated current 1200mA
Protection class IP20
Lifespan 100000h
Height 29.0mm
Width 44.0mm
Length 137.5mm
In box 32pcs
Casing material plastic
Power supply BOKE
Work environment indoor use
Operation temperature -20 - 60°C
Warranty 5 years

LED driver DALI-2 CC DT8 48V 12,6-18,9W IP20

Product code 23747

Supply voltage 48V
Output voltage 9-42V
Output 12,6-18,9W
Maximum output 18.9W/1m
Rated current 450mA
Protection class IP20
Height 28.0mm
Width 41.0mm
Length 147.0mm
Weight 227 g
Package weight 250 g
Casing material plastic
Work environment outdoor use
Certificates CE, RoHS



Power supply Deko-Light 350mA 2-52 V/DC 0.7-18.0 W 50 / 60 Hz black 0.7-18.0W IP20

Product code 20192

Brand Deko-Light
Output 0.7-18.0W
Maximum output 18W/1m
Protection class IP20
Height 21.0mm
Width 115.0mm
Length 45.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS



Power supply Deko-Light 500 mA(CV,DC)-IP,CV,V6-40-24 black 24V 40W IP67 No dim

Product code 20082

Brand Deko-Light
Supply voltage 24V
Output 40W
Maximum output 40W/1m
Protection class IP67
Lifespan 50000h
Height 30.5mm
Width 58.0mm
Length 176.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor / outdoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Robust housing,flicker-free,secured against short circuits and overloads,overheating protection



Power supply Deko-Light Basic 500mA CC50018/18 W black 0.7-18.0W IP20

Product code 20198

Brand Deko-Light
Output 0.7-18.0W
Maximum output 18W/1m
Protection class IP20
Height 21.0mm
Width 115.0mm
Length 45.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS



Power supply Deko-Light Basic 700mA 2-26 V/DC 1.4-18.0 W black 0.7-18.0W IP20

Product code 20197

Brand Deko-Light
Output 0.7-18.0W
Protection class IP20
Height 21.0mm
Width 115.0mm
Length 45.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS



Power supply Deko-Light BASIC, CC, DIM D35009UF/4,5-9 W black 9W IP20 DIMMABLE

Product code 23527 **dimmerdatav dimmable**

Brand Deko-Light
Dimmable dimmerdatav
Output 9W
Maximum output 9W/1m
Protection class IP20
Lifespan 30000h
Height 22.0mm
Width 39.0mm
Length 115.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Can be dimmed using trailing-edge phase dimmers Flicker-free Short circuit, overload and overheating protection



Power supply Deko-Light BASIC, CC, DIM D35020UF/9,8-20 W black 20W IP20 DIMMABLE

Product code 23528 **dimmerdatav**
dimmable

Brand Deko-Light
Dimmable dimmerdatav
Output 20W
Maximum output 20W/1m
Protection class IP20
Lifespan 30000h
Height 28.0mm
Width 44.0mm
Length 127.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Can be dimmed using trailing-edge phase dimmers Flicker-free Short circuit, overload and overheating protection



Power supply Deko-Light BASIC, CC, V8-30-700 mA/14.0-30.0 W black 30W IP20

Product code 23526 **DALI 2**
dimmable

Brand Deko-Light
Dimmable DALI 2
Output 30W
Maximum output 30W/1m
Protection class IP20
Lifespan 30000h
Height 28.0mm
Width 43.0mm
Length 127.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Basic, CV, Q8H-24-75W,176–250V black 75W IP20 No dim

Product code 20813

Brand Deko-Light
Output 75W
Maximum output 75W/1m
Protection class IP20
Lifespan 50000h
Height 32.0mm
Width 184.0mm
Length 61.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor / outdoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years


Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light CC, DC BASIC, DIM, CC, D350012UF /12 W black 12W IP20

Product code 23710

Brand Deko-Light
Output 12W
Maximum output 12W/1m
Protection class IP20
Height 22.0mm
Width 39.0mm
Length 115.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS

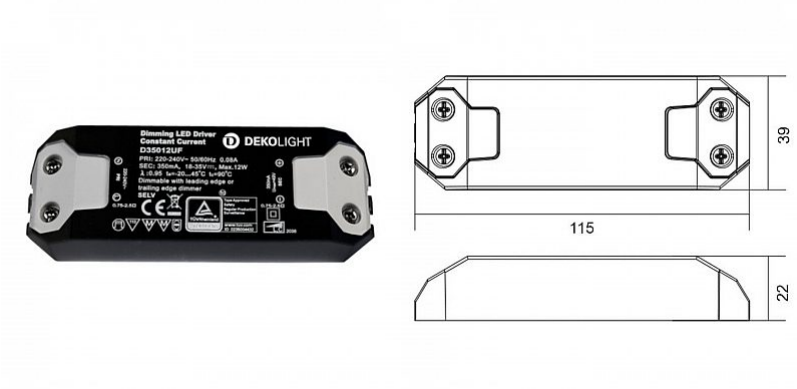

Power supply Deko-Light Flat CC,DC UT350mA 0,7-6 W black 0.7-18.0W IP20

Product code 20193

Brand Deko-Light
Output 0.7-18.0W
Maximum output 18W/1m
Protection class IP20
Height 11.0mm
Width 98.0mm
Length 46.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS

Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light FLAT, CV, UT 12 V/6 W black 6W IP20

Product code 23523 DALI 2 dimmable

Brand Deko-Light
Dimmable DALI 2
Output 6W
Maximum output 6W/1m
Protection class IP20
Lifespan 30000h
Height 11.0mm
Width 46.0mm
Length 98.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Ideal for concealed mounting in ceiling coves Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Mini , CC, 350 mA 0,9-3,9W black 4W IP65 No dim

Product code 23520

Brand Deko-Light
Output 4W
Maximum output 4W/1m
Protection class IP65
Lifespan 30000h
Height 21.0mm
Width 27.0mm
Length 53.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Mini , CC, 700 mA 1.7-4.0 W black 4W IP65 No dim

Product code 23521

Brand Deko-Light
Output 4W
Maximum output 4W/1m
Protection class IP65
Lifespan 30000h
Height 21.0mm
Width 27.0mm
Length 53.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor / outdoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Mini 0-170mA 100-240 V/AC 24 V/4 W black IP65

Product code 20194

Brand Deko-Light
Protection class IP65
Lifespan 30000h
Height 21.0mm
Width 53.0mm
Length 27.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS



Power supply Deko-Light Mini 220-240 V/AC 500mA (CV,DC)-OCTO,CV black 12W IP65

Product code 20081

Brand Deko-Light
Output 12W
Maximum output 12W/1m
Protection class IP65
Lifespan 50000h
Height 24.0mm
Width 48.0mm
Length 50.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor / outdoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Flicker-free,secured against short circuits and overloads.



Power supply Deko-Light Mini-4-350T 350 mA , 2.1-4.0 WCC, DC DIM black 4W IP65 DIMMABLE

Product code 23522 dimmerdatav dimmable

Brand Deko-Light
Dimmable dimmerdatav
Output 4W
Maximum output 4W/1m
Protection class IP65
Lifespan 30000h
Height 20.0mm
Width 30.0mm
Length 48.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Can be dimmed using leading-edge/trailing-edge phase dimmers Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Octo DIM CC, RSM-12-350T/6.3-12.0 W black 12W IP65

Product code 20988

Brand Deko-Light
Output 12W
Protection class IP65
Lifespan 30000h
Height 24.0mm
Width 48.0mm
Length 50.0mm
Casing colour black
Casing material plastic
Work environment indoor / outdoor use
Operation temperature to 50 °C°C
Certificates CE, RoHS


Can be dimmed using leading-edge/trailing-edge phase dimmers Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Octo DIM, CC, RSM-12-500T/ 6.0-12.0 W black 12W IP65 DIMMABLE

Product code 23524 **dimmerdatav**
dimmable

Brand Deko-Light
Dimmable dimmerdatav
Output 12W
Maximum output 12W/1m
Protection class IP65
Lifespan 30000h
Height 24.0mm
Width 48.0mm
Length 50.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor / outdoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

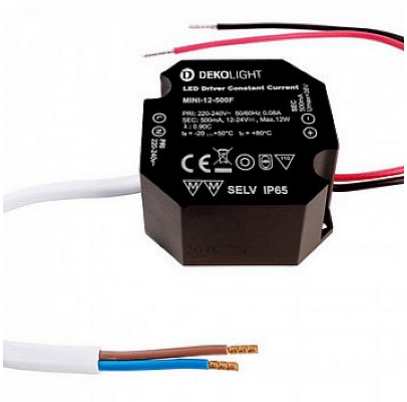

Can be dimmed using leading-edge/trailing-edge phase dimmers Flicker-free Secured against short circuits and overloads Overheating protection

Power supply Deko-Light Power supply unit (CV, DC) - IP, CV, V6-75-24, 100–240V, 75W black 75W IP67 No dim

Product code 20814

Brand Deko-Light
Output 75W
Protection class IP67
Lifespan 50000h
Height 39.0mm
Width 186.0mm
Length 64.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor / outdoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years

Robust housing Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Power supply unit 22W 500mA 20-44V DC DIM black IP20 No dim

Product code 22299

Brand Deko-Light
Protection class IP20
Lifespan 30000h
Height 28.0mm
Width 127.0mm
Length 44.0mm
In package 1pc
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years



Power supply Deko-Light RF-dimmer (CV, DC) - RF Single 12-24V RF 1ch 15A black IP20

Product code 22303 DALI 2 dimmable

Brand Deko-Light
Dimmable DALI 2
Protection class IP20
Height 25.0mm
Width 115.0mm
Length 57.0mm
Casing colour black
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -5 kuni 30 °C°C
Certificates CE

Flicker-free Secured against short circuits and overloads Overheating protection



Power supply Deko-Light Round CC, RS350 mA 3.2-8.0 W black 8W IP20 No dim

Product code 20195

Brand Deko-Light
Output 8W
Maximum output 8W/1m
Protection class IP20
Lifespan 30000h
Height 22.0mm
Diameter 53.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS

Flicker-free Secured against short circuits and overloads Overheating protection



LED driver EMOS 200-350mA 25-40V, 230V 14W IP20 TRIAC

Product code 16645 TRIAC dimmable

Brand EMOS
Supply voltage 230V
Dimmable TRIAC
Output voltage 25-40V
Output 14W
Maximum output 14W/1m
Rated current 350mA
Protection class IP20
Height 31.0mm
Width 46.0mm
Length 97.0mm
Weight 114 g
Certificates CE
Warranty 5 years



Power supply Karizma Luce Casambi 42W300-1050CG-4W C KGP 300-1050mA 48V 42W IP20

Product code 20830

Brand Karizma Luce
Supply voltage 48V
Output 42W
Protection class IP20
Height 45.0mm
Width 250.0mm
Length 31.0mm
Casing material aluminium
Work environment indoor use



Power supply Karizma Luce DALI Philips Xitanium 20W/m 350mA (24-54V 350mA) CI1208/1204/1002/DTW @ 350mA) CI 1208/1204/1002/DTW black 20W IP2

Product code 22182



Brand Karizma Luce
Output 20W
Protection class IP20
Height 3.0mm
Width 9.5mm
Length 4.0mm
Casing colour black
Casing material plastic
Work environment indoor use
Certificates CE, RoHS

LED driver KGP 1200-2100mA 2.5-52V NFC 230V 80W IP20

Product code 18097



Brand KGP
Supply voltage 230V
Power factor 0.97
Output voltage 2.5-52V
Output 80W
Maximum output 80W/1m
Protection class IP20
Lifespan 100000h
Height 30.0mm
Width 63.0mm
Length 251.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years

The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 1200-2100mA 2.5-52V NFC 230V 80W IP20 DALI

Product code 18131 DALI dimmable

Brand KGP
Supply voltage 230V
Power factor 0.97
Dimmable DALI
Output voltage 2.5-52V
Output 80W
Maximum output 80W/1m
Protection class IP20
Lifespan 100000h
Height 30.0mm
Width 63.0mm
Length 251.0mm
In package 1pc
In box 30pcs
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 150-500mA NFC white 230V 10W IP20

Product code 19685

Brand KGP
Supply voltage 230V
Power factor 0.88
Output voltage 2.5-45V
Output 10W
Maximum output 10W/1m
Protection class IP20
Lifespan 100000h
Height 23.0mm
Width 40.0mm
Length 64.5mm
In package 1pc
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 150-500mA NFC white 230V 10W IP20 DALI

Product code 19075 **DALI dimmable**

Brand KGP
Supply voltage 230V
Power factor 0.88
Dimmable DALI
Output voltage 2.5-45V
Output 10W
Maximum output 10W/1m
Protection class IP20
Lifespan 100000h
Height 23.0mm
Width 40.0mm
Length 64.5mm
In package 1pc
Casing colour white
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee

LED driver KGP 150-600mA 25-42V NFC 230V 3,75-15W IP20

Product code 19301

Brand KGP
Supply voltage 230V
Power factor 0.97
Output voltage 25-42V
Output 3,75-15W
Maximum output 15W/1m
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 30.0mm
Length 103.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 200-350mA 26-42V TRIAC 230V 5.2-15W IP20 TRIAC

Product code 19657 TRIAC dimmable

Brand KGP
Supply voltage 230V
Power factor 0.92
Dimmable TRIAC
Output voltage 26-42V
Output 5.2-15W
Maximum output 15W/1m
Protection class IP20
Lifespan 100000h
Height 23.0mm
Width 41.0mm
Length 125.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 250-1050mA DALI NFC 230V 100W IP20 DALI

Product code 20210 DALI dimmable

Brand KGP
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 100W
Maximum output 100W/1m
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 29.4mm
Length 280.0mm
In package 1pc
In box 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



LED driver KGP 300-1050mA 9-42V 230V 44.1W IP20

Product code 17575

Brand KGP
Supply voltage 230V
Power factor 0.95
Output voltage 9-42V
Output 44.1W
Maximum output 44.1W/1m
Rated current 1050mA
Protection class IP20
Lifespan 100000h
Height 23.0mm
Width 43.0mm
Length 131.2mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 500-700mA 230V 30W IP20 TRIAC

Product code 21076 TRIAC dimmable

Brand KGP
Supply voltage 230V
Power factor 0.92
Dimmable TRIAC
Output 30W
Maximum output 30W/1m
Protection class IP20
Lifespan 100000h
Height 30.0mm
Width 44.0mm
Length 137.5mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP 700-1050mA 27-38V 230V 40W IP20 TRIAC

Product code 17593 TRIAC dimmable

Brand KGP
Supply voltage 230V
Power factor 0.92
Dimmable TRIAC
Output voltage 27-38V
Output 40W
Maximum output 40W/1m
Rated current 1050mA
Protection class IP20
Lifespan 50000h
Height 30.0mm
Width 44.0mm
Length 172.3mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

KGP DALI Siinile 3F 300-1050mA

Product code 24051

Brand KGP

LED driver KGP LC110W350-500 230V 110W IP20 No dim

Product code 18313

Brand KGP
Supply voltage 230V
Power factor 0.95
Output voltage 50V
Output 110W
Maximum output 110W/1m
Rated current 1800mA
Protection class IP20
Lifespan 50000h
Height 21.0mm
Width 30.0mm
Length 280.0mm
In package 1pc
In box 20pcs
Work environment indoor use
Operation temperature -25 - +50°C
Certificates CE, RoHS, ENEC, SAA, UKCA
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP LC75W900-1800 230V 75W IP20 No dim

Product code 17556

Brand KGP
Supply voltage 230V
Power factor 0.95
Output voltage 60V
Output 75W
Maximum output 75W/1m
Rated current 1800mA
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 29.4mm
Length 280.0mm
In package 1pc
In box 20pcs
Work environment indoor use
Operation temperature -25 - +50°C
Certificates CE, RoHS, ENEC, SAA, UKCA
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP LV100W48CG-DALI-NX 230V 100W IP20 DALI

Product code 23993 **DALI dimmable**

Brand KGP
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 100W
Maximum output 100W/1m
Rated current 600mA
Protection class IP20
Lifespan 100000h
Height 18.0mm
Width 30.0mm
Length 350.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP LV250W24CG-DALI-NX 230V 250W IP20 DALI

Product code 23991 DALI dimmable

Brand KGP
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 250W
Maximum output 250W/1m
Rated current 1500mA
Protection class IP20
Lifespan 100000h
Height 22.0mm
Width 40.0mm
Length 400.0mm
In package 1pc
In box 30pcs
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver KGP Micro-DT6 100-700mA 48V 30W IP20

Product code 20548

Brand KGP
Supply voltage 48V
Power factor 0.95
Output voltage 42V
Output 30W
Maximum output 30W/1m
Rated current 700mA
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 29.4mm
Length 280.0mm
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -25 - +45°C
Certificates ENEC, UKCA, CE, EAC, SAA, RoHS
Warranty 5 years



LED driver LIFUD 1000mA 27-42V LF-GDE042YF1000U 230V 42W IP20 0-10V

Product code 13930 0-10V dimmable

Brand LIFUD
Supply voltage 230V
Dimmable 0-10V
Output voltage 27-42V
Output 42W
Maximum output 42W/1m
Rated current 1000mA
Protection class IP20
Height 30.0mm
Width 65.0mm
Length 140.0mm
Weight 200 g
Casing material plastic
Work environment indoor use
Certificates CE, SELV, ENEC, F, M



LED driver LIFUD LF-GSD040YE 230V 40W IP20 DALI

Product code 18283 **DALI dimmable**

Brand LIFUD
Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output voltage 25-42V
Output 40W
Maximum output 40W/1m
Protection class IP20
Lifespan 100000h
Height 21.0mm
Width 30.0mm
Length 245.0mm
Weight 185 g
In package 1pc
Casing material plastic
Work environment indoor use
Operation temperature -30 - +50°C
Certificates ENEC, , CE,
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

LED driver LTECH DT6/DT8 2CH 1 230V 20W IP20 DALI

Product code 21025 **DALI dimmable**

Brand LTECH
Supply voltage 230V
Power factor 0.85
Dimmable DALI
Output voltage 9-42V
Output 20W
Maximum output 20W/1m
Rated current 700mA
Protection class IP20
Height 23.0mm
Width 40.0mm
Length 127.0mm
Weight 105 g
Operation temperature -20 ~ 50°C
Warranty 5 years



A high-quality constant current LED driver designed for professional lighting solutions where precise light control, smooth dimming, and color temperature adjustment are essential. The device supports DALI-2 control and is ideal for Tunable White luminaires. Thanks to NFC programming, configuration is fast and flexible — parameters can be adjusted without physical switches or opening the housing. This significantly simplifies installation and system setup for both designers and installers.

Power supply LTECH LTECH LTSYS CC 1CH 100mA white 0,9–4,2W IP20 TRIAC

Product code 23761 **TRIAC dimmable**

Brand LTECH
Dimmable TRIAC
Output 0,9–4,2W
Maximum output 4.2W/1m
Protection class IP20
Lifespan 30000h
Height 20.0mm
Width 20.0mm
Length 84.0mm
In package 1pc
Casing colour white
Casing material plastic
Polishing matt
Work environment indoor use
Operation temperature -20 - +50°C
Certificates CE
Warranty 5 years



LED driver LTECH SE-12-100-400-W1DS 230V 12W IP20 DALI

Product code 16893 **DALI dimmable**

Brand LTECH
Supply voltage 230V
Power factor 0.85
Dimmable DALI
Output voltage 9-42V
Output 12W
Maximum output 12W/1m
Rated current 400mA
Protection class IP20
Height 20.0mm
Width 30.0mm
Length 135.0mm
Operation temperature -20 ~ 50°C
Warranty 5 years

DALI dimmable LED power supply that can be easily reconfigured. 0.9-12W 100mA / 9-42V / 0.9-4.2W 150mA / 9-42V / 1.35-6.3W 200mA / 9-42V / 1.8-8.4W 250mA / 9-42V / 2.25-10.5W 300mA / 9-40V / 2.7-12W 350mA / 9-34V / 3.15-11.9W 400mA / 9-30V / 3.6-12W



LED driver MEAN WELL 1450mA HLG-60H-42A 230V 60W IP65

Product code 14541

Brand MEAN WELL
Supply voltage 230V
Output voltage 42V
Output 60W
Maximum output 60W/1m
Rated current 1450mA
Protection class IP65
Warranty 3 years



LED driver SKYDANCE TE-12A-H 230V 12W IP20 TRIAC

Product code 22148 **TRIAC dimmable**

Brand SKYDANCE
Supply voltage 230V
Dimmable TRIAC
Output voltage 3-24V
Output 12W
Maximum output 12W/1m
Rated current 700mA
Protection class IP20
Height 20.0mm
Width 36.0mm
Length 111.0mm
Work environment indoor use
Operation temperature -20~50°C
Certificates CE
Warranty 5 years



LED driver SKYDANCE TE-36A 230V 36W IP20 TRIAC / PUSH

Product code 16522 TRIAC / PUSH dimmable



Brand SKYDANCE
Supply voltage 230V
Dimmable TRIAC / PUSH
Output voltage 10-52V
Output 36W
Maximum output 36W/1m
Rated current 1200mA
Protection class IP20
Height 30.0mm
Width 44.0mm
Length 168.5mm
Work environment indoor use
Operation temperature -30~50°C
Certificates CE
Warranty 5 years