

## LED driver 1750mA 20-34V LPF-60-1750 230V 60W IP67

### Product code 13291

---

Supply voltage 230V  
Output voltage 20-34V  
Output 60W  
Maximum output 60W/1m  
Rated current 1750mA  
Protection class IP67  
Height 32.0mm  
Width 42.0mm  
Length 163.0mm  
Weight 399 g  
Package weight 426 g  
Casing material plastic  
Work environment indoor use  
Certificates CE, RoHS



## LED driver 3000mA 30-42V LW-FL100W silver 230V 100W IP67

### Product code 14107

---

Supply voltage 230V  
Output voltage 30-42V  
Output 100W  
Maximum output 100W/1m  
Rated current 3000mA  
Protection class IP67  
Height 45.0mm  
Width 70.0mm  
Length 164.0mm  
Casing colour silver  
Casing material aluminium  
Work environment outdoor use  
Warranty 2 years



## **LED driver 350mA 66-110V LPF-35-350 230V 35W IP67**

**Product code 12909**

---

Supply voltage 230V  
Output voltage 66-110V  
Output 35W  
Maximum output 35W/1m  
Rated current 350mA  
Protection class IP67  
Height 28.0mm  
Width 41.0mm  
Length 147.0mm  
Weight 227 g  
Package weight 250 g  
Casing material plastic  
Work environment outdoor use  
Certificates CE, RoHS



## **LED driver 950mA 25-40v PAN-TRAND 40W IP20 TRIAC**

**Product code 15167 TRIAC dimmable**

---

Dimmable TRIAC  
Output 40W  
Maximum output 40W/1m  
Protection class IP20



## LED driver BOKE 1200mA 28-42V 230V 50W IP20

**Product code 17161**

---

Brand [BOKE](#)

Supply voltage 230V

Output voltage 28-42V

Output 50W

Maximum output 50W/1m

Rated current 1200mA

Protection class IP20

Lifespan 100000h

Height 29.0mm

Width 45.0mm

Length 135.0mm

Casing material plastic

Power supply [BOKE](#)

Work environment indoor use

Operation temperature -20 - 60°C

Warranty 5 years



## LED driver BOKE 200-550mA 50-216V 230V 80W IP20

**Product code 17817**

---

Brand [BOKE](#)

Supply voltage 230V

Power factor 0.95

Output voltage 216V

Output 80W

Maximum output 80W/1m

Rated current 550mA

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 30.0mm

Length 210.0mm

Power supply [BOKE](#)

Work environment indoor use

Operation temperature -20° - +60°C

Certificates CE, ENEC, UKCA, RCM,

CCC, EL, RoHS

Warranty 5 years



## LED driver BOKE 300-1050 mA 6-54V 230V 42W IP20 DALI / PUSH

**Product code 22835 DALI / PUSH dimmable**

Brand [BOKE](#)  
Supply voltage 230V  
Power factor 0.98  
Dimmable DALI / PUSH  
Output voltage 6-54V  
Output 42W  
Maximum output 42W/1m  
Rated current 1050mA  
Protection class IP20  
Lifespan 100000h  
Height 21.0mm  
Width 43.5mm  
Length 98.0mm  
Casing material plastic  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -25°C-60°C  
Warranty 5 years



## LED driver BOKE 300-500mA 28-42V 230V 21W IP20

**Product code 17159**

Brand [BOKE](#)  
Supply voltage 230V  
Output voltage 28-42V  
Output 21W  
Maximum output 21W/1m  
Rated current 500mA  
Protection class IP20  
Lifespan 100000h  
Height 28.0mm  
Width 45.0mm  
Length 117.0mm  
Casing material plastic  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20 - 60°C  
Warranty 5 years



## LED driver BOKE 450-1100 mA 6-42V , 230V 42W IP20 DALI / PUSH

**Product code 22304 DALI / PUSH dimmable**

Brand [BOKE](#)  
 Supply voltage 230V  
 Dimmable DALI / PUSH  
 Output voltage 6-42V  
 Output 42W  
 Maximum output 42W/1m  
 Rated current 1100mA  
 Protection class IP20  
 Lifespan 50000h  
 Weight 170 g  
 Casing material plastic  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 - +45°C  
 Warranty 5 years



## LED driver BOKE 500-1100mA 28-42V 230V 42W IP20

**Product code 17160**

Brand [BOKE](#)  
 Supply voltage 230V  
 Output voltage 28-42V  
 Output 42W  
 Maximum output 42W/1m  
 Rated current 1100mA  
 Protection class IP20  
 Lifespan 100000h  
 Height 28.0mm  
 Width 45.0mm  
 Length 117.0mm  
 Casing material plastic  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 - 60°C  
 Warranty 5 years



## LED driver BOKE 700-1050mA 24-42V 230V 40W IP20 TRIAC

**Product code 22332 TRIAC dimmable**

Brand [BOKE](#)  
 Supply voltage 230V  
 Dimmable TRIAC  
 Output voltage 24-42V  
 Output 40W  
 Maximum output 40W/1m  
 Rated current 1200mA  
 Protection class IP20  
 Lifespan 100000h  
 Height 29.0mm  
 Width 44.0mm  
 Length 137.5mm  
 In box 32pcs  
 Casing material plastic  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 - 60°C  
 Warranty 5 years



## Power supply Deko-Light 350mA 2-52 V/DC 0.7-18.0 W 50 / 60 Hz black 0.7-18.0W IP20

**Product code 20192**

Brand [Deko-Light](#)  
 Output 0.7-18.0W  
 Maximum output 18W/1m  
 Protection class IP20  
 Height 21.0mm  
 Width 115.0mm  
 Length 45.0mm  
 Casing colour black  
 Casing material plastic  
 Work environment indoor use  
 Certificates CE, RoHS



## Power supply Deko-Light 500 mA(CV,DC)-IP,CV,V6-40-24 black 24V 40W IP67 No dim

**Product code 20082 No dim  
dimmable**

Brand [Deko-Light](#)  
Supply voltage 24V  
Dimmable No dim  
Output 40W  
Maximum output 40W/1m  
Protection class IP67  
Lifespan 50000h  
Height 30.5mm  
Width 58.0mm  
Length 176.0mm  
In package 1pc  
Casing colour black  
Casing material plastic  
Polishing matt  
Work environment indoor / outdoor  
use  
Operation temperature -20 - +50°C  
Certificates CE  
Warranty 5 years



Robust housing, flicker-free, secured  
against short circuits and  
overloads, overheating protection

## Power supply Deko-Light Basic 500mA CC50018/18 W black 0.7-18.0W IP20

**Product code 20198**

Brand [Deko-Light](#)  
Output 0.7-18.0W  
Maximum output 18W/1m  
Protection class IP20  
Height 21.0mm  
Width 115.0mm  
Length 45.0mm  
Casing colour black  
Casing material plastic  
Work environment indoor use  
Certificates CE, RoHS



## Power supply Deko-Light Basic 700mA 2-26 V/DC 1.4-18.0 W black 0.7-18.0W IP20

**Product code 20197**

Brand [Deko-Light](#)

Output 0.7-18.0W

Protection class IP20

Height 21.0mm

Width 115.0mm

Length 45.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



## Power supply Deko-Light CC, DC dim - OCTO, DIM, CC, RSM-12-350T black 12W IP65

**Product code 20988**

Brand [Deko-Light](#)

Output 12W

Protection class IP65

Lifespan 30000h

Height 24.0mm

Width 48.0mm

Length 50.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Operation temperature to 50 °C

Certificates CE, RoHS



Can be dimmed using leading-edge/trailing-edge phase dimmers  
Flicker-free Secured against short circuits and overloads Overheating protection

## Power supply Deko-Light Flat CC,DC UT350mA 0,7-6 W black 0.7-18.0W IP20

**Product code 20193**

Brand [Deko-Light](#)

Output 0.7-18.0W

Maximum output 18W/1m

Protection class IP20

Height 11.0mm

Width 98.0mm

Length 46.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



## Power supply Deko-Light Mini 0-170mA 100-240 V/AC 24 V/4 W black IP65

**Product code 20194**

Brand [Deko-Light](#)

Protection class IP65

Lifespan 30000h

Height 21.0mm

Width 53.0mm

Length 27.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



## Power supply Deko-Light Mini 220-240 V/AC 500mA (CV,DC)- OCTO,CV black 12W IP65

**Product code 20081**

Brand [Deko-Light](#)

Output 12W

Maximum output 12W/1m

Protection class IP65

Lifespan 50000h

Height 24.0mm

Width 48.0mm

Length 50.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor / outdoor  
use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



Flicker-free, secured against short  
circuits and overloads.

## Power supply Deko-Light Power supply unit (CV, DC) - BASIC, CV, Q8H-24-75 W black IP20 No dim

**Product code 20813 No dim  
dimmable**

Brand [Deko-Light](#)

Dimmable No dim

Protection class IP20

Lifespan 50000h

Height 32.0mm

Width 184.0mm

Length 61.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor / outdoor  
use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



## Power supply Deko-Light Power supply unit (CV, DC) - IP, CV, V6-75-24, 100-240V, 75W black 75W IP20 No dim

**Product code 20814 No dim dimmable**

Brand [Deko-Light](#)

Dimmable No dim

Output 75W

Protection class IP20

Lifespan 50000h

Height 39.0mm

Width 186.0mm

Length 64.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor / outdoor use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



Robust housing Flicker-free Secured against short circuits and overloads Overheating protection

## Power supply Deko-Light Power supply unit 22W 500mA 20-44V DC DIM black IP20 No dim

**Product code 22299 No dim dimmable**

Brand [Deko-Light](#)

Dimmable No dim

Protection class IP20

Lifespan 30000h

Height 28.0mm

Width 127.0mm

Length 44.0mm

In package 1pc

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature -20 - +50°C

Certificates CE

Warranty 5 years



## Power supply Deko-Light RF-dimmer (CV, DC) - RF Single 12-24V RF 1ch 15A black IP20

**Product code 22303**

Brand [Deko-Light](#)

Protection class IP20

Height 25.0mm

Width 115.0mm

Length 57.0mm

Casing colour black

Casing material plastic

Polishing matt

Work environment indoor use

Operation temperature -5 kuni 30  
°C°C

Certificates CE



Flicker-free Secured against short  
circuits and overloads Overheating  
protection

## Power supply Deko-Light Round CC, RS350 mA 3.2-8.0 W black No dim

**Product code 20195 No dim  
dimmable**

Brand [Deko-Light](#)

Dimmable No dim

Lifespan 30000h

Height 22.0mm

Diameter 53.0mm

Casing colour black

Casing material plastic

Work environment indoor use

Certificates CE, RoHS



## LED driver EMOS 200-350mA 25-40V, 230V 14W IP20 TRIAC

**Product code 16645 TRIAC dimmable**

Brand [EMOS](#)  
 Supply voltage 230V  
 Dimmable TRIAC  
 Output voltage 25-40V  
 Output 14W  
 Maximum output 14W/1m  
 Rated current 350mA  
 Protection class IP20  
 Height 31.0mm  
 Width 46.0mm  
 Length 97.0mm  
 Weight 114 g  
 Certificates CE  
 Warranty 5 years



## LED driver KGP 1200-2100mA 2.5-52V NFC 230V 80W IP20

**Product code 18097**

Brand [KGP](#)  
 Supply voltage 230V  
 Power factor 0.97  
 Output voltage 2.5-52V  
 Output 80W  
 Maximum output 80W/1m  
 Protection class IP20  
 Lifespan 100000h  
 Height 30.0mm  
 Width 63.0mm  
 Length 251.0mm  
 In package 1pc  
 Casing material plastic  
 Work environment indoor use  
 Operation temperature -25 - +45°C  
 Certificates ENEC, UKCA, CE, EAC, SAA, RoHS  
 Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP 1200-2100mA 2.5-52V NFC 230V 80W IP20 DALI

**Product code 18131 DALI dimmable**

Brand [KGP](#)

Supply voltage 230V

Power factor 0.97

Dimmable DALI

Output voltage 2.5-52V

Output 80W

Maximum output 80W/1m

Protection class IP20

Lifespan 100000h

Height 30.0mm

Width 63.0mm

Length 251.0mm

In package 1pc

In box 30pcs

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP 150-500mA NFC white 230V 10W IP20

### Product code 19685

Brand [KGP](#)

Supply voltage 230V

Power factor 0.88

Output voltage 2.5-45V

Output 10W

Maximum output 10W/1m

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 40.0mm

Length 64.5mm

In package 1pc

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP 150-500mA NFC white 230V 10W IP20 DALI

**Product code 19075 DALI dimmable**

Brand [KGP](#)

Supply voltage 230V

Power factor 0.88

Dimmable DALI

Output voltage 2.5-45V

Output 10W

Maximum output 10W/1m

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 40.0mm

Length 64.5mm

In package 1pc

Casing colour white

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP 150-600mA 25-42V NFC 230V 3,75-15W IP20

### Product code 19301

Brand [KGP](#)

Supply voltage 230V

Power factor 0.97

Output voltage 25-42V

Output 3,75-15W

Maximum output 15W/1m

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 30.0mm

Length 103.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP 200-350mA 26-42V TRIAC 230V 5.2-15W IP20 TRIAC

**Product code 19657 TRIAC dimmable**

Brand [KGP](#)

Supply voltage 230V

Power factor 0.92

Dimmable TRIAC

Output voltage 26-42V

Output 5.2-15W

Maximum output 15W/1m

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 41.0mm

Length 125.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## **LED driver KGP 250-1050mA DALI NFC 230V 100W IP20 DALI**

**Product code 20210 DALI dimmable**

---

Brand [KGP](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 100W

Maximum output 100W/1m

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 29.4mm

Length 280.0mm

In package 1pc

In box 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



## **LED driver KGP 300-1050mA 9-42V 230V 44.1W IP20**

## Product code 17575

---

Brand [KGP](#)

Supply voltage 230V

Power factor 0.95

Output voltage 9-42V

Output 44.1W

Maximum output 44.1W/1m

Rated current 1050mA

Protection class IP20

Lifespan 100000h

Height 23.0mm

Width 43.0mm

Length 131.2mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP 500-700mA 230V 30W IP20 TRIAC

**Product code 21076 TRIAC dimmable**

Brand [KGP](#)

Supply voltage 230V

Power factor 0.92

Dimmable TRIAC

Output 30W

Maximum output 30W/1m

Protection class IP20

Lifespan 100000h

Height 30.0mm

Width 44.0mm

Length 137.5mm

In package 1pc

Casing material plastic


Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years

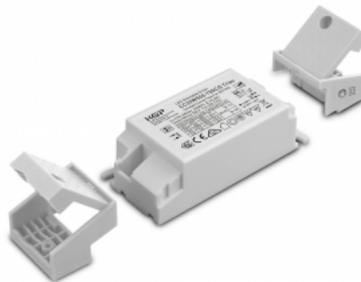

The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP 700-1050mA 27-38V 230V 40W IP20 TRIAC

**Product code 17593 TRIAC dimmable**

Brand [KGP](#)

Supply voltage 230V

Power factor 0.92

Dimmable TRIAC

Output voltage 27-38V

Output 40W

Maximum output 40W/1m

Rated current 1050mA

Protection class IP20

Lifespan 50000h

Height 30.0mm

Width 44.0mm

Length 172.3mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP LC110W350-500 230V 110W IP20 No dim

**Product code 18313 No dim  
dimmable**

Brand [KGP](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable No dim  
Output voltage 50V  
Output 110W  
Maximum output 110W/1m  
Rated current 1800mA  
Protection class IP20  
Lifespan 50000h  
Height 21.0mm  
Width 30.0mm  
Length 280.0mm  
In package 1pc  
In box 20pcs  
Work environment indoor use  
Operation temperature -25 - +50°C  
Certificates CE, RoHS, ENEC, SAA,  
UKCA  
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP LC75W900-1800 230V 75WW IP20 No dim

**Product code 17556 No dim  
dimmable**

---

Brand [KGP](#)

Supply voltage 230V

Power factor 0.95

Dimmable No dim

Output voltage 60V

Output 75WW

Maximum output 75W/1m

Rated current 1800mA

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 29.4mm

Length 280.0mm

In package 1pc

In box 20pcs

Work environment indoor use

Operation temperature -25 - +50°C

Certificates CE, RoHS, ENEC, SAA,  
UKCA

Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver KGP Micro-DT6 100-700mA 48V 30W IP20

**Product code 20548**

---

Brand [KGP](#)

Supply voltage 48V

Power factor 0.95

Output voltage 42V

Output 30W

Maximum output 30W/1m

Rated current 700mA

Protection class IP20

Lifespan 100000h

Height 21.0mm

Width 29.4mm

Length 280.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -25 - +45°C

Certificates ENEC, UKCA, CE, EAC,

SAA, RoHS

Warranty 5 years



## LED driver LIFUD 1000mA 27-42V LF-GDE042YF1000U 230V 42W IP20 0-10V

**Product code 13930 0-10V dimmable**

---

Brand LIFUD

Supply voltage 230V

Dimmable 0-10V

Output voltage 27-42V

Output 42W

Maximum output 42W/1m

Rated current 1000mA

Protection class IP20

Height 30.0mm

Width 65.0mm

Length 140.0mm

Weight 200 g

Casing material plastic

Work environment indoor use

Certificates CE, SELV, ENEC, F, M



## LED driver LIFUD LF-GSD040YE 230V 40W IP20 DALI

**Product code 18283 DALI dimmable**

Brand LIFUD  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output voltage 25-42V  
Output 40W  
Maximum output 40W/1m  
Protection class IP20  
Lifespan 100000h  
Height 21.0mm  
Width 30.0mm  
Length 245.0mm  
Weight 185 g  
In package 1pc  
Casing material plastic  
Work environment indoor use  
Operation temperature -30 - +50°C  
Certificates ENEC, , CE,  
Warranty 5 years



The power supply unit is designed for indoor use, and its IP20 protection class provides adequate protection against dust and small objects. It is an ideal choice for home and office spaces where a reliable and stable power source for various electronic devices is needed. By choosing a quality power supply unit from the LED house selection, you can be sure that your electronic devices are reliably and safely powered, ensuring their smooth operation and longer lifespan.

## LED driver LTECH DT6/DT8 2CH 1 230V 20W IP20 DALI

**Product code 21025 DALI dimmable**

Brand LTECH  
Supply voltage 230V  
Power factor 0.85  
Dimmable DALI  
Output voltage 9-42V  
Output 20W  
Maximum output 20W/1m  
Rated current 700mA  
Protection class IP20  
Height 23.0mm  
Width 40.0mm  
Length 127.0mm  
Weight 105 g  
Operation temperature -20 ~ 50°C  
Warranty 5 years



A high-quality constant current LED driver designed for professional lighting solutions where precise light control, smooth dimming, and color temperature adjustment are essential. The device supports DALI-2 control and is ideal for Tunable White luminaires. Thanks to NFC programming, configuration is fast and flexible — parameters can be adjusted without physical switches or opening the housing. This significantly simplifies installation and system setup for both designers and installers.

## LED driver LTECH SE-12-100-400-W1DS 230V 12W IP20 DALI

**Product code 16893 DALI dimmable**

Brand LTECH  
Supply voltage 230V  
Power factor 0.85  
Dimmable DALI  
Output voltage 9-42V  
Output 12W  
Maximum output 12W/1m  
Rated current 400mA  
Protection class IP20  
Height 20.0mm  
Width 30.0mm  
Length 135.0mm  
Operation temperature -20 ~ 50°C  
Warranty 5 years



DALI dimmable LED power supply that can be easily reconfigured. 0.9-12W 100mA / 9-42V / 0.9-4.2W 150mA / 9-42V / 1.35-6.3W 200mA / 9-42V / 1.8-8.4W 250mA / 9-42V / 2.25-10.5W 300mA / 9-40V / 2.7-12W 350mA / 9-34V / 3.15-11.9W 400mA / 9-30V / 3.6-12W

## LED driver MEAN WELL 1450mA HLG-60H-42A 230V 60W IP65

**Product code 14541**

Brand [MEAN WELL](#)  
Supply voltage 230V  
Output voltage 42V  
Output 60W  
Maximum output 60W/1m  
Rated current 1450mA  
Protection class IP65  
Warranty 3 years



## LED driver Moso driver poseidon 230V 80W IP20 DALI

**Product code 21473 DALI dimmable**

---

Supply voltage 230V  
Power factor 0.97  
Dimmable DALI  
Output 80W  
Maximum output 80W/1m  
Protection class IP20  
Lifespan 100000h  
In package 1pc  
Casing material plastic  
Work environment indoor use  
Operation temperature -25 - +45°C  
Certificates ENEC, UKCA, CE, EAC,  
SAA, RoHS  
Warranty 5 years

## LED driver SKYDANCE TE-12A-H 230V 12W IP20 TRIAC

**Product code 22148 TRIAC dimmable**

---

Brand [SKYDANCE](#)  
Supply voltage 230V  
Dimmable TRIAC  
Output voltage 3-24V  
Output 12W  
Maximum output 12W/1m  
Rated current 700mA  
Protection class IP20  
Height 20.0mm  
Width 36.0mm  
Length 111.0mm  
Work environment indoor use  
Operation temperature -20~50°C  
Certificates CE  
Warranty 5 years



## LED driver SKYDANCE TE-36A 230V 36W IP20 TRIAC / PUSH

**Product code 16522 TRIAC / PUSH  
dimmable**

---

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable TRIAC / PUSH

Output voltage 10-52V

Output 36W

Maximum output 36W/1m

Rated current 1200mA

Protection class IP20

Height 30.0mm

Width 44.0mm

Length 168.5mm

Work environment indoor use

Operation temperature -30~50°C

Certificates CE

Warranty 5 years

