LED floodlight BLP-F24A50P black 230V 47W 7500lm 120° IP66 0-10V 730

Product code 18284 **0-10V dimmable**

Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 47W
Maximum output 47W/1m
Luminous flux 7500lumens
Luminaire’s efficiency 160W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 70
Sdcm - macadam ellipses 3
Protection class IP66
Lifespan 50000h
Llmf tm21 L80B50 @25°C 50.000h
Height 142.0mm
Width 200.0mm
Length 265.0mm
Weight 2.3 kg
In package 1pc
Casing colour black
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

Floodlight Deko-Light Flood Flex II black 230V 12W IP65 3000K warm white

Product code 20993

Brand Deko-Light
Supply voltage 230V
Output 12W
Correlated colour temperature warm white 3000K
Protection class IP65
Height 152.0mm
Width 200.0mm
Length 56.0mm
Casing colour black
Casing material aluminium
Impact resistance IK08
Work environment outdoor use
Warranty 5 years



Floodlight Deko-Light Flood RF II gray 230V 10W 270lm 115° IP65 RGB + 3000K RGBW warm

Product code 20994

Brand Deko-Light
Supply voltage 230V
Output 10W
Luminous flux 270lumens
Luminaire’s efficiency 27W
Correlated colour temperature RGBW warm RGB + 3000K
Lens angle 115
Protection class IP65
Lifespan 25000h
Height 179.0mm
Width 133.0mm
Length 57.0mm
Casing colour gray
Casing material plastic
Impact resistance IK08
Work environment outdoor use
Operation temperature -20 kuni 50 °C°C
Warranty 5 years



LED floodlight EMOS ASIMO black 230V 300W 33000lm 55x125° IP66 840

Product code 16609

Brand EMOS
Supply voltage 230V
Power factor 0.90
Output 300W
Maximum output 300W/1m
Luminous flux 33000lumens
Luminaire’s efficiency 110W
Correlated colour temperature pure white 4000K
Lens angle 55x125
Cri 80
Protection class IP66
Lifespan 50000h
Height 80.0mm
Width 363.0mm
Length 370.0mm
In package 1pc
Casing colour black
Casing material aluminum + glass
Impact resistance IK08
Work environment outdoor use
Operation temperature -30 ~ 50°C
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight LED slim black 230V 10W 1050lm 90° IP65 845

Product code 22716

Supply voltage 230V
Output 10W
Maximum output 10W/1m
Luminous flux 1050lumens
Luminaire’s efficiency 105W
Correlated colour temperature pure white 4500K
Lens angle 90
Cri 80
Sdcm - macadam ellipses 5
En62471 1
Protection class IP65
Lifespan 100000h
Casing colour black
Casing material aluminium
Impact resistance IK07
Work environment outdoor use
Operation temperature -30...+50°C
Certificates CE, CB, ENEC, EAC, UKCA, EPD



LED floodlight LEDVANCE FL 50 P black 230V 27-41W 6000lm 100° IP66 840

Product code 19186

Brand LEDVANCE
Supply voltage 230V
Output 27-41W
Maximum output 41W/1m
Luminous flux 6000lumens
Correlated colour temperature pure white 4000K
Lens angle 100
Cri 80
Sdcm - macadam ellipses 5
En62471 1
Protection class IP66
Lifespan 100000h
Height 179.0mm
Width 43.0mm
Length 201.0mm
Weight 830 g
Casing colour black
Casing material aluminium
Impact resistance IK07
Work environment outdoor use
Operation temperature -30...+50°C
Certificates CE, CB, ENEC, EAC, UKCA, EPD



LED floodlight Light Slim G3 230V 400W 68000lm 38x70° No dim 740

Product code 23769

Supply voltage 230V
Power factor 0.90
Output 400W
Maximum output 400W/1m
Luminous flux 68000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 4000K
Lens angle 38x70
Cri 70
Sdcm - macadam ellipses 6
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 500.0mm
Width 370.0mm
Length 80.0mm
No. of switches 30000pcs
Power supply SOSEN
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

Floodlight Liralighting Piston 140 black 12V 16W 1419lm 60° IP67 RGB+4000K RGBW pure white

Product code 19107

Brand Liralighting
Supply voltage 12V
Output 16W
Maximum output 16W/1m
Luminous flux 1419lumens
Luminaire’s efficiency 89W
Correlated colour temperature RGBW pure white RGB+4000K
Lens angle 60
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 60.0mm
Width 168.0mm
Length 185.0mm
In package 1pc
Casing colour black
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 140 black 17W 2191lm 10° IP67 3000K warm white

Product code 22744

Brand Liralighting
Output 17W
Maximum output 17W/1m
Luminous flux 2191lumens
Luminaire’s efficiency 129W
Correlated colour temperature warm white 3000K
Lens angle 10
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 200.0mm
Width 380.0mm
Length 300.0mm
In package 1pc
Casing colour black
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 140 gray 12V 16W 1419lm 60° IP67 RGB + 3000K RGBW warm

Product code 23292


Brand Liralighting
Supply voltage 12V
Output 16W
Maximum output 16W/1m
Luminous flux 1419lumens
Luminaire’s efficiency 89W
Correlated colour temperature RGBW warm RGB + 3000K
Lens angle 60
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 60.0mm
Width 168.0mm
Length 185.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 200 black 230V 25W 3012lm 10° IP65 DALI 830

Product code 22860 DALI dimmable

Brand Liralighting
Supply voltage 230V
Dimmable DALI
Output 25W
Maximum output 25W/1m
Luminous flux 3012lumens
Luminaire’s efficiency 120W
Correlated colour temperature warm white 3000K
Lens angle 10
Cri 80
Sdcm - macadam ellipses 3
Protection class IP65
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 233.0mm
Diameter 200.0mm
Weight 4.9 kg
In package 1pc
Casing colour black
Casing material aluminium
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years

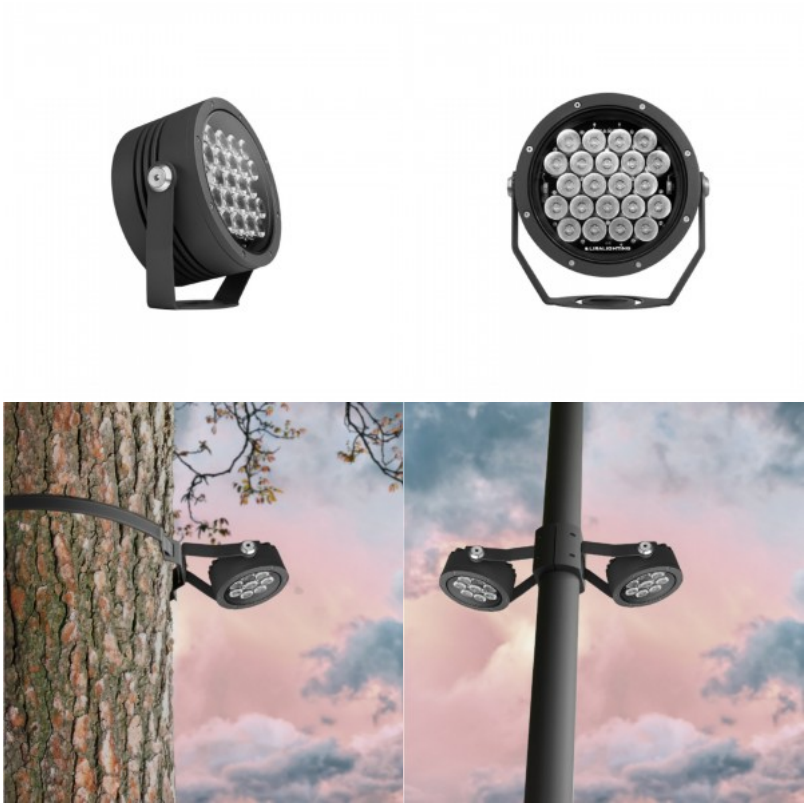

Floodlight Liralighting Piston 200 black 230V 36W 3192lm 45° IP67 DMX RGB+4000K RGBW pure white

Product code 20155 DMX dimmable

Brand Liralighting
Supply voltage 230V
Dimmable DMX
Output 36W
Maximum output 36W/1m
Luminous flux 3192lumens
Luminaire’s efficiency 89W
Correlated colour temperature RGBW pure white RGB+4000K
Lens angle 45
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 60.0mm
Width 228.0mm
Length 233.0mm
Weight 3.7 kg
In package 1pc
Casing colour black
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 200 gray 36W 2232lm 40° IP67 RGB+4000K RGBW pure white

Product code 19114

Brand Liralighting
Output 36W
Maximum output 36W/1m
Luminous flux 2232lumens
Luminaire’s efficiency 62W
Correlated colour temperature RGBW pure white RGB+4000K
Lens angle 40
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 60.0mm
Width 228.0mm
Length 233.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 200 gray 66W 8008lm IP67 4000K pure white

Product code 19112

Brand Liralighting
Output 66W
Maximum output 66W/1m
Luminous flux 8008lumens
Luminaire’s efficiency 121W
Correlated colour temperature pure white 4000K
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 60.0mm
Width 228.0mm
Length 233.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 200 LV gray 44W 6025lm IP67 3000K warm white

Product code 19110

Brand Liralighting
Output 44W
Maximum output 44W/1m
Luminous flux 6025lumens
Luminaire’s efficiency 137W
Correlated colour temperature warm white 3000K
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 60.0mm
Width 228.0mm
Length 233.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 200 LV gray 66W 7528lm IP67 3000K warm white

Product code 19109

Brand Liralighting
Output 66W
Maximum output 66W/1m
Luminous flux 7528lumens
Luminaire’s efficiency 114W
Correlated colour temperature warm white 3000K
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 60.0mm
Width 228.0mm
Length 233.0mm
In package 1pc
Casing colour gray
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



Floodlight Liralighting Piston 350 slim black 230V 160W 20128lm 20° IP67 3000K warm white

Product code 23763

Brand Liralighting
Supply voltage 230V
Output 160W
Maximum output 160W/1m
Luminous flux 20128lumens
Luminaire’s efficiency 126W
Correlated colour temperature warm white 3000K
Lens angle 20
Sdcm - macadam ellipses 3
Protection class IP67
Lifespan 100000h
Llmf tm21 L80B10 @25°C 100.000h
Height 408.0mm
Diameter 366.0mm
Weight 12 kg
In package 1pc
Casing colour black
Casing material aluminium + plastic
Polishing matt
Impact resistance IK10
Work environment outdoor use
Operation temperature -40 ~ 45°C
Certificates CE
Warranty 5 years



LED floodlight PHILIPS BVP154 motion sensor 10W 1000lm IP65 3000K warm white

Product code 19106

Brand PHILIPS
Output 10W
Maximum output 10W/1m
Luminous flux 1000lumens
Luminaire’s efficiency 100W
Correlated colour temperature warm white 3000K
Protection class IP65
Height 35.0mm
Width 150.0mm
Length 160.0mm
Impact resistance IK07
Work environment indoor / outdoor use



LED floodlight PHILIPS BVP164 motion sensor 20W 2200lm IP65 3000K warm white

Product code 19103

Brand PHILIPS
Output 20W
Maximum output 20W/1m
Luminous flux 2200lumens
Luminaire’s efficiency 110W
Correlated colour temperature warm white 3000K
Protection class IP65
Height 52.0mm
Width 97.0mm
Length 172.0mm
Impact resistance IK07
Work environment indoor / outdoor use



LED floodlight PHILIPS BVP167 30W 3600lm IP65 3000K, 4000K, 6500K 3CCT

Product code 19102

Brand PHILIPS
Output 30W
Maximum output 30W/1m
Luminous flux 3600lumens
Luminaire’s efficiency 120W
Correlated colour temperature 3CCT 3000K, 4000K, 6500K
Protection class IP65
Height 29.0mm
Width 133.0mm
Length 182.0mm
Work environment indoor / outdoor use



LED floodlight Prolumen AKITA gray 230V 600W 76330lm 50° IP66 0-10V 750

Product code 17776 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 600W
Maximum output 600W/1m
Luminous flux 76330lumens
Luminaire’s efficiency 127W
Correlated colour temperature cold white 5700K
Lens angle 50
Source of light OSRAM LED
Cri 70
Protection class IP66
Lifespan 50000h
Height 311.0mm
Width 308.0mm
Length 686.0mm
Weight 13 kg
Casing colour gray
Casing material aluminium
Power supply INVENTRONICS
Impact resistance IK10
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates ENEC, CE, CB
Warranty 7 years



LED floodlight Prolumen AKITA gray 230V 600W 89307lm 50° IP66 0-10V 750

Product code 17775 0-10V dimmable

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable 0-10V
Output 600W
Maximum output 600W/1m
Luminous flux 89307lumens
Luminaire’s efficiency 149W
Correlated colour temperature cold white 5700K
Lens angle 50
Source of light LUMILEDS
Cri 70
Protection class IP66
Lifespan 50000h
Height 311.0mm
Width 308.0mm
Length 686.0mm
Weight 13 kg
Casing colour gray
Casing material aluminium
Power supply INVENTRONICS
Impact resistance IK10
Work environment outdoor use
Operation temperature -40° - +50°C
Certificates ENEC, CE, CB
Warranty 7 years



Floodlight Prolumen FLV black 230V 70W 8400lm 120° IP65 830

Product code 16208

Brand Prolumen
Supply voltage 230V
Output 70W
Maximum output 70W/1m
Luminous flux 8400lumens
Luminaire’s efficiency 120W
Correlated colour temperature warm white 3000K
Lens angle 120
Source of light CREE LED
Cri 80
Protection class IP65
Lifespan 50000h
Casing colour black
Casing material aluminum + glass
Impact resistance IK08
Work environment outdoor use
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP65, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 100W 15000lm 120x150° IP66 No dim 750

Product code 18979

Brand Prolumen
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120x150
Cri 70
Protection class IP66
Power supply MEAN WELL
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 100W 16000lm 120x150° IP66 750

Product code 18990

Brand Prolumen
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 5000K
Lens angle 120x150
Cri 70
Protection class IP66
Power supply SOSEN
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 150W 22500lm 120x150° No dim 740

Product code 18975

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120x150
Cri 70
Power supply MEAN WELL
Warranty 5 years
Cable 1m



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 150W 22500lm 120x150° No dim 750

Product code 18980

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120x150
Cri 70
Power supply OSRAM
Warranty 5 years
Cable 1m



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 150W 22500lm 120x150° No dim 750

Product code 18981

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120x150
Cri 70
Power supply MEAN WELL
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 150W 25500lm 100x60° No dim 750

Product code 18995

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 25500lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle 100x60
Cri 70
Power supply SOSEN
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 150W 25500lm 120x150° No dim 750

Product code 18991

Brand Prolumen
Output 150W
Maximum output 150W/1m
Luminous flux 25500lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle 120x150
Cri 70
Power supply SOSEN
Warranty 5 years
Cable 1m



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 200W 34000lm 100x60° IP66 No dim 750

Product code 18996

Brand Prolumen
Output 200W
Maximum output 200W/1m
Luminous flux 34000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle 100x60
Cri 70
Protection class IP66
Power supply SOSEN
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 200W 34000lm MLP30° No dim 740

Product code 18976

Brand Prolumen
Output 200W
Maximum output 200W/1m
Luminous flux 34000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 4000K
Lens angle MLP30
Cri 70
Power supply MEAN WELL
Warranty 5 years
Cable 1m



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 200W 34000lm P45° No dim 750

Product code 18992

Brand Prolumen
Output 200W
Maximum output 200W/1m
Luminous flux 34000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle P45
Cri 70
Power supply SOSEN
Warranty 5 years
Cable 1m



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 230V 100W 15000lm 120x150° No dim 740

Product code 18974

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 100W
Maximum output 100W/1m
Luminous flux 15000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120x150
Cri 70
Sdcm - macadam ellipses 6
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 57.0mm
Width 254.0mm
Length 288.0mm
In box 6pcs
Power supply MEAN WELL
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 230V 200W 34000lm 45x100° No dim 740

Product code 18987

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 200W
Maximum output 200W/1m
Luminous flux 34000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 4000K
Lens angle 45x100
Cri 70
Sdcm - macadam ellipses 6
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 57.0mm
Width 333.0mm
Length 403.0mm
In box 6pcs
Power supply SOSEN
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 230V 200W 34000lm 45° No dim 740

Product code 21862

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 200W
Maximum output 200W/1m
Luminous flux 34000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 4000K
Lens angle 45
Cri 70
Sdcm - macadam ellipses 6
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 57.0mm
Width 333.0mm
Length 403.0mm
In box 6pcs
Power supply SOSEN
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Light Slim G3 240W 40800lm 25° No dim 750

Product code 18997

Brand Prolumen
Output 240W
Maximum output 240W/1m
Luminous flux 40800lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle 25
Cri 70
Power supply SOSEN
Warranty 5 years

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 240W 40800lm MLP30° No dim 740

Product code 18977

Brand Prolumen
Output 240W
Maximum output 240W/1m
Luminous flux 40800lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 4000K
Lens angle MLP30
Cri 70
Power supply MEAN WELL
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 240W 40800lm MLP30° No dim 750

Product code 18984

Brand Prolumen
Output 240W
Maximum output 240W/1m
Luminous flux 40800lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle MLP30
Cri 70
Power supply MEAN WELL
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 240W 40800lm P45° No dim 740

Product code 18988

Brand Prolumen
Output 240W
Maximum output 240W/1m
Luminous flux 40800lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 4000K
Lens angle P45
Cri 70
Power supply SOSEN
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 240W 40800lm P45° No dim 750

Product code 18993

Brand Prolumen
Output 240W
Maximum output 240W/1m
Luminous flux 40800lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle P45
Cri 70
Power supply SOSEN
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 400W 68000lm 25° No dim 750

Product code 18998

Brand Prolumen
Output 400W
Maximum output 400W/1m
Luminous flux 68000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle 25
Cri 70
Power supply SOSEN
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 400W 68000lm MLP30° No dim 750

Product code 18985

Brand Prolumen
Output 400W
Maximum output 400W/1m
Luminous flux 68000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle MLP30
Cri 70
Power supply MEAN WELL
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Light Slim G3 400W 68000lm P45° No dim 750

Product code 18994

Brand Prolumen
Output 400W
Maximum output 400W/1m
Luminous flux 68000lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 5000K
Lens angle P45
Cri 70
Power supply SOSEN
Warranty 5 years
Cable 1m

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Recon 30W 4500lm 120° No dim 750

Product code 18971

Brand Prolumen
Output 30W
Maximum output 30W/1m
Luminous flux 4500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Power supply DONE
Warranty 3 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon 50W 7500lm 120° No dim 750

Product code 18972

Brand Prolumen
Output 50W
Maximum output 50W/1m
Luminous flux 7500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Cri 70
Power supply DONE
Warranty 3 years

A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!



LED floodlight Prolumen Recon black 230V 150W 22500lm 90° IP66 740

Product code 16422

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 150W
Maximum output 150W/1m
Luminous flux 22500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 63.0mm
Width 359.0mm
Length 400.0mm
In package 1pc
In box 4pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon black 230V 200W 30000lm 90° IP66 740

Product code 16423

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 200W
Maximum output 200W/1m
Luminous flux 30000lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 63.0mm
Width 389.0mm
Length 430.0mm
In package 1pc
In box 3pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply SOSEN
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon black 230V 30W 4000lm 120° IP66 727

Product code 18004

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 4000lumens
Luminaire’s efficiency 133W
Correlated colour temperature warm white 2700K
Lens angle 120
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 53.0mm
Width 204.0mm
Length 232.0mm
In package 1pc
In box 5pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply TUREFUL
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon black 230V 30W 4500lm 120° IP66 740

Product code 17225

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 4500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 53.0mm
Width 204.0mm
Length 232.0mm
In package 1pc
In box 5pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply TUREFUL
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon black 230V 30W 4500lm 120° IP66 750

Product code 16328

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 30W
Maximum output 30W/1m
Luminous flux 4500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 53.0mm
Width 204.0mm
Length 232.0mm
In package 1pc
In box 5pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply TUREFUL
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 3 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon black 230V 50W 6500lm 120° IP66 727

Product code 18005

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 50W
Maximum output 50W/1m
Luminous flux 6500lumens
Luminaire’s efficiency 130W
Correlated colour temperature warm white 2700K
Lens angle 120
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 53.0mm
Width 245.0mm
Length 280.0mm
In package 1pc
In box 5pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply DONE
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon black 230V 50W 7500lm 120° IP66 740

Product code 17585

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 50W
Maximum output 50W/1m
Luminous flux 7500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 53.0mm
Width 245.0mm
Length 280.0mm
In package 1pc
In box 5pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply DONE
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Recon black 230V 50W 7500lm 120° IP66 750

Product code 16329

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 50W
Maximum output 50W/1m
Luminous flux 7500lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 5000K
Lens angle 120
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 35000h
Llmf tm21 L80B10 @25°C 50.000h
Height 53.0mm
Width 245.0mm
Length 280.0mm
In package 1pc
In box 5pcs
Casing colour black
Casing material aluminium
Polishing matt
No. of switches 30000pcs
Power supply TUREFUL
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -25°C - +45°C
Certificates CE, RoHS
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Recon lights in the LED House selection are available in different power levels - we will find the perfect outdoor light for any environment! Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Slim black 230V 100W 16000lm 120X150° IP66 740

Product code 17700

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 100W
Maximum output 100W/1m
Luminous flux 16000lumens
Luminaire’s efficiency 160W
Correlated colour temperature pure white 4000K
Lens angle 120X150
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 105.0mm
Width 275.0mm
Length 370.0mm
In package 1pc
In box 4pcs
Casing colour black
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -40° - +50°C
Certificates CE
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

LED floodlight Prolumen Slim black 230V 150W 25500lm 120X150° IP66 740

Product code 17718

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Output 150W
Maximum output 150W/1m
Luminous flux 25500lumens
Luminaire’s efficiency 170W
Correlated colour temperature pure white 4000K
Lens angle 120X150
Source of light PHILIPS LED
Cri 70
Sdcm - macadam ellipses 6
Protection class IP66
Lifespan 50000h
Llmf tm21 L90B10 @25°C 50.000h
Height 105.0mm
Width 275.0mm
Length 370.0mm
In package 1pc
In box 3pcs
Casing colour black
Casing material aluminium
Polishing matt
Power supply SOSEN
Impact resistance IK08
Work environment indoor / outdoor use
Operation temperature -40° - +50°C
Certificates CE
Warranty 5 years



A reliable LED floodlight for illuminating areas and parking lots. The floodlight's protection class is IP66 and IK08, which means the light fixture withstands outdoor conditions excellently. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!

Motion sensor Quick plug-in Micro-wave sensor, 5.8Ghz, Micro-wave + daylight sensor 230V



Product code 14853

Supply voltage 230V
Warranty 2 years

Motion sensor Quick plug-in PIR sensor, infrared motion sensor + daylight sensor



Product code 18973

Warranty 2 years

© LED House OÜ, (+372) 56 202 303
Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee