

## Regulator Casambi R4EBT anthracite IP20 CASAMBI

**Product code 18018 CASAMBI**  
**dimmable**

---

Brand Casambi  
Dimmable CASAMBI  
Protection class IP20  
Height 11.0mm  
Width 40.0mm  
Length 40.0mm  
Casing colour anthracite  
Work environment indoor use  
Operation temperature -20° - + 65°C  
Certificates CE  
Warranty 2 years



remote control / radio insert for  
CASAMBI conversion kit for wall  
switch, battery-free for CASAMBI  
networks 2/4-channel

## Remote G201, RF 2.4Ghz

**Product code 15425**

---

Warranty 5 years



## Control panel LTECH Dimmer DA4 DALI

**Product code 13793 DALI dimmable**

Brand LTECH  
Dimmable DALI  
Height 37.0mm  
Width 86.0mm  
Length 86.0mm  
Weight 200 g  
Operation temperature -20°C~60°C  
Certificates CE, RoHS

4 channel



## Control panel LTECH DX5 4 tsooni, 2.4GHz + DMX512 white 230V

**Product code 13789**

Brand LTECH  
Supply voltage 230V  
Height 36.0mm  
Width 86.0mm  
Length 86.0mm  
Weight 225 g  
Casing colour white  
Operation temperature -20°C~60°C  
Certificates CE, RoHS



## Control panel LTECH DX6 4 zone, 2.4GHz + DMX512 white 230V

**Product code 13705**

Brand LTECH  
Supply voltage 230V  
Height 36.0mm  
Width 86.0mm  
Length 86.0mm  
Weight 225 g  
Casing colour white  
Operation temperature -20°C~60°C  
Certificates CE, RoHS



## Control panel LTECH DX7 4 tsooni, valge korpus 2.4GHz + DMX512 230V

**Product code 13704**


Brand LTECH  
Supply voltage 230V  
Height 36.0mm  
Width 86.0mm  
Length 86.0mm  
Weight 225 g  
Operation temperature -20°C~60°C  
Certificates CE, RoHS



## Control panel LTECH EX6 230V IP20

**Product code 15115**

Brand LTECH  
Supply voltage 230V  
Protection class IP20  
Height 37.0mm  
Width 86.0mm  
Length 86.0mm  
Weight 240 g  
Operation temperature -30 ~ 55°C°C  
Certificates CE

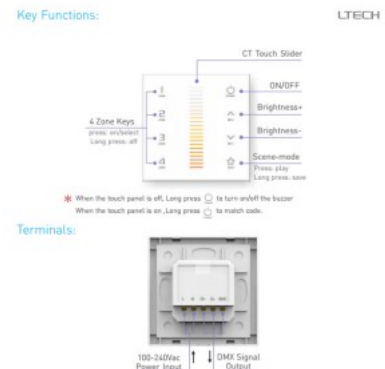

## Control panel LTECH EX61 230V IP20

**Product code 15118**

Brand LTECH  
Supply voltage 230V  
Protection class IP20  
Height 50.0mm  
Width 86.0mm  
Length 86.0mm  
Weight 235 g  
In package 1pc  
Operation temperature 20°C~55°C°C  
Certificates CE, RoHS



## Control panel LTECH EX7S RGB Touch Panel 4 zones 230V IP20

**Product code 15116**

Brand LTECH  
Supply voltage 230V  
Protection class IP20  
Height 36.0mm  
Width 86.0mm  
Length 86.0mm  
Weight 225 g  
Operation temperature -20 ~ 55°C  
Certificates CE, RoHS



## Remote LTECH F1 IP20

**Product code 15508**

Brand LTECH  
Protection class IP20  
Height 18.0mm  
Width 46.0mm  
Length 150.0mm  
Weight 80 g  
Operation temperature -30°C~55°C  
Battery DC3V CR2032  
Certificates CE, RoHS




## Receiver LTECH R4-5A 4x5A 2.4GHz 5-24V

**Product code 13697**

Brand LTECH  
Supply voltage 5-24V  
Rated current 20000mA  
Height 30.0mm  
Length 175.0mm  
Weight 150 g  
Work environment indoor use  
Operation temperature -30°C~55°C  
Certificates CE, RoHS



R4-5A Wiring Diagram



## Remote LTECH T4 RF 2.4GHZ RGBW 5V

**Product code 13698**

Brand LTECH  
Supply voltage 5V  
Height 22.0mm  
Width 55.0mm  
Length 145.0mm  
Weight 200 g  
Operation temperature -20 ° C to 55°C  
Certificates CE, RoHS  
Warranty 3 years

Input voltage: DC5V (Built-in Lithium battery) Working current: ≤30mA  
Working frequency: 2.4GHZ  
transmitting distance: 30m Remote option sync or zone or programming control Gray scale level: 4096×4096×4096 Battery capacity: 1000mAh Working temperature: -20°C□55°C Dimension: 145×W55×H22mm Package Size: 168×W102×H28mm



## Remote SKYDANCE R 14 1zone RGBW white IP20 RF

**Product code 21938 RF dimmable**

Brand [SKYDANCE](#)  
Dimmable RF  
Protection class IP20  
Height 11.0mm  
Width 36.0mm  
Length 139.0mm  
Weight 40 g  
In package 1pc  
Casing colour white  
Work environment indoor use  
Operation temperature -30~55°C  
Battery CR2032  
Certificates CE  
Warranty 5 years



## Remote SKYDANCE R1 1 zone IP20 RF

**Product code 15717 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 11.0mm

Width 40.0mm

Length 135.0mm

Weight 41 g

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Regulator SKYDANCE R1-1 black IP20 RF

**Product code 16085 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 17.0mm

Diameter 43.0mm

Casing colour black

Work environment indoor use

Operation temperature -30 ~ 55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Regulator SKYDANCE R1-1 white IP20 RF

**Product code 16086 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 17.0mm

Diameter 43.0mm

Casing colour white

Work environment indoor use

Operation temperature -30 ~ 55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Remote SKYDANCE R11 1zone white IP20 RF

**Product code 21937 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 11.0mm

Width 36.0mm

Length 139.0mm

Weight 40 g

In package 1pc

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Remote SKYDANCE R11 1 zone IP20 RF

**Product code 16142 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 11.0mm

Width 36.0mm

Length 139.0mm

Weight 40 g

In package 1pc

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Remote SKYDANCE R6-1 1 zone IP20 RF

**Product code 15718 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.0mm

Width 58.5mm

Length 107.0mm

Weight 37 g

Package weight 62 g

In package 1pc

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Remote SKYDANCE R9 RGBW 1 zone IP20 RF

**Product code 15795 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.0mm

Width 58.5mm

Length 107.0mm

Weight 34 g

Package weight 58 g

In package 1pc

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Control panel SKYDANCE RK2 CCT black IP20 RF

**Product code 16895 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 57.0mm

Width 91.0mm

Length 72.0mm

Weight 61 g

Package weight 118 g

In package 1pc

Casing colour black

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Remote SKYDANCE RS2 4 zone CCT black IP20 RF

**Product code 16292 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 17.5mm

Width 50.0mm

Length 141.0mm

Weight 164 g

Casing colour black

Operation temperature -30~55°C

Battery AAA\*2

Certificates CE

Warranty 5 years



## Remote SKYDANCE RS4 4 zone black IP20 RF RGBW

**Product code 16098 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Correlated colour temperature RGBW

RGBW

Protection class IP20

Height 17.5mm

Width 50.0mm

Length 141.0mm

Weight 164 g

Casing colour black

Operation temperature -30~55°C

Battery AAA\*2

Certificates CE

Warranty 5 years



## Remote SKYDANCE RS8 8 zone black IP20 RF RGBW

**Product code 18207 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Correlated colour temperature RGBW

RGBW

Protection class IP20

Height 17.5mm

Width 50.0mm

Length 141.0mm

Weight 164 g

Casing colour black

Operation temperature -30~55°C

Battery AAA\*2

Certificates CE

Warranty 5 years



## Remote SKYDANCE RS9 RGBW 1 zone IP20 RF

**Product code 16449 RF dimmable**

---

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 17.5mm

Width 50.0mm

Length 141.0mm

Weight 78 g

Package weight 111 g

In package 1pc

Work environment indoor use

Operation temperature -30~55°C

Battery AAA x 2

Certificates CE

Warranty 5 years



## Remote SKYDANCE RTS 1 zone SPI IP20 RF

**Product code 19231 RF dimmable**

---

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 17.5mm

Width 53.0mm

Length 122.0mm

Weight 88 g

Casing material plastic

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Remote SKYDANCE RU4 4 zone IP20 RF

**Product code 15763 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 11.0mm

Width 40.0mm

Length 135.0mm

Weight 41 g

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Remote SKYDANCE RU8 8zone IP20 RF

**Product code 18001 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 11.0mm

Width 40.0mm

Length 135.0mm

Weight 41 g

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Control panel SKYDANCE S1-K white 230V IP20 TRIAC / RF

**Product code 16353 TRIAC / RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 230V  
 Dimmable TRIAC / RF  
 Output voltage 230V  
 Maximum output 360W/1m  
 Rated current 1500mA  
 Protection class IP20  
 Height 48.0mm  
 Width 86.0mm  
 Length 86.0mm  
 Installation opening diameter 59mm  
 Weight 181 g  
 Package weight 234 g  
 In package 1pc  
 Casing colour white  
 Work environment indoor use  
 Operation temperature -30~55°C  
 Certificates CE  
 Warranty 5 years



## Control panel SKYDANCE T11 black 230V IP20 RF

**Product code 16099 RF dimmable**

Brand [SKYDANCE](#)  
 Supply voltage 230V  
 Dimmable RF  
 Protection class IP20  
 Height 33.0mm  
 Width 86.0mm  
 Length 86.0mm  
 Weight 169 g  
 Casing colour black  
 Work environment indoor use  
 Operation temperature -30~55°C  
 Certificates CE  
 Warranty 5 years



## Control panel SKYDANCE T11 white 230V IP20 RF

**Product code 17865 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable RF

Protection class IP20

Height 33.0mm

Width 86.0mm

Length 86.0mm

Weight 169 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Control panel SKYDANCE T13 4 zones RGB black 230V IP20 RF

**Product code 15897 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable RF

Protection class IP20

Height 33.0mm

Width 86.0mm

Length 86.0mm

Weight 169 g

Casing colour black

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Control panel SKYDANCE T13 4 zones RGB white 230V IP20 RF

**Product code 15896 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable RF

Protection class IP20

Height 33.0mm

Width 86.0mm

Length 86.0mm

Weight 169 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Control panel SKYDANCE T13-S RGB 1 zone RF/DMX black IP20 RF / DMX

**Product code 17108 RF / DMX dimmable**

Brand [SKYDANCE](#)

Dimmable RF / DMX

Protection class IP20

Height 11.5mm

Width 86.0mm

Length 86.0mm

Package weight 230 g

Casing colour black

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Single-zone 2.4GHz wall panel that also controls DMX devices. Operates on 230V power.

## Control panel SKYDANCE T14 4 zones RGBW black 230V IP20 RF

**Product code 15895 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable RF

Protection class IP20

Height 33.0mm

Width 86.0mm

Length 86.0mm

Weight 169 g

Casing colour black

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Control panel SKYDANCE T14 4 zones RGBW white 230V IP20 RF

**Product code 15894 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable RF

Protection class IP20

Height 33.0mm

Width 86.0mm

Length 86.0mm

Weight 169 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Control panel SKYDANCE T21 4 zone battery power black IP20 RF

**Product code 16717 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 20.5mm

Width 86.0mm

Length 86.0mm

Weight 156 g

Package weight 192 g

Casing colour black

Work environment indoor use

Operation temperature -30~55°C

Battery AAA\*2

Certificates CE

Warranty 5 years



## Control panel SKYDANCE T21 4 zone battery power white IP20 RF

**Product code 16907 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 20.5mm

Width 86.0mm

Length 86.0mm

Weight 156 g

Package weight 192 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery AAA\*2

Certificates CE

Warranty 5 years



Four-zone 2.4GHz wall panel. Battery powered. Batteries are not included with the product.

## Control panel SKYDANCE T24 RGBW 4 zone battery power black IP20 RF

**Product code 18100 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 20.5mm

Width 86.0mm

Length 86.0mm

Weight 156 g

Package weight 192 g

Casing colour black

Work environment indoor use

Operation temperature -30~55°C

Battery AAA\*2

Certificates CE

Warranty 5 years



Four-zone 2.4GHz wall panel. Battery powered. Batteries are not included with the product.

## Control panel SKYDANCE T24 RGBW 4 zone battery power white IP20 RF

**Product code 16906 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 20.5mm

Width 86.0mm

Length 86.0mm

Weight 156 g

Package weight 192 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery AAA\*2

Certificates CE

Warranty 5 years



Four-zone 2.4GHz wall panel. Battery powered. Batteries are not included with the product.

## Control panel SKYDANCE TL2-4 4 zone battery power CCT white IP20 RF

**Product code 19406 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 16.5mm

Width 92.0mm

Length 100.0mm

Package weight 142 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Four-zone 2.4GHz wall panel.  
Operates on battery power. Batteries are not included with the product.

## Control panel SKYDANCE TL4-4 4 zone battery-powered RGB/RGBW white IP20 RF

**Product code 19614 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 16.5mm

Width 92.0mm

Length 100.0mm

Package weight 142 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



The TL4-4 control panel is a battery-powered wall-mounted touch remote that allows convenient control of multiple lighting zones. The device is suitable for both RGB and RGBW LED strips, enabling adjustment of brightness and colors. Its compact and stylish design complements the interior and makes lighting control easy and flexible.

## Control panel SKYDANCE TW1 1 zone battery power black IP20 RF

**Product code 16638 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.5mm

Width 86.0mm

Length 86.0mm

Package weight 137 g

Casing colour black


Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Single-zone 2.4GHz wall panel.  
Battery-powered operation. Batteries  
are not included with the product.

## Control panel SKYDANCE TW1 1 zone battery power white IP20 RF

**Product code 16639 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.5mm

Width 86.0mm

Length 86.0mm

Package weight 137 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Single-zone 2.4GHz wall panel.  
Battery-powered operation. Batteries  
are not included with the product.

## Control panel SKYDANCE TW2-4 4 zone battery power black IP20 RF

**Product code 17166 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.5mm

Width 86.0mm

Length 86.0mm

Package weight 137 g

Casing colour black


Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Four-zone 2.4GHz wall panel.  
Operates on battery power. Batteries  
are not included with the product.

## Control panel SKYDANCE TW2-4 4 zone battery power white IP20 RF

**Product code 17165 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.5mm

Width 86.0mm

Length 86.0mm

Package weight 137 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Four-zone 2.4GHz wall panel.  
Operates on battery power. Batteries  
are not included with the product.

## Control panel SKYDANCE TW4 RGB/RGBW 1 zone battery power black IP20 RF

**Product code 16636 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.5mm

Width 86.0mm

Length 86.0mm

Package weight 137 g

Casing colour black


Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Single-zone 2.4GHz wall panel.  
Battery-powered operation. Batteries  
are not included with the product.

## Control panel SKYDANCE TW4 RGB/RGBW 1 zone battery power white IP20 RF

**Product code 16637 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 9.5mm

Width 86.0mm

Length 86.0mm

Package weight 137 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



Single-zone 2.4GHz wall panel.  
Battery-powered operation. Batteries  
are not included with the product.

## Control panel SKYDANCE V4-K RGB/RGBW LED RF Controller white IP20 RF

**Product code 19534 RF dimmable**

Brand [SKYDANCE](#)

Dimmable RF

Protection class IP20

Height 22.0mm

Width 460.0mm

Length 187.0mm

Package weight 154 g

Casing colour white

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



V4-K is an LED strip controller that allows you to adjust the color and brightness of the light. The device can be controlled in two ways: directly with the knobs on the controller, or conveniently via a remote control. The controller is suitable for both RGB (color) and RGBW (color + white) strips. Intended for indoor use.

## Control panel Sunricher SR-2820 4 zone RGBW 12-24V

**Product code 13484**

Brand [Sunricher](#)

Supply voltage 12-24V

