

## LED module luminaire 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 830

### Product code 15927

Supply voltage 230V  
Output 25W  
Luminous flux 3750lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature warm white 3000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 3400g  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 840

### Product code 15941

Supply voltage 230V  
Output 25W  
Luminous flux 3750lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 3400g  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## LED module luminaire 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 830

### Product code 15642

---

Supply voltage 230V  
Output 36W  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 119W  
Correlated colour temperature warm white 3000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 3400g  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 840

### Product code 15641

Supply voltage 230V  
Output 36W  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 119W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2400g  
Package weight 2650g  
In package 1pc  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Mounting frame 1200x300 white

### Product code 14207

---

Height 45.0mm  
Width 300.0mm  
Length 1200.0mm  
In package 1pc  
In box 10pcs  
Casing colour white  
Casing material aluminum  
Polishing matt  
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

## Mounting frame 600x300 white

### Product code 17074

---

Height 45.0mm  
Width 300.0mm  
Length 600.0mm  
Weight 310g  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminum  
Polishing matt  
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

## LED module luminaire ECO 1200x300 Backlit h35 white 230V 36W 4300lm 120° IP20 840

### Product code 17977

---

Supply voltage 230V  
Output 36W  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 119W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 30.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2400g  
Package weight 2650g  
In package 1pc  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 3 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire ECO 600x600 Backlit 36A2 h25 white 230V 36W 4320lm 120° IP40 840

### Product code 17577

Brand ECO  
 Supply voltage 230V  
 Output 36W  
 Luminous flux 4320lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [SAMSUNG LED](#)  
 Cri 80  
 Ugr 22  
 Sdcm - macadam ellipses 3  
 Protection class IP40  
 Lifespan 50000h  
 Llmf tm21 L70B50 @25°C 50.000h  
 Height 25.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In box 5pcs  
 Casing colour white  
 Casing material aluminum  
 Polishing matt  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20°C~40°C  
 Certificates CE, RoHS  
 Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire ECO 600x600 Backlit h35 white 230V 36W 4320lm 120° IP20 840

### Product code 17600

Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Luminous flux 4320lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Lmf tm21 L90B50 @25°C 50.000h  
 Height 35.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In package 90pcs  
 In box 6pcs  
 Casing colour white  
 Casing material aluminum + plastic  
 Power supply [LIFUD](#)  
 Work environment indoor use  
 Operation temperature -20° - +40°C  
 Certificates CE, SAA, RoHS,  
 Warranty 3 years




High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## LED module luminaire ECO 600x600 Backlit UGR<19 36U2 h25 white 230V 36W 4000lm 120° IP40 840

### Product code 17555

Brand ECO  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Luminous flux 4000lumens  
 Luminaire's efficiency lm79 111W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [SAMSUNG LED](#)  
 Cri 80  
 Ugr 19  
 Protection class IP40  
 Lifespan 50000h  
 Height 25.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminum  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -20 - +40°C  
 Certificates CE, RoHS, ENEC, CB, New ERP  
 Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Mounting frame EMOS 600x600 70mm white

**Product code 16634**

Brand [EMOS](#)  
Height 70.0mm  
Width 600.0mm  
Length 600.0mm  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminum  
Polishing semimatt  
Work environment indoor use  
Warranty 2 years

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!



## LED module luminaire EMOS 600x600 LEXXO h30 230V 34W 4200lm 120° IP20 840

## Product code 16481

---

Brand [EMOS](#)  
Supply voltage 230V  
Power factor 0.90  
Output 34W  
Luminous flux 4200lumens  
Luminaire's efficiency lm79 124W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Ugr 22  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 30.0mm  
Width 595.0mm  
Length 595.0mm  
In package 1pc  
In box 4pcs  
Casing material aluminum  
Polishing matt  
No. of switches 25000pcs  
Work environment indoor use  
Battery 600x600 OPAL  
Certificates CE, RoHS  
Warranty 5 years




PROLUMEN OPAL LED panel 600x600 is slim and modern, making it well-suited for contemporary interiors. The panel features high-efficiency LED lights, providing bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to improve the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. Enhance your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

## LED module luminaire Eridanus 600x600 2x1800 white 230V

## 21.9W 3399lm 77° IP40/20 830

### Product code 18026

Supply voltage 230V  
Power factor 0.95  
Output 21.9W  
Luminous flux 3399lumens  
Luminaire's efficiency lm79 155W  
Correlated colour temperature warm white 3000K  
Lens angle 77  
Cri 80  
Ugr 16  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 595.0mm  
Length 595.0mm  
Weight 2700g  
In package 1pc  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years

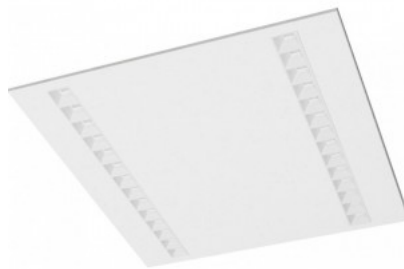

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire Eridanus R 1195x295 LED1x4250 white 230V 26.1W 4222lm 77° IP40/20 840

### Product code 18031

Supply voltage 230V  
Power factor 0.96  
Output 26.1W  
Luminous flux 4222lumens  
Luminaire's efficiency lm79 162W  
Correlated colour temperature pure white 4000K  
Lens angle 77  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2700g  
In package 1pc  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire Eridanus R 1195x295 LED1x4900 white 230V 30.8W 4867lm 77° IP40/20 840

### Product code 18032

Supply voltage 230V  
Power factor 0.95  
Output 30.8W  
Luminous flux 4867lumens  
Luminaire's efficiency lm79 158W  
Correlated colour temperature pure white 4000K  
Lens angle 77  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2800g  
In package 1pc  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years




Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## **LED module luminaire Eridanus R LED 600x600 LED2x2450 white 230V 30.8W 4867lm 77° IP40/20 840**

### **Product code 18030**

Supply voltage 230V  
Power factor 0.95  
Output 30.8W  
Luminous flux 4867lumens  
Luminaire's efficiency lm79 158W  
Correlated colour temperature pure white 4000K  
Lens angle 77  
Cri 80  
Ugr 16  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 595.0mm  
Length 595.0mm  
Weight 2700g  
In package 1pc  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years

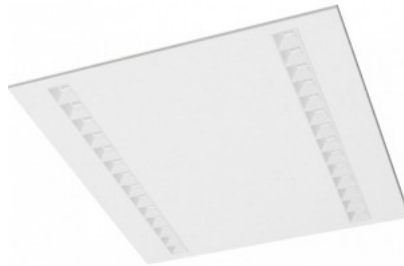

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire NELIO 1200x300 white 230V 40W 4300lm 120° IP20 840

### Product code 13863

Brand NELIO  
Supply voltage 230V  
Output 40W  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 108W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Protection class IP20  
Lifespan 35000h  
Height 10.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2100g  
In package 1pc  
In box 5pcs  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 3 years



This NELIO LED 1200x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!



## LED module luminaire NELIO 600x300 OPAL white 230V 28W 3000lm 120° IP20 840

### Product code 15105

Brand NELIO  
Supply voltage 230V  
Output 28W  
Maximum output 28W/1m  
Luminous flux 3000lumens  
Luminaire's efficiency lm79 107W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Protection class IP20  
Lifespan 35000h  
Height 10.0mm  
Width 600.0mm  
Length 300.0mm  
Installation opening diameter 575x275mm  
Weight 1030g  
In package 1pc  
In box 10pcs  
Casing colour white  
No. of switches 20000pcs  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 3 years




This NELIO LED 600x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

## Mounting frame NELIO 600x600 45mm white

**Product code 14122**

Brand NELIO  
 Height 45.0mm  
 Width 600.0mm  
 Length 600.0mm  
 Weight 300g  
 In package 1pc  
 In box 20pcs  
 Casing colour white  
 Casing material aluminum  
 Polishing semimatt  
 Work environment indoor use

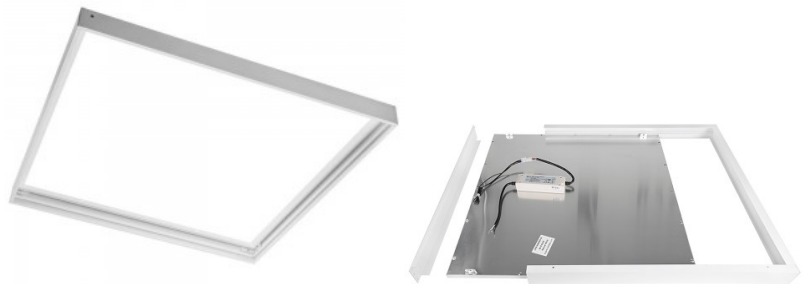

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

## Mounting frame NELIO 600x600 63mm black

**Product code 17777**

Brand NELIO  
 Height 63.0mm  
 Width 600.0mm  
 Length 600.0mm  
 In box 20pcs  
 Casing colour black  
 Casing material aluminum  
 Polishing semimatt  
 Work environment indoor use



600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!




## Mounting frame NELIO 600x600 63mm white

**Product code 15495**

Brand NELIO  
Height 63.0mm  
Width 600.0mm  
Length 600.0mm  
Weight 300g  
In box 20pcs  
Casing colour white  
Casing material aluminum  
Polishing semimatt  
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

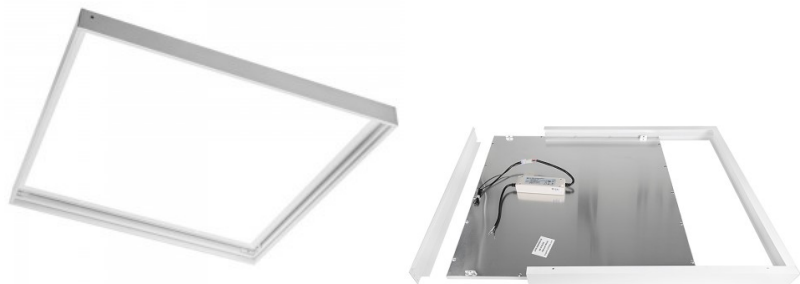

## LED module luminaire PROLUMEN 1200x300 Backlit white 230V 25W 5000lm 120° IP20 840

## Product code 17553

---

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output 25W  
Luminous flux 5000lumens  
Luminaire's efficiency lm79 200W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Width 1195.0mm  
Length 295.0mm  
In package 1pc  
In box 5pcs  
Casing colour white  
Casing material aluminum  
Polishing matt  
No. of switches 25000pcs  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -10 ~ 40°C  
Certificates CE, RoHS  
Warranty 5 years



This PROLUMEN 295x1195 [LED module luminaire](#) is designed to illuminate office spaces and commercial buildings. The luminaire dimensions are compatible with standard ceiling installation. Thanks to its simple design, the luminaire is easy to install in corridors, break rooms, offices, and conference rooms. All PROLUMEN products come with a power supply unit included. The luminaire is flicker-free. Enhance your everyday lighting quality and choose a top-quality lighting solution from LED house's product range!

## LED module luminaire PROLUMEN 600x600 Backlit h34 230V 36W 5040lm 120° IP20 830

## Product code 17354

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 36W

Luminous flux 5040lumens

Luminaire's efficiency lm79 140W

Correlated colour temperature warm white 3000K

Lens angle 120

Cri 80

Ugr 22

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 34.0mm

Width 595.0mm

Length 595.0mm

Weight 1600g

Package weight 2150g

In package 1pc

Casing material aluminum

Polishing matt

No. of switches 25000pcs

Power supply [BOKE](#)

Work environment indoor use

Operation temperature -10 ~ 40°C

Certificates CE, RoHS

Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire PROLUMEN 600x600 Backlit UGR<19 h34 230V 36W 4220lm 120° IP20 830

### Product code 17708

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output 36W  
Luminous flux 4220lumens  
Luminaire's efficiency lm79 117W  
Correlated colour temperature warm white 3000K  
Lens angle 120  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 34.0mm  
Width 595.0mm  
Length 595.0mm  
Weight 1600g  
Package weight 2150g  
In package 1pc  
Casing material aluminum  
Polishing matt  
No. of switches 25000pcs  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -10 ~ 40°C  
Certificates CE, RoHS  
Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire PROLUMEN 600x600 Backlit UGR<19 h34 230V 36W 4320lm 120° IP20 840

**Product code 16352**

Brand [PROLUMEN](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Luminous flux 4320lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 34.0mm  
 Width 595.0mm  
 Length 595.0mm  
 Weight 1600g  
 Package weight 2150g  
 In package 1pc  
 Casing material aluminum  
 Polishing matt  
 No. of switches 25000pcs  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -10 ~ 40°C  
 Certificates CE, RoHS  
 Warranty 5 years




High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## LED module luminaire PROLUMEN 600x600 NEPTUN 230V 40W 4000lm 120° IP65 840

### Product code 13743

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output 40W  
Luminous flux 4000lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP65  
Lifespan 50000h  
Height 20.0mm  
Width 595.0mm  
Length 595.0mm  
In package 1pc  
In box 5pcs  
Casing material aluminum + plastic  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20 ~ 48°C  
Certificates CE, RoHS  
Warranty 5 years

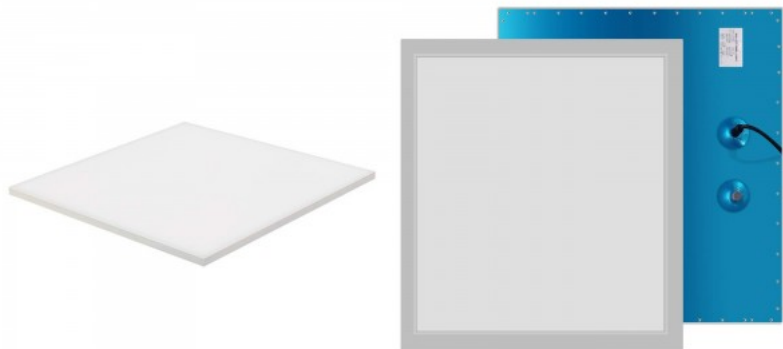

The PROLUMEN 600x600 NEPTUN modular luminaire is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. A high-quality LED panel, designed to last long due to its quality components. The 4000K light temperature provides clear and sharp illumination, ideal for lighting up stores and other commercial spaces. IP65 - moisture-resistant version. Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!



## LED module luminaire PROLUMEN 600x600 white 230V 42W 5880lm 80° IP20 DALI 830

**Product code 18128 DALI dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable DALI  
Output 42W  
Luminous flux 5880lumens  
Luminaire's efficiency lm79 140W  
Correlated colour temperature warm white 3000K  
Lens angle 80  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP20  
Height 51.0mm  
Width 595.0mm  
Length 595.0mm  
In package 1pc  
Casing colour white  
Casing material aluminum  
Power supply [VS \(Vossloh-Schwabe\)](#)  
Work environment indoor use  
Certificates CE, UKCA, RoHS  
Warranty 5 years

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

