# Modular light 1200x300 Backlit h32 white 230V 25-40W 5200lm CRI80 120° IP44 3000K, 4000K, 5700K 3CCT

**Product code 19643**

Supply voltage 230V
Power factor 0.90
Output 25-40W
Maximum output 40W/1m
Luminous flux 5200lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 120
Cri 80
Protection class IP44
Lifespan 50000h
Height 32.0mm
Width 295.0mm
Length 1195.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Impact resistance IK03
Work environment indoor use
Operation temperature -20° - +40°C
Certificates CE, SAA, RoHS,
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 830

**Product code 15927**

Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 3750lumens
Luminaire’s efficiency 150W
Correlated colour temperature warm white 3000K
Lens angle 120
Source of light EPISTAR LED
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3.4 kg
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 840

**Product code 15941**

Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 3750lumens
Luminaire’s efficiency 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light EPISTAR LED
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3.4 kg
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 830

**Product code 15642**

Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 4300lumens
Luminaire’s efficiency 119W
Correlated colour temperature warm white 3000K
Lens angle 120
Source of light EPISTAR LED
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3.4 kg
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 840

**Product code 15641**

Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 4300lumens
Luminaire’s efficiency 119W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light EPISTAR LED
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.4 kg
Package weight 2.65 kg
In package 1pc
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Mounting frame 1200x300 white IP20

**Product code 19069**

Protection class IP20
Height 72.0mm
Width 315.0mm
Length 1215.0mm
Weight 1.78 kg
In package 1pc
Casing colour white
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

# Mounting frame 1200x300x45 white

**Product code 14207**

Height 45.0mm
Width 300.0mm
Length 1200.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminium
Polishing matt
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

# Mounting frame 1200x300x63 white IP20

**Product code 19070**

Protection class IP20
Height 63.0mm
Width 300.0mm
Length 1200.0mm
Weight 1.78 kg
In package 1pc
Casing colour white
Work environment indoor use




Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

# Modular light 120x300 Backlit + frame white 230V 36W 4320lm 120° IP20 840

**Product code 19161**

Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 4320lumens
Luminaire’s efficiency 120W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Llmf tm21 L90B50 @25°C 50.000h
Height 39.0mm
Width 295.0mm
Length 1195.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply LIFUD
Impact resistance IK03
Work environment indoor use
Operation temperature -20° - +45°°C
Certificates CE, SAA, RoHS,
Warranty 3 years

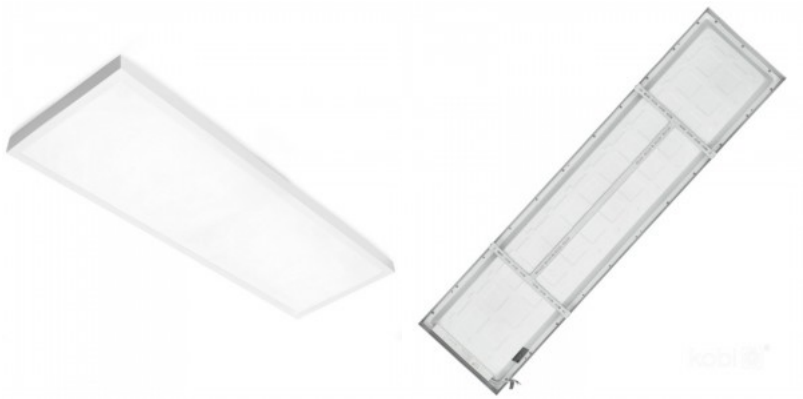

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Mounting frame 600x300 white

**Product code 17074**

Height 45.0mm
Width 300.0mm
Length 600.0mm
Weight 310 g
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium
Polishing matt
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

# Mounting frame 600x600 50mm black

**Product code 22825**

Height 50.0mm
Width 600.0mm
Length 600.0mm
In box 20pcs
Casing colour black
Casing material aluminium
Polishing semimatt
Work environment indoor use





600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!



# Modular light 600x600 Backlit + frame white 230V 36W 4320lm 120° IP20 840

**Product code 19160**

Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 4320lumens
Luminaire’s efficiency 120W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Llmf tm21 L90B50 @25°C 50.000h
Height 35.0mm
Width 595.0mm
Length 595.0mm
In package 90pcs
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply LIFUD
Impact resistance IK03
Work environment indoor use
Operation temperature -20° - +45°°C
Certificates CE, SAA, RoHS,
Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light 600x600 white 230V 36W 3960lm 120° IP65 DALI 830

**Product code 20678 DALI dimmable**


Supply voltage 230V
Power factor 0.90
Dimmable DALI
Output 36W
Maximum output 36W/1m
Luminous flux 3960lumens
Luminaire’s efficiency 110W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 80
Protection class IP65
Lifespan 50000h
Llmf tm21 L90B50 @25°C 50.000h
Height 12.0mm
Width 595.0mm
Length 595.0mm
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply PHILIPS
Work environment indoor use
Operation temperature -20° - +40°°C
Certificates CE, SAA, RoHS,
Warranty 3 years



# Modular light CAPRI 600x600 40W 4400lm 120° IP65 4000K pure white

**Product code 19304**

Output 40W
Luminous flux 4400lumens
Luminaire’s efficiency 110W
Correlated colour temperature pure white 4000K
Lens angle 120
Protection class IP65
Height 32.0mm
Width 596.0mm
Length 596.0mm
Weight 1.49 kg
In package 1pc
In box 6pcs
Impact resistance IK04
Operation temperature -20 - +40°C

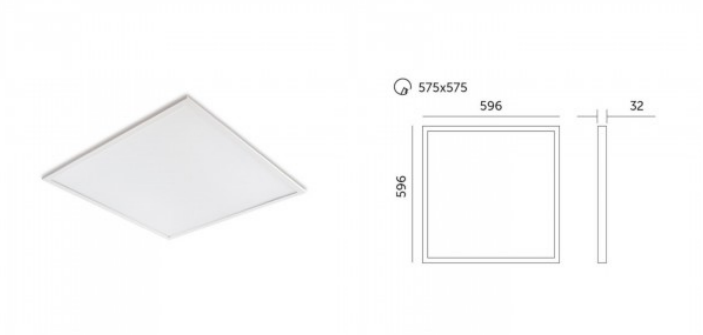

# Modular light CAPRI 600x600 Backlit h32 white 230V 40W 5200lm CRI80 90° IP20 3000K, 4000K, 5700K 3CCT

**Product code 23274**

Supply voltage 230V
Output 40W
Maximum output 40W/1m
Luminous flux 5200lumens
Luminaire’s efficiency 130W
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 90
Cri 80
Protection class IP20
Lifespan 50000h
Height 32.0mm
Width 595.0mm
Length 595.0mm
Installation opening diameter
575x575mm
Weight 1.42 kg
In package 1pc
In box 6pcs
Casing colour white
No. of switches 30000pcs
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 5 years



Ceiling panel is a stylish and functional lighting solution, which fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use Replaceable LED module if necessary. This allows users to easily and conveniently replace the LED light source without replacing the entire luminaire or light bulb. Replaceable LED modules are more energy-efficient, have a longer lifespan, and offer different light temperatures and brightness levels according to the user's needs. This ceiling panel is suitable for indoor use only, with IP20 protection class. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light CAPRI 600x600 Backlit h35 white 230V 40W 4400lm 120° IP20 830

**Product code 16965**

Supply voltage 230V
Output 40W
Maximum output 40W/1m
Rated current 1000mA
Luminous flux 4400lumens
Luminaire’s efficiency 110W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 50000h
Llmf tm21 L70B50 @25°C 50.000h
Height 35.0mm
Width 596.0mm
Length 596.0mm
Installation opening diameter 575x575mm
Weight 1.49 kg
In package 1pc
In box 6pcs
Casing colour white
No. of switches 30000pcs
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 5 years




Ceiling panel is a stylish and functional lighting solution, which fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use Replaceable LED module if necessary. This allows users to easily and conveniently replace the LED light source without replacing the entire luminaire or light bulb. Replaceable LED modules are more energy-efficient, have a longer lifespan, and offer different light temperatures and brightness levels according to the user's needs. This ceiling panel is suitable for indoor use only, with IP20 protection class. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light CAPRI 600x600 G3 25/36/40W 6400lm 90° IP20 3000K, 4000K, 5700K 3CCT

**Product code 20865**

Output 25/36/40W
Maximum output 40W/1m
Luminous flux 6400lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 90
Protection class IP20
Height 32.0mm
Width 595.0mm
Length 595.0mm
Weight 1.49 kg
In package 1pc
In box 6pcs
Impact resistance IK04
Operation temperature -20 - +40°C

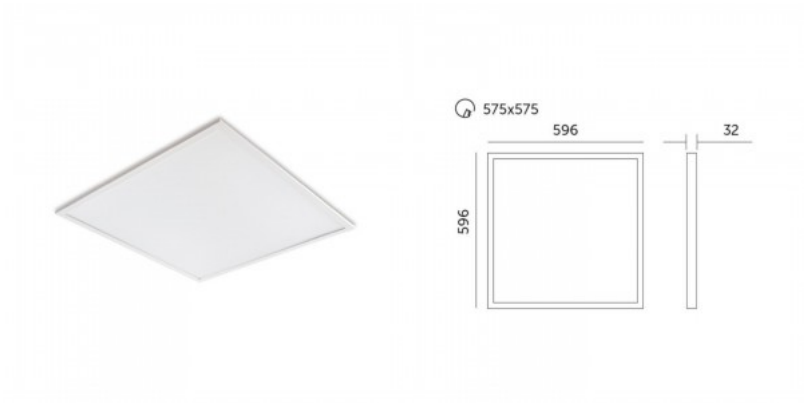


# Modular light CAPRI 600x600 white 230V 25, 36, 40W 5200lm CRI80 120° IP44/40 3000K, 4000K, 5700K 3CCT

**Product code 19538**

Supply voltage 230V
Power factor 0.90
Output 25, 36, 40W
Maximum output 40W/1m
Luminous flux 5200lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 120
Cri 80
Protection class IP44/40
Lifespan 50000h
Height 32.0mm
Width 595.0mm
Length 595.0mm
Weight 1.25 kg
In package 90pcs
In box 6pcs
Casing colour white
Casing material aluminium + plastic
No. of switches 30000pcs
Work environment indoor use
Operation temperature -20° - +45°°C
Certificates CE, SAA, RoHS,
Warranty 5 years



Ceiling panel is a stylish and functional lighting solution, which fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use Replaceable LED module if necessary. This allows users to easily and conveniently replace the LED light source without replacing the entire luminaire or light bulb. Replaceable LED modules are more energy-efficient, have a longer lifespan, and offer different light temperatures and brightness levels according to the user's needs. This ceiling panel is suitable for indoor use only, with IP20 protection class. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Deko-Light Basic Office white 30,5W 1500lm 90° IP40 4000K pure white

**Product code 23112**

Brand Deko-Light
Output voltage 220-240V
Output 30,5W
Luminous flux 1500lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Protection class IP40
Lifespan 5000h
Height 32.0mm
Width 1195.0mm
Length 295.0mm
Diameter 200.0mm
Casing colour white
Casing material aluminium + plastic
No. of switches 100000pcs
Impact resistance IK03
Work environment indoor use
Operation temperature -25 kuni 45 °C°C



# Modular light ECO 1200x300 Backlit h35 white 230V 36W 4300lm 120° IP20 840

**Product code 17977**

Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 4300lumens
Luminaire’s efficiency 119W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light EPISTAR LED
Cri 80
Protection class IP20
Lifespan 50000h
Height 30.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.4 kg
Package weight 2.65 kg
In package 1pc
Casing colour white
Work environment indoor use
Certificates CE
Warranty 3 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light ECO 1200x300 Backlit white 230V 25W 5000lm 120° IP20 840

**Product code 17553**

Brand ECO
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 5000lumens
Luminaire’s efficiency 200W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Width 1195.0mm
Length 295.0mm
In package 1pc
In box 5pcs
Casing colour white
Casing material aluminium
Polishing matt
No. of switches 25000pcs
Power supply BOKE
Work environment indoor use
Operation temperature -10 ~ 40°C
Certificates CE, RoHS
Warranty 5 years




This PROLUMEN 295x1195 LED module luminaire is designed to illuminate office spaces and commercial buildings. The luminaire dimensions are compatible with standard ceiling installation. Thanks to its simple design, the luminaire is easy to install in corridors, break rooms, offices, and conference rooms. All PROLUMEN products come with a power supply unit included. The luminaire is flicker-free. Enhance your everyday lighting quality and choose a top-quality lighting solution from LED house's product range!

# Modular light ECO 600x600 UGR<19 Backlit h25 white 230V 36W 4320lm 90° IP40 840

**Product code 18238**

Brand ECO
Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 4320lumens
Luminaire’s efficiency 120W
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light SAMSUNG LED
Cri 80
Ugr 22
Sdcm - macadam ellipses 6
Protection class IP40
Lifespan 50000h
Height 25.0mm
Width 595.0mm
Length 595.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium
Polishing matt
Power supply LIFUD
Work environment indoor use
Operation temperature -20 - +40°C
Certificates CE, RoHS, ENEC, CB, New ERP
Warranty 3 years

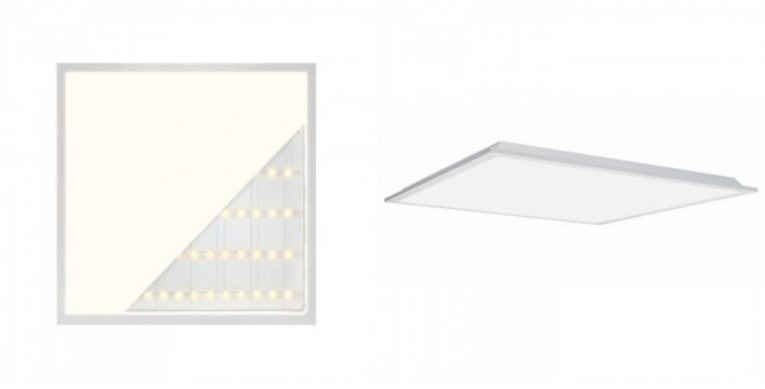


Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light ECO 600x600 UGR<19 Backlit h35 white 230V 25W 5000lm 90° IP20 840

**Product code 18230**

Brand ECO
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 5000lumens
Luminaire’s efficiency 200W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP20
Lifespan 50000h
Llmf tm21 L90B50 @25°C 50.000h
Height 35.0mm
Width 595.0mm
Length 595.0mm
In package 90pcs
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply PHILIPS
Work environment indoor use
Operation temperature -20° - +40°°C
Certificates CE, SAA, RoHS,
Warranty 3 years

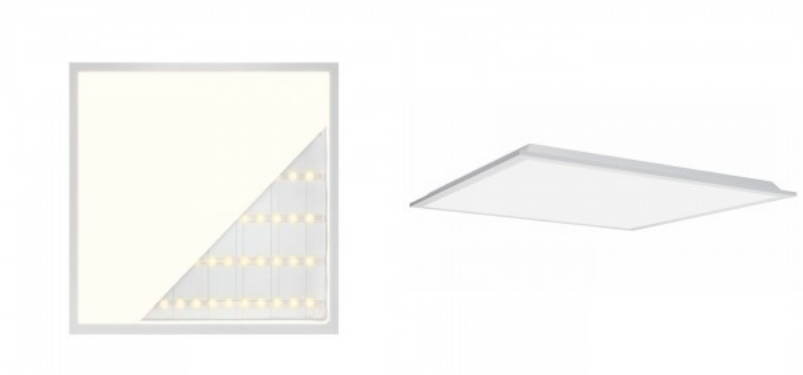


Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Mounting frame EMOS 600x600 70mm white

**Product code 16634**

Brand EMOS
Height 70.0mm
Width 600.0mm
Length 600.0mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium
Polishing semimatt
Work environment indoor use
Warranty 2 years

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

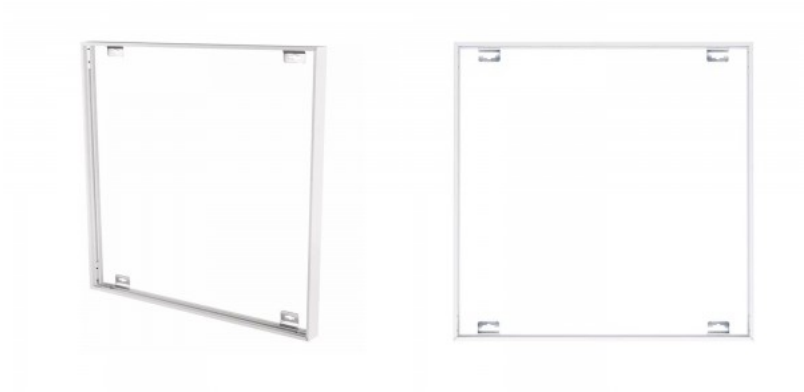

# Modular light Eridanus 600x600 2x1800 white 230V 21.9W 3399lm 77° IP40/20 830

**Product code 18026**

Supply voltage 230V
Power factor 0.95
Output 21.9W
Maximum output 21.9W/1m
Luminous flux 3399lumens
Luminaire’s efficiency 155W
Correlated colour temperature warm white 3000K
Lens angle 77
Cri 80
Ugr 16
Sdcm - macadam ellipses 3
Protection class IP40/20
Lifespan 100000h
Height 31.0mm
Width 595.0mm
Length 595.0mm
Weight 2.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Work environment indoor use
Operation temperature ta 0...+35°C
Certificates CE, UKCA, RoHS
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Eridanus R 1195x295 LED1x4250 white 230V 26.1W 4222lm 77° IP40/20 840

**Product code 18031**

Supply voltage 230V
Power factor 0.96
Output 26.1W
Maximum output 26.1W/1m
Luminous flux 4222lumens
Luminaire’s efficiency 162W
Correlated colour temperature pure white 4000K
Lens angle 77
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP40/20
Lifespan 100000h
Height 31.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Work environment indoor use
Operation temperature ta 0...+35°C
Certificates CE, UKCA, RoHS
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Eridanus R 1195x295 LED1x4900 white 230V 30.8W 4867lm 77° IP40/20 840

**Product code 18032**

Supply voltage 230V
Power factor 0.95
Output 30.8W
Maximum output 30.8W/1m
Luminous flux 4867lumens
Luminaire’s efficiency 158W
Correlated colour temperature pure white 4000K
Lens angle 77
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP40/20
Lifespan 100000h
Height 31.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.8 kg
In package 1pc
Casing colour white
Casing material aluminium
Work environment indoor use
Operation temperature ta 0...+35°C
Certificates CE, UKCA, RoHS
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

*© LED House OÜ, (+372) 56 202 303*
*Kadaka street 3/3, Tallinn 10621, Estonia, info@ledhouse.ee*

# Modular light LEDVANCE 1500 panel white 230V 48W 6240lm CRI80 90° IP20 DALI / PUSH 3000K-4000K 2CCT

**Product code 23381** **DALI / PUSH dimmable**



Brand LEDVANCE
Supply voltage 230V
Dimmable DALI / PUSH
Output 48W
Maximum output 48W/1m
Luminous flux 6240lumens
Luminaire’s efficiency 130W
Correlated colour temperature 2CCT
3000K-4000K
Lens angle 90
Cri 80
Protection class IP20
Lifespan 100000h
Height 77.0mm
Width 381.0mm
Length 1588.0mm
Weight 5.57 kg
In package 1pc
Casing colour white
Impact resistance IK02
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 5 years

# Modular light NELIO 1200x300 white 230V 36W 4320lm 120° IP20 840

**Product code 23482**

Brand NELIO
Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 4320lumens
Luminaire’s efficiency 120W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 35000h
Height 10.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.1 kg
In package 1pc
In box 5pcs
Casing colour white
Work environment indoor use
Certificates CE
Warranty 3 years





This NELIO LED 1200x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

# Mounting frame NELIO 600x600 45mm white

**Product code 14122**

Brand NELIO
Height 45.0mm
Width 600.0mm
Length 600.0mm
Weight 300 g
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium
Polishing semimatt
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

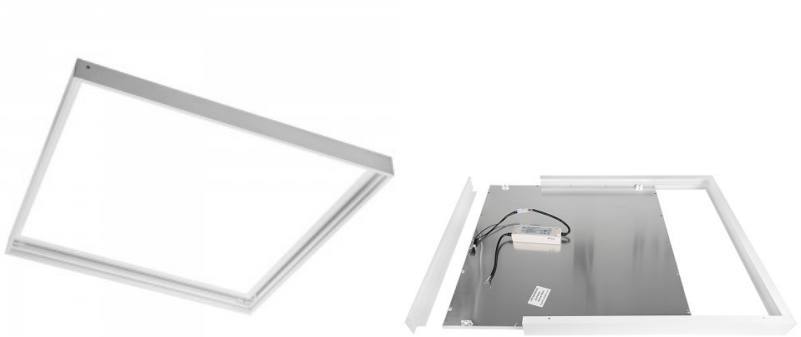

# Mounting frame NELIO 600x600 63mm white

**Product code 15495**

Brand NELIO
Height 63.0mm
Width 600.0mm
Length 600.0mm
Weight 300 g
In box 20pcs
Casing colour white
Casing material aluminium
Polishing semimatt
Work environment indoor use


600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!



# Modular light NELIO NELIO G2 600x300 white 230V 25W 3120lm 120° IP40 840

**Product code 19649**

Brand NELIO
Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 3120lumens
Luminaire’s efficiency 125W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP40
Lifespan 35000h
Height 10.0mm
Width 600.0mm
Length 300.0mm
Installation opening diameter 575x275mm
Weight 1.03 kg
In package 1pc
In box 10pcs
Casing colour white
No. of switches 20000pcs
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 3 years

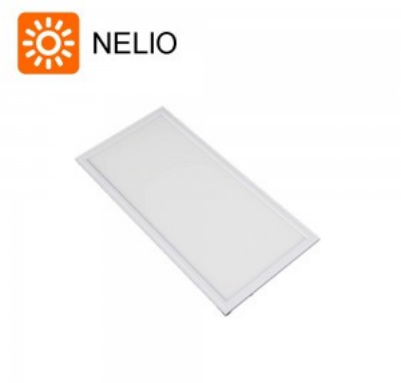


This NELIO LED 600x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

# Modular light Prolumen 600x600 Backlit h34 230V 36W 5040lm 120° IP20 830

**Product code 17354**

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 5040lumens
Luminaire’s efficiency 140W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 80
Ugr 22
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 34.0mm
Width 595.0mm
Length 595.0mm
Weight 1.6 kg
Package weight 2.15 kg
In package 1pc
Casing material aluminium
Polishing matt
No. of switches 25000pcs
Power supply BOKE
Work environment indoor use
Operation temperature -10 ~ 40°C
Certificates CE, RoHS
Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Prolumen 600x600 Backlit UGR<19 h26 230V 13-42W 6400lm 90° IP20 Dip Switch 840

**Product code 23726 Dip Switch dimmable**

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable Dip Switch
Output 13-42W
Maximum output 42W/1m
Luminous flux 6400lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light SANAN LED
Cri 80
Sdcm - macadam ellipses 5
Protection class IP20
Lifespan 102000h
Llmf tm21 L70B10 @25°C 100.000h
Height 26.0mm
Width 595.0mm
Length 595.0mm
Weight 1.8 kg
In box 10pcs
Impact resistance IK08
Operation temperature -20° - +45°C
Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Prolumen 600x600 Backlit UGR<19 h26 230V 18-40W 6400lm 90° IP20 Dip Switch 840

**Product code 19060 Dip Switch dimmable**

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable Dip Switch
Output 18-40W
Maximum output 40W/1m
Luminous flux 6400lumens
Correlated colour temperature pure white 4000K
Lens angle 90
Source of light SANAN LED
Cri 80
Sdcm - macadam ellipses 5
Protection class IP20
Lifespan 102000h
Llmf tm21 L70B10 @25°C 100.000h
Height 26.0mm
Width 595.0mm
Length 595.0mm
Weight 1.8 kg
In box 10pcs
Power supply BOKE
Impact resistance IK08
Operation temperature -20° - +45°C
Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Prolumen 600x600 Backlit UGR<19 h34 230V 36W 4220lm 90° IP20 830

**Product code 17708**

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 4220lumens
Luminaire’s efficiency 117W
Correlated colour temperature warm white 3000K
Lens angle 90
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 34.0mm
Width 595.0mm
Length 595.0mm
Weight 1.6 kg
Package weight 2.15 kg
In package 1pc
Casing material aluminium
Polishing matt
No. of switches 25000pcs
Power supply BOKE
Work environment indoor use
Operation temperature -10 ~ 40°C
Certificates CE, RoHS
Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Prolumen 600x600 Backlit UGR<19 h34 230V 36W 4320lm 90° IP20 840

**Product code 16352**

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 4320lumens
Luminaire’s efficiency 120W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 34.0mm
Width 595.0mm
Length 595.0mm
Weight 1.6 kg
Package weight 2.15 kg
In package 1pc
In box 6pcs
Casing material aluminium
Polishing matt
No. of switches 25000pcs
Power supply BOKE
Work environment indoor use
Operation temperature -10 ~ 40°C
Certificates CE, RoHS
Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Prolumen 600x600 DALI 230V 36W 3600lm 120° IP20 830

**Product code 18342**

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 3600lumens
Luminaire’s efficiency 100W
Correlated colour temperature warm white 3000K
Lens angle 120
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Height 33.0mm
Width 595.0mm
Length 595.0mm
Weight 1.8 kg
In package 1pc
Casing material aluminium
Polishing matt
Power supply BOKE
Work environment indoor use
Operation temperature -10 ~ 40°C
Certificates CE, RoHS
Warranty 5 years




High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Prolumen 600x600 NEPTUN 230V 40W 4000lm 120° IP65 840

**Product code 13743**

Brand Prolumen
Supply voltage 230V
Power factor 0.90
Output 40W
Maximum output 40W/1m
Luminous flux 4000lumens
Luminaire’s efficiency 100W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 6
Protection class IP65
Lifespan 50000h
Height 20.0mm
Width 595.0mm
Length 595.0mm
In package 1pc
In box 5pcs
Casing material aluminium + plastic
Power supply BOKE
Work environment indoor use
Operation temperature -20 ~ 48°C
Certificates CE, RoHS
Warranty 5 years

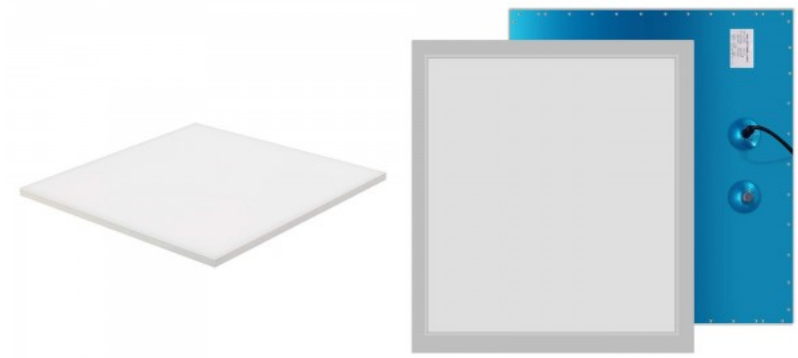

The PROLUMEN 600x600 NEPTUN modular luminaire is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. A high-quality LED panel, designed to last long due to its quality components. The 4000K light temperature provides clear and sharp illumination, ideal for lighting up stores and other commercial spaces. IP65 - moisture-resistant version. Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

# Modular light Prolumen 600x600 UGR<19 34W 4080lm 90° 840

**Product code 19057**

Brand Prolumen
Output 34W
Maximum output 34W/1m
Luminous flux 4080lumens
Luminaire’s efficiency 120W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Power supply LIFUD
Warranty 5 years




High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

# Modular light Prolumen 600x600 white 230V 42W 5880lm 80° IP20 DALI 830

**Product code 18128 DALI dimmable**

Brand Prolumen
Supply voltage 230V
Power factor 0.95
Dimmable DALI
Output 42W
Maximum output 42W/1m
Luminous flux 5880lumens
Luminaire’s efficiency 140W
Correlated colour temperature warm white 3000K
Lens angle 80
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP20
Height 51.0mm
Width 595.0mm
Length 595.0mm
In package 1pc
Casing colour white
Casing material aluminium
Power supply VS (Vossloh-Schwabe)
Work environment indoor use
Certificates CE, UKCA, RoHS
Warranty 5 years

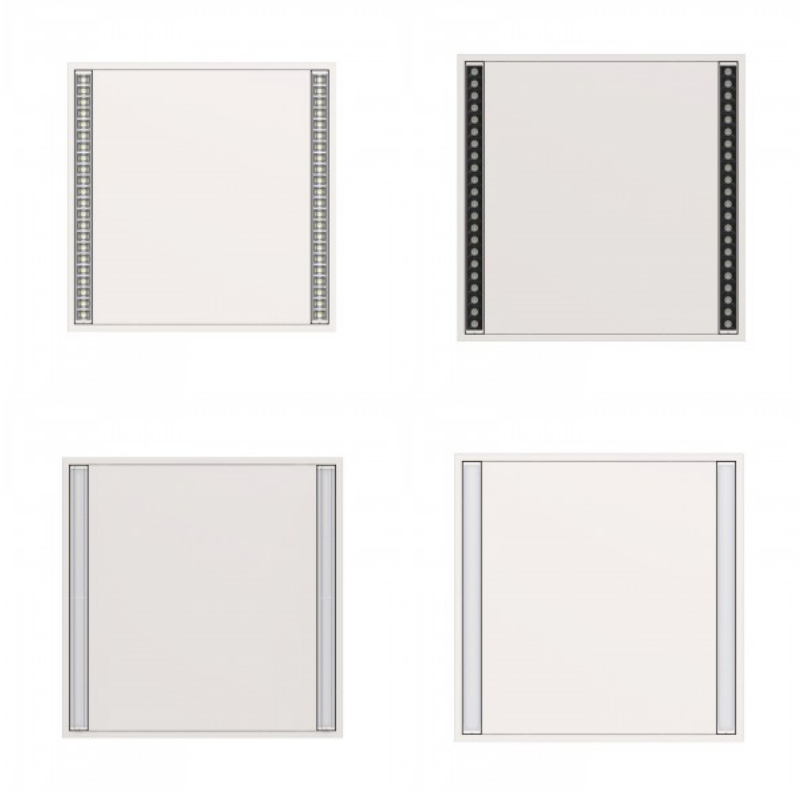

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!