

Modular light 1200x300 Backlit h32 white 230V 25-40W 5200lm CRI80 120° IP44 3000K, 4000K, 5700K 3CCT

Product code 19643

Supply voltage 230V
Power factor 0.90
Output 25-40W
Maximum output 40W/1m
Luminous flux 5200lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 120
Cri 80
Protection class IP44
Lifespan 50000h
Height 32.0mm
Width 295.0mm
Length 1195.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Impact resistance IK03
Work environment indoor use
Operation temperature -20° - +40°C
Certificates CE, SAA, RoHS,
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 830

Product code 15927

Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 3750lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature warm white 3000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3.4 kg
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



Modular light 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 840

Product code 15941

Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 3750lumens
Luminaire's efficiency lm79 150W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3.4 kg
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



Modular light 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 830

Product code 15642

Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 4300lumens
Luminaire's efficiency lm79 119W
Correlated colour temperature warm white 3000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3.4 kg
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



Modular light 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 840

Product code 15641

Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 4300lumens
Luminaire's efficiency lm79 119W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.4 kg
Package weight 2.65 kg
In package 1pc
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Mounting frame 1200x300 white IP20

Product code 19069

Protection class IP20
Height 72.0mm
Width 315.0mm
Length 1215.0mm
Weight 1.78 kg
In package 1pc
Casing colour white
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

Mounting frame 1200x300x45 white

Product code 14207

Height 45.0mm
Width 300.0mm
Length 1200.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminium
Polishing matt
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

Mounting frame 1200x300x63 white IP20

Product code 19070

Protection class IP20
Height 63.0mm
Width 300.0mm
Length 1200.0mm
Weight 1.78 kg
In package 1pc
Casing colour white
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

Modular light 120x300 Backlit + frame white 230V 36W 4320lm 120° IP20 840

Product code 19161

Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 4320lumens
Luminaire's efficiency lm79 120W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Llmf tm21 L90B50 @25°C 50.000h
Height 39.0mm
Width 295.0mm
Length 1195.0mm
In package 1pc
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply [LIFUD](#)
Impact resistance IK03
Work environment indoor use
Operation temperature -20° - +45°C
Certificates CE, SAA, RoHS,
Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Mounting frame 600x300 white

Product code 17074

Height 45.0mm
Width 300.0mm
Length 600.0mm
Weight 310 g
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium
Polishing matt
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

Modular light 600x600 Backlit + frame white 230V 36W 4320lm 120° IP20 840

Product code 19160

Supply voltage 230V
Power factor 0.90
Output 36W
Maximum output 36W/1m
Luminous flux 4320lumens
Luminaire's efficiency lm79 120W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Llmf tm21 L90B50 @25°C 50.000h
Height 35.0mm
Width 595.0mm
Length 595.0mm
In package 90pcs
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply [LIFUD](#)
Impact resistance IK03
Work environment indoor use
Operation temperature -20° - +45°C
Certificates CE, SAA, RoHS,
Warranty 3 years




Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light 600x600 white 230V 36W 3960lm 120° IP65 DALI 830

Product code 20678 DALI dimmable


Supply voltage 230V
 Power factor 0.90
 Dimmable DALI
 Output 36W
 Maximum output 36W/1m
 Luminous flux 3960lumens
 Luminaire's efficiency lm79 110W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 80
 Protection class IP65
 Lifespan 50000h
 Llmf tm21 L90B50 @25°C 50.000h
 Height 12.0mm
 Width 595.0mm
 Length 595.0mm
 In box 6pcs
 Casing colour white
 Casing material aluminium + plastic
 Power supply [PHILIPS](#)
 Work environment indoor use
 Operation temperature -20° - +40°C
 Certificates CE, SAA, RoHS,
 Warranty 3 years



Modular light CAPRI 600x600 40W 4400lm 120° IP65 4000K pure white

Product code 19304


Output 40W
 Luminous flux 4400lumens
 Luminaire's efficiency lm79 110W
 Correlated colour temperature pure white 4000K
 Lens angle 120
 Protection class IP65
 Height 32.0mm
 Width 596.0mm
 Length 596.0mm
 Weight 1.49 kg
 In package 1pc
 In box 6pcs
 Impact resistance IK04
 Operation temperature -20 - +40°C



Modular light CAPRI 600x600 G3 25/36/40W 6400lm 90° IP20 3000K, 4000K, 5700K 3CCT

Product code 20865

Output 25/36/40W
Maximum output 40W/1m
Luminous flux 6400lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 90
Protection class IP20
Height 32.0mm
Width 595.0mm
Length 595.0mm
Weight 1.49 kg
In package 1pc
In box 6pcs
Impact resistance IK04
Operation temperature -20 - +40°C

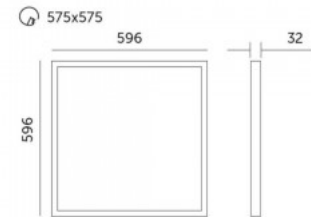

Modular light CAPRI 600x600 white 230V 25, 36, 40W 5200lm CRI80 120° IP44/40 3000K, 4000K, 5700K 3CCT

Product code 19538

Supply voltage 230V
Power factor 0.90
Output 25, 36, 40W
Maximum output 40W/1m
Luminous flux 5200lumens
Correlated colour temperature 3CCT
3000K, 4000K, 5700K
Lens angle 120
Cri 80
Protection class IP44/40
Lifespan 50000h
Height 32.0mm
Width 595.0mm
Length 595.0mm
Weight 1.25 kg
In package 90pcs
In box 6pcs
Casing colour white
Casing material aluminium + plastic
No. of switches 30000pcs
Work environment indoor use
Operation temperature -20° - +45°C
Certificates CE, SAA, RoHS,
Warranty 5 years



Ceiling panel is a stylish and functional lighting solution, which fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. Replaceable LED module if necessary. This allows users to easily and conveniently replace the LED light source without replacing the entire luminaire or light bulb. Replaceable LED modules are more energy-efficient, have a longer lifespan, and offer different light temperatures and brightness levels according to the user's needs. This ceiling panel is suitable for indoor use only, with IP20 protection class. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light ECO 1200x300 Backlit h35 white 230V 36W 4300lm 120° IP20 840

Product code 17977

Supply voltage 230V
Output 36W
Maximum output 36W/1m
Luminous flux 4300lumens
Luminaire's efficiency lm79 119W
Correlated colour temperature pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 30.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.4 kg
Package weight 2.65 kg
In package 1pc
Casing colour white
Work environment indoor use
Certificates CE
Warranty 3 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light ECO 1200x300 Backlit white 230V 25W 5000lm 120° IP20 840

Product code 17553

Brand ECO
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 5000lumens
Luminaire's efficiency lm79 200W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 3
Protection class IP20
Lifespan 50000h
Llmf tm21 L80B10 @25°C 50.000h
Width 1195.0mm
Length 295.0mm
In package 1pc
In box 5pcs
Casing colour white
Casing material aluminium
Polishing matt
No. of switches 25000pcs
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -10 ~ 40°C
Certificates CE, RoHS
Warranty 5 years



This PROLUMEN 295x1195 [LED module luminaire](#) is designed to illuminate office spaces and commercial buildings. The luminaire dimensions are compatible with standard ceiling installation. Thanks to its simple design, the luminaire is easy to install in corridors, break rooms, offices, and conference rooms. All PROLUMEN products come with a power supply unit included. The luminaire is flicker-free. Enhance your everyday lighting quality and choose a top-quality lighting solution from LED house's product range!

Modular light ECO 600x600 UGR<19 Backlit h25 white 230V 36W 4320lm 90° IP40 840

Product code 18238

Brand ECO
 Supply voltage 230V
 Power factor 0.90
 Output 36W
 Maximum output 36W/1m
 Luminous flux 4320lumens
 Luminaire's efficiency lm79 120W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Source of light [SAMSUNG LED](#)
 Cri 80
 Ugr 22
 Sdcm - macadam ellipses 6
 Protection class IP40
 Lifespan 50000h
 Height 25.0mm
 Width 595.0mm
 Length 595.0mm
 In package 1pc
 In box 6pcs
 Casing colour white
 Casing material aluminium
 Polishing matt
 Power supply [LIFUD](#)
 Work environment indoor use
 Operation temperature -20 - +40°C
 Certificates CE, RoHS, ENEC, CB, New ERP
 Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light ECO 600x600 UGR<19 Backlit h35 white 230V 25W 5000lm 90° IP20 840

Product code 18230

Brand ECO
Supply voltage 230V
Power factor 0.90
Output 25W
Maximum output 25W/1m
Luminous flux 5000lumens
Luminaire's efficiency lm79 200W
Correlated colour temperature pure white 4000K
Lens angle 90
Cri 80
Protection class IP20
Lifespan 50000h
Llmf tm21 L90B50 @25°C 50.000h
Height 35.0mm
Width 595.0mm
Length 595.0mm
In package 90pcs
In box 6pcs
Casing colour white
Casing material aluminium + plastic
Power supply [PHILIPS](#)
Work environment indoor use
Operation temperature -20° - +40°C
Certificates CE, SAA, RoHS,
Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Mounting frame EMOS 600x600 70mm white

Product code 16634

Brand [EMOS](#)
Height 70.0mm
Width 600.0mm
Length 600.0mm
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium
Polishing semimatt
Work environment indoor use
Warranty 2 years



600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

Modular light Eridanus 600x600 2x1800 white 230V 21.9W 3399lm 77° IP40/20 830

Product code 18026

Supply voltage 230V
Power factor 0.95
Output 21.9W
Maximum output 21.9W/1m
Luminous flux 3399lumens
Luminaire's efficiency lm79 155W
Correlated colour temperature warm white 3000K
Lens angle 77
Cri 80
Ugr 16
Sdcm - macadam ellipses 3
Protection class IP40/20
Lifespan 100000h
Height 31.0mm
Width 595.0mm
Length 595.0mm
Weight 2.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Work environment indoor use
Operation temperature ta 0...+35°C
Certificates CE, UKCA, RoHS
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Eridanus R 1195x295 LED1x4250 white 230V 26.1W 4222lm 77° IP40/20 840

Product code 18031

Supply voltage 230V
Power factor 0.96
Output 26.1W
Maximum output 26.1W/1m
Luminous flux 4222lumens
Luminaire's efficiency lm79 162W
Correlated colour temperature pure white 4000K
Lens angle 77
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP40/20
Lifespan 100000h
Height 31.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Work environment indoor use
Operation temperature ta 0...+35°C
Certificates CE, UKCA, RoHS
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Eridanus R 1195x295 LED1x4900 white 230V 30.8W 4867lm 77° IP40/20 840

Product code 18032

Supply voltage 230V
Power factor 0.95
Output 30.8W
Maximum output 30.8W/1m
Luminous flux 4867lumens
Luminaire's efficiency lm79 158W
Correlated colour temperature pure white 4000K
Lens angle 77
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP40/20
Lifespan 100000h
Height 31.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.8 kg
In package 1pc
Casing colour white
Casing material aluminium
Work environment indoor use
Operation temperature ta 0...+35°C
Certificates CE, UKCA, RoHS
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Eridanus R LED 600x600 LED2x2450 white 230V 30.8W 4867lm 77° IP40/20 840

Product code 18030

Supply voltage 230V
Power factor 0.95
Output 30.8W
Maximum output 30.8W/1m
Luminous flux 4867lumens
Luminaire's efficiency lm79 158W
Correlated colour temperature pure white 4000K
Lens angle 77
Cri 80
Ugr 16
Sdcm - macadam ellipses 3
Protection class IP40/20
Lifespan 100000h
Height 31.0mm
Width 595.0mm
Length 595.0mm
Weight 2.7 kg
In package 1pc
Casing colour white
Casing material aluminium
Work environment indoor use
Operation temperature ta 0...+35°C
Certificates CE, UKCA, RoHS
Warranty 5 years




Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light NELIO 1200x300 white 230V 40W 4300lm 120° IP20 840

Product code 13863

Brand NELIO
Supply voltage 230V
Output 40W
Maximum output 40W/1m
Luminous flux 4300lumens
Luminaire's efficiency lm79 108W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 35000h
Height 10.0mm
Width 295.0mm
Length 1195.0mm
Weight 2.1 kg
In package 1pc
In box 5pcs
Casing colour white
Work environment indoor use
Certificates CE
Warranty 3 years



This NELIO LED 1200x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

Modular light NELIO 600x300 OPAL white 230V 28W 3000lm

120° IP20 840

Product code 15105

Brand NELIO
Supply voltage 230V
Output 28W
Maximum output 28W/1m
Luminous flux 3000lumens
Luminaire's efficiency lm79 107W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 35000h
Height 10.0mm
Width 600.0mm
Length 300.0mm
Installation opening diameter 575x275mm
Weight 1.03 kg
In package 1pc
In box 10pcs
Casing colour white
No. of switches 20000pcs
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 3 years




This NELIO LED 600x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

Mounting frame NELIO 600x600 45mm white

Product code 14122

Brand NELIO
Height 45.0mm
Width 600.0mm
Length 600.0mm
Weight 300 g
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminium
Polishing semimatt
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

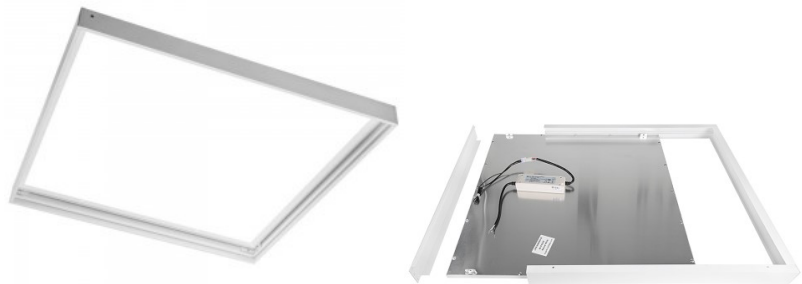

Mounting frame NELIO 600x600 63mm black

Product code 17777

Brand NELIO
Height 63.0mm
Width 600.0mm
Length 600.0mm
In box 20pcs
Casing colour black
Casing material aluminium
Polishing semimatt
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!




Mounting frame NELIO 600x600 63mm white

Product code 15495

Brand NELIO
Height 63.0mm
Width 600.0mm
Length 600.0mm
Weight 300 g
In box 20pcs
Casing colour white
Casing material aluminium
Polishing semimatt
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

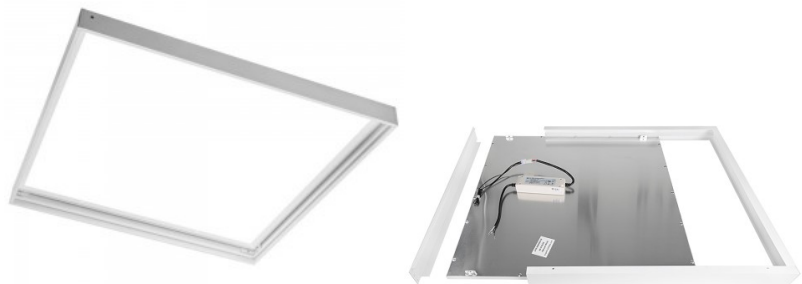

Modular light NELIO NELIO G2 600x300 white 230V 25W 3120lm 120° IP40 840

Product code 19649

Brand NELIO
Supply voltage 230V
Output 25W
Maximum output 25W/1m
Luminous flux 3120lumens
Luminaire's efficiency lm79 125W
Correlated colour temperature pure white 4000K
Lens angle 120
Cri 80
Protection class IP40
Lifespan 35000h
Height 10.0mm
Width 600.0mm
Length 300.0mm
Installation opening diameter 575x275mm
Weight 1.03 kg
In package 1pc
In box 10pcs
Casing colour white
No. of switches 20000pcs
Work environment indoor use
Operation temperature -20 ~ 40°C
Certificates CE
Warranty 3 years



This NELIO LED 600x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

Modular light Prolumen 600x600 Backlit h34 230V 36W 5040lm

120° IP20 830

Product code 17354

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 36W
 Maximum output 36W/1m
 Luminous flux 5040lumens
 Luminaire's efficiency lm79 140W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 80
 Ugr 22
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 34.0mm
 Width 595.0mm
 Length 595.0mm
 Weight 1.6 kg
 Package weight 2.15 kg
 In package 1pc
 Casing material aluminium
 Polishing matt
 No. of switches 25000pcs
 Power supply [BOKE](#)
 Work environment indoor use
 Operation temperature -10 ~ 40°C
 Certificates CE, RoHS
 Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Prolumen 600x600 Backlit UGR<19 h26 230V 18-40W 6400lm 90° IP20 Dip Switch 840

**Product code 19060 Dip Switch
dimmable**

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.95
 Dimmable Dip Switch
 Output 18-40W
 Maximum output 40W/1m
 Luminous flux 6400lumens
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Source of light SANAN LED
 Cri 80
 Sdcm - macadam ellipses 5
 Protection class IP20
 Lifespan 102000h
 Llmf tm21 L70B10 @25°C 100.000h
 Height 26.0mm
 Width 595.0mm
 Length 595.0mm
 Weight 1.8 kg
 In box 10pcs
 Power supply [BOKE](#)
 Impact resistance IK08
 Operation temperature -20° - +45°C
 Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Prolumen 600x600 Backlit UGR<19 h34 230V 36W 4220lm 90° IP20 830

Product code 17708

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 36W
 Maximum output 36W/1m
 Luminous flux 4220lumens
 Luminaire's efficiency lm79 117W
 Correlated colour temperature warm white 3000K
 Lens angle 90
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 34.0mm
 Width 595.0mm
 Length 595.0mm
 Weight 1.6 kg
 Package weight 2.15 kg
 In package 1pc
 Casing material aluminium
 Polishing matt
 No. of switches 25000pcs
 Power supply [BOKE](#)
 Work environment indoor use
 Operation temperature -10 ~ 40°C
 Certificates CE, RoHS
 Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Prolumen 600x600 Backlit UGR<19 h34 230V 36W 4320lm 90° IP20 840

Product code 16352

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 36W
 Maximum output 36W/1m
 Luminous flux 4320lumens
 Luminaire's efficiency lm79 120W
 Correlated colour temperature pure white 4000K
 Lens angle 90
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 34.0mm
 Width 595.0mm
 Length 595.0mm
 Weight 1.6 kg
 Package weight 2.15 kg
 In package 1pc
 In box 6pcs
 Casing material aluminium
 Polishing matt
 No. of switches 25000pcs
 Power supply [BOKE](#)
 Work environment indoor use
 Operation temperature -10 ~ 40°C
 Certificates CE, RoHS
 Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Prolumen 600x600 DALI 230V 36W 3600lm 120° IP20 830

Product code 18342

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 36W
 Maximum output 36W/1m
 Luminous flux 3600lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature warm white 3000K
 Lens angle 120
 Cri 80
 Ugr 19
 Sdcm - macadam ellipses 3
 Protection class IP20
 Lifespan 50000h
 Llmf tm21 L80B10 @25°C 50.000h
 Height 33.0mm
 Width 595.0mm
 Length 595.0mm
 Weight 1.8 kg
 In package 1pc
 Casing material aluminium
 Polishing matt
 Power supply [BOKE](#)
 Work environment indoor use
 Operation temperature -10 ~ 40°C
 Certificates CE, RoHS
 Warranty 5 years




High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

Modular light Prolumen 600x600 NEPTUN 230V 40W 4000lm 120° IP65 840

Product code 13743

Brand [Prolumen](#)
 Supply voltage 230V
 Power factor 0.90
 Output 40W
 Maximum output 40W/1m
 Luminous flux 4000lumens
 Luminaire's efficiency lm79 100W
 Correlated colour temperature pure white 4000K
 Lens angle 120
 Cri 80
 Sdcm - macadam ellipses 6
 Protection class IP65
 Lifespan 50000h
 Height 20.0mm
 Width 595.0mm
 Length 595.0mm
 In package 1pc
 In box 5pcs
 Casing material aluminium + plastic
 Power supply [BOKE](#)
 Work environment indoor use
 Operation temperature -20 ~ 48°C
 Certificates CE, RoHS
 Warranty 5 years

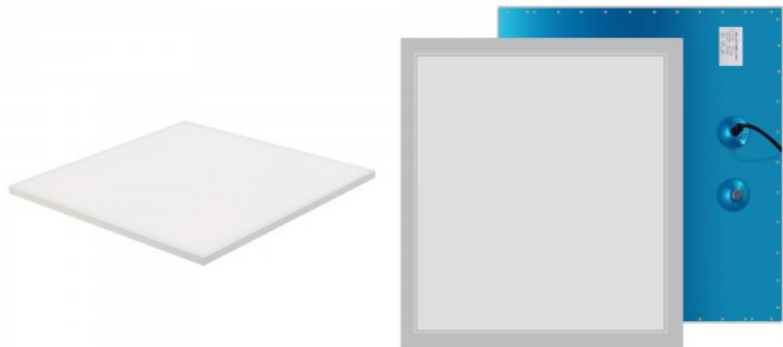

The PROLUMEN 600x600 NEPTUN modular luminaire is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. A high-quality LED panel, designed to last long due to its quality components. The 4000K light temperature provides clear and sharp illumination, ideal for lighting up stores and other commercial spaces. IP65 - moisture-resistant version. Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

Modular light Prolumen 600x600 UGR<19 34W 4080lm 90° 840

Product code 19057

Brand [Prolumen](#)

Output 34W

Maximum output 34W/1m

Luminous flux 4080lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 80

Power supply [LIFUD](#)

Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



Modular light Prolumen 600x600 white 230V 42W 5880lm 80° IP20 DALI 830

Product code 18128 DALI dimmable

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.95

Dimmable DALI

Output 42W

Maximum output 42W/1m

Luminous flux 5880lumens

Luminaire's efficiency lm79 140W

Correlated colour temperature warm white 3000K

Lens angle 80

Cri 80

Ugr 19

Sdcm - macadam ellipses 3

Protection class IP20

Height 51.0mm

Width 595.0mm

Length 595.0mm

In package 1pc

Casing colour white

Casing material aluminium

Power supply [VS \(Vossloh-Schwabe\)](#)

Work environment indoor use

Certificates CE, UKCA, RoHS

Warranty 5 years

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

