

## Modular light 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 830

### Product code 15927

Supply voltage 230V  
Output 25W  
Maximum output 25W/1m  
Luminous flux 3750lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature warm  
white 3000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 3400g  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Modular light 1200x300 OPAL STRONG white 230V 25W 3750lm 120° IP20 840

### Product code 15941

Supply voltage 230V  
Output 25W  
Maximum output 25W/1m  
Luminous flux 3750lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 3400g  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Modular light 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 830

### Product code 15642

Supply voltage 230V  
Output 36W  
Maximum output 36W/1m  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 119W  
Correlated colour temperature warm white 3000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 3400g  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Modular light 1200x300 OPAL STRONG white 230V 36W 4300lm 120° IP20 840

### Product code 15641

Supply voltage 230V  
Output 36W  
Maximum output 36W/1m  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 119W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 11.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2400g  
Package weight 2650g  
In package 1pc  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 5 years

The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Mounting frame 1200x300 white

### Product code 14207

Height 45.0mm  
Width 300.0mm  
Length 1200.0mm  
In package 1pc  
In box 10pcs  
Casing colour white  
Casing material aluminium  
Polishing matt  
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

## Mounting frame 1200x300 white IP20

### Product code 19069

Protection class IP20  
Height 72.0mm  
Width 315.0mm  
Length 1215.0mm  
Weight 1782g  
In package 1pc  
Casing colour white  
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

## Mounting frame 1200x300x63 white IP20

### Product code 19070

---

Protection class IP20  
Height 63.0mm  
Width 300.0mm  
Length 1200.0mm  
Weight 1782g  
In package 1pc  
Casing colour white  
Work environment indoor use




Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

## Modular light 120x300 Backlit + frame white 230V 36W 4320lm 120° IP20 840

## Product code 19161

Supply voltage 230V  
Power factor 0.90  
Output 36W  
Maximum output 36W/1m  
Luminous flux 4320lumens  
Luminaire's efficiency lm79 120W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Protection class IP20  
Lifespan 30000h  
Llmf tm21 L90B50 @25°C 50.000h  
Height 39.0mm  
Width 295.0mm  
Length 1195.0mm  
In package 1pc  
In box 6pcs  
Casing colour white  
Casing material aluminium + plastic  
Power supply [LIFUD](#)  
Impact resistance IK03  
Work environment indoor use  
Operation temperature -20° - +45°C  
Certificates CE, SAA, RoHS,  
Warranty 3 years

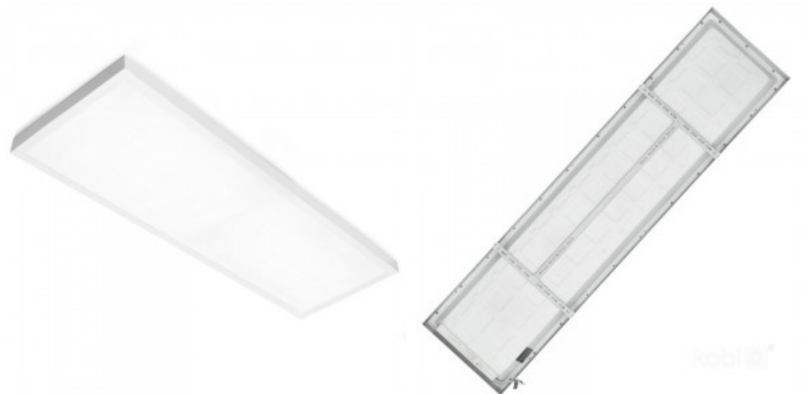

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Mounting frame 600x300 white

### Product code 17074

---

Height 45.0mm  
Width 300.0mm  
Length 600.0mm  
Weight 310g  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminium  
Polishing matt  
Work environment indoor use



Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

## Modular light 600x600 Backlit + frame white 230V 36W 4320lm 120° IP20 840



## Product code 19160

Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4320lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Protection class IP20  
 Lifespan 30000h  
 Llmf tm21 L90B50 @25°C 50.000h  
 Height 35.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In package 90pcs  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Power supply [LIFUD](#)  
 Impact resistance IK03  
 Work environment indoor use  
 Operation temperature -20° - +45°C  
 Certificates CE, SAA, RoHS,  
 Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light 600x600 white 230V 36W 3960lm 120° IP65 DALI 830

**Product code 20678 DALI dimmable**


Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 36W  
Maximum output 36W/1m  
Luminous flux 3960lumens  
Luminaire's efficiency lm79 110W  
Correlated colour temperature warm white 3000K  
Lens angle 120  
Cri 80  
Protection class IP65  
Lifespan 50000h  
Llmf tm21 L90B50 @25°C 50.000h  
Height 12.0mm  
Width 595.0mm  
Length 595.0mm  
In box 6pcs  
Casing colour white  
Casing material aluminium + plastic  
Power supply [PHILIPS](#)  
Work environment indoor use  
Operation temperature -20° - +40°C  
Certificates CE, SAA, RoHS,  
Warranty 3 years



## Modular light CAPRI 600x600 40W 4400lm 120° IP65 4000K pure white

**Product code 19304**

Output 40W  
Luminous flux 4400lumens  
Luminaire's efficiency lm79 110W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Protection class IP65  
Height 32.0mm  
Width 596.0mm  
Length 596.0mm  
Weight 1490g  
In package 1pc  
In box 6pcs  
Impact resistance IK04  
Operation temperature -20 - +40°C



## Modular light CAPRI 600x600 white 230V 25, 36, 40W 5200lm CRI80 120° IP44/40 3000K, 4000K, 5700K 3CCT

### Product code 19538

Supply voltage 230V  
Power factor 0.90  
Output 25, 36, 40W  
Maximum output 40W/1m  
Luminous flux 5200lumens  
Correlated colour temperature 3CCT  
3000K, 4000K, 5700K  
Lens angle 120  
Cri 80  
Protection class IP44/40  
Lifespan 50000h  
Height 32.0mm  
Width 595.0mm  
Length 595.0mm  
Weight 1250g  
In package 90pcs  
In box 6pcs  
Casing colour white  
Casing material aluminium + plastic  
No. of switches 30000pcs  
Work environment indoor use  
Operation temperature -20° - +45°C  
Certificates CE, SAA, RoHS,  
Warranty 5 years



Ceiling panel is a stylish and functional lighting solution, which fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. Replaceable LED module if necessary. This allows users to easily and conveniently replace the LED light source without replacing the entire luminaire or light bulb. Replaceable LED modules are more energy-efficient, have a longer lifespan, and offer different light temperatures and brightness levels according to the user's needs. This ceiling panel is suitable for indoor use only, with IP20 protection class. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light ECO 1200x300 Backlit h35 white 230V 36W 4300lm 120° IP20 840

### Product code 17977

Supply voltage 230V  
Output 36W  
Maximum output 36W/1m  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 119W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light [EPISTAR LED](#)  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 30.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2400g  
Package weight 2650g  
In package 1pc  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 3 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warmth temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light ECO 1200x300 Backlit white 230V 25W 5000lm 120° IP20 840

### Product code 17553

Brand ECO  
Supply voltage 230V  
Power factor 0.90  
Output 25W  
Maximum output 25W/1m  
Luminous flux 5000lumens  
Luminaire's efficiency lm79 200W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Width 1195.0mm  
Length 295.0mm  
In package 1pc  
In box 5pcs  
Casing colour white  
Casing material aluminium  
Polishing matt  
No. of switches 25000pcs  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -10 ~ 40°C  
Certificates CE, RoHS  
Warranty 5 years



This PROLUMEN 295x1195 [LED module luminaire](#) is designed to illuminate office spaces and commercial buildings. The luminaire dimensions are compatible with standard ceiling installation. Thanks to its simple design, the luminaire is easy to install in corridors, break rooms, offices, and conference rooms. All PROLUMEN products come with a power supply unit included. The luminaire is flicker-free. Enhance your everyday lighting quality and choose a top-quality lighting solution from LED house's product range!

## Modular light ECO 600x600 Backlit h35 white 230V 36W 4320lm 120° IP20 840

### Product code 17600

Brand ECO  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4320lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B50 @25°C 50.000h  
 Height 35.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In package 90pcs  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Power supply [LIFUD](#)  
 Work environment indoor use  
 Operation temperature -20° - +40°C  
 Certificates CE, SAA, RoHS,  
 Warranty 3 years




Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light ECO 600x600 UGR<19 Backlit h25 white 230V 36W 4320lm 120° IP40 840

### Product code 18238

Brand ECO  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4320lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light [SAMSUNG LED](#)  
 Cri 80  
 Ugr 22  
 Sdcm - macadam ellipses 6  
 Protection class IP40  
 Lifespan 50000h  
 Height 25.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Power supply [LIFUD](#)  
 Work environment indoor use  
 Operation temperature -20 - +40°C  
 Certificates CE, RoHS, ENEC, CB, New ERP  
 Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light ECO 600x600 UGR<19 Backlit h35 white 230V 25W 5000lm 90° IP20 840

### Product code 18230

Brand ECO  
 Supply voltage 230V  
 Power factor 0.90  
 Output 25W  
 Maximum output 25W/1m  
 Luminous flux 5000lumens  
 Luminaire's efficiency lm79 200W  
 Correlated colour temperature pure white 4000K  
 Lens angle 90  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B50 @25°C 50.000h  
 Height 35.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In package 90pcs  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Power supply [PHILIPS](#)  
 Work environment indoor use  
 Operation temperature -20° - +40°C  
 Certificates CE, SAA, RoHS,  
 Warranty 3 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)



## Mounting frame EMOS 600x600 70mm white

**Product code 16634**

Brand [EMOS](#)

Height 70.0mm

Width 600.0mm

Length 600.0mm

In package 1pc

In box 20pcs

Casing colour white


Casing material aluminium

Polishing semimatt

Work environment indoor use

Warranty 2 years

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!




## Modular light Eridanus 600x600 2x1800 white 230V 21.9W 3399lm 77° IP40/20 830

## Product code 18026

---

Supply voltage 230V  
Power factor 0.95  
Output 21.9W  
Maximum output 21.9W/1m  
Luminous flux 3399lumens  
Luminaire's efficiency lm79 155W  
Correlated colour temperature warm  
white 3000K  
Lens angle 77  
Cri 80  
Ugr 16  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 595.0mm  
Length 595.0mm  
Weight 2700g  
In package 1pc  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years

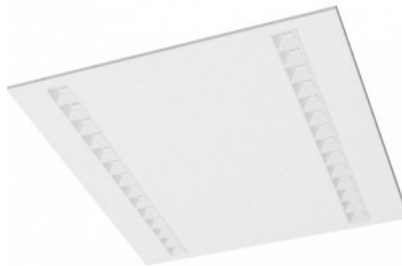

Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light Eridanus R 1195x295 LED1x4250 white 230V 26.1W 4222lm 77° IP40/20 840

### Product code 18031

Supply voltage 230V  
Power factor 0.96  
Output 26.1W  
Maximum output 26.1W/1m  
Luminous flux 4222lumens  
Luminaire's efficiency lm79 162W  
Correlated colour temperature pure white 4000K  
Lens angle 77  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2700g  
In package 1pc  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light Eridanus R 1195x295 LED1x4900 white 230V 30.8W 4867lm 77° IP40/20 840

### Product code 18032

Supply voltage 230V  
Power factor 0.95  
Output 30.8W  
Maximum output 30.8W/1m  
Luminous flux 4867lumens  
Luminaire's efficiency lm79 158W  
Correlated colour temperature pure white 4000K  
Lens angle 77  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2800g  
In package 1pc  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light Eridanus R LED 600x600 LED2x2450 white 230V 30.8W 4867lm 77° IP40/20 840

### Product code 18030

Supply voltage 230V  
Power factor 0.95  
Output 30.8W  
Maximum output 30.8W/1m  
Luminous flux 4867lumens  
Luminaire's efficiency lm79 158W  
Correlated colour temperature pure white 4000K  
Lens angle 77  
Cri 80  
Ugr 16  
Sdcm - macadam ellipses 3  
Protection class IP40/20  
Lifespan 100000h  
Height 31.0mm  
Width 595.0mm  
Length 595.0mm  
Weight 2700g  
In package 1pc  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Operation temperature ta 0...+35°C  
Certificates CE, UKCA, RoHS  
Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light NELIO 1200x300 white 230V 40W 4300lm 120° IP20 840

### Product code 13863

Brand NELIO  
Supply voltage 230V  
Output 40W  
Maximum output 40W/1m  
Luminous flux 4300lumens  
Luminaire's efficiency lm79 108W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Protection class IP20  
Lifespan 35000h  
Height 10.0mm  
Width 295.0mm  
Length 1195.0mm  
Weight 2100g  
In package 1pc  
In box 5pcs  
Casing colour white  
Work environment indoor use  
Certificates CE  
Warranty 3 years



This NELIO LED 1200x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

## Modular light NELIO 600x300 OPAL white 230V 28W 3000lm

## 120° IP20 840

### Product code 15105

Brand NELIO  
Supply voltage 230V  
Output 28W  
Maximum output 28W/1m  
Luminous flux 3000lumens  
Luminaire's efficiency lm79 107W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Protection class IP20  
Lifespan 35000h  
Height 10.0mm  
Width 600.0mm  
Length 300.0mm  
Installation opening diameter 575x275mm  
Weight 1030g  
In package 1pc  
In box 10pcs  
Casing colour white  
No. of switches 20000pcs  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 3 years



NELIO




This NELIO LED 600x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

## Mounting frame NELIO 600x600 45mm white

**Product code 14122**

Brand NELIO  
Height 45.0mm  
Width 600.0mm  
Length 600.0mm  
Weight 300g  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminium  
Polishing semimatt  
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!

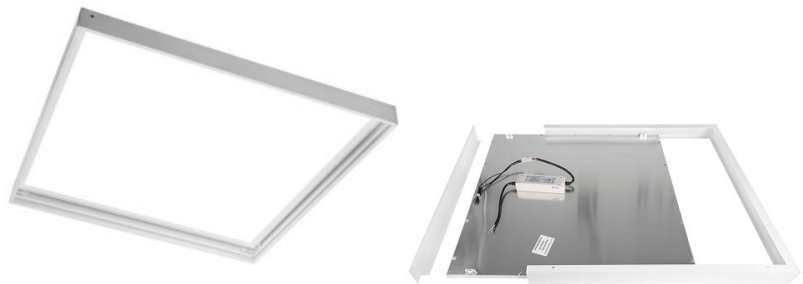

## Mounting frame NELIO 600x600 63mm black

**Product code 17777**

Brand NELIO  
Height 63.0mm  
Width 600.0mm  
Length 600.0mm  
In box 20pcs  
Casing colour black  
Casing material aluminium  
Polishing semimatt  
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!





## Mounting frame NELIO 600x600 63mm white

**Product code 15495**

Brand NELIO  
Height 63.0mm  
Width 600.0mm  
Length 600.0mm  
Weight 300g  
In box 20pcs  
Casing colour white  
Casing material aluminium  
Polishing semimatt  
Work environment indoor use

600x600 panel for surface mount use. Our LED panel frame is designed to provide a practical and aesthetic solution for installing LED panels. The frame provides stable support for the panel while creating a visually pleasing appearance. Elevate your everyday lighting quality and choose a top-of-the-line lighting solution from the LED house product range!



## Modular light NELIO NELIO G2 600x300 white 230V 25W 3120lm 120° IP40 840

## Product code 19649

Brand NELIO  
Supply voltage 230V  
Output 25W  
Maximum output 25W/1m  
Luminous flux 3120lumens  
Luminaire's efficiency lm79 125W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Protection class IP40  
Lifespan 35000h  
Height 10.0mm  
Width 600.0mm  
Length 300.0mm  
Installation opening diameter 575x275mm  
Weight 1030g  
In package 1pc  
In box 10pcs  
Casing colour white  
No. of switches 20000pcs  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 3 years



This NELIO LED 600x300 panel is ultra-thin and modern, making it a perfect fit for contemporary interiors. The panel features high-efficiency LED lights, ensuring bright and uniform illumination while consuming minimal energy. The panel can be installed in various locations, including offices, schools, and homes, helping to enhance the quality of lighting. This ceiling panel is suitable for indoor use only, with IP20 protection class. The panel has a light temperature of 4000K (daylight). Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!

## Modular light PROLUMEN 600x600 Backlit h34 230V 36W

## 5040lm 120° IP20 830

### Product code 17354

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 5040lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature warm white 3000K  
 Lens angle 120  
 Cri 80  
 Ugr 22  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 34.0mm  
 Width 595.0mm  
 Length 595.0mm  
 Weight 1600g  
 Package weight 2150g  
 In package 1pc  
 Casing material aluminium  
 Polishing matt  
 No. of switches 25000pcs  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -10 ~ 40°C  
 Certificates CE, RoHS  
 Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light PROLUMEN 600x600 Backlit UGR<19 h26 230V 18-40W 6400lm 90° IP20 Dip Switch 840

**Product code 19060 Dip Switch  
dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Dimmable Dip Switch  
Output 18-40W  
Maximum output 40W/1m  
Luminous flux 6400lumens  
Correlated colour temperature pure white 4000K  
Lens angle 90  
Source of light SANAN LED  
Cri 80  
Sdcm - macadam ellipses 5  
Protection class IP20  
Lifespan 102000h  
Llmf tm21 L70B10 @25°C 100.000h  
Height 26.0mm  
Width 595.0mm  
Length 595.0mm  
Weight 1800g  
In box 10pcs  
Power supply [BOKE](#)  
Impact resistance IK08  
Operation temperature -20° - +45°C  
Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light PROLUMEN 600x600 Backlit UGR<19 h34 230V 36W 4220lm 120° IP20 830

**Product code 17708**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4220lumens  
 Luminaire's efficiency lm79 117W  
 Correlated colour temperature warm white 3000K  
 Lens angle 120  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 34.0mm  
 Width 595.0mm  
 Length 595.0mm  
 Weight 1600g  
 Package weight 2150g  
 In package 1pc  
 Casing material aluminium  
 Polishing matt  
 No. of switches 25000pcs  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -10 ~ 40°C  
 Certificates CE, RoHS  
 Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light PROLUMEN 600x600 Backlit UGR<19 h34 230V 36W 4320lm 120° IP20 840

**Product code 16352**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4320lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 34.0mm  
 Width 595.0mm  
 Length 595.0mm  
 Weight 1600g  
 Package weight 2150g  
 In package 1pc  
 In box 6pcs  
 Casing material aluminium  
 Polishing matt  
 No. of switches 25000pcs  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -10 ~ 40°C  
 Certificates CE, RoHS  
 Warranty 5 years



High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light PROLUMEN 600x600 DALI 230V 36W 3600lm 120° IP20 830

**Product code 18342**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 3600lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature warm white 3000K  
 Lens angle 120  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 33.0mm  
 Width 595.0mm  
 Length 595.0mm  
 Weight 1800g  
 In package 1pc  
 Casing material aluminium  
 Polishing matt  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -10 ~ 40°C  
 Certificates CE, RoHS  
 Warranty 5 years




High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light PROLUMEN 600x600 NEPTUN 230V 40W 4000lm 120° IP65 840

**Product code 13743**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 40W  
Maximum output 40W/1m  
Luminous flux 4000lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP65  
Lifespan 50000h  
Height 20.0mm  
Width 595.0mm  
Length 595.0mm  
In package 1pc  
In box 5pcs  
Casing material aluminium + plastic  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20 ~ 48°C  
Certificates CE, RoHS  
Warranty 5 years

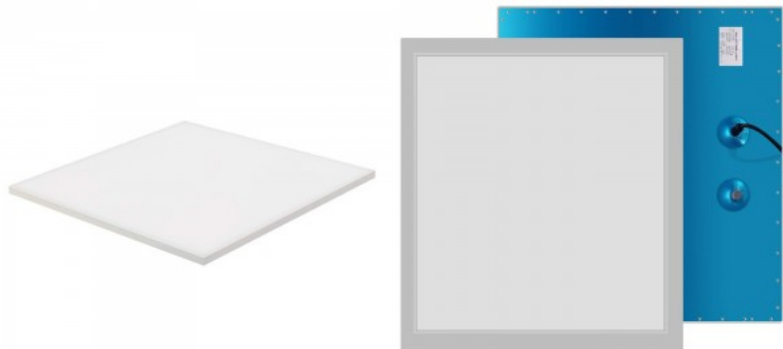

The PROLUMEN 600x600 NEPTUN modular luminaire is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. A high-quality LED panel, designed to last long due to its quality components. The 4000K light temperature provides clear and sharp illumination, ideal for lighting up stores and other commercial spaces. IP65 - moisture-resistant version. Improve your everyday lighting quality and choose a top-quality lighting solution from the LED house product range!



## Modular light PROLUMEN 600x600 UGR<19 34W 4080lm 90° 840

**Product code 19057**

Brand [Prolumen](#)

Output 34W

Maximum output 34W/1m

Luminous flux 4080lumens

Luminaire's efficiency lm79 120W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 80

Power supply [LIFUD](#)

Warranty 5 years




High quality modular luminaire, ideal for spaces such as offices and corridors. The PROLUMEN ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. In addition to a high UGR value, the Backlit panel is flicker-free. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light PROLUMEN 600x600 white 230V 42W 5880lm 80° IP20 DALI 830

## Product code 18128 DALI dimmable

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable DALI  
 Output 42W  
 Maximum output 42W/1m  
 Luminous flux 5880lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature warm white 3000K  
 Lens angle 80  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Height 51.0mm  
 Width 595.0mm  
 Length 595.0mm  
 In package 1pc  
 Casing colour white  
 Casing material aluminium  
 Power supply [VS \(Vossloh-Schwabe\)](#)  
 Work environment indoor use  
 Certificates CE, UKCA, RoHS  
 Warranty 5 years



Budget friendly modular luminaire, ideal for spaces such as offices and corridors. The ceiling panel luminaire stands out due to its low UGR value, long lifespan, and adaptable installation and maintenance methods. The driver of this luminaire is external - this feature simplifies installation and maintenance by allowing easier access. The luminaire is designed to be as eye-friendly as possible. The high lumen output ensures that surfaces are covered with quality and sufficient light. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Modular light white 230V 25-40W 5200lm CRI80 120° IP44

## 3000K, 4000K, 5700K 3CCT

### Product code 19643

Supply voltage 230V  
Power factor 0.90  
Output 25-40W  
Maximum output 40W/1m  
Luminous flux 5200lumens  
Correlated colour temperature 3CCT  
3000K, 4000K, 5700K  
Lens angle 120  
Cri 80  
Protection class IP44  
Lifespan 50000h  
Height 32.0mm  
Width 295.0mm  
Length 1195.0mm  
In package 1pc  
In box 6pcs  
Casing colour white  
Casing material aluminium + plastic  
Impact resistance IK03  
Work environment indoor use  
Operation temperature -20° - +40°C  
Certificates CE, SAA, RoHS,  
Warranty 5 years



The ceiling panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The luminaire is made of high-quality materials, ensuring durability and long-term use. The light source of the ceiling panel is efficient LED technology, providing bright light and energy savings. The luminaire is easy to install and is ideal for evenly and clearly illuminating spaces. This ceiling panel is suitable for indoor use only, with an IP20 protection rating. When ordering the OPAL STRONG ceiling panel, you can choose between warm temperatures of 3000K (warm white) and 4000K (daylight). The power supply unit is included in the set! Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

