

LED panel 1200x300 OPAL STRONG white 230V 25W 3750lm CRI80 120° IP20 3000K warm white

Product code 15927

Price 56,28+VAT

Supply voltage 230V
Output 25W
Luminous flux 3750lumens
Luminaire's efficiency 150W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3400g
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



LED panel 1200x300 OPAL STRONG white 230V 25W 3750lm CRI80 120° IP20 4000K pure white

Product code 15941

Price 56,28+VAT

Supply voltage 230V
Output 25W
Luminous flux 3750lumens
Luminaire's efficiency 150W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3400g
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



LED panel 1200x300 OPAL STRONG white 230V 36W 4300lm CRI80 120° IP20 3000K warm white

Product code 15642

Price 38,19+VAT

Supply voltage 230V
Output 36W
Luminous flux 4300lumens
Luminaire's efficiency 119W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3400g
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



LED panel 1200x300 OPAL STRONG white 230V 36W 4300lm CRI80 120° IP20 4000K pure white

Product code 15641

Price 44,22+VAT

Supply voltage 230V
Output 36W
Luminous flux 4300lumens
Luminaire's efficiency 119W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 3400g
Casing colour white
Work environment indoor use
Certificates CE
Warranty 5 years



LED panel 1200x300 panel frame white

Product code 14207

Price 13,12+VAT

Height 45.0mm
Width 300.0mm
Length 1200.0mm
In package 1pc
In box 10pcs
Casing colour white
Casing material aluminum
Polishing matt
Work environment indoor use




Mounting clip 4x1m points for LED panel

Product code 14255

Price 3,12+VAT

In package 1pc
In box 40pcs



LED panel 600x600 STRONG white 230V 36W 4320lm CRI80 120° IP20 4000K pure white

Product code 15366

Price 50,31+VAT

Supply voltage 230V
Output 36W
Luminous flux 4320lumens
Luminaire's efficiency 120W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 13.0mm
Width 595.0mm
Length 595.0mm
Weight 2450g
Package weight 400g
Casing colour white
Casing material aluminum + plastic
Work environment indoor use
Operation temperature -10~40°C
Certificates CE
Warranty 5 years

STRONG

120lm/W



LED panel AIGOSTAR 1200x300 E5 white 230V 40W 3600lm CRI80 120° IP20 4000K pure white

Product code 16343

Price 41,95+VAT

Equivalent 340W regular bulb
Brand AIGOSTAR
Supply voltage 230V
Output 40W
Electric current 1000mA
Luminous flux 3600lumens
Luminaire's efficiency 90W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 35000h
Height 9.0mm
Width 295.0mm
Length 1195.0mm
In package 1pc
In box 5pcs
Casing colour white
Casing material aluminum + plastic
No. of switches 15000pcs
Work environment indoor use
Operation temperature -10~+40°C
Certificates CE, RoHS
Warranty 3 years



LED panel AIGOSTAR 1200x300 panel frame white

Product code 16503

Price 14,80+VAT

Brand AIGOSTAR
Width 300.0mm
Length 1200.0mm
In package 1pc
Casing colour white
Casing material aluminum
Polishing matt
Work environment indoor use



LED panel AIGOSTAR 600x300 OPAL white 230V 25W 2125lm CRI80 120° 4000K pure white

Product code 14261

Price 27,96+VAT

Equivalent 180W regular bulb
Brand AIGOSTAR
Supply voltage 230V
Output 25W
Electric current 600mA
Luminous flux 2125lumens
Luminaire's efficiency 85W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Lifespan 30000h
Width 300.0mm
Length 600.0mm
In package 1pc
In box 5pcs
Casing colour white
Casing material aluminum + plastic
Polishing matt
No. of switches 10000pcs
Work environment indoor use
Operation temperature -20°C - +40°C
Certificates CE, RoHS
Warranty 2 years



LED panel AIGOSTAR 600x600 E5 white 230V 40W 3600lm CRI80 120° IP20 4000K pure white

Product code 13958

Price 40,29+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 40W
Luminous flux 3600lumens
Luminaire's efficiency 90W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Height 10.0mm
Width 595.0mm
Length 595.0mm
In box 5pcs
Casing colour white
Casing material aluminum
Polishing matt
No. of switches 10000pcs
Work environment indoor use
Operation temperature -20°C~40°C
Certificates CE,RoHS
Warranty 3 years



LED panel AIGOSTAR 600x600 E5 white 230V 40W 4800lm CRI80 120° IP20 4000K pure white

Product code 16579

Price 40,29+VAT

Brand AIGOSTAR
Supply voltage 230V
Output 40W
Luminous flux 4800lumens
Luminaire's efficiency 120W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Height 10.0mm
Width 595.0mm
Length 595.0mm
In box 5pcs
Casing colour white
Casing material aluminum
Polishing matt
No. of switches 10000pcs
Work environment indoor use
Operation temperature -20°C~40°C
Certificates CE,RoHS
Warranty 3 years



LED panel EMOS 600x600 LEXXO h30 230V 34W 4200lm CRI80 120° IP20 4000K pure white

Product code 16481

Price 32,36+VAT

Brand [EMOS](#)

Supply voltage 230V

Output 34W

Luminous flux 4200lumens

Luminaire's efficiency 124W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Ugr 22

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Llmf L80B10 @25°C 50.000h

Height 30.0mm

Width 595.0mm

Length 595.0mm

In package 1pc

In box 4pcs

Casing material aluminum

Polishing matt

No. of switches 25000pcs

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



LED panel EMOS 600x600 panel frame 70mm white

Product code 16634

Price 18,00+VAT

Brand [EMOS](#)

Height 70.0mm

Width 600.0mm

Length 600.0mm

In package 1pc

In box 20pcs


Casing colour white

Casing material aluminum

Polishing semimatt

Work environment indoor use

Warranty 2 years



600x600 panel for superficial use.

LED panel NELIO 1200x300 white 230V 40W 3400lm CRI80 120° IP20 4000K pure white

Product code 13863

Price 35,54+VAT

Brand NELIO
Supply voltage 230V
Output 40W
Luminous flux 3400lumens
Luminaire's efficiency 85W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 35000h
Height 10.0mm
Width 295.0mm
Length 1195.0mm
Weight 2100g
In package 1pc
In box 5pcs
Casing colour white
Work environment indoor use
Certificates CE
Warranty 3 years



LED panel NELIO 600x300 OPAL white 230V 28W 2240lm CRI80 120° IP20 4000K pure white

Product code 15105

Price 42,43+VAT

Brand NELIO
Supply voltage 230V
Output 28W
Maximum output 28W/1m
Luminous flux 2240lumens
Luminaire's efficiency 80W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Height 10.0mm
Width 600.0mm
Length 300.0mm
Weight 1050g
In package 1pc
In box 10pcs
Casing colour white
Power supply [BOKE](#)
Work environment indoor use
Certificates CE
Warranty 2 years



LED panel NELIO 600x600 OPAL white 230V 40W 3400lm CRI80 120° IP20 3000K warm white

Product code 15126

Brand NELIO
Supply voltage 230V
Output 40W
Electric current 1000mA
Luminous flux 3400lumens
Luminaire's efficiency 85W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Llmf L70B50 @25°C 50.000h
Height 10.0mm
Width 595.0mm
Length 595.0mm
Weight 2740g
In package 1pc
In box 5pcs
Casing colour white
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 3 years



LED panel NELIO 600x600 OPAL white 230V 40W 3400lm CRI80 120° IP20 4000K pure white

Product code 14920

Price 41,99+VAT

Brand NELIO
Supply voltage 230V
Output 40W
Electric current 1000mA
Luminous flux 3400lumens
Luminaire's efficiency 85W
Correlated colour temperature (cct) pure white 4000K
Lens angle 120
Cri 80
Protection class IP20
Lifespan 30000h
Llmf L70B50 @25°C 50.000h
Height 10.0mm
Width 595.0mm
Length 595.0mm
Weight 2740g
In package 1pc
In box 5pcs
Casing colour white
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 3 years




LED panel NELIO 600x600 panel frame 45mm white

Product code 14122

Price 10,31+VAT

Brand NELIO
Height 45.0mm
Width 600.0mm
Length 600.0mm
Weight 300g
In package 1pc
In box 20pcs
Casing colour white
Casing material aluminum
Polishing semimatt
Work environment indoor use

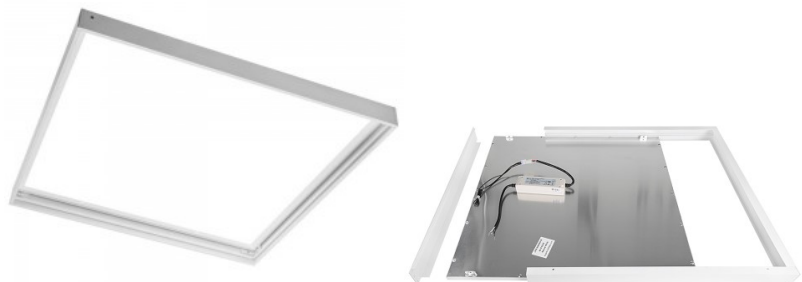


600x600 panel for superficial use.

LED panel NELIO 600x600 panel frame 63mm white

Product code 15495

Price 13,69+VAT

Brand NELIO
Height 63.0mm
Width 600.0mm
Length 600.0mm
Weight 300g
In box 20pcs
Casing colour white
Casing material aluminum
Polishing semimatt
Work environment indoor use

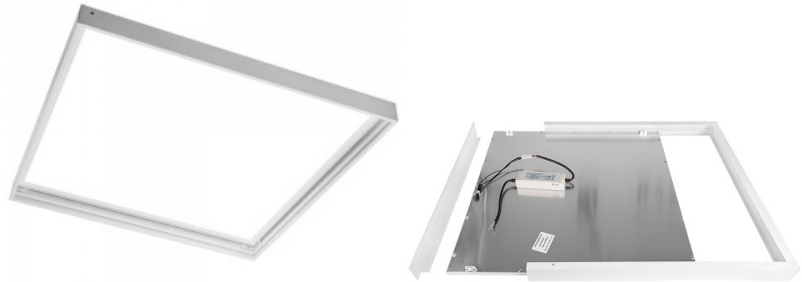

600x600 panel for superficial use.

LED panel Northcliffe 600x600 LEVANTO OPAL white 230V 36W 3600lm CRI80 120° IP40 3000K warm white

Product code 16201

Price 32,50+VAT

Brand Northcliffe
Supply voltage 230V
Output 36W
Electric current 1000mA
Luminous flux 3600lumens
Luminaire's efficiency 100W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP40
Lifespan 30000h
Llmf L70B50 @25°C 50.000h
Height 33.0mm
Width 595.0mm
Length 595.0mm
Weight 1800g
Casing colour white
Impact resistance IK02
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 3 years



LED panel Northcliffe 600x600 LEVANTO OPAL white 230V 36W 3650lm CRI80 120° IP40 4000K pure white

Product code 16081

Price 32,50+VAT

Brand Northcliffe
Supply voltage 230V
Output 36W
Electric current 1000mA
Luminous flux 3650lumens
Luminaire's efficiency 101W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Sdcm - macadam ellipses 5
Protection class IP40
Lifespan 30000h
Llmf L70B50 @25°C 50.000h
Height 33.0mm
Width 595.0mm
Length 595.0mm
Weight 1800g
Casing colour white
Impact resistance IK02
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 3 years



LED panel PROLUMEN 1200x300 OPAL white 230V 40W 4000lm CRI80 120° IP20 4000K pure white

Product code 15942

Price 45,89+VAT

Brand [PROLUMEN](#)
Supply voltage 230V
Output 40W
Luminous flux 4000lumens
Luminaire's efficiency 100W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Llmf L70B50 @25°C 50.000h
Height 11.0mm
Width 295.0mm
Length 1195.0mm
Weight 2000g
Package weight 1250g
In package 5pcs
Casing colour white
Casing material aluminum
Power supply [PHILIPS](#)
Impact resistance IK06
Work environment indoor use
Certificates CE
Warranty 5 years



LED panel PROLUMEN 1200x600 white 230V 70W 7000lm CRI80 120° IP20 4000K pure white

Product code 15589

Price 154,17+VAT

Brand [PROLUMEN](#)
Supply voltage 230V
Output 70W
Luminous flux 7000lumens
Luminaire's efficiency 100W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Source of light [EPISTAR LED](#)
Cri 80
Protection class IP20
Lifespan 50000h
Height 11.0mm
Width 595.0mm
Length 1195.0mm
Package weight 2600g
In package 1pc
In box 4pcs
Casing colour white
Casing material aluminum + plastic
No. of switches 10000pcs
Power supply [PHILIPS](#)
Work environment indoor use
Operation temperature -20~+40°C
Certificates CE
Warranty 5 years



LED panel PROLUMEN 600x600 NEPTUN 230V 40W 4000lm CRI80 120° IP65 4000K pure white

Product code 13743

Price 95,56+VAT

Promotional price 75,00+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 40W

Luminous flux 4000lumens

Luminaire's efficiency 100W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 20.0mm

Width 595.0mm

Length 595.0mm

In package 1pc

In box 5pcs


Casing material aluminum + plastic

Power supply [BOKE](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

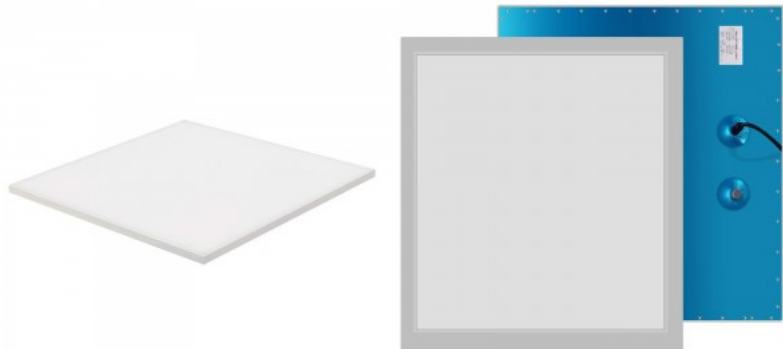

LED panel PROLUMEN 600x600 OPAL 230V 40W 4000lm CRI85 120° IP20 3000K warm white

Product code 13298

Price 40,26+VAT

Brand [PROLUMEN](#)
Supply voltage 230V
Output 40W
Electric current 1000mA
Luminous flux 4000lumens
Luminaire's efficiency 100W
Correlated colour temperature (cct)
warm white 3000K
Lens angle 120
Cri 85
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 50000h
Llmf L70B50 @25°C 50.000h
Height 11.0mm
Width 595.0mm
Length 595.0mm
Power supply [PHILIPS](#)
Work environment indoor use
Operation temperature -20-40°C
Certificates CE, RoHS
Warranty 5 years



LED panel PROLUMEN 600x600 UGR<19 230V 40W 4000lm CRI80 90° IP20 4000K pure white

Product code 14408

Price 56,32+VAT

Brand [PROLUMEN](#)
Supply voltage 230V
Output 40W
Luminous flux 4000lumens
Luminaire's efficiency 100W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 90
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 50000h
Llmf L70B50 @25°C 50.000h
Height 15.0mm
Width 597.0mm
Length 597.0mm
In package 1pc
In box 8pcs
Casing material aluminum
Polishing matt
No. of switches 25000pcs
Power supply [PHILIPS](#)
Work environment indoor use
Certificates CE, RoHS
Warranty 5 years



LED panel PROLUMEN 600x600 UGR<19 h32 230V 36W 4320lm CRI80 120° IP20 4000K pure white

Product code 16352

Price 50,00+VAT

Brand [PROLUMEN](#)
Supply voltage 230V
Output 36W
Luminous flux 4320lumens
Luminaire's efficiency 120W
Correlated colour temperature (cct)
pure white 4000K
Lens angle 120
Cri 80
Ugr 19
Sdcm - macadam ellipses 6
Protection class IP20
Lifespan 50000h
Llmf L80B10 @25°C 50.000h
Height 32.0mm
Width 595.0mm
Length 595.0mm
In package 1pc
Casing material aluminum
Polishing matt
No. of switches 25000pcs
Power supply [BOKE](#)
Work environment indoor use
Operation temperature -10 ~ 40°C
Certificates CE, RoHS
Warranty 5 years



LED panel PROLUMEN 600x600 WP 230V 40W 4000lm CRI80 120° IP65 4000K pure white

Product code 15864

Price 61,63+VAT

Brand [PROLUMEN](#)

Supply voltage 230V

Output 40W

Luminous flux 4000lumens

Luminaire's efficiency 100W

Correlated colour temperature (cct)

pure white 4000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 10.0mm

Width 595.0mm

Length 595.0mm

In package 1pc

In box 5pcs

Casing material aluminum + plastic

Power supply [BOKE](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

