

## Ceiling lamp DB157 UGR<19 1200 DALI white 230V 25-40W 4400lm CRI95 80° IP20 DALI 3000K-4000K 2CCT

**Product code 22320 DALI dimmable**

Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 25-40W  
Maximum output 40W/1m  
Rated current 1250mA  
Luminous flux 4400lumens  
Correlated colour temperature 2CCT  
3000K-4000K  
Lens angle 80  
Cri 95  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 59.0mm  
Width 120.0mm  
Length 1200.0mm  
In package 1pc  
In box 6pcs  
Casing colour white  
Casing material aluminium  
Power supply [BOKE](#)  
Impact resistance IK08  
Work environment indoor use  
Operation temperature -20 ~45°C  
Certificates CE  
Warranty 5 years



## Ceiling lamp DB157 UGR<19 1200 white 230V 30W 3500lm 80° IP20 940

### Product code 18172

---

Supply voltage 230V  
Power factor 0.90  
Output 30W  
Maximum output 30W/1m  
Rated current 1250mA  
Luminous flux 3500lumens  
Luminaire's efficiency lm79 117W  
Correlated colour temperature pure white 4000K  
Lens angle 80  
Cri 95  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 59.0mm  
Width 120.0mm  
Length 1200.0mm  
In package 1pc  
In box 6pcs  
Casing colour white  
Casing material aluminium  
Impact resistance IK08  
Work environment indoor use  
Operation temperature -20 ~45°C  
Certificates CE  
Warranty 5 years



## LED luminaire ECO Bianca BFLH-12-36C1 white 230V 21-36W 5760lm CRI80 120° IP44 3000K, 3500K, 4000K 3CCT

**Product code 19396**

Brand ECO  
Supply voltage 230V  
Power factor 0.90  
Output 21-36W  
Maximum output 36W/1m  
Luminous flux 5760lumens  
Correlated colour temperature 3CCT  
3000K, 3500K, 4000K  
Lens angle 120°  
Cri 80  
Sdcm - macadam ellipses 5  
Protection class IP44  
Lifespan 50000h  
Height 61.0mm  
Width 160.0mm  
Length 1160.0mm  
In package 1pc  
In box 4pcs  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Power supply [PHILIPS](#)  
Impact resistance IK08  
Work environment indoor use  
Operation temperature -20 - +45°C  
Certificates CE  
Warranty 3 years



## LED luminaire ECO Bianca BFLH-15-42C1 white 230V 25-42W 6720lm CRI80 120° IP44 3000K, 3500K, 4000K 3CCT

**Product code 19397**

Brand ECO  
Supply voltage 230V  
Power factor 0.90  
Output 25-42W  
Maximum output 42W/1m  
Luminous flux 6720lumens  
Correlated colour temperature 3CCT  
3000K, 3500K, 4000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 5  
Protection class IP44  
Lifespan 50000h  
Height 61.0mm  
Width 160.0mm  
Length 1440.0mm  
In package 1pc  
In box 4pcs  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Power supply [PHILIPS](#)  
Impact resistance IK08  
Work environment indoor use  
Operation temperature -20 - +45°C  
Certificates CE  
Warranty 3 years



## Ceiling lamp Koline 1200 black 230V 20-30-40W 4800lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

**Product code 23037**

Supply voltage 230V  
 Power factor 0.90  
 Output 20-30-40W  
 Maximum output 40W/1m  
 Luminous flux 4800lumens  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 6500K  
 Lens angle 110  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Height 72.8mm  
 Width 50.0mm  
 Length 1200.0mm  
 Weight 1.5 kg  
 In package 1pc  
 In box 9pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Impact resistance IK04  
 Work environment indoor use  
 Operation temperature -20 ~45°C  
 Certificates CE  
 Warranty 5 years





An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Ceiling lamp Koline 1200 black 230V 20W 2400lm 105° IP20 840

### Product code 17275

Supply voltage 230V  
 Power factor 0.90  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 2400lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4000K  
 Lens angle 105  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Height 72.8mm  
 Width 50.0mm  
 Length 1200.0mm  
 Weight 1.5 kg  
 In package 1pc  
 In box 9pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20 ~40°C  
 Certificates CE  
 Warranty 5 years

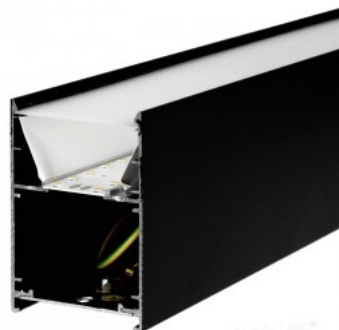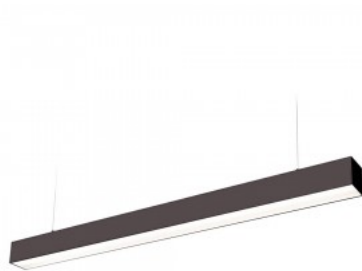

An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Ceiling lamp Koline 1200 white 230V 20W 2600lm 105° IP20 840

### Product code 17276

---

Supply voltage 230V  
Power factor 0.90  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2600lumens  
Luminaire's efficiency lm79 130W  
Correlated colour temperature pure white 4000K  
Lens angle 105  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 72.8mm  
Width 50.0mm  
Length 1200.0mm  
Weight 1.55 kg  
In package 1pc  
In box 9pcs  
Casing colour white  
No. of switches 30000pcs  
Work environment indoor use  
Operation temperature -20° - +40°C  
Certificates CE  
Warranty 5 years



An evenly distributed light fixture, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Ceiling lamp Koline 1200 white 230V 40W 5200lm 105° IP20 840

### Product code 17274

---

Supply voltage 230V  
Power factor 0.90  
Output 40W  
Maximum output 40W/1m  
Luminous flux 5200lumens  
Luminaire's efficiency lm79 130W  
Correlated colour temperature pure white 4000K  
Lens angle 105  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 72.8mm  
Width 50.0mm  
Length 1200.0mm  
Weight 1.55 kg  
In package 1pc  
In box 9pcs  
Casing colour white  
No. of switches 30000pcs  
Work environment indoor use  
Operation temperature -20 ~45°C  
Certificates CE  
Warranty 5 years





An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

# Ceiling lamp Koline K2 1200 black 230V 20W 2600lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

## Product code 18117

Supply voltage 230V  
 Power factor 0.90  
 Output 20W  
 Maximum output 20W/1m  
 Luminous flux 2600lumens  
 Luminaire's efficiency lm79 130W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 6500K  
 Lens angle 110  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Height 72.8mm  
 Width 50.0mm  
 Length 1200.0mm  
 Weight 1.5 kg  
 In package 1pc  
 In box 9pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20 ~40°C  
 Certificates CE  
 Warranty 5 years

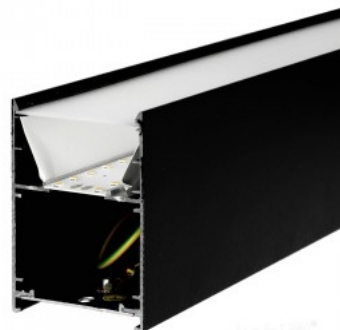
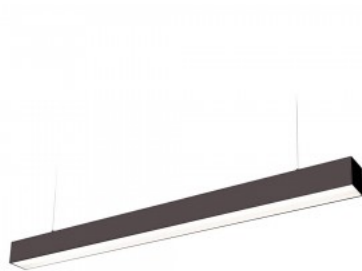


An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Ceiling lamp Koline K2 1200 black 230V 40W 4800lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

### Product code 18119

Supply voltage 230V  
 Power factor 0.90  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 4800lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 6500K  
 Lens angle 110  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Height 72.8mm  
 Width 50.0mm  
 Length 1200.0mm  
 Weight 1.5 kg  
 In package 1pc  
 In box 9pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20 ~45°C  
 Certificates CE  
 Warranty 5 years

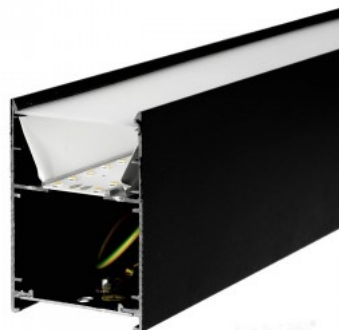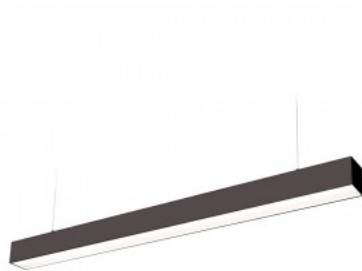

An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

# Ceiling lamp Koline K2 1200 UGR<19 black 230V 30W 3300lm CRI80 60° IP20 3000K, 4000K, 6500K 3CCT

## Product code 18122

Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3300lumens  
 Luminaire's efficiency lm79 110W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 6500K  
 Lens angle 60  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 Height 72.8mm  
 Width 50.0mm  
 Length 1200.0mm  
 Weight 1.5 kg  
 In package 1pc  
 In box 9pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20 ~45°C  
 Certificates CE  
 Warranty 5 years



An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Ceiling lamp Koline K2 1200 UGR<19 white 230V 30W 3600lm CRI80 60° IP20 3000K, 4000K, 6500K 3CCT

### Product code 18121

---

Supply voltage 230V  
Power factor 0.90  
Output 30W  
Maximum output 30W/1m  
Luminous flux 3600lumens  
Luminaire's efficiency lm79 120W  
Correlated colour temperature 3CCT  
3000K, 4000K, 6500K  
Lens angle 60  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 72.8mm  
Width 50.0mm  
Length 1200.0mm  
Weight 1.55 kg  
In package 1pc  
In box 9pcs  
Casing colour white  
No. of switches 30000pcs  
Work environment indoor use  
Operation temperature -20 ~45°C  
Certificates CE  
Warranty 5 years



An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Ceiling lamp Koline K2 1200 white 230V 20W 2600lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

### Product code 18118

---

Supply voltage 230V  
Power factor 0.90  
Output 20W  
Maximum output 20W/1m  
Luminous flux 2600lumens  
Luminaire's efficiency lm79 130W  
Correlated colour temperature 3CCT  
3000K, 4000K, 6500K  
Lens angle 110  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 72.8mm  
Width 50.0mm  
Length 1200.0mm  
Weight 1.55 kg  
In package 1pc  
In box 9pcs  
Casing colour white  
No. of switches 30000pcs  
Work environment indoor use  
Operation temperature -20° - +40°C  
Certificates CE  
Warranty 5 years



An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

## Ceiling lamp Koline K2 1200 white 230V 40W 4800lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

### Product code 18120

---

Supply voltage 230V  
Power factor 0.90  
Output 40W  
Maximum output 40W/1m  
Luminous flux 4800lumens  
Luminaire's efficiency lm79 120W  
Correlated colour temperature 3CCT  
3000K, 4000K, 6500K  
Lens angle 110  
Cri 80  
Protection class IP20  
Lifespan 50000h  
Height 72.8mm  
Width 50.0mm  
Length 1200.0mm  
Weight 1.55 kg  
In package 1pc  
In box 9pcs  
Casing colour white  
No. of switches 30000pcs  
Work environment indoor use  
Operation temperature -20 ~45°C  
Certificates CE  
Warranty 5 years




An evenly distributed light light, which can be installed both on the ceiling and suspended from the ceiling. An ideal luminaire for above desks! This luminaire is suitable for indoor use only, protection class IP20. LED lights provide clear and sharp light, which is ideal for lighting shops and other commercial spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from [the LED house product range!](#)

# Ceiling lamp KOLINE K2 L - extension black 230V 8W 800lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

## Product code 19077

Supply voltage 230V  
 Power factor 0.90  
 Output 8W  
 Maximum output 8W/1m  
 Luminous flux 800lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 6500K  
 Lens angle 110  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 In package 1pc  
 In box 5pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20 ~40°C  
 Certificates CE EMC LVD ROHS  
 Warranty 5 years




The LED KOLINE K2 connector allows you to link luminaires into various shapes, offering flexible and stylish lighting solutions for any space. Built-in LEDs and a frosted diffuser provide uniform and eye-friendly illumination. A durable aluminum housing and strong polycarbonate ensure long-lasting quality. The light color can be adjusted to warm, neutral, or cool tones as needed. A wide beam angle provides good coverage, and the energy-efficient light source keeps costs low. For safety, LED replacement is permitted only by qualified personnel.

# Ceiling lamp KOLINE K2 T - extension black 230V 11W 1100lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

## Product code 19076

Supply voltage 230V  
 Power factor 0.90  
 Output 11W  
 Maximum output 11W/1m  
 Luminous flux 1100lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 6500K  
 Lens angle 110  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 In package 1pc  
 In box 5pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20 ~40°C  
 Certificates CE EMC LVD ROHS  
 Warranty 5 years




The LED KOLINE K2 connector allows you to link luminaires into various shapes, offering flexible and stylish lighting solutions for any space. Built-in LEDs and a frosted diffuser provide uniform and eye-friendly illumination. A durable aluminum housing and strong polycarbonate ensure long-lasting quality. The light color can be adjusted to warm, neutral, or cool tones as needed. A wide beam angle provides good coverage, and the energy-efficient light source keeps costs low. For safety, LED replacement is permitted only by qualified personnel.

## Ceiling lamp KOLINE K2 X - extension black 230V 15W 1500lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

### Product code 19078

Supply voltage 230V  
 Power factor 0.90  
 Output 15W  
 Maximum output 15W/1m  
 Rated current 70mA  
 Luminous flux 1500lumens  
 Luminaire's efficiency lm79 100W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 6500K  
 Lens angle 110  
 Cri 80  
 Protection class IP20  
 Lifespan 50000h  
 In package 1pc  
 In box 5pcs  
 Casing colour black  
 No. of switches 30000pcs  
 Work environment indoor use  
 Operation temperature -20 ~40°C  
 Certificates CE EMC LVD ROHS  
 Warranty 5 years



The LED KOLINE K2 connector allows you to link luminaires into various shapes, offering flexible and stylish lighting solutions for any space. Built-in LEDs and a frosted diffuser provide uniform and eye-friendly illumination. A durable aluminum housing and strong polycarbonate ensure long-lasting quality. The light color can be adjusted to warm, neutral, or cool tones as needed. A wide beam angle provides good coverage, and the energy-efficient light source keeps costs low. For safety, LED replacement is permitted only by qualified personnel.

## Linear light Linda 5073 1200 MicroPrism black 230V 26W 3250lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT

## Product code 19149 DALI dimmable

Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 26W  
 Maximum output 26W/1m  
 Luminous flux 3250lumens  
 Luminaire's efficiency lm79 125W  
 Correlated colour temperature 3CCT  
 3000K, 3500K, 4000K  
 Lens angle 100  
 Cri 80  
 Ugr 18  
 Sdcm - macadam ellipses 6  
 En62471 1  
 Protection class IP20  
 Lifespan 50000h  
 Height 73.0mm  
 Width 50.0mm  
 Length 1200.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 3 years



Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

## Linear light Linda 5073 1200 MicroPrism white 230V 26W 3250lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT

**Product code 19398 DALI dimmable**

Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 26W  
Maximum output 26W/1m  
Luminous flux 3250lumens  
Luminaire's efficiency lm79 125W  
Correlated colour temperature 3CCT  
3000K, 3500K, 4000K  
Lens angle 100  
Cri 80  
Ugr 18  
Sdcm - macadam ellipses 6  
En62471 1  
Protection class IP20  
Lifespan 50000h  
Height 73.0mm  
Width 50.0mm  
Length 1200.0mm  
In package 1pc  
Casing colour white  
Casing material aluminium  
Power supply [BOKE](#)  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 3 years



## Linear light Linda 5073 1200 MicroPrism white 230V 26W 3380lm 100° IP20 840

### Product code 22279



Supply voltage 230V  
Power factor 0.90  
Output 26W  
Maximum output 26W/1m  
Luminous flux 3380lumens  
Luminaire's efficiency lm79 130W  
Correlated colour temperature pure white 4000K  
Lens angle 100  
Cri 80  
Ugr 18  
Sdcm - macadam ellipses 6  
En62471 1  
Protection class IP20  
Lifespan 50000h  
Height 73.0mm  
Width 50.0mm  
Length 1200.0mm  
In package 1pc  
Casing colour white  
Casing material aluminium  
Power supply [BOKE](#)  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 3 years



## Linear light Linda 5073 1500 MicroPrism black 230V 32W 4000lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT

**Product code 19154 DALI dimmable**

Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 32W  
 Maximum output 32W/1m  
 Luminous flux 4000lumens  
 Luminaire's efficiency lm79 125W  
 Correlated colour temperature 3CCT  
 3000K, 3500K, 4000K  
 Lens angle 100  
 Cri 80  
 Ugr 18  
 Sdcm - macadam ellipses 6  
 En62471 1  
 Protection class IP20  
 Lifespan 50000h  
 Height 73.0mm  
 Width 50.0mm  
 Length 1500.0mm  
 Weight 1.15 kg  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 3 years

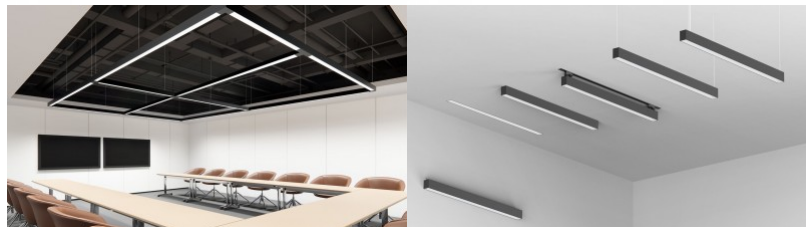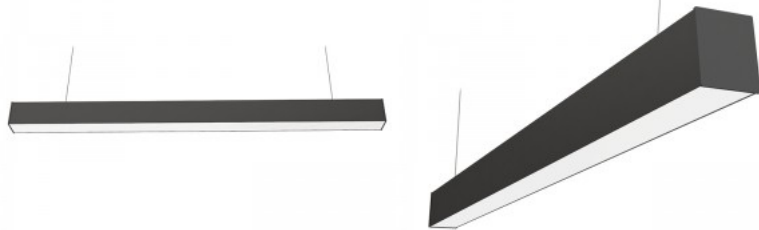

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

## Linear light Linda 5073 1500 MicroPrism white 230V 32W 4000lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT

**Product code 19399 DALI dimmable**

Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 32W  
Maximum output 32W/1m  
Luminous flux 4000lumens  
Luminaire's efficiency lm79 125W  
Correlated colour temperature 3CCT  
3000K, 3500K, 4000K  
Lens angle 100  
Cri 80  
Ugr 18  
Sdcm - macadam ellipses 6  
En62471 1  
Protection class IP20  
Lifespan 50000h  
Height 73.0mm  
Width 50.0mm  
Length 1500.0mm  
Weight 1.15 kg  
In package 1pc  
Casing colour white  
Casing material aluminium  
Power supply [BOKE](#)  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 3 years



## LED luminaire LSLG 1200 UGR white 230V 40W 4800lm 65° IP20 842

**Product code 16308**

Supply voltage 230V  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 4800lumens  
 Luminaire's efficiency lm79 120W  
 Correlated colour temperature pure white 4200K  
 Lens angle 65  
 Source of light SANAN LED  
 Cri 80  
 Ugr 19  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L70B50 @25°C 50.000h  
 Height 70.0mm  
 Width 50.0mm  
 Length 1200.0mm  
 Weight 1.85 kg  
 Package weight 2 kg  
 In package 1pc  
 In box 9pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 No. of switches 30000pcs  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years



Linear workplace luminaire with low UGR value. This IP20-rated linear luminaire is an ideal choice for home or office environments, providing daylight illumination at a temperature of 4200K. The luminaire comes with a suspension kit. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

**LED luminaire Prolumen Barrett 1200 recessed white 230V  
 36W 3100lm 75° IP20 DALI 940**

**Product code 17004 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 36W

Maximum output 36W/1m

Luminous flux 3100lumens

Luminaire's efficiency lm79 86W

Correlated colour temperature pure white 4000K

Lens angle 75

Cri 90

Ugr 22

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Llmf tm21 L70B50 @25°C 50.000h

Height 76.0mm

Width 57.0mm

Length 1212.0mm

In box 6pcs

Casing colour white

Casing material aluminium

Polishing matt

Impact resistance IK06

Work environment indoor use

Certificates CE

Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments.

There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!](#)

## LED luminaire Prolumen Barrett 1200 black 230V 36W 3350lm 110° IP20 DALI 930

**Product code 16970 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 3350lumens  
 Luminaire's efficiency lm79 93W  
 Correlated colour temperature warm white 3000K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L70B50 @25°C 50.000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1212.0mm  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years

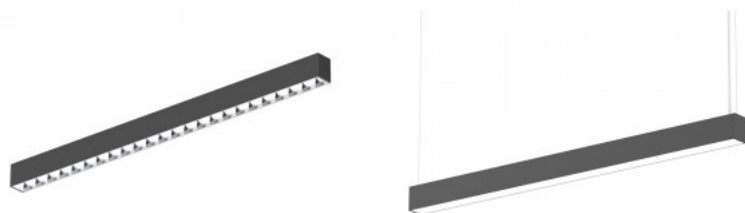


Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1200 black 230V 36W 3600lm 65° IP20 DALI 940

**Product code 21926 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 36W  
Maximum output 36W/1m  
Luminous flux 3600lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature pure white 4000K  
Lens angle 65  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 76.0mm  
Width 57.0mm  
Length 1212.0mm  
In box 6pcs  
Casing colour black  
Casing material aluminium  
Polishing matt  
Power supply [BOKE](#)  
Impact resistance IK06  
Work environment indoor use  
Certificates CE  
Warranty 5 years

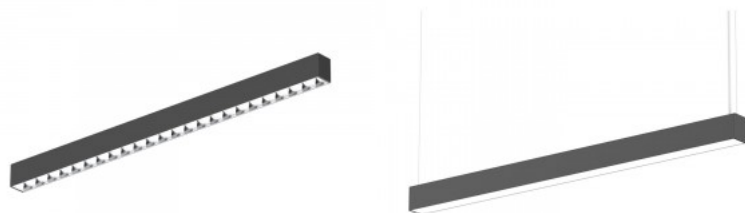


Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1200 UP/DOWN white 230V 36W 4100lm 110° IP20 DALI 940

**Product code 16992 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4100lumens  
 Luminaire's efficiency lm79 114W  
 Correlated colour temperature pure white 4000K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L70B50 @25°C 50.000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1212.0mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Impact resistance IK06  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years

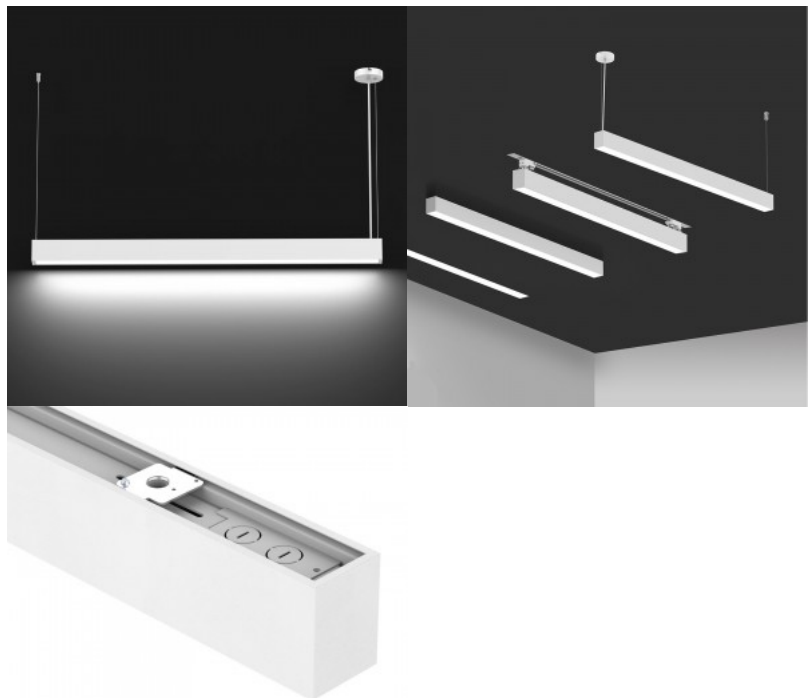


Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1200 white 230V 36W 3100lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

**Product code 17022 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 3100lumens  
 Luminaire's efficiency lm79 86W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5700K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L70B50 @25°C 50.000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1212.0mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Impact resistance IK06  
 Work environment indoor use  
 Certificates CE  
 Warranty 5 years

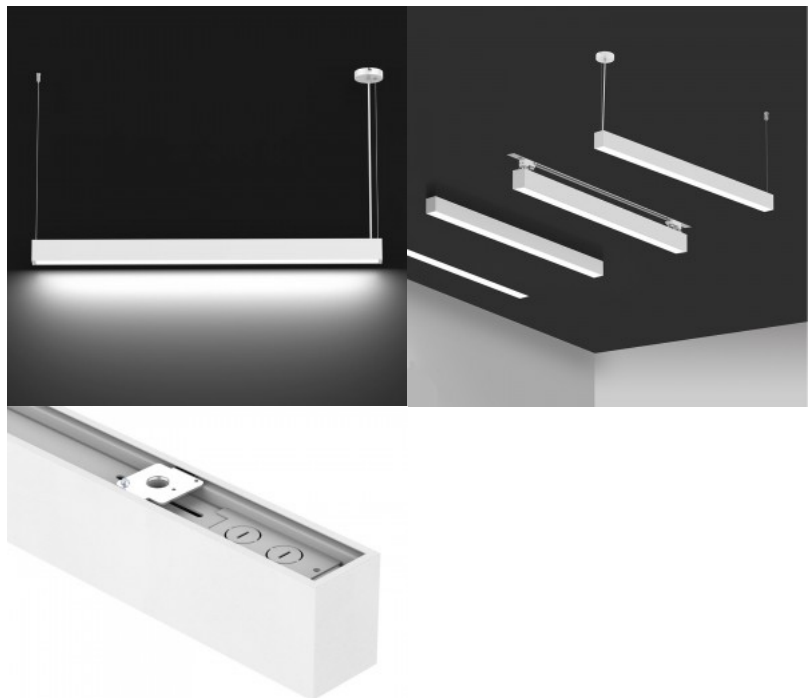

Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1500 black 230V 45W 4673lm CRI90 65° IP20 3000K, 4000K, 5700K 3CCT

**Product code 16477**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 45W  
Maximum output 45W/1m  
Luminous flux 4673lumens  
Luminaire's efficiency lm79 104W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5700K  
Lens angle 65  
Cri 90  
Ugr 19  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Height 76.0mm  
Width 57.0mm  
Length 1512.0mm  
In box 6pcs  
Casing colour black  
Casing material aluminium  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE  
Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1500 UGR19 UP/DOWN white 230V 60W 6000lm 65° IP20 930

**Product code 18070**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 60W  
Maximum output 60W/1m  
Luminous flux 6000lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature warm  
white 3000K  
Lens angle 65  
Cri 90  
Ugr 19  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Height 76.0mm  
Width 57.0mm  
Length 1512.0mm  
In box 6pcs  
Casing colour white  
Casing material aluminium  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE  
Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1500 UP/DOWN black 230V 60W 5300lm 65° IP20 DALI 930

**Product code 17043 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 5300lumens  
 Luminaire's efficiency lm79 88W  
 Correlated colour temperature warm white 3000K  
 Lens angle 65  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1512.0mm  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1500 UP/DOWN black 230V 60W 6000lm 65° IP20 DALI 940

**Product code 22220 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 60W  
Maximum output 60W/1m  
Luminous flux 6000lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature pure white 4000K  
Lens angle 65  
Cri 90  
Ugr 19  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 76.0mm  
Width 57.0mm  
Length 1512.0mm  
In box 6pcs  
Casing colour black  
Casing material aluminium  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE  
Warranty 5 years





Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1500 UP/DOWN V black 230V 60W 5400lm 65° IP20 No dim 930

**Product code 16511 No dim  
dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable No dim  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 5400lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 65  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1512.0mm  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years

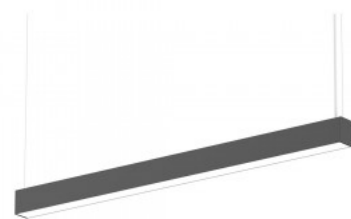


Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 1500 white 230V 45W 4573lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

**Product code 17016 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 45W  
 Maximum output 45W/1m  
 Luminous flux 4573lumens  
 Luminaire's efficiency lm79 102W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5700K  
 Lens angle 110  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1512.0mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years

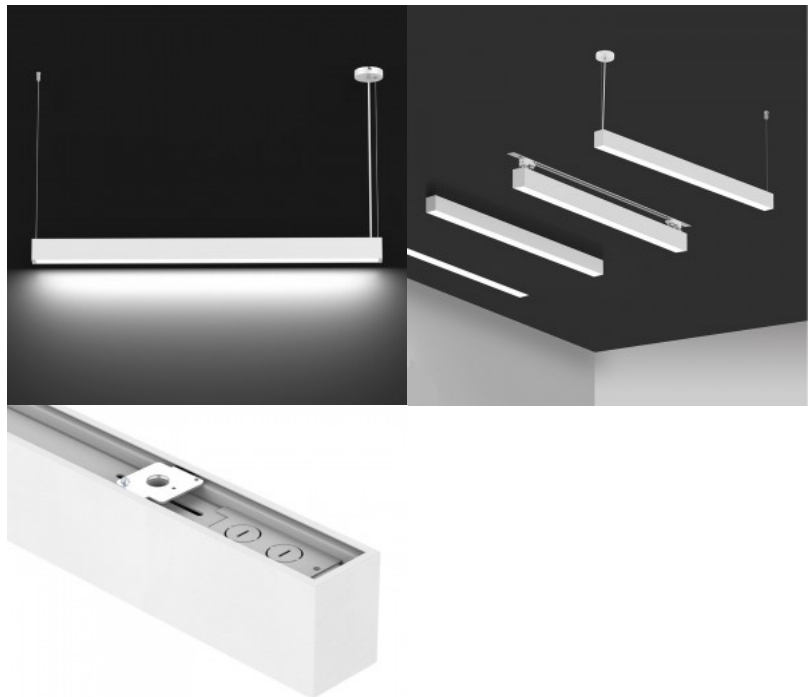


Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 600 black 230V 17W 1500lm 75° IP20 930

**Product code 16672**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 17W  
 Maximum output 17W/1m  
 Luminous flux 1500lumens  
 Luminaire's efficiency lm79 88W  
 Correlated colour temperature warm white 3000K  
 Lens angle 75  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 602.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply OSRAM  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years



Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 600 white 230V 17W 1500lm 75° IP20 DALI 930

**Product code 16971 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 17W  
 Maximum output 17W/1m  
 Luminous flux 1500lumens  
 Luminaire's efficiency lm79 88W  
 Correlated colour temperature warm white 3000K  
 Lens angle 75  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 602.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years



Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 600 white 230V 17W 1500lm 75° IP20 DALI 940

**Product code 20464 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 17W  
 Maximum output 17W/1m  
 Luminous flux 1500lumens  
 Luminaire's efficiency lm79 88W  
 Correlated colour temperature pure white 4000K  
 Lens angle 75  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 602.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett 600 white 230V 17W 1500lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

**Product code 17017 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 17W  
 Maximum output 17W/1m  
 Luminous flux 1500lumens  
 Luminaire's efficiency lm79 88W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5700K  
 Lens angle 110  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 602.0mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years

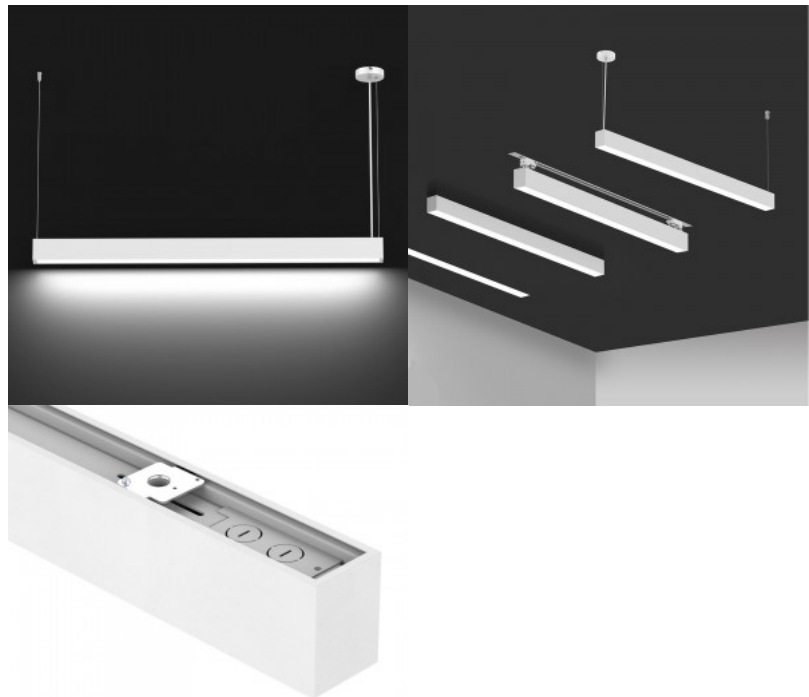

Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett A 1200 white 230V 36W 3100lm 75° IP20 DALI 940

**Product code 20463 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 3100lumens  
 Luminaire's efficiency lm79 86W  
 Correlated colour temperature pure white 4000K  
 Lens angle 75  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1212.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!](#)

## LED luminaire Prolumen Barrett A 1200 white 230V 36W 3750lm 75° IP20 DALI 930

**Product code 17368 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 3750lumens  
 Luminaire's efficiency lm79 104W  
 Correlated colour temperature warm white 3000K  
 Lens angle 75  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1212.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years

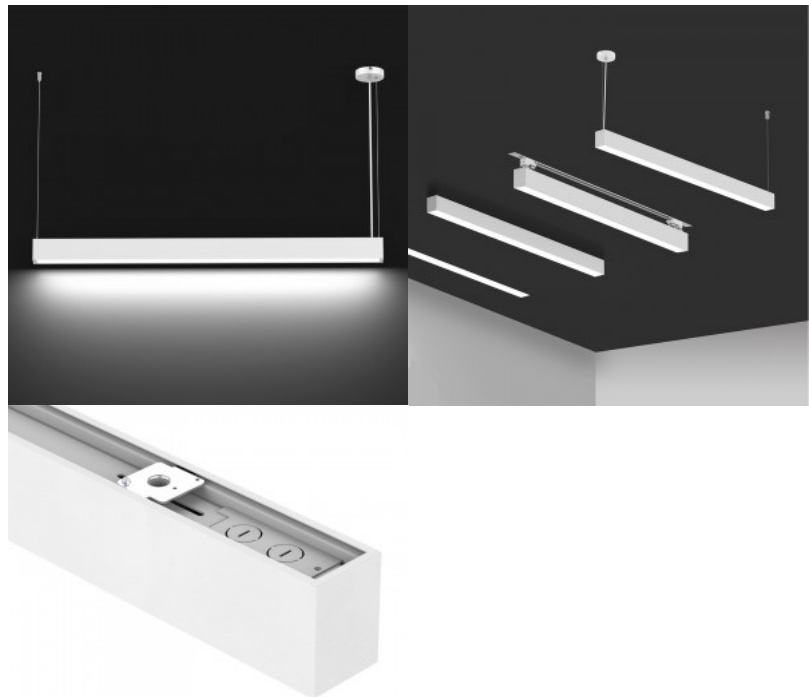

Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!](#)

## LED luminaire Prolumen Barrett A 1200 white 230V 36W 3750lm 75° IP20 DALI 940

**Product code 20462 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 3750lumens  
 Luminaire's efficiency lm79 104W  
 Correlated colour temperature pure white 4000K  
 Lens angle 75  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1212.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!](#)

## LED luminaire Prolumen Barrett A 1500 up-down black 230V 56W 6000lm CRI80 75° IP20 DALI 3000K, 4000K, 5700K 3CCT

**Product code 19321 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 56W  
 Maximum output 56W/1m  
 Luminous flux 6000lumens  
 Luminaire's efficiency lm79 107W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5700K  
 Lens angle 75  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1512.0mm  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years

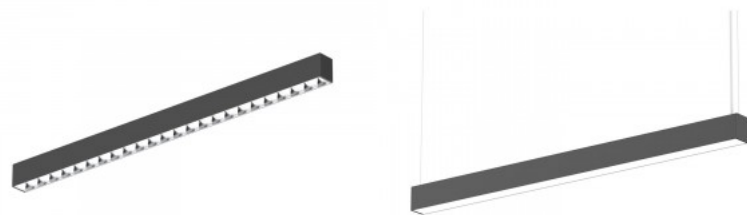

Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Barrett A 1500 white 230V 45W 3750lm 75° IP20 DALI 930

**Product code 17369 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 45W  
 Maximum output 45W/1m  
 Luminous flux 3750lumens  
 Luminaire's efficiency lm79 83W  
 Correlated colour temperature warm white 3000K  
 Lens angle 75  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 1512.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years




Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!](#)

## LED luminaire Prolumen Barrett A 600 up-down black 230V 22W 1950lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

**Product code 17352 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 22W  
 Maximum output 22W/1m  
 Luminous flux 1950lumens  
 Luminaire's efficiency lm79 89W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5700K  
 Lens angle 110  
 Cri 90  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 76.0mm  
 Width 57.0mm  
 Length 602.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE  
 Warranty 5 years

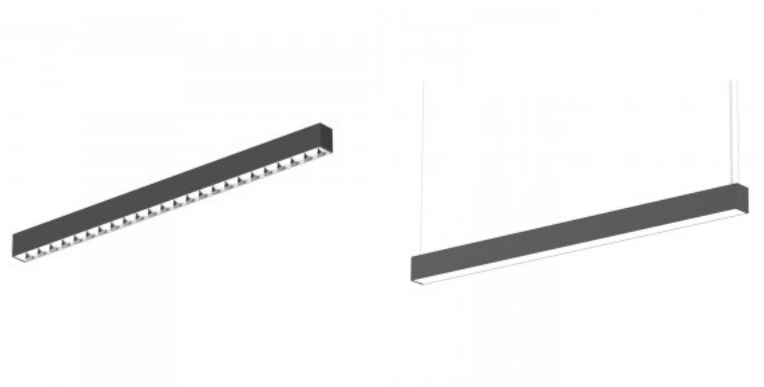

Linear workplace luminaire. High quality, easy to install, and long-lasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Bianca 600 MW white 230V 17W 2349lm CRI80 120° IP44 DALI 3000K, 4000K, 5000K 3CCT

**Product code 22405 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 17W  
Maximum output 17W/1m  
Luminous flux 2349lumens  
Luminaire's efficiency lm79 138W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP44  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 52.2mm  
Width 152.0mm  
Length 660.0mm  
Weight 1.55 kg  
Package weight 1.8 kg  
In package 1pc  
In box 4pcs  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20° +40°C  
Certificates CE, D, F  
Warranty 5 years



High-quality, dimmable ceiling light. DALI Dim technology allows adjusting the light according to preference. 4000K LED lights provide clear and sharp illumination, perfect for lighting stores and other commercial spaces. The high color rendering index CRI90 ensures the accuracy of colors under the light beam. IP44 protection class means the luminaire can be used even in damp conditions. Illuminate your world with the help of LED House professionals - [check out our portfolio of projects here!!](#)

## LED luminaire Prolumen Bianca S1 1200 white 230V 39W 4742lm 120° IP44 840

**Product code 17442**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 39W  
Maximum output 39W/1m  
Luminous flux 4742lumens  
Luminaire's efficiency lm79 122W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Source of light OSRAM LED  
Cri 80  
Sdcm - macadam ellipses 5  
Protection class IP44  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 52.0mm  
Width 152.0mm  
Length 1200.0mm  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20° - +45°C  
Warranty 5 years



Bianca S1 linear light. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with the help of LED House professionals - check out our project portfolio here!

## LED luminaire Prolumen Bianca S1 1200 white 230V 39W 4742lm 120° IP44 DALI 840

**Product code 17448 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 39W  
 Maximum output 39W/1m  
 Luminous flux 4742lumens  
 Luminaire's efficiency lm79 122W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Source of light OSRAM LED  
 Cri 80  
 Sdcm - macadam ellipses 5  
 Protection class IP44  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 52.0mm  
 Width 152.0mm  
 Length 1200.0mm  
 Casing colour white  
 Casing material polycarbonate  
 Polishing matt  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20° - +45°C  
 Warranty 5 years



Bianca S1 linear light. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with the help of LED House professionals - check out our project portfolio here!

## LED luminaire Prolumen Bianca white 230V 17W 2349lm CRI80 120° IP44 DALI 3000K, 4000K, 5000K 3CCT

## Product code 19066 DALI dimmable

---

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 17W  
Maximum output 17W/1m  
Luminous flux 2349lumens  
Luminaire's efficiency lm79 138W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP44  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 52.2mm  
Width 152.0mm  
Length 660.0mm  
Weight 1.55 kg  
Package weight 1.8 kg  
In package 1pc  
In box 4pcs  
Casing colour white  
Casing material polycarbonate  
Polishing matt  
Power supply [BOKE](#)  
Work environment indoor use  
Operation temperature -20° +40°C  
Certificates CE, D, F  
Warranty 5 years



High-quality, dimmable ceiling light. DALI Dim technology allows adjusting the light according to preference. 4000K LED lights provide clear and sharp illumination, perfect for lighting stores and other commercial spaces. The high color rendering index CRI90 ensures the accuracy of colors under the light beam. IP44 protection class means the luminaire can be used even in damp conditions. Illuminate your world with the help of LED House professionals - [check out our portfolio of projects here!!](#)

## Ceiling lamp Prolumen DB106B 1200 white 230V 20W 2200lm CRI90 120° IP44 DALI 3000K, 4000K, 5700K 3CCT

**Product code 17353 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Maximum output 20W/1m

Luminous flux 2200lumens

Luminaire's efficiency lm79 110W

Correlated colour temperature 3CCT

3000K, 4000K, 5700K

Lens angle 120

Cri 90

Sdcm - macadam ellipses 6

Protection class IP44

Lifespan 50000h

Height 80.0mm

Width 207.0mm

Length 1200.0mm

In package 1pc

In box 6pcs

Casing colour white

Casing material aluminium

Polishing matt

Impact resistance IK08

Work environment indoor use

Operation temperature -20 ~40°C

Certificates CE

Warranty 5 years



High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high colour rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

## Ceiling lamp Prolumen DB106B 1200 white 40W 4400lm CRI80 120° IP44 0-10V 3000K, 4000K, 5700K 3CCT

**Product code 17351 0-10V dimmable**

Brand [Prolumen](#)  
Power factor 0.90  
Dimmable 0-10V  
Output 40W  
Maximum output 40W/1m  
Luminous flux 4400lumens  
Luminaire's efficiency lm79 110W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5700K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP44  
Lifespan 50000h  
Height 80.0mm  
Width 208.0mm  
Length 1200.0mm  
In box 12pcs  
Casing colour white  
Casing material aluminium  
Polishing matt  
Impact resistance IK08  
Work environment indoor use  
Certificates CE  
Warranty 5 years



High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high colour rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

## Ceiling lamp Prolumen DB106B 1500 white 230V 58W 6500lm CRI90 120° IP44 3000K, 4000K, 5700K 3CCT

**Product code 18149**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 58W  
Maximum output 58W/1m  
Luminous flux 6500lumens  
Luminaire's efficiency lm79 112W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5700K  
Lens angle 120  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP44  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 80.0mm  
Width 207.0mm  
Length 1500.0mm  
In box 12pcs  
Casing colour white  
Casing material aluminium  
Polishing matt  
Impact resistance IK08  
Work environment indoor use  
Certificates CE  
Warranty 5 years




High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high colour rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the [PROLUMEN catalogue](#) as well!

## **Ceiling lamp Prolumen DB157 UGR<19 1200 white 230V 40W 4550lm CRI95 80° IP20 3000K, 4000K 2CCT**

**Product code 18173**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 40W  
 Maximum output 40W/1m  
 Rated current 1250mA  
 Luminous flux 4550lumens  
 Luminaire's efficiency lm79 114W  
 Correlated colour temperature 2CCT  
 3000K, 4000K  
 Lens angle 80  
 Cri 95  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 59.0mm  
 Width 120.0mm  
 Length 1200.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Impact resistance IK08  
 Work environment indoor use  
 Operation temperature -20 ~45°C  
 Certificates CE  
 Warranty 5 years

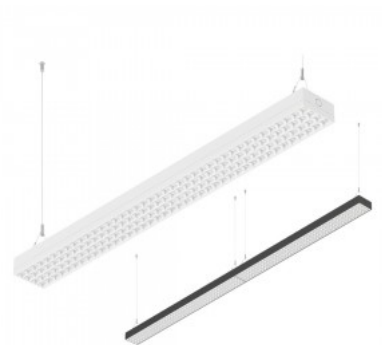

## **Linear light Prolumen Delia UGR 600 black 230V 20W 2000lm CRI90 100° IP20 3000K, 4000K, 5700K 3CCT**

**Product code 15206**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 20W

Maximum output 20W/1m

Luminous flux 2000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature 3CCT  
3000K, 4000K, 5700K

Lens angle 100

Cri 90

Ugr 18

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 70.0mm

Width 60.0mm

Length 604.0mm

Weight 1.15 kg

Package weight 1.65 kg

In package 1pc

In box 12pcs



Casing colour black

Casing material aluminium

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years

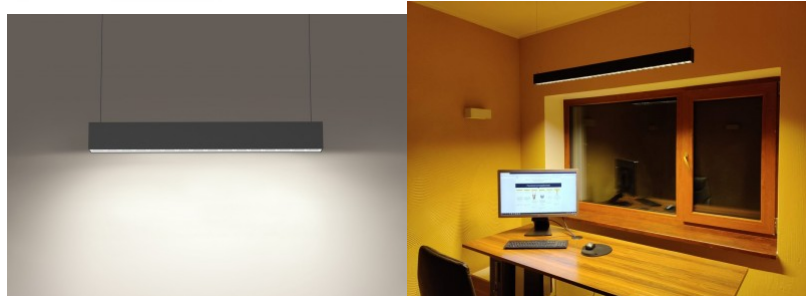
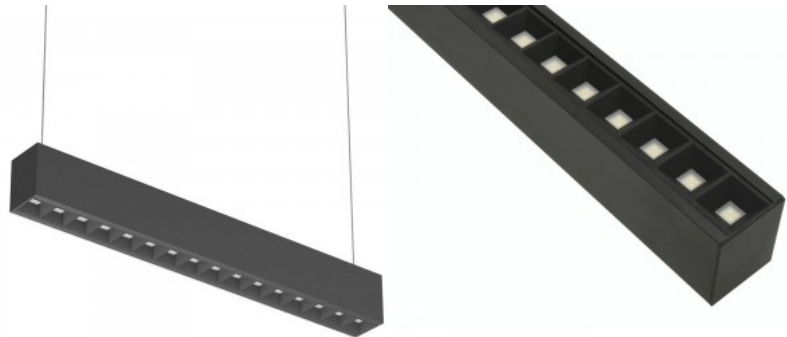


Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surface-mounted and suspended. In both cases, the result is guaranteed to be good. [Hanging cables](#) (2 pcs) must be ordered separately. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

# Linear light Prolumen Delia UGR19 1200 black 230V 40W 4500lm 100° IP40 DALI 840

**Product code 15323 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 4500lumens  
 Luminaire's efficiency lm79 113W  
 Correlated colour temperature pure white 4000K  
 Lens angle 100  
 Cri 80  
 Ugr 18  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP40  
 Lifespan 50000h  
 Llmf tm21 L80B50 @25°C 50.000h  
 Height 70.0mm  
 Width 60.0mm  
 Length 1204.0mm  
 Weight 2.2 kg  
 Package weight 3 kg  
 In package 1pc  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 5 years

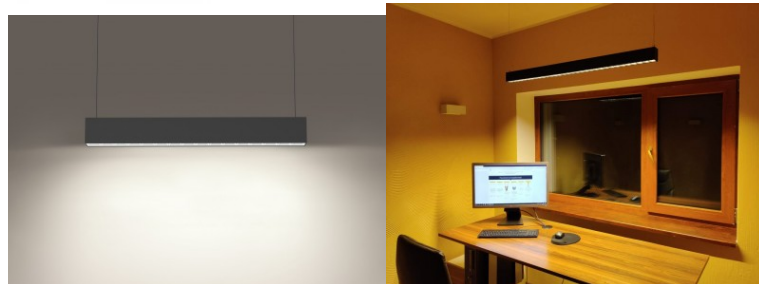
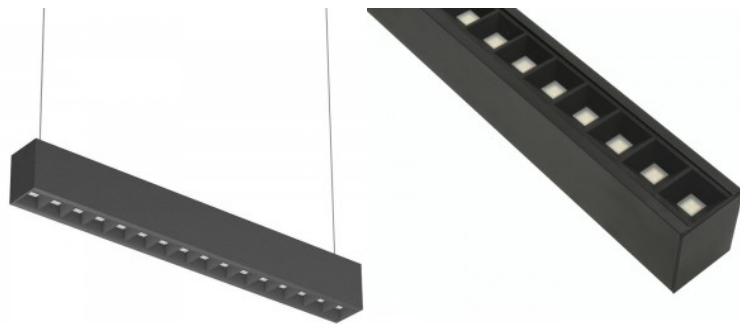


Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surface-mounted and suspended. In both cases, the result is guaranteed to be good. [Hanging cables](#) (2 pcs) must be ordered separately. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

# Linear light Prolumen Delia UGR19 1200 black 230V 40W 4500lm CRI90 100° IP20 3000K, 4000K, 5700K 3CCT

## Product code 15026

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 4500lumens  
 Luminaire's efficiency lm79 113W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5700K  
 Lens angle 100  
 Cri 90  
 Ugr 18  
 Lor 80  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B50 @25°C 50.000h  
 Height 70.0mm  
 Width 60.0mm  
 Length 1204.0mm  
 Weight 2.2 kg  
 Package weight 3 kg  
 In package 1pc  
 In box 12pcs  
 Casing colour black  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 5 years

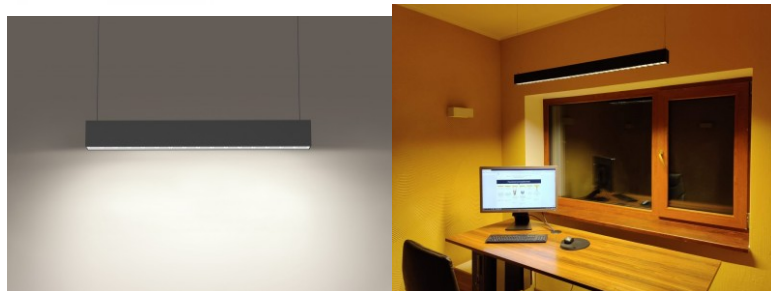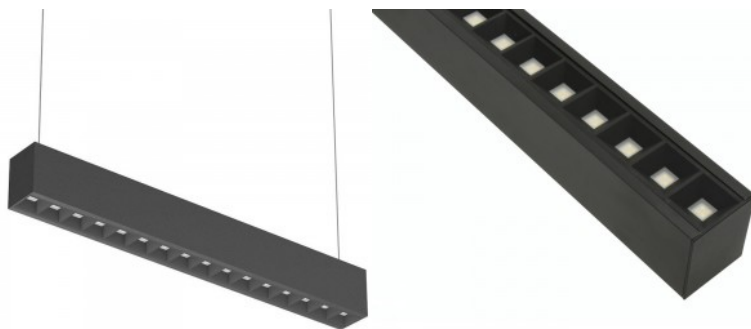


Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surface-mounted and suspended. In both cases, the result is guaranteed to be good. [Hanging cables](#) (2 pcs) must be ordered separately. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Linear light Prolumen Delia UGR19 1200 white 230V 40W 4500lm CRI80 100° IP20 3000K, 4000K, 5700K 3CCT

### Product code 15535

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 40W  
Maximum output 40W/1m  
Luminous flux 4500lumens  
Luminaire's efficiency lm79 113W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5700K  
Lens angle 100  
Cri 80  
Ugr 18  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B50 @25°C 50.000h  
Height 70.0mm  
Width 60.0mm  
Length 1204.0mm  
Weight 2.2 kg  
Package weight 3 kg  
In package 1pc  
In box 12pcs  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 5 years

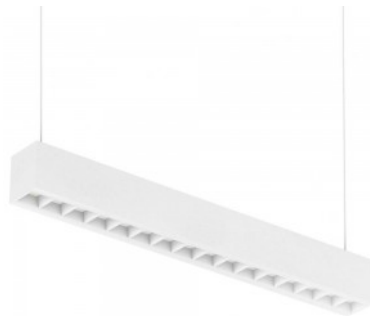

White body and square design. Elegant and functional, this minimalist luminaire is an excellent choice for those who appreciate simplicity and modernity in their home decor. This luminaire can be installed as both a pendant light and surface-mounted. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Some models have adjustable light color: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surface-mounted and suspended. In both cases, good results are guaranteed. [Suspension cables](#) (2 pcs) must be ordered separately. Illuminate your world with the help of LED House professionals - [check out our project portfolio here!](#)

**LED luminaire Prolumen Delilah 0,6m white 230V 15W 1400lm  
110° IP20 940**

**Product code 17051**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 15W  
 Maximum output 15W/1m  
 Luminous flux 1400lumens  
 Luminaire's efficiency lm79 93W  
 Correlated colour temperature pure white 4000K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 29.0mm  
 Width 62.0mm  
 Length 615.0mm  
 Installation opening diameter 607x54mm  
 In box 12pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE, RoHS  
 Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



# **LED luminaire Prolumen Delilah 1,2m white 230V 30W 3100lm 110° IP20 940**

**Product code 17052**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3100lumens  
 Luminaire's efficiency lm79 103W  
 Correlated colour temperature pure white 4000K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 29.0mm  
 Width 62.0mm  
 Length 1208.0mm  
 Installation opening diameter 1201x54mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE, RoHS  
 Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



# **LED luminaire Prolumen Delilah 1,5m white 230V 37W 3800lm 110° IP20 940**

**Product code 17053**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 37W  
 Maximum output 37W/1m  
 Luminous flux 3800lumens  
 Luminaire's efficiency lm79 103W  
 Correlated colour temperature pure white 4000K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 29.0mm  
 Width 62.0mm  
 Length 1505.0mm  
 Installation opening diameter 1498x54mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE, RoHS  
 Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## **LED luminaire Prolumen Delilah 2,4m white 230V 60W 6200lm 110° IP20 940**

**Product code 16407**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 60W  
 Maximum output 60W/1m  
 Luminous flux 6200lumens  
 Luminaire's efficiency lm79 103W  
 Correlated colour temperature pure white 4000K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 29.0mm  
 Width 62.0mm  
 Length 2395.0mm  
 Installation opening diameter 2388x54mm  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE, RoHS  
 Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



# LED luminaire Prolumen Delilah L-corner 150+150 white 230V 7.5W 650lm 110° IP20 940

## Product code 17054

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 7.5W  
 Maximum output 7.5W/1m  
 Luminous flux 650lumens  
 Luminaire's efficiency lm79 87W  
 Correlated colour temperature pure white 4000K  
 Lens angle 110  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 29.0mm  
 Width 150.0mm  
 Length 150.0mm  
 In box 24pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE, RoHS  
 Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



# Ceiling lamp Prolumen Delilah white 230V 45W 4300lm 45° IP20 940

## Product code 16793

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 45W  
 Maximum output 45W/1m  
 Luminous flux 4300lumens  
 Luminaire's efficiency lm79 96W  
 Correlated colour temperature pure white 4000K  
 Lens angle 45  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 29.0mm  
 Width 62.0mm  
 Length 1802.0mm  
 Package weight 2.68 kg  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## LED luminaire Prolumen Dennis 1200 white 230V 40W 4400lm 120° IP20 840

**Product code 15353**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 40W  
Maximum output 40W/1m  
Luminous flux 4400lumens  
Luminaire's efficiency lm79 110W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Height 64.0mm  
Width 71.0mm  
Length 1203.0mm  
In box 12pcs  
Casing colour white  
Impact resistance IK08  
Work environment indoor use  
Certificates CE  
Warranty 5 years



A classic luminaire for offices, schools, hotels, corridors, etc. Its minimalist design blends seamlessly into various interiors, whether at home, in the office, or in a business environment. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## LED luminaire Prolumen Dennis 1500 white 230V 58W 5850lm 120° IP20 840

**Product code 15628**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 58W  
Maximum output 58W/1m  
Luminous flux 5850lumens  
Luminaire's efficiency lm79 101W  
Correlated colour temperature pure white 4000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Height 64.0mm  
Width 71.0mm  
Length 1503.0mm  
In box 12pcs  
Casing colour white  
Impact resistance IK08  
Work environment indoor use  
Certificates CE  
Warranty 5 years



A classic luminaire for offices, schools, hotels, corridors, etc. Its minimalist design blends seamlessly into various interiors, whether at home, in the office, or in a business environment. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## LED luminaire Prolumen EMPIRIO B025S 1500 white 230V 75W 12000lm 90° IP40 840

**Product code 15018**

Brand [Prolumen](#)

Supply voltage 230V

Output 75W

Maximum output 75W/1m

Luminous flux 12000lumens

Luminaire's efficiency lm79 160W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 80

Sdcm - macadam ellipses 3

Protection class IP40

Lifespan 50000h

Llmf tm21 L80B10 @25°C 80.000h

Height 72.0mm

Width 65.0mm

Length 1460.0mm

Casing colour white

Casing material aluminium


Power supply OSRAM

Work environment indoor use

Operation temperature -20°C - +45°C

Certificates CE, RoHS

Warranty 5 years

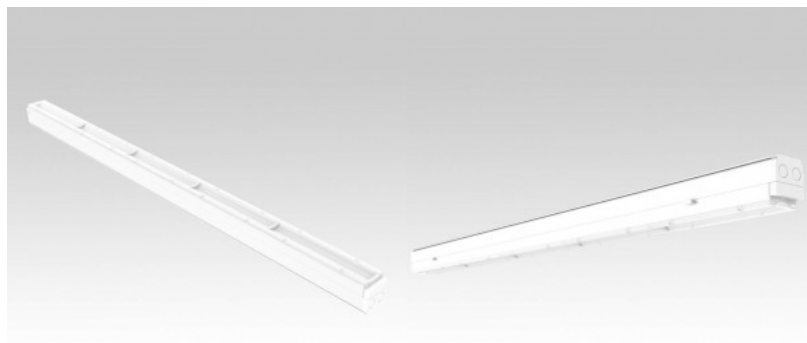

A ceiling light fixture with uniform light distribution that can be installed either flush-mounted or suspended from the ceiling. An ideal light fixture for above desks! 4000K LED lights provide clear and sharp light, perfect for illuminating stores and other commercial spaces. Option to order linear lights with different lenses and power levels: 30°, 60°, 90°, 120°, 2 x 25°. Improve your everyday lighting quality and choose a top-notch lighting solution from the LED house product range! Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Ceiling lamp Prolumen Lidya 1100 up-down white 230V 45W 4700lm CRI80 50° IP20 3000K-4000K 2CCT

**Product code 16791**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Output 45W  
Maximum output 45W/1m  
Luminous flux 4700lumens  
Luminaire's efficiency lm79 104W  
Correlated colour temperature 2CCT  
3000K-4000K  
Lens angle 50  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Height 74.0mm  
Width 236.0mm  
Length 1172.0mm  
Package weight 4.8 kg  
In package 1pc  
In box 2pcs  
Casing colour white  
Casing material aluminium  
Work environment indoor use  
Operation temperature -20° - +40°C  
Certificates CE, RoHS  
Warranty 5 years



Up-down light fixture, ideal for offices and other workspaces. Adjustable light color temperature: 3000K, 4000K. This fixture is suitable for indoor use only, with IP20 protection rating. The light fixture has an ideal color rendering index CRI90 for workspaces and offices. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the [LED House product range!](#)

## Ceiling lamp Prolumen Lidya 1500 up-down white 230V 60W 5400lm CRI90 50° IP20 3000K-4000K 2CCT

**Product code 16792**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 60W

Maximum output 60W/1m

Luminous flux 5400lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature 2CCT

3000K-4000K

Lens angle 50

Cri 90

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 74.0mm

Width 236.0mm

Length 1552.0mm

Package weight 5.9 kg

In package 1pc

In box 2pcs

Casing colour white

Casing material aluminium

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Up-down light fixture, ideal for offices and other workspaces. Adjustable light color temperature: 3000K, 4000K. This fixture is suitable for indoor use only, with IP20 protection rating. The light fixture has an ideal color rendering index CRI90 for workspaces and offices. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the [LED House product range!](#)

# Linear light Prolumen Linda 5076 1500 UGR<sub>20</sub> with downward light distribution black 230V 43W 5100lm 90° IP20 DALI 830

**Product code 19391 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 43W

Maximum output 43W/1m

Luminous flux 5100lumens

Luminaire's efficiency lm79 119W

Correlated colour temperature warm

white 3000K

Lens angle 90

Cri 80

Ugr 20

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

LLmf tm21 L80B50 @25°C 75.000h

Height 76.0mm

Width 50.0mm

Length 14400.0mm

In box 6pcs

Casing colour black

Casing material aluminium

Polishing matt

Power supply [BOKE](#)

Impact resistance IK06

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE

Warranty 5 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.



## Linear light Prolumen Linda 66D 1200 with downward light distribution black 230V 28W 3600lm 75° IP20 DALI 830

**Product code 17751 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 28W

Maximum output 28W/1m

Luminous flux 3600lumens

Luminaire's efficiency lm79 129W

Correlated colour temperature warm white 3000K

Lens angle 75

Cri 80

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Llmf tm21 L70B50 @25°C 50.000h

Height 75.0mm

Width 56.0mm

Length 1204.0mm

Weight 2.75 kg

In box 6pcs

Casing colour black

Casing material aluminium

Polishing matt

Power supply [BOKE](#)


Impact resistance IK06

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE

Warranty 5 years

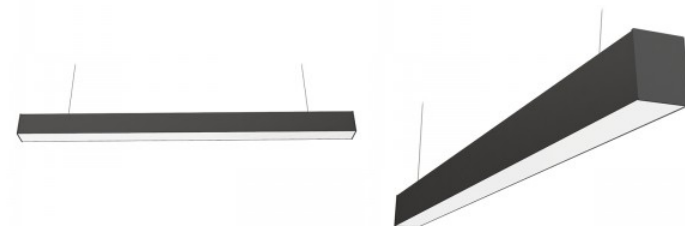

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

## Linear light Prolumen Linda 66D 1200 with downward light distribution black 230V 28W 3800lm 75° IP20 DALI 840

**Product code 17750 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 28W

Maximum output 28W/1m

Luminous flux 3800lumens

Luminaire's efficiency lm79 136W

Correlated colour temperature pure white 4000K

Lens angle 75

Cri 80

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Llmf tm21 L70B50 @25°C 50.000h

Height 75.0mm

Width 56.0mm

Length 1204.0mm

Weight 2.75 kg

In box 6pcs

Casing colour black

Casing material aluminium

Polishing matt

Power supply [BOKE](#)



Impact resistance IK06

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE

Warranty 5 years

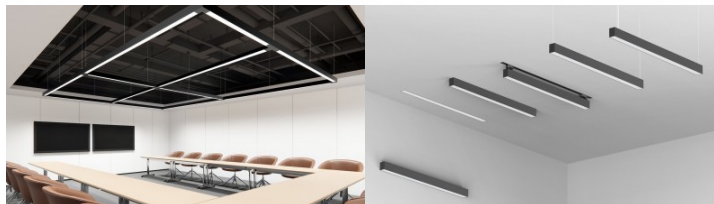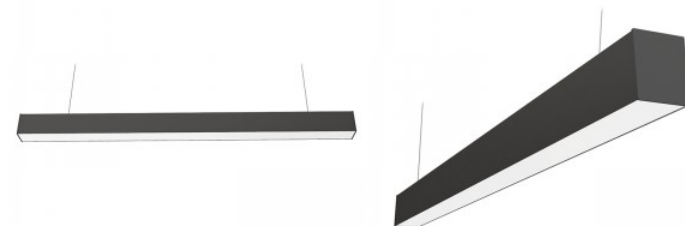


Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

## Linear light Prolumen Linda 66D 1200 with downward light distribution white 230V 28W 3800lm 75° IP20 DALI 840

**Product code 20672 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 28W  
Maximum output 28W/1m  
Luminous flux 3800lumens  
Luminaire's efficiency lm79 136W  
Correlated colour temperature pure white 4000K  
Lens angle 75  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 6  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L70B50 @25°C 50.000h  
Height 75.0mm  
Width 56.0mm  
Length 1204.0mm  
Weight 2.75 kg  
In box 6pcs  
Casing colour white  
Casing material aluminium  
Polishing matt  
Power supply [BOKE](#)  
Impact resistance IK06  
Work environment indoor use  
Operation temperature -20° - +45°C  
Certificates CE  
Warranty 5 years

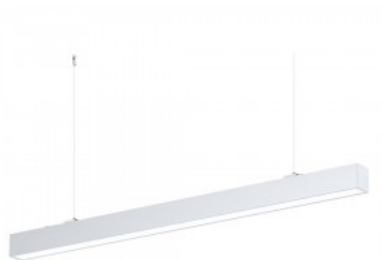

## Linear light Prolumen Linda 66D 1200 with light distribution up and down + suspension wires. black 230V 40W 5550lm 75° IP20 DALI / PUSH 840

**Product code 17741 DALI / PUSH dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI / PUSH  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 5550lumens  
 Luminaire's efficiency lm79 139W  
 Correlated colour temperature pure white 4000K  
 Lens angle 75  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 75.0mm  
 Width 56.0mm  
 Length 1204.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20° - +45°C  
 Certificates CE  
 Warranty 5 years



Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

**Linear light Prolumen Linda 66D 1200 with light distribution upwards and downwards + suspension wires. black 230V 40W**

## 5270lm 75° IP20 DALI 8

**Product code 17752 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 5270lumens  
 Luminaire's efficiency lm79 132W  
 Correlated colour temperature warm white 3000K  
 Lens angle 75  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 75.0mm  
 Width 56.0mm  
 Length 1204.0mm  
 Weight 1.7 kg  
 Package weight 2.13 kg  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Operation temperature -20° - +45°C  
 Certificates CE  
 Warranty 5 years



Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

## Linear light Prolumen Linda 66D 1500 with downward light distribution black 230V 35W 4600lm 75° IP20 DALI 830

**Product code 19315 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 35W

Maximum output 35W/1m

Luminous flux 4600lumens

Luminaire's efficiency lm79 131W

Correlated colour temperature warm

white 3000K

Lens angle 75

Cri 80

Ugr 19

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

LLmf tm21 L70B50 @25°C 50.000h

Height 75.0mm

Width 56.0mm

Length 1504.0mm

In box 6pcs

Casing colour black

Casing material aluminium

Polishing matt

Power supply [BOKE](#)

Impact resistance IK06

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE

Warranty 5 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.



## Linear light Prolumen Linda 66D 1500 with light distribution upwards and downwards, UGR<19 + suspension wires. black 230V 49W 6500lm 75° IP2

**Product code 18163 DALI dimmable**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 49W

Maximum output 49W/1m

Luminous flux 6500lumens

Luminaire's efficiency lm79 133W

Correlated colour temperature pure white 4000K

Lens angle 75

Cri 80

Ugr 19

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 75.0mm

Width 56.0mm

Length 1504.0mm

Weight 1.7 kg

Package weight 2.13 kg

In box 6pcs

Casing colour black

Casing material aluminium

Power supply [BOKE](#)

Impact resistance IK06

Work environment indoor use

Operation temperature -20° - +45°C

Certificates CE

Warranty 5 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.



## **Linear light Prolumen Linda 900 MicroPrism white 230V 28W 3500lm CRI80 90° IP20 DALI / PUSH 3000K, 3500K, 4000K 3CCT**

**Product code 21007 DALI / PUSH  
dimnable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI / PUSH  
 Output 28W  
 Maximum output 28W/1m  
 Luminous flux 3500lumens  
 Luminaire's efficiency lm79 125W  
 Correlated colour temperature 3CCT  
 3000K, 3500K, 4000K  
 Lens angle 90  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L90B10 @25°C 50.000h  
 Height 76.0mm  
 Width 50.0mm  
 Length 906.0mm  
 In package 1pc  
 In box 4pcs  
 Casing colour white  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -20 ~ 45°C  
 Certificates CE, RoHS  
 Warranty 5 years



## **Linear light Prolumen Linda C27 1200 with downward light distribution black 230V 30W 4200lm 100° IP20 DALI 840**

**Product code 17876 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Dimmable DALI  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 4200lumens  
 Luminaire's efficiency lm79 140W  
 Correlated colour temperature pure white 4000K  
 Lens angle 100  
 Cri 80  
 Ugr 19  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 160000h  
 Lmf tm21 L70B50 @25°C 160.000h  
 Height 55.0mm  
 Width 50.0mm  
 Length 1120.0mm  
 Weight 1.94 kg  
 In box 6pcs  
 Casing colour black  
 Casing material aluminium  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor use  
 Operation temperature -20° - +45°C  
 Certificates CE  
 Warranty 5 years





Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

**Linear light Prolumen Linda C27 1200 white 230V 30W 3900lm 100° IP20 830**

**Product code 17909**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 30W  
 Maximum output 30W/1m  
 Luminous flux 3900lumens  
 Luminaire's efficiency lm79 130W  
 Correlated colour temperature warm white 3000K  
 Lens angle 100  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 160000h  
 Llmf tm21 L70B50 @25°C 160.000h  
 Height 55.0mm  
 Width 50.0mm  
 Length 1120.0mm  
 Weight 1.94 kg  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium  
 Polishing matt  
 Power supply [TRIDONIC](#)  
 Impact resistance IK08  
 Work environment indoor use  
 Operation temperature -20° - +45°C  
 Certificates CE  
 Warranty 5 years

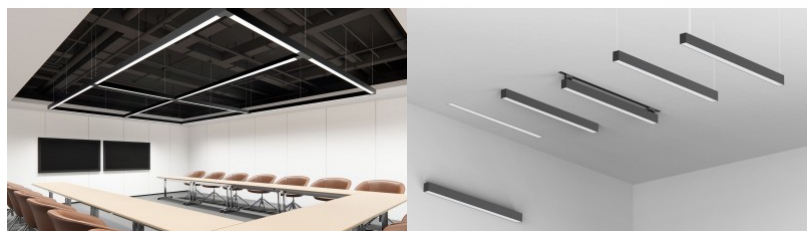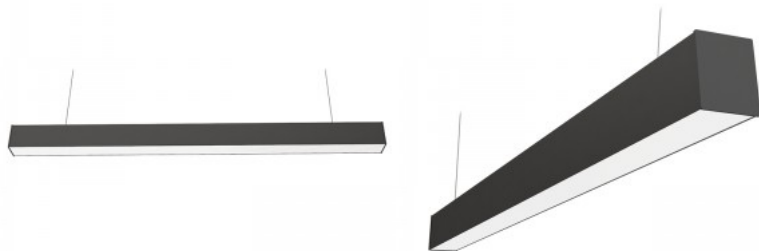

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K - neutral and clear light 3000-6500K - adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.

## LED luminaire Prolumen Meena 1200 22-40W white 230V 5600lm CRI80 120° IP44 3000K, 4000K, 5000K 3CCT

**Product code 17711**

Brand [Prolumen](#)

Supply voltage 230V

Luminous flux 5600lumens

Correlated colour temperature 3CCT

3000K, 4000K, 5000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 3

Protection class IP44

Llmf tm21 L90B10 @25°C 50.000h

Height 55.0mm

Width 140.0mm

Length 1198.0mm

In package 1pc

Casing colour white

Casing material aluminium + plastic

Power supply OSRAM

Operation temperature -20° - +45°C

Certificates CE, RoHS

Warranty 5 years



PROLUMEN Meena [linear luminaire](#) with adjustable power levels of 22W/30W/35W/40W. A high-quality linear light suitable for installation in parking garages, large closets, corridors, and warehouses. The Meena luminaire is designed to be very easy to install and maintain. The housing can be opened with a button press, and the suspension cables are adjustable during installation.

## LED luminaire Prolumen Meena 1500 230V 60W 8400lm CRI80 120° IP44 3000K, 4000K, 5000K 3CCT

**Product code 17456**

Brand [Prolumen](#)

Supply voltage 230V

Output 60W

Maximum output 60W/1m

Luminous flux 8400lumens

Luminaire's efficiency lm79 140W

Correlated colour temperature 3CCT 3000K, 4000K, 5000K

Lens angle 120

Cri 80

Sdcm - macadam ellipses 3

Protection class IP44

Lifespan 100000h

Height 55.0mm

Width 140.0mm

Length 1500.0mm

In package 1pc

Casing material aluminium + plastic

Operation temperature -20° - +45°C

Certificates CE, RoHS

Warranty 5 years



PROLUMEN Meena [linear luminaire](#) with adjustable power levels of 22W/30W/35W/40W. A high-quality linear light suitable for installation in parking garages, large closets, corridors, and warehouses. The Meena luminaire is designed to be very easy to install and maintain. The housing can be opened with a button press, and the suspension cables are adjustable during installation.

## LED luminaire Prolumen Miina 1200 white 230V 40W 6400lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT

**Product code 17753**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Output 40W  
 Maximum output 40W/1m  
 Luminous flux 6400lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 120  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP65  
 Height 54.0mm  
 Width 102.0mm  
 Length 1219.0mm  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Power supply [BOKE](#)  
 Operation temperature -20° - +45°C  
 Certificates CE, RoHS  
 Warranty 5 years



PROLUMEN Miina linear light fixture with adjustable color temperature and power levels. A high-quality linear fixture suitable for installation in parking garages, large closets, corridors, and warehouses. The opal glass provides a very wide beam angle, evenly covering a larger area. The Miina fixture is designed for easy installation and maintenance. The color temperature and power are adjustable via a button on the fixture. A motion sensor can also be added to the Miina fixture. Adding the sensor is easy thanks to the openable end cap, where the sensor wires can be connected. With the motion sensor, LED lights become even more energy-efficient and convenient, as the step of turning the light on and off with a switch is eliminated, and the fixture turns off automatically. Trust your lighting project to the experienced team of LED House - [let's bring your vision to life!](#)

## LED luminaire Prolumen RALTEX 1200 white 230V 50W 8000lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

**Product code 18263 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 50W  
 Maximum output 50W/1m  
 Luminous flux 8000lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 120  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 69.0mm  
 Width 74.0mm  
 Length 1200.0mm  
 Weight 1.5 kg  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Power supply [BOKE](#)  
 Operation temperature -20° - +45°C  
 Certificates CE, RoHS  
 Warranty 5 years



This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.

## LED luminaire Prolumen RALTEX 1500 white 230V 63W 10080lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

**Product code 18264 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 63W  
 Maximum output 63W/1m  
 Luminous flux 10080lumens  
 Luminaire's efficiency lm79 160W  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 120  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP66  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 69.0mm  
 Width 74.0mm  
 Length 1500.0mm  
 Weight 1.9 kg  
 In package 1pc  
 In box 6pcs  
 Casing colour white  
 Casing material aluminium + plastic  
 Power supply [BOKE](#)  
 Operation temperature -20° - +45°C  
 Certificates CE, RoHS  
 Warranty 5 years



This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.

## LED luminaire Prolumen RALTEX 600 white 230V 30W 4800lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

**Product code 18262 DALI dimmable**

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 30W  
Maximum output 30W/1m  
Luminous flux 4800lumens  
Luminaire's efficiency lm79 160W  
Correlated colour temperature 3CCT  
3000K, 4000K, 5000K  
Lens angle 120  
Cri 80  
Sdcm - macadam ellipses 3  
Protection class IP66  
Lifespan 100000h  
Llmf tm21 L80B10 @25°C 100.000h  
Height 69.0mm  
Width 74.0mm  
Length 600.0mm  
Weight 1.13 kg  
In package 1pc  
In box 6pcs  
Casing colour white  
Casing material aluminium + plastic  
Power supply [BOKE](#)  
Operation temperature -20° - +45°C  
Certificates CE, RoHS  
Warranty 5 years



This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.

## Linear light Prolumen Retro Force 1500 white 230V 75W 12480lm 120° IP54 840

**Product code 17675**

Brand [Prolumen](#)

Supply voltage 230V

Power factor 0.90

Output 75W

Maximum output 75W/1m

Luminous flux 12480lumens

Luminaire's efficiency lm79 166W

Correlated colour temperature pure white 4000K

Lens angle 120

Source of light [SAMSUNG LED](#)

Cri 80

Sdcm - macadam ellipses 3

Protection class IP54

Lifespan 100000h

Llmf tm21 L80B10 @25°C 100.000h

Height 64.8mm

Width 107.0mm

Length 1460.0mm

In package 1pc

Casing colour white

Power supply [BOKE](#)

Impact resistance IK10

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



PROLUMEN Retro Force industrial luminaire. These LED luminaires are equipped with high-quality components and provide excellent lighting for indoor use. The G-Force luminaire has adjustable power strength, allowing users to customize the brightness themselves. 38W/48W/58W/68W/75W Also available with DALI dimming technology, which allows users to adjust the brightness of the light according to their needs.

## Linear light Prolumen Retro Force 1500 white 230V 75W 12480lm 120° IP54 DALI 840

**Product code 17443 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 75W  
 Maximum output 75W/1m  
 Luminous flux 12480lumens  
 Luminaire's efficiency lm79 166W  
 Correlated colour temperature pure white 4000K  
 Lens angle 120  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP54  
 Lifespan 100000h  
 Llmf tm21 L80B10 @25°C 100.000h  
 Height 64.8mm  
 Width 107.0mm  
 Length 1460.0mm  
 In package 1pc  
 Casing colour white  
 Power supply [BOKE](#)  
 Impact resistance IK10  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 5 years



PROLUMEN Retro Force industrial luminaire. These LED luminaires are equipped with high-quality components and provide excellent lighting for indoor use. The G-Force luminaire has adjustable power strength, allowing users to customize the brightness themselves. 38W/48W/58W/68W/75W Also available with DALI dimming technology, which allows users to adjust the brightness of the light according to their needs.

## Linear light Prolumen RetroFit white 230V 30-76W 14000lm

## CRI80 90° IP20 3000K, 4000K, 5000K 3CCT

### Product code 19950

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.95  
 Output 30-76W  
 Maximum output 76W/1m  
 Luminous flux 14000lumens  
 Correlated colour temperature 3CCT  
 3000K, 4000K, 5000K  
 Lens angle 90  
 Cri 80  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 80000h  
 Llmf tm21 L80B10 @25°C 80.000h  
 Height 27.5mm  
 Width 74.0mm  
 Length 1458.0mm  
 In package 1pc  
 Casing colour white  
 Power supply [LIFUD](#)  
 Impact resistance IK06  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 5 years


The PROLUMEN RetroFit light is an innovative solution that allows for easy and efficient replacement of trunk lights, including models from well-known brands like Zombotel, Veko, Trilux, and Philips, without needing to replace the entire trunk. Easy Installation: The light is designed for simple installation into existing light fixtures, saving time and costs. Energy Efficiency: The PROLUMEN RetroFit light uses the latest LED technology, ensuring energy efficiency and a long service life, reducing ongoing maintenance costs. Customizability: You can choose from different color temperatures to suit the lighting in various spaces—from work environments to retail areas. Quality Guarantee: The light is made from high-quality materials, ensuring durability and reliable performance. Customized Lighting Solutions: The RetroFit light allows for the creation of various lighting solutions tailored to your specific needs and preferences. The PROLUMEN RetroFit light is an ideal choice for those seeking modern and efficient lighting that fits existing structures and provides quality illumination without additional costs.



# Ceiling lamp Prolumen SmartGlow Linear 1200 black 230V 36W 4000lm CRI90 100x50° IP20 DIMMABLE 3000K-6500K

**Product code 17730 DIMMABLE dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DIMMABLE  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4000lumens  
 Luminaire's efficiency lm79 111W  
 Correlated colour temperature 3000K-6500K  
 Lens angle 100x50  
 Cri 90  
 Ugr 6  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 85.0mm  
 Width 65.0mm  
 Length 1200.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -10 - +30°C  
 Certificates CE  
 Warranty 5 years




Ergonomic office light with adjustable color temperature, featuring an aesthetic and compact design that fits into any modern office. SmartGlow illuminates both the desk and the room - the light beam shines both downwards and upwards. The upward-directed light makes the room feel more spacious. The luminaire has an exceptionally good UGR value, meaning the light beam is not uncomfortable for the eyes and glare is minimal. If you want to make your space even more impressive, it is possible to order this luminaire in a connectable version, allowing the linear ceiling light to extend throughout the entire room. In addition to its good looks, SmartGlow is easy to install and control thanks to its patented lockable plug. It can be mounted suspended, surface-mounted, or recessed. As a bonus, it features HCL intelligent control with Casambi, presence, and daylight sensors. Contact our sales team, and we will plan a top-notch lighting solution for your spaces!

# Ceiling lamp Prolumen SmartGlow Linear 1500 black 230V 36W 4000lm CRI90 50° IP20 DALI 3000K-6500K

**Product code 17772 DALI dimmable**

Brand [Prolumen](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Dimmable DALI  
 Output 36W  
 Maximum output 36W/1m  
 Luminous flux 4000lumens  
 Luminaire's efficiency lm79 111W  
 Correlated colour temperature 3000K-6500K  
 Lens angle 50  
 Cri 90  
 Ugr 6  
 Sdcm - macadam ellipses 3  
 Protection class IP20  
 Lifespan 50000h  
 Llmf tm21 L80B10 @25°C 50.000h  
 Height 85.0mm  
 Width 65.0mm  
 Length 1550.0mm  
 In package 1pc  
 Casing colour black  
 Casing material aluminium  
 Power supply [BOKE](#)  
 Work environment indoor use  
 Operation temperature -10 - +30°C  
 Certificates CE  
 Warranty 5 years



Ergonomic office light with adjustable color temperature, featuring an aesthetic and compact design that fits into any modern office. SmartGlow illuminates both the desk and the room - the light beam shines both downwards and upwards. The upward-directed light makes the room feel more spacious. The luminaire has an exceptionally good UGR value, meaning the light beam is not uncomfortable for the eyes and glare is minimal. If you want to make your space even more impressive, it is possible to order this luminaire in a connectable version, allowing the linear ceiling light to extend throughout the entire room. In addition to its good looks, SmartGlow is easy to install and control thanks to its patented lockable plug. It can be mounted suspended, surface-mounted, or recessed. As a bonus, it features HCL intelligent control with Casambi, presence, and daylight sensors. Contact our sales team, and we will plan a top-notch lighting solution for your spaces!

## LED luminaire Prolumen Zennor 1200 frame white 230V IP20

### Product code 17710

---

Brand [Prolumen](#)  
Supply voltage 230V  
Power factor 0.95  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 54000h  
Llmf tm21 L90B50 @25°C 50.000h  
Height 80.0mm  
Width 46.0mm  
Length 1182.0mm  
In package 1pc  
Casing colour white  
Casing material aluminium  
Power supply [BOKE](#)  
Operation temperature -20° - +45°C  
Certificates TUV ENEC, CB, CE, VDE, ROHS  
Warranty 5 years



Zennor linear system allows customization of lighting according to specific requirements and room characteristics. The IP20 protection class ensures durability against dust and small amounts of liquid, making them suitable for various indoor spaces, such as offices, shopping malls, or homes. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## LED luminaire Prolumen Zennor 1200 module black 3675lm 20° IP20 830

**Product code 22078**

Brand [Prolumen](#)  
Rated current 800mA  
Luminous flux 3675lumens  
Correlated colour temperature warm white 3000K  
Lens angle 20  
Cri 80  
Ugr 16  
Sdcm - macadam ellipses 3  
Protection class IP20  
Llmf tm21 L80B10 @25°C 50.000h  
Length 1164.0mm  
Casing colour black  
No. of switches 50000pcs  
Impact resistance IK02  
Work environment indoor use



Zennor is an LED modular light fixture, where different lengths can be used to achieve different power and light output. LED module requires a separate power supply unit or housing with built-in power supply. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## LED luminaire Prolumen Zennor 1200 module black 50W 20° IP20 840

**Product code 17393**

---

Brand [Prolumen](#)  
Output 50W  
Maximum output 50W/1m  
Correlated colour temperature pure white 4000K  
Lens angle 20  
Cri 80  
Ugr 19  
Sdcm - macadam ellipses 3  
Protection class IP20  
Llmf tm21 L80B10 @25°C 50.000h  
Length 1164.0mm  
Casing colour black  
No. of switches 50000pcs  
Impact resistance IK02  
Work environment indoor use



Zennor is an LED modular light fixture, where different lengths can be used to achieve different power and light output. LED module requires a separate power supply unit or housing with built-in power supply. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Accessory Quick straight line splicing accessories silver

**Product code 20461**

---

En62471 1  
In package 1pc  
Casing colour silver  
Casing material aluminium  
Warranty 3 years

