



### LED ceiling light Koline 1200 black 230V 20W 2400lm 105° IP20 840

#### **Product code 17275**

Supply voltage 230V Power factor 0.90 Output 20W Luminous flux 2400lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1500g In package 1pc In box 9pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~40°C Certificates CE Warranty 5 years











### LED ceiling light Koline 1200 black 230V 40W 4800lm 105° IP20 840

#### **Product code 17273**

Supply voltage 230V Power factor 0.90 Output 40W Luminous flux 4800lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1500g In package 1pc In box 9pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years









### LED ceiling light Koline 1200 white 230V 20W 2600lm 105° IP20 840

### **Product code 17276**

Supply voltage 230V Power factor 0.90 Output 20W Luminous flux 2600lumens Luminaire's efficiency Im79 130W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1550g In package 1pc In box 9pcs Casing colour white No. of switches 30000pcs Work environment indoor use Operation temperature -20° - +40°C Certificates CE Warranty 5 years





### LED ceiling light Koline 1200 white 230V 40W 5200lm 105° IP20 840

### **Product code 17274**

Supply voltage 230V Power factor 0.90 Output 40W Luminous flux 5200lumens Luminaire's efficiency Im79 130W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1550g In package 1pc In box 9pcs Casing colour white No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years







#### Product code 17128 PUSH dimmable

Brand LED House Dimmable PUSH Output 55W Luminous flux 6000lumens Luminaire's efficiency Im79 109W Correlated colour temperature warm + day white 3000K + 4000K Lens angle 60 Source of light REVAL BULB Cri 90 Protection class IP20 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 78.0mm Width 58.0mm Length 1500.0mm Casing colour black Casing material aluminum Polishing matt Power supply LTECH Work environment indoor use Warranty 5 years

Adjustable colour temperature and dimmable office light. Ideal desk lamp for work, where you can choose the brightness and suitable light temperature yourself. The luminaire has a prismatic diffuser, which makes working in this light enjoyable and does not strain the eyes. The luminaire is suspended from the ceiling with two cables, and the height of the luminaire can be adjusted. Light distribution is upwards and downwards, and when the colour temperature is changed, it changes both upwards and downwards. Facing downwards is a 3000K LED strip 45W and a 4000K LED strip 45W. Facing upwards is a 3000K + 4000K LED strip 23W. LED strip CRI90. Luminaire control with two buttons located on the housing. The luminaire is manufactured in Estonia! Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







### LED luminaire Leelo 1200 UGR white 230V 40W 4800lm 65° IP20 842

#### **Product code 16308**

Supply voltage 230V Output 40W Luminous flux 4800lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4200K Lens angle 65 Source of light SANAN LED Cri 80 Ugr 19 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 70.0mm Width 50.0mm Length 1200.0mm Weight 1850g Package weight 2000g In package 1pc In box 9pcs Casing colour white Casing material aluminum Polishing matt No. of switches 30000pcs Power supply **BOKE** Work environment indoor use Certificates CE Warranty 5 years

Linear workplace luminaire with low UGR value. This IP20-rated linear luminaire is an ideal choice for home or office environments, providing daylight illumination at a temperature of 4200K. The luminaire comes with a suspension kit. Illuminate your world with LED House professionals - check out our project portfolio here!







### LED luminaire Leelo 1500 UGR white 230V 50W 6000lm 65° IP20 842

#### Product code 16307

Supply voltage 230V Output 50W Luminous flux 6000lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4200K Lens angle 65 Source of light SANAN LED Cri 80 Ugr 19 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 70.0mm Width 50.0mm Length 1500.0mm Weight 2200g Package weight 2400g In package 1pc In box 9pcs Casing colour white Casing material aluminum Polishing matt No. of switches 30000pcs Power supply **BOKE** Work environment indoor use Certificates CE Warranty 5 years

Linear workplace luminaire with low UGR value. This IP20-rated linear luminaire is an ideal choice for home or office environments, providing daylight illumination at a temperature of 4200K. The luminaire comes with a suspension kit. Illuminate your world with LED House professionals - <a href="check-out-our-project-portfolio-here!">check-out-our-project-portfolio-here!</a>




### LED luminaire PROLUMEN Barrett 1200 DALI black 230V 36W 3350lm 110° IP20 930





#### Product code 16970 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Luminous flux 3350lumens Luminaire's efficiency Im79 93W Correlated colour temperature warm white 3000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour black Casing material aluminum Polishing matt Power supply **BOKE** Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years

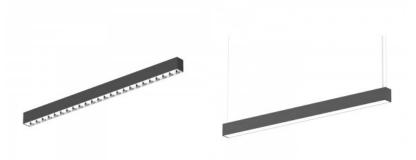







### LED luminaire PROLUMEN Barrett 1200 DALI recessed white 230V 36W 3100lm 75° IP20 940

#### Product code 17004 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Luminous flux 3100lumens Luminaire's efficiency Im79 86W Correlated colour temperature pure white 4000K Lens angle 75 Cri 90 Ugr 22 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour white Casing material aluminum Polishing matt Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years

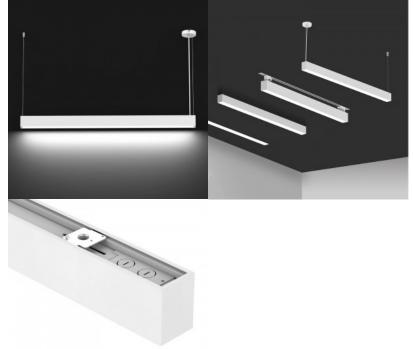






### LED luminaire PROLUMEN Barrett 1200 DALI white 230V 36W 3100lm CRI90 110° IP20 3000K, 4000K, 5700K WW/DW/CW

### Product code 17022 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Luminous flux 3100lumens Luminaire's efficiency Im79 86W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour white Casing material aluminum Polishing matt Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years

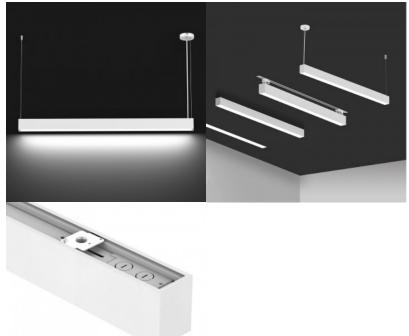





### LED luminaire PROLUMEN Barrett 1200 UP/DOWN DALI white 230V 36W 4100lm 110° IP20 940

#### Product code 16992 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Luminous flux 4100lumens Luminaire's efficiency Im79 114W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour white Casing material aluminum Polishing matt Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years








### LED luminaire PROLUMEN Barrett 1500 black 230V 45W 4673lm CRI90 65° IP20 3000K, 4000K, 5700K WW/DW/CW

### **Product code 16477**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 45W Luminous flux 4673lumens Luminaire's efficiency Im79 104W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 65 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour black Casing material aluminum Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

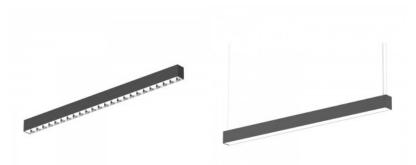





### LED luminaire PROLUMEN Barrett 1500 DALI white 230V 45W 4573lm CRI90 110° IP20 3000K, 4000K, 5700K WW/DW/CW

### Product code 17016 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 45W Luminous flux 4573lumens Luminaire's efficiency Im79 102W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 110 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour white Casing material aluminum Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years







### LED luminaire PROLUMEN Barrett 1500 UP/DOWN 1-10V black 230V 60W 5400lm 65° IP20 930

#### **Product code 16511**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 60W Luminous flux 5400lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Lens angle 65 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour black Casing material aluminum Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








### LED luminaire PROLUMEN Barrett 1500 UP/DOWN DALI black 230V 60W 5300lm 65° IP20 930

#### **Product code 17043**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 60W Luminous flux 5300lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 65 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour black Casing material aluminum Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE

Linear workplace luminaire. High quality, easy to install, and longlasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - check out our portfolio of projects here!!

Warranty 5 years

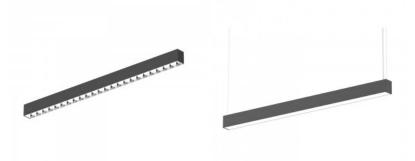







### LED luminaire PROLUMEN Barrett 600 black 230V 17W 1500lm 75° IP20 930

### **Product code 16672**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 17W Luminous flux 1500lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminum Power supply OSRAM Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

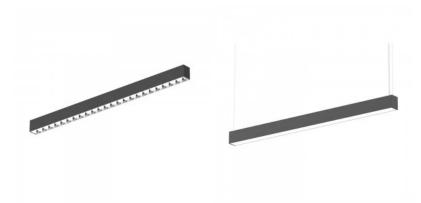





### LED luminaire PROLUMEN Barrett 600 DALI white 230V 17W 1500lm 75° IP20 930

#### Product code 16971 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 17W Luminous flux 1500lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm Weight 1700g Package weight 2133g In box 6pcs

Casing colour white

Power supply **BOKE** 

Certificates CE Warranty 5 years

Casing material aluminum

Work environment indoor use Operation temperature -20 ~ 45°C








### LED luminaire PROLUMEN Barrett 600 DALI white 230V 17W 1500lm CRI90 110° IP20 3000K, 4000K, 5700K WW/DW/CW

### Product code 17017 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 17W Luminous flux 1500lumens Luminaire's efficiency Im79 88W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 110 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm In box 6pcs Casing colour white Casing material aluminum Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

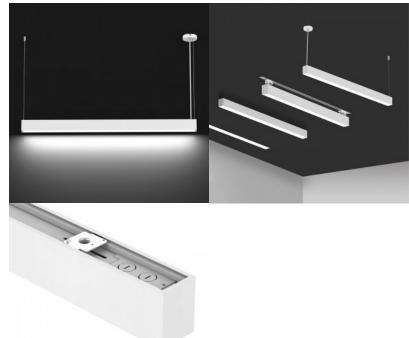





### LED luminaire PROLUMEN Barrett A 1200 (DALI) white 230V 36W 3750lm 75° IP20 930

#### Product code 17368 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Luminous flux 3750lumens Luminaire's efficiency Im79 104W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1212.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminum Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years







### LED luminaire PROLUMEN Barrett A 1500 (DALI) white 230V 45W 3750lm 75° IP20 930

### Product code 17369 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 45W Luminous flux 3750lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminum Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








# LED luminaire PROLUMEN Barrett A 600 up-down DALI black 230V 22W 1950lm CRI90 110° IP20 3000K, 4000K, 5700K WW/DW/CW

### Product code 17352 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 22W Luminous flux 1950lumens Luminaire's efficiency Im79 89W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 110 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminum Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE

Linear workplace luminaire. High quality, easy to install, and longlasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - check out our portfolio of projects here!!

Warranty 5 years

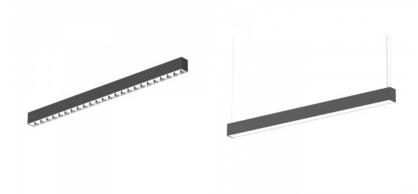






### LED luminaire PROLUMEN Bianca S1 1200 (DALI) white 230V 39W 5400lm 120° IP44 840

#### Product code 17448 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 39W Luminous flux 5400lumens Luminaire's efficiency Im79 138W Correlated colour temperature pure white 4000K Lens angle 120 Source of light OSRAM LED Cri 80 Sdcm - macadam ellipses 5 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 52.0mm Width 152.0mm Length 1200.0mm Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° - +45°C Warranty 5 years

Bianca S1 linear light. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with the help of LED House professionals - check out our project portfolio here!







### LED luminaire PROLUMEN Bianca S1 1200 white 230V 39W 4742lm 120° IP44 840


### **Product code 17442**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 39W Luminous flux 4742lumens Luminaire's efficiency Im79 122W Correlated colour temperature pure white 4000K Lens angle 120 Source of light OSRAM LED Cri 80 Sdcm - macadam ellipses 5 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 52.0mm Width 152.0mm Length 1200.0mm Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° - +45°C Warranty 5 years

Bianca S1 linear light. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with the help of LED House professionals - check out our project portfolio here!



LED ceiling light PROLUMEN Clara 1200 0-10V white 40W 4400lm CRI90 120° IP44 3000K, 4000K, 5700K WW/DW/CW






### Product code 17351 0-10V dimmable

**Brand PROLUMEN** Power factor 0.90 Dimmable 0-10V Output 40W Luminous flux 4400lumens Luminaire's efficiency Im79 110W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Height 80.0mm Width 208.0mm Length 1200.0mm In box 12pcs Casing colour white Casing material aluminum Polishing matt Impact resistance IK08 Work environment indoor use Certificates CE Warranty 5 years

High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high coluor rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the PROLUMEN catalogue as well!







#### Product code 17353 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 20W Luminous flux 2200lumens Luminaire's efficiency Im79 110W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Height 80.0mm Width 207.0mm Length 1200.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminum Polishing matt Impact resistance IK08 Work environment indoor use Operation temperature -20 ~40°C Certificates CE Warranty 5 years

High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high coluor rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the PROLUMEN catalogue as well!

### LED luminaire PROLUMEN DB66A 1200 DALI white 230V 36W





### 3800lm CRI90 120° IP20 3000K, 4000K, 5700K WW/DW/CW

#### Product code 16180 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Luminous flux 3800lumens Luminaire's efficiency Im79 106W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 2750g In box 6pcs Casing colour white Casing material aluminum Polishing matt Power supply LIFUD Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years

Perfect for office or workplace lighting. Some models also feature ship lighting. The PROLUMEN DB66A series offers versatile options for lighting projects. These high-quality luminaires with uniform light distribution allow for customizable lighting according to preference. DB66A provides powerful illumination that meets high standards. Available in various wattages ranging from 36W to 60W and brightness from 3800lm to 6200lm, ensuring adequate lighting in different spaces and environments. The luminaires are equipped with high-quality LEDs, providing stable light and a high color rendering index (CRI90), which helps maintain the natural color of objects. Additionally, you can choose from different color temperatures - 3000K, 4000K, and 5700K, from warm white to cool white light. PROLUMEN DB66A luminaires are ideal for both indoor and commercial buildings. In addition, UP/DOWN versions are available, providing light both upwards and downwards, ensuring uniform illumination of the space. All PROLUMEN DB66A luminaires come with IP20 protection class, ensuring their durability and suitability for various indoor environments. Additionally, DALI versions are available, allowing precise control of lighting as needed. Mounting cables are not included, but you can find all the necessary accessories from LED house in the accessories category!





## LED luminaire PROLUMEN DB66A 1200 white 230V 36W 3800lm CRI80 120° IP20 3000K, 4000K, 5700K WW/DW/CW

#### Product code 16028

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 36W Luminous flux 3800lumens Luminaire's efficiency lm79 106W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 2750g In box 6pcs Casing colour white Casing material aluminum Polishing matt Power supply LIFUD Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years

Perfect for office or workplace lighting. Some models also feature ship lighting. The PROLUMEN DB66A series offers versatile options for lighting projects. These high-quality luminaires with uniform light distribution allow for customizable lighting according to preference. DB66A provides powerful illumination that meets high standards. Available in various wattages ranging from 36W to 60W and brightness from 3800lm to 6200lm, ensuring adequate lighting in different spaces and environments. The luminaires are equipped with high-quality LEDs, providing stable light and a high color rendering index (CRI90), which helps maintain the natural color of objects. Additionally, you can choose from different color temperatures - 3000K, 4000K, and 5700K, from warm white to cool white light. PROLUMEN DB66A luminaires are ideal for both indoor and commercial buildings. In addition, UP/DOWN versions are available, providing light both upwards and downwards, ensuring uniform illumination of the space. All PROLUMEN DB66A luminaires come with IP20 protection class, ensuring their durability and suitability for various indoor environments. Additionally, DALI versions are available, allowing precise control of lighting as needed. Mounting cables are not included, but you can find all the necessary accessories from LED house in the accessories category!






## LED luminaire PROLUMEN DB66A 1500 white 230V 42W 4500lm CRI80 120° IP20 3000K, 4000K, 5700K WW/DW/CW

#### Product code 16029

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 42W Luminous flux 4500lumens Luminaire's efficiency lm79 107W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1504.0mm In box 6pcs Casing colour white Casing material aluminum Polishing matt Impact resistance IK06 Work environment indoor use Certificates CF Warranty 5 years

Perfect for office or workplace lighting. Some models also feature ship lighting. The PROLUMEN DB66A series offers versatile options for lighting projects. These high-quality luminaires with uniform light distribution allow for customizable lighting according to preference. DB66A provides powerful illumination that meets high standards. Available in various wattages ranging from 36W to 60W and brightness from 3800lm to 6200lm, ensuring adequate lighting in different spaces and environments. The luminaires are equipped with high-quality LEDs, providing stable light and a high color rendering index (CRI90), which helps maintain the natural color of objects. Additionally, you can choose from different color temperatures - 3000K, 4000K, and 5700K, from warm white to cool white light. PROLUMEN DB66A luminaires are ideal for both indoor and commercial buildings. In addition, UP/DOWN versions are available, providing light both upwards and downwards, ensuring uniform illumination of the space. All PROLUMEN DB66A luminaires come with IP20 protection class, ensuring their durability and suitability for various indoor environments. Additionally, DALI versions are available, allowing precise control of lighting as needed. Mounting cables are not included, but you can find all the necessary accessories from LED house in the accessories category!





### LED luminaire PROLUMEN DB74 1500 Bianca DALI white 230V 50W 4900lm 120° IP44 840

### **Product code 16988**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 50W Luminous flux 4900lumens Luminaire's efficiency Im79 98W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 63.0mm Width 171.0mm Length 1495.0mm Weight 3520g Package weight 4150g In package 1pc In box 4pcs Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° +40°C Certificates CE, D, F Warranty 5 years

High-quality, dimmable ceiling light. DALI Dim technology allows adjusting the light according to preference. 4000K LED lights provide clear and sharp illumination, perfect for lighting stores and other commercial spaces. The high color rendering index CRI90 ensures the accuracy of colors under the light beam. IP44 protection class means the luminaire can be used even in damp conditions. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!!







### LED luminaire PROLUMEN DB74 600 Bianca DALI white 230V 17W 1800lm 120° IP44 940

### **Product code 16987**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 17W Luminous flux 1800lumens Luminaire's efficiency Im79 106W Correlated colour temperature pure white 4000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 63.0mm Width 171.0mm Length 595.0mm Weight 1550g Package weight 1800g In package 1pc In box 12pcs Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° +40°C Certificates CE, D, F Warranty 5 years

High-quality, dimmable ceiling light. DALI Dim technology allows adjusting the light according to preference. 4000K LED lights provide clear and sharp illumination, perfect for lighting stores and other commercial spaces. The high color rendering index CRI90 ensures the accuracy of colors under the light beam. IP44 protection class means the luminaire can be used even in damp conditions. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!!







### Linear Light PROLUMEN Delia UGR 600 black 230V 20W 2000lm CRI90 100° IP20 3000K, 4000K, 5700K WW/DW/CW

#### Product code 15206

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 20W Luminous flux 2000lumens Luminaire's efficiency Im79 100W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 100 Cri 90 Ugr 18 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 70.0mm Width 60.0mm Length 604.0mm Weight 1150g Package weight 1650g In package 1pc In box 12pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years

Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, the result is guaranteed to be good. <u>Hanging cables</u> (2 pcs) must be ordered separately. Illuminate your world with LED House professionals check out our project portfolio here!







32/63 26.12.2024

### Linear Light PROLUMEN Delia UGR19 1200 black 230V 40W 4500lm CRI90 100° IP20 3000K, 4000K, 5700K WW/DW/CW

#### Product code 15026

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 40W Luminous flux 4500lumens Luminaire's efficiency Im79 113W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 100 Cri 90 Uar 18 Lor 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 70.0mm Width 60.0mm Length 1204.0mm Weight 2200g Package weight 3000g In package 1pc In box 12pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years

Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, the result is guaranteed to be good. Hanging cables (2 pcs) must be ordered separately. Illuminate your world with LED House professionals check out our project portfolio here!





33/63 26.12.2024

### Linear Light PROLUMEN Delia UGR19 1200 DALI black 230V 40W 4500lm 100° IP40 840

#### Product code 15323 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 40W Luminous flux 4500lumens Luminaire's efficiency Im79 113W Correlated colour temperature pure white 4000K Lens angle 100 Cri 80 Uar 18 Lor 80 Sdcm - macadam ellipses 6 Protection class IP40 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 70.0mm Width 60.0mm Length 1204.0mm Weight 2200g Package weight 3000g In package 1pc In box 12pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years

Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, the result is guaranteed to be good. Hanging cables (2 pcs) must be ordered separately. Illuminate your world with LED House professionals check out our project portfolio here!








34/63 26.12.2024

### Linear Light PROLUMEN Delia UGR19 1200 TRIAC black 230V 40W 4500lm CRI90 100° IP20 3000K, 4000K, 5700K WW/DW/CW

#### Product code 15460 TRIAC dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable TRIAC Output 40W Luminous flux 4500lumens Luminaire's efficiency Im79 113W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 100 Cri 90 Uar 18 Lor 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 70.0mm Width 60.0mm Length 1204.0mm Weight 2200g Package weight 3000g In package 1pc In box 12pcs Casing colour black Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years

Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, the result is guaranteed to be good. Hanging cables (2 pcs) must be ordered separately. Illuminate your world with LED House professionals check out our project portfolio here!

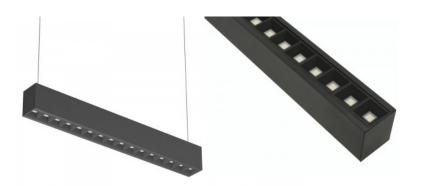







### Linear Light PROLUMEN Delia UGR19 1200 white 230V 40W 4500lm CRI80 100° IP20 3000K, 4000K, 5700K WW/DW/CW

#### Product code 15535

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 40W Luminous flux 4500lumens Luminaire's efficiency lm79 113W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5700K Lens angle 100 Cri 80 Uar 18 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 70.0mm Width 60.0mm Length 1204.0mm Weight 2200g Package weight 3000g In package 1pc In box 12pcs Casing colour white Casing material aluminum Work environment indoor use Certificates CE. RoHS Warranty 5 years

White body and square design. Elegant and functional, this minimalist luminaire is an excellent choice for those who appreciate simplicity and modernity in their home decor. This luminaire can be installed as both a pendant light and surface-mounted. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Some models have adjustable light color: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, good results are guaranteed. Suspension cables (2 pcs) must be ordered separately. Illuminate your world with the help of LED House professionals - check out our project portfolio here!







# LED luminaire PROLUMEN Delilah 0,6m white 230V 15W 1400lm $110^{\circ}$ IP20 940



37/63 26.12.2024

#### Product code 17051

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 15W Luminous flux 1400lumens Luminaire's efficiency Im79 93W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 615.0mm Installation opening diameter 607x54mm In box 12pcs Casing colour white Casing material aluminum Polishing matt Work environment indoor use Operation temperature -20  $\sim$  45°C Certificates CE, RoHS Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination, Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here! Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!



### LED luminaire PROLUMEN Delilah 1,2m white 230V 30W 3100lm





### 110° IP20 940

#### Product code 17052

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 30W Luminous flux 3100lumens Luminaire's efficiency Im79 103W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 1208.0mm Installation opening diameter 1201x54mm In box 6pcs Casing colour white Casing material aluminum Polishing matt Work environment indoor use Operation temperature -20  $\sim$  45°C Certificates CE, RoHS Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!









# LED luminaire PROLUMEN Delilah 1,5m white 230V 37W 3800lm 110° IP20 940



40/63 26.12.2024

#### Product code 17053

Brand PROLUMEN Supply voltage 230V Power factor 0.90 Output 37W Luminous flux 3800lumens Luminaire's efficiency Im79 103W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 1505.0mm Installation opening diameter 1498x54mm In box 6pcs Casing colour white Casing material aluminum Polishing matt Work environment indoor use Operation temperature -20  $\sim$  45°C Certificates CE, RoHS Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here! Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!



### LED luminaire PROLUMEN Delilah 2,4m white 230V 60W 6200lm





### 110° IP20 940

#### Product code 16407

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 60W Luminous flux 6200lumens Luminaire's efficiency Im79 103W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 2395.0mm Installation opening diameter 2388x54mm In box 6pcs Casing colour white Casing material aluminum Polishing matt Work environment indoor use Operation temperature -20  $\sim$  45°C Certificates CE, RoHS Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!









### LED luminaire PROLUMEN Delilah L-corner 150+150 white 230V 7.5W 650lm 110° IP20 940

#### Product code 17054

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 7.5W Luminous flux 650lumens Luminaire's efficiency Im79 87W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 150.0mm Length 150.0mm In box 24pcs Casing colour white Casing material aluminum Polishing matt Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here! Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!







### LED ceiling light PROLUMEN Delilah white 230V 45W 4300lm 45° IP20 940

#### Product code 16793

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 45W Luminous flux 4300lumens Luminaire's efficiency Im79 96W Correlated colour temperature pure white 4000K Lens angle 45 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 1802.0mm Package weight 2683g In package 1pc In box 6pcs Casing colour white Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years

Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here! Extendable linear recessed luminaire that allows for creating light games according to preference. Possible to install into walls and ceilings, creating a minimalist and striking appearance. This enables creating a modern look in spaces, perfect for both homes and commercial areas. The luminaire is equipped with high-quality LED light sources, ensuring stable and uniform illumination. Recessed linear luminaires are energy-efficient and have a long lifespan. Protection class IP20 means that the luminaires are suitable for indoor use only. The luminaire adds daylight (4000K) to the room and does not distort the true colors of objects under the light beam (CRI90). Illuminate your world with LED House professionals - check out our project portfolio here!



8





### LED luminaire PROLUMEN Dennis 1200 white 230V 40W 4400lm 120° IP20 840

#### **Product code 15353**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 40W Luminous flux 4400lumens Luminaire's efficiency Im79 110W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 64.0mm Width 71.0mm Length 1203.0mm In box 12pcs Casing colour white Impact resistance IK08 Work environment indoor use Certificates CE Warranty 5 years

A classic luminaire for offices, schools, hotels, corridors, etc. Its minimalist design blends seamlessly into various interiors, whether at home, in the office, or in a business environment. Illuminate your world with LED House professionals - check out our project portfolio here!







### LED luminaire PROLUMEN Dennis 1500 white 230V 58W 5850lm 120° IP20 840

#### **Product code 15628**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 58W Luminous flux 5850lumens Luminaire's efficiency Im79 101W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 64.0mm Width 71.0mm Length 1503.0mm In box 12pcs Casing colour white Impact resistance IK08 Work environment indoor use Certificates CE Warranty 5 years

A classic luminaire for offices, schools, hotels, corridors, etc. Its minimalist design blends seamlessly into various interiors, whether at home, in the office, or in a business environment. Illuminate your world with LED House professionals - check out our project portfolio here!



### LED luminaire PROLUMEN EMPIRIO B025S 1500 white 230V 75W 12000lm 90° IP40 840





#### **Product code 15018**

Brand **PROLUMEN** Supply voltage 230V Output 75W Luminous flux 12000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 90 Cri 80 Sdcm - macadam ellipses 3 Protection class IP40 Lifespan 50000h Llmf tm21 L80B10 @25°C 80.000h Height 72.0mm Width 65.0mm Length 1460.0mm Casing colour white Casing material aluminum Power supply OSRAM Work environment indoor use Operation temperature -20°C - +45°C Certificates CE, RoHS Warranty 5 years

A ceiling light fixture with uniform light distribution that can be installed either flush-mounted or suspended from the ceiling. An ideal light fixture for above desks! 4000K LED lights provide clear and sharp light, perfect for illuminating stores and other commercial spaces. Option to order linear lights with different lenses and power levels: 30°, 60°, 90°, 120°, 2 x 25°. Improve your everyday lighting quality and choose a top-notch lighting solution from the LED house product range! Illuminate your world with LED House professionals - check out our project portfolio here!









## LED ceiling light PROLUMEN Lidya 1100 up-down white 230V 45W 4700lm CRI80 50° IP20 3000K + 4000K warm + day white

#### Product code 16791

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 45W Luminous flux 4700lumens Luminaire's efficiency Im79 104W Correlated colour temperature warm + day white 3000K + 4000K Lens angle 50 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 74.0mm Width 236.0mm Length 1172.0mm Package weight 4800g In package 1pc In box 2pcs Casing colour white Casing material aluminum Work environment indoor use Operation temperature -20° - +40°C Certificates CE, RoHS Warranty 5 years

Up-down light fixture, ideal for offices and other workspaces. Adjustable light color temperature: 3000K, 4000K. This fixture is suitable for indoor use only, with IP20 protection rating. The light fixture has an ideal color rendering index CRI90 for workspaces and offices. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED House product range!







## LED ceiling light PROLUMEN Lidya 1500 up-down white 230V 60W 5400lm CRI90 50° IP20 3000K + 4000K warm + day white

#### **Product code 16792**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 60W Luminous flux 5400lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm + day white 3000K + 4000K Lens angle 50 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 74.0mm Width 236.0mm Length 1552.0mm Package weight 5900g In package 1pc In box 2pcs Casing colour white Casing material aluminum Work environment indoor use Certificates CE, RoHS Warranty 5 years

Up-down light fixture, ideal for offices and other workspaces. Adjustable light color temperature: 3000K, 4000K. This fixture is suitable for indoor use only, with IP20 protection rating. The light fixture has an ideal color rendering index CRI90 for workspaces and offices. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED House product range!







# Linear Light PROLUMEN Linda 66D 1200 DALI (with downward light distribution) black 230V 28W 3600lm 75° IP20 830

#### Product code 17751 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 28W Luminous flux 3600lumens Luminaire's efficiency Im79 129W Correlated colour temperature warm white 3000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 2750g In box 6pcs Casing colour black Casing material aluminum Polishing matt Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







# Linear Light PROLUMEN Linda 66D 1200 DALI (with downward light distribution) black 230V 28W 3800lm 75° IP20 840

#### Product code 17750 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 28W Luminous flux 3800lumens Luminaire's efficiency Im79 136W Correlated colour temperature pure white 4000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 2750g In box 6pcs Casing colour black Casing material aluminum Polishing matt Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







# Linear Light PROLUMEN Linda 66D 1200 DALI (with light distribution up and down) black 230V 40W 5270lm 75° IP20 830

#### Product code 17752 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 40W Luminous flux 5270lumens Luminaire's efficiency lm79 132W Correlated colour temperature warm white 3000K Lens angle 75 Cri 80 Uar 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminum Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







# Linear Light PROLUMEN Linda 66D 1200 DALI (with light distribution up and down) black 230V 40W 5550lm 75° IP20 840

#### Product code 17741 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 40W Luminous flux 5550lumens Luminaire's efficiency Im79 139W Correlated colour temperature pure white 4000K Lens angle 75 Cri 80 Uar 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminum Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







## Linear Light PROLUMEN Linda C27 1200 DALI (with downward light distribution) black 230V 30W 4200lm 100° IP20 840

#### Product code 17876 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.95 Dimmable DALI Output 30W Luminous flux 4200lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 100 Cri 80 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 160000h Llmf tm21 L70B50 @25°C 160.000h Height 55.0mm Width 50.0mm Length 1120.0mm Weight 1940g In box 6pcs Casing colour black Casing material aluminum Polishing matt Power supply TRIDONIC Impact resistance IK08 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







### Linear Light PROLUMEN Linda C27 1200 white 230V 30W 3900lm 100° IP20 830

#### Product code 17909

**Brand PROLUMEN** Supply voltage 230V Power factor 0.95 Output 30W Luminous flux 3900lumens Luminaire's efficiency Im79 130W Correlated colour temperature warm white 3000K Lens angle 100 Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 160000h Llmf tm21 L70B50 @25°C 160.000h Height 55.0mm Width 50.0mm Length 1120.0mm Weight 1940g In box 6pcs Casing colour white Casing material aluminum Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







## LED luminaire PROLUMEN Meena 1200 white 230V 40W 5600lm CRI80 120° IP44 3000K, 4000K, 5000K WW/DW/CW

#### **Product code 17711**

**Brand PROLUMEN** Supply voltage 230V Output 40W Luminous flux 5600lumens Luminaire's efficiency Im79 140W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP44 Llmf tm21 L90B10 @25°C 50.000h Height 55.0mm Width 140.0mm Length 1198.0mm In package 1pc Casing colour white Casing material aluminum + plastic Power supply OSRAM Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

PROLUMEN Meena <u>linear luminaire</u> with adjustable power levels of 22W/30W/35W/40W. A high-quality linear light suitable for installation in parking garages, large closets, corridors, and warehouses. The Meena luminaire is designed to be very easy to install and maintain. The housing can be opened with a button press, and the suspension cables are adjustable during installation.







## LED luminaire PROLUMEN Meena 1500 230V 60W 8400lm CRI80 120° IP44 3000K, 4000K, 5000K WW/DW/CW

#### **Product code 17456**

**Brand PROLUMEN** Supply voltage 230V Output 60W Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP44 Lifespan 100000h Height 55.0mm Width 140.0mm Length 1500.0mm In package 1pc Casing material aluminum + plastic Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

PROLUMEN Meena <u>linear luminaire</u> with adjustable power levels of 22W/30W/35W/40W. A high-quality linear light suitable for installation in parking garages, large closets, corridors, and warehouses. The Meena luminaire is designed to be very easy to install and maintain. The housing can be opened with a button press, and the suspension cables are adjustable during installation.



LED luminaire PROLUMEN Miina 1200 white 230V 40W 6400lm CRI80 120° IP65 3000K, 4000K, 5000K WW/DW/CW





#### Product code 17753

**Brand PROLUMEN** Supply voltage 230V Output 40W Luminous flux 6400lumens Luminaire's efficiency Im79 160W Correlated colour temperature WW/DW/CW 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP65 Height 54.0mm Width 102.0mm Length 1219.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminum + plastic Power supply **BOKE** Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

PROLUMEN Miina linear light fixture with adjustable color temperature and power levels. A high-quality linear fixture suitable for installation in parking garages, large closets, corridors, and warehouses. The opal glass provides a very wide beam angle, evenly covering a larger area. The Miina fixture is designed for easy installation and maintenance. The color temperature and power are adjustable via a button on the fixture. A motion sensor can also be added to the Miina fixture. Adding the sensor is easy thanks to the openable end cap, where the sensor wires can be connected. With the motion sensor. LED lights become even more energyefficient and convenient, as the step of turning the light on and off with a switch is eliminated, and the fixture turns off automatically. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!







### Linear Light PROLUMEN Retro Force 1500 (DALI) white 230V 75W 12480lm 120° IP54 840

#### Product code 17443 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 75W Luminous flux 12480lumens Luminaire's efficiency Im79 166W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP54 Lifespan 100000h Llmf tm21 L80B10 @25°C 100.000h Height 64.8mm Width 107.0mm Length 1460.0mm In package 1pc Casing colour white Power supply **BOKE** Impact resistance IK10 Work environment indoor use Certificates CE, RoHS Warranty 5 years

PROLUMEN Retro Force industrial luminaire. These LED luminaires are equipped with high-quality components and provide excellent lighting for indoor use. The G-Force luminaire has adjustable power strength, allowing users to customize the brightness themselves. 38W/48W/58W/68W/75W Also available with DALI dimming technology, which allows users to adjust the brightness of the light according to their needs.







### Linear Light PROLUMEN Retro Force 1500 white 230V 75W 12480lm 120° IP54 840

#### **Product code 17675**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 75W Luminous flux 12480lumens Luminaire's efficiency Im79 166W Correlated colour temperature pure white 4000K Lens angle 120 Source of light **SAMSUNG LED** Cri 80 Sdcm - macadam ellipses 3 Protection class IP54 Lifespan 100000h Llmf tm21 L80B10 @25°C 100.000h Height 64.8mm Width 107.0mm Length 1460.0mm In package 1pc Casing colour white Power supply **BOKE** Impact resistance IK10 Work environment indoor use Certificates CE, RoHS Warranty 5 years

PROLUMEN Retro Force industrial luminaire. These LED luminaires are equipped with high-quality components and provide excellent lighting for indoor use. The G-Force luminaire has adjustable power strength, allowing users to customize the brightness themselves. 38W/48W/58W/68W/75W Also available with DALI dimming technology, which allows users to adjust the brightness of the light according to their needs.







### LED ceiling light PROLUMEN SmartGlow Linear 1200 black 230V 36W 4000lm CRI90 100/50° IP20 3000-6500K WARM TO COLD

### Product code 17730 DIMMABLE dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DIMMABLE Output 36W Luminous flux 4000lumens Luminaire's efficiency Im79 111W Correlated colour temperature WARM TO COLD 3000-6500K Lens angle 100/50 Cri 90 Ugr 6 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 85.0mm Width 65.0mm Length 1200.0mm In package 1pc Casing colour black Casing material aluminum Power supply **BOKE** Work environment indoor use Operation temperature -10 - +30°C Certificates CE Warranty 5 years

Ergonomic office light with adjustable color temperature, featuring an aesthetic and compact design that fits into any modern office. SmartGlow illuminates both the desk and the room - the light beam shines both downwards and upwards. The upwarddirected light makes the room feel more spacious. The luminaire has an exceptionally good UGR value, meaning the light beam is not uncomfortable for the eyes and glare is minimal. If you want to make your space even more impressive, it is possible to order this luminaire in a connectable version, allowing the linear ceiling light to extend throughout the entire room. In addition to its good looks, SmartGlow is easy to install and control thanks to its patented lockable plug. It can be mounted suspended, surfacemounted, or recessed. As a bonus, it features HCL intelligent control with Casambi, presence, and daylight sensors. Contact our sales team, and we will plan a top-notch lighting solution for your spaces!









# LED ceiling light PROLUMEN SmartGlow Linear 1500 (DALI) black 230V 36W 4000lm CRI90 50° IP20 3000-6500K WARM TO COLD

#### Product code 17772 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Luminous flux 4000lumens Luminaire's efficiency Im79 111W Correlated colour temperature WARM TO COLD 3000-6500K Lens angle 50 Cri 90 Ugr 6 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 85.0mm Width 65.0mm Length 1550.0mm In package 1pc Casing colour black Casing material aluminum Power supply **BOKE** Work environment indoor use Operation temperature -10 - +30°C Certificates CE Warranty 5 years

Ergonomic office light with adjustable color temperature, featuring an aesthetic and compact design that fits into any modern office. SmartGlow illuminates both the desk and the room - the light beam shines both downwards and upwards. The upwarddirected light makes the room feel more spacious. The luminaire has an exceptionally good UGR value, meaning the light beam is not uncomfortable for the eyes and glare is minimal. If you want to make your space even more impressive, it is possible to order this luminaire in a connectable version, allowing the linear ceiling light to extend throughout the entire room. In addition to its good looks, SmartGlow is easy to install and control thanks to its patented lockable plug. It can be mounted suspended, surfacemounted, or recessed. As a bonus, it features HCL intelligent control with Casambi, presence, and daylight sensors. Contact our sales team, and we will plan a top-notch lighting solution for your spaces!









### LED luminaire PROLUMEN Zennor 1200 frame white 230V IP20

#### **Product code 17710**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.95 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 54000h Llmf tm21 L90B50 @25°C 50.000h Height 80.0mm Width 46.0mm Length 1182.0mm In package 1pc Casing colour white Casing material aluminum Power supply **BOKE** Operation temperature -20° - +45°C Certificates TUV ENEC, CB, CE, VDE, **ROHS** Warranty 5 years

Zennor linear system allows customization of lighting according to specific requirements and room characteristics. The IP20 protection class ensures durability against dust and small amounts of liquid, making them suitable for various indoor spaces, such as offices, shopping malls, or homes. Illuminate your world with LED House professionals - check out our project portfolio here!







### LED luminaire PROLUMEN Zennor 1200 module black 50W 20° IP20 840

#### **Product code 17393**

Brand PROLUMEN
Output 50W
Correlated colour temperature pure white 4000K
Lens angle 20
Cri 80
Ugr 19
Sdcm - macadam ellipses 3
Protection class IP20
Llmf tm21 L80B10 @25°C 50.000h
Length 1164.0mm
Casing colour black
No. of switches 50000pcs
Impact resistance IK02
Work environment indoor use

