



### Ceiling lamp DB157 UGR<19 1200 white 230V 30W 3500lm 80° IP20 940

### **Product code 18172**

Supply voltage 230V Power factor 0.90 Output 30W Maximum output 30W/1m Rated current 1250mA Luminous flux 3500lumens Luminaire's efficiency Im79 117W Correlated colour temperature pure white 4000K Lens angle 80 Cri 95 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 59.0mm Width 120.0mm Length 1200.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium Impact resistance IK08 Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years







### Ceiling lamp DB157 UGR<19 1200 white 230V 40W 4550lm 80° IP20 940

### **Product code 18173**

Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Rated current 1250mA Luminous flux 4550lumens Luminaire's efficiency lm79 114W Correlated colour temperature pure white 4000K Lens angle 80 Cri 95 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 59.0mm Width 120.0mm Length 1200.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium Impact resistance IK08 Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years







# LED luminaire ECO Bianca BFLH-12-36C1 white 230V 21-36W 5760lm CRI80 120° IP44 3000K, 3500K, 4000K 3CCT

### **Product code 19396**

**Brand ECO** Supply voltage 230V Power factor 0.90 Output 21-36W Maximum output 36W/1m Luminous flux 5760lumens Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP44 Lifespan 50000h Height 61.0mm Width 160.0mm Length 1160.0mm In package 1pc In box 4pcs Casing colour white Casing material polycarbonate Polishing matt Power supply **PHILIPS** Impact resistance IK08 Work environment indoor use Operation temperature -20 - +45°C Certificates CE Warranty 3 years







# LED luminaire ECO Bianca BFLH-15-42C1 white 230V 25-42W 6720lm CRI80 120° IP44 3000K, 3500K, 4000K 3CCT

#### **Product code 19397**

Brand ECO Supply voltage 230V Power factor 0.90 Output 25-42W Maximum output 42W/1m Luminous flux 6720lumens Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 5 Protection class IP44 Lifespan 50000h Height 61.0mm Width 160.0mm Length 1440.0mm In package 1pc In box 4pcs Casing colour white Casing material polycarbonate Polishing matt Power supply **PHILIPS** Impact resistance IK08 Work environment indoor use Operation temperature -20 - +45°C Certificates CE Warranty 3 years



### Ceiling lamp Koline 1200 black 230V 20W 2400lm 105° IP20 840



5/88 8.12.2025

#### **Product code 17275**

Supply voltage 230V Power factor 0.90 Output 20W Maximum output 20W/1m Luminous flux 2400lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1500g In package 1pc In box 9pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~40°C Certificates CE Warranty 5 years













### Ceiling lamp Koline 1200 black 230V 40W 4800lm 105° IP20 840

#### **Product code 17273**

Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 4800lumens Luminaire's efficiency lm79 120W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1500g In package 1pc In box 9pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years







### Ceiling lamp Koline 1200 white 230V 20W 2600lm 105° IP20 840

### **Product code 17276**

Supply voltage 230V Power factor 0.90 Output 20W Maximum output 20W/1m Luminous flux 2600lumens Luminaire's efficiency Im79 130W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1550g In package 1pc In box 9pcs Casing colour white No. of switches 30000pcs Work environment indoor use Operation temperature -20° - +40°C Certificates CE Warranty 5 years





## Ceiling lamp Koline 1200 white 230V 40W 5200lm 105° IP20 840

### **Product code 17274**

Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 5200lumens Luminaire's efficiency lm79 130W Correlated colour temperature pure white 4000K Lens angle 105 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1550g In package 1pc In box 9pcs Casing colour white No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years





# Ceiling lamp Koline K2 1200 black 230V 20W 2600lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

#### Product code 18117

Supply voltage 230V Power factor 0.90 Output 20W Maximum output 20W/1m Luminous flux 2600lumens Luminaire's efficiency Im79 130W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 110 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1500g In package 1pc In box 9pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~40°C Certificates CE Warranty 5 years










# Ceiling lamp Koline K2 1200 black 230V 40W 4800lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

#### **Product code 18119**

Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 4800lumens Luminaire's efficiency Im79 120W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 110 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1500g In package 1pc In box 9pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years







# Ceiling lamp Koline K2 1200 UGR<19 black 230V 30W 3600lm CRI80 60° IP20 3000K, 4000K, 6500K 3CCT

#### **Product code 18122**

Supply voltage 230V Power factor 0.90 Output 30W Maximum output 30W/1m Luminous flux 3600lumens Luminaire's efficiency Im79 120W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 60 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1500g In package 1pc In box 9pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years









# Ceiling lamp Koline K2 1200 UGR<19 white 230V 30W 3600lm CRI80 60° IP20 3000K, 4000K, 6500K 3CCT

### **Product code 18121**

Supply voltage 230V Power factor 0.90 Output 30W Maximum output 30W/1m Luminous flux 3600lumens Luminaire's efficiency Im79 120W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 60 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1550g In package 1pc In box 9pcs Casing colour white No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years








# Ceiling lamp Koline K2 1200 white 230V 20W 2600lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

### **Product code 18118**

Supply voltage 230V Power factor 0.90 Output 20W Maximum output 20W/1m Luminous flux 2600lumens Luminaire's efficiency Im79 130W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 110 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1550g In package 1pc In box 9pcs Casing colour white No. of switches 30000pcs Work environment indoor use Operation temperature -20° - +40°C Certificates CE Warranty 5 years





# Ceiling lamp Koline K2 1200 white 230V 40W 4800lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

### **Product code 18120**

Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 4800lumens Luminaire's efficiency Im79 120W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 110 Cri 80 Protection class IP20 Lifespan 50000h Height 72.8mm Width 50.0mm Length 1200.0mm Weight 1550g In package 1pc In box 9pcs Casing colour white No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~45°C Certificates CE Warranty 5 years






# Ceiling lamp KOLINE K2 L - extension black 230V 8W 800lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

#### Product code 19077

Supply voltage 230V Power factor 0.90 Output 8W Maximum output 8W/1m Luminous flux 800lumens Luminaire's efficiency Im79 100W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 110 Cri 80 Protection class IP20 Lifespan 50000h In package 1pc In box 5pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~40°C Certificates CE EMC LVD ROHS Warranty 5 years

The LED KOLINE K2 connector allows you to link luminaires into various shapes, offering flexible and stylish lighting solutions for any space. Builtin LEDs and a frosted diffuser provide uniform and eye-friendly illumination. A durable aluminum housing and strong polycarbonate ensure longlasting quality. The light color can be adjusted to warm, neutral, or cool tones as needed. A wide beam angle provides good coverage, and the energy-efficient light source keeps costs low. For safety, LED replacement is permitted only by qualified personnel.










# Ceiling lamp KOLINE K2 T - extension black 230V 11W 1100lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

#### **Product code 19076**

Supply voltage 230V Power factor 0.90 Output 11W Maximum output 11W/1m Luminous flux 1100lumens Luminaire's efficiency Im79 100W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 110 Cri 80 Protection class IP20 Lifespan 50000h In package 1pc In box 5pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~40°C Certificates CE EMC LVD ROHS Warranty 5 years

The LED KOLINE K2 connector allows you to link luminaires into various shapes, offering flexible and stylish lighting solutions for any space. Builtin LEDs and a frosted diffuser provide uniform and eye-friendly illumination. A durable aluminum housing and strong polycarbonate ensure longlasting quality. The light color can be adjusted to warm, neutral, or cool tones as needed. A wide beam angle provides good coverage, and the energy-efficient light source keeps costs low. For safety, LED replacement is permitted only by qualified personnel.

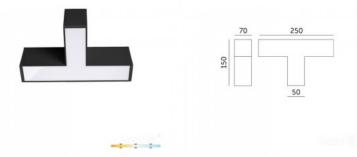



8.12.2025




### Ceiling lamp KOLINE K2 X - extension black 230V 15W 1500lm CRI80 110° IP20 3000K, 4000K, 6500K 3CCT

#### Product code 19078

Supply voltage 230V Power factor 0.90 Output 15W Maximum output 15W/1m Rated current 70mA Luminous flux 1500lumens Luminaire's efficiency Im79 100W Correlated colour temperature 3CCT 3000K, 4000K, 6500K Lens angle 110 Cri 80 Protection class IP20 Lifespan 50000h In package 1pc In box 5pcs Casing colour black No. of switches 30000pcs Work environment indoor use Operation temperature -20 ~40°C Certificates CE EMC LVD ROHS Warranty 5 years

The LED KOLINE K2 connector allows you to link luminaires into various shapes, offering flexible and stylish lighting solutions for any space. Builtin LEDs and a frosted diffuser provide uniform and eye-friendly illumination. A durable aluminum housing and strong polycarbonate ensure longlasting quality. The light color can be adjusted to warm, neutral, or cool tones as needed. A wide beam angle provides good coverage, and the energy-efficient light source keeps costs low. For safety, LED replacement is permitted only by qualified personnel.





Linear light Linda 5073 1200 MicroPrism black 230V 26W 3250lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT



18/88 8.12.2025

### Product code 19149 DALI dimmable

Supply voltage 230V Power factor 0.90 Dimmable DALI Output 26W Maximum output 26W/1m Luminous flux 3250lumens Luminaire's efficiency Im79 125W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 100 Cri 80 Ugr 18 Sdcm - macadam ellipses 6 En62471 1 Protection class IP20 Lifespan 50000h Height 73.0mm Width 50.0mm Length 1200.0mm In package 1pc Casing colour black Casing material aluminium Power supply **BOKE** Work environment indoor use Certificates CE, RoHS Warranty 3 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K neutral and clear light 3000-6500K adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.







# Linear light Linda 5073 1200 MicroPrism white 230V 26W 3250lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT

### Product code 19398 DALI dimmable

Supply voltage 230V Power factor 0.90 Dimmable DALI Output 26W Maximum output 26W/1m Luminous flux 3250lumens Luminaire's efficiency Im79 125W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 100 Cri 80 Ugr 18 Sdcm - macadam ellipses 6 En62471 1 Protection class IP20 Lifespan 50000h Height 73.0mm Width 50.0mm Length 1200.0mm In package 1pc Casing colour white Casing material aluminium Power supply **BOKE** Work environment indoor use Certificates CE, RoHS Warranty 3 years



Linear light Linda 5073 1500 MicroPrism black 230V 32W 4000lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT



20/88 8.12.2025

### Product code 19154 DALI dimmable

Supply voltage 230V Power factor 0.90 Dimmable DALI Output 32W Maximum output 32W/1m Luminous flux 4000lumens Luminaire's efficiency Im79 125W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 100 Cri 80 Ugr 18 Sdcm - macadam ellipses 6 En62471 1 Protection class IP20 Lifespan 50000h Height 73.0mm Width 50.0mm Length 1500.0mm Weight 1150g In package 1pc Casing colour black Casing material aluminium Power supply **BOKE** Work environment indoor use Certificates CE. RoHS Warranty 3 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K neutral and clear light 3000-6500K adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.







# Linear light Linda 5073 1500 MicroPrism white 230V 32W 4000lm CRI80 100° IP20 DALI 3000K, 3500K, 4000K 3CCT

### Product code 19399 DALI dimmable

Supply voltage 230V Power factor 0.90 Dimmable DALI Output 32W Maximum output 32W/1m Luminous flux 4000lumens Luminaire's efficiency Im79 125W Correlated colour temperature 3CCT 3000K, 3500K, 4000K Lens angle 100 Cri 80 Ugr 18 Sdcm - macadam ellipses 6 En62471 1 Protection class IP20 Lifespan 50000h Height 73.0mm Width 50.0mm Length 1500.0mm Weight 1150g In package 1pc Casing colour white Casing material aluminium Power supply **BOKE** Work environment indoor use Certificates CE, RoHS Warranty 3 years



# LED luminaire LSLG 1200 UGR white 230V 40W 4800lm 65° IP20 842



22/88 8.12.2025

#### **Product code 16308**

Supply voltage 230V Output 40W Maximum output 40W/1m Luminous flux 4800lumens Luminaire's efficiency Im79 120W Correlated colour temperature pure white 4200K Lens angle 65 Source of light SANAN LED Cri 80 Ugr 19 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 70.0mm Width 50.0mm Length 1200.0mm Weight 1850g Package weight 2000g In package 1pc In box 9pcs Casing colour white Casing material aluminium Polishing matt No. of switches 30000pcs Power supply **BOKE** Work environment indoor use Certificates CE Warranty 5 years

Linear workplace luminaire with low UGR value. This IP20-rated linear luminaire is an ideal choice for home or office environments, providing daylight illumination at a temperature of 4200K. The luminaire comes with a suspension kit. Illuminate your world with LED House professionals - <a href="mailto:check-out-our-project-portfolio-here!">check-out-our-project-portfolio-here!</a>




### LED luminaire PROLUMEN Barrett 1200 recessed white 230V 36W 3100lm 75° IP20 DALI 940





#### Product code 17004 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 3100lumens Luminaire's efficiency Im79 86W Correlated colour temperature pure white 4000K Lens angle 75 Cri 90 Uar 22 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour white Casing material aluminium Polishing matt Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years

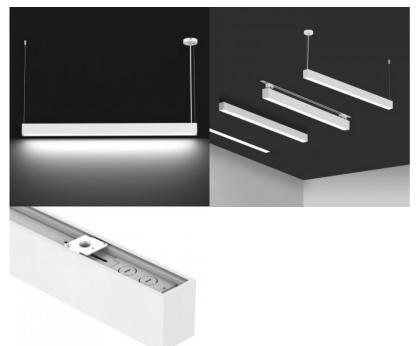






### LED luminaire PROLUMEN Barrett 1200 black 230V 36W 3350lm 110° IP20 DALI 930

#### Product code 16970 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 3350lumens Luminaire's efficiency Im79 93W Correlated colour temperature warm white 3000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour black Casing material aluminium Polishing matt Power supply **BOKE** Impact resistance IK06 Work environment indoor use Certificates CE

Linear workplace luminaire. High quality, easy to install, and longlasting (50000h)! This luminaire with IP20 protection class is an ideal choice for home or office environments. There is also a model with DALI dimmer available. This technology allows adjusting the brightness of the luminaire according to needs. This luminaire has an ideal color rendering index CRI90 for workspaces and offices. The model offers light temperatures ranging from warm white light (3000K) to cool white light (5700K). Illuminate your world with LED House professionals - check out our portfolio of projects here!!

Warranty 5 years

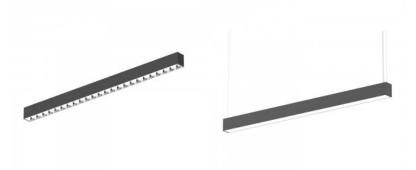






# LED luminaire PROLUMEN Barrett 1200 UP/DOWN white 230V 36W 4100lm 110° IP20 DALI 940

#### Product code 16992 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 4100lumens Luminaire's efficiency Im79 114W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour white Casing material aluminium Polishing matt Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years

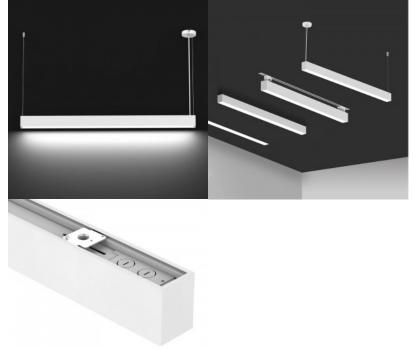





# LED luminaire PROLUMEN Barrett 1200 white 230V 36W 3100lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

### Product code 17022 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 3100lumens Luminaire's efficiency Im79 86W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1212.0mm In box 6pcs Casing colour white Casing material aluminium Polishing matt Impact resistance IK06 Work environment indoor use Certificates CE Warranty 5 years








# LED luminaire PROLUMEN Barrett 1500 black 230V 45W 4673lm CRI90 65° IP20 3000K, 4000K, 5700K 3CCT

### **Product code 16477**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 45W Maximum output 45W/1m Luminous flux 4673lumens Luminaire's efficiency Im79 104W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 65 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour black Casing material aluminium Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

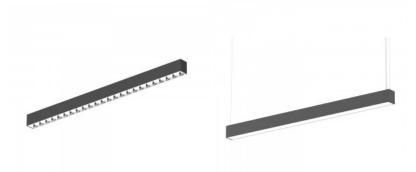






### LED luminaire PROLUMEN Barrett 1500 UGR19 UP/DOWN white 230V 60W 6000lm 65° IP20 930

### **Product code 18070**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 60W Maximum output 60W/1m Luminous flux 6000lumens Luminaire's efficiency Im79 100W Correlated colour temperature warm white 3000K Lens angle 65 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

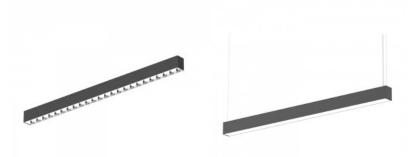






### LED luminaire PROLUMEN Barrett 1500 UP/DOWN black 230V 60W 5300lm 65° IP20 DALI 930

#### Product code 17043 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 60W Maximum output 60W/1m Luminous flux 5300lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 65 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour black Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

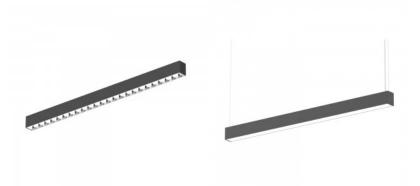






### LED luminaire PROLUMEN Barrett 1500 UP/DOWN V black 230V 60W 5400lm 65° IP20 No dim 930

### Product code 16511 No dim dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable No dim Output 60W Maximum output 60W/1m Luminous flux 5400lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Lens angle 65 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour black Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

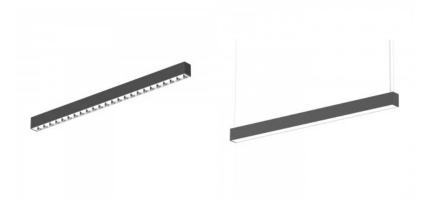





# LED luminaire PROLUMEN Barrett 1500 white 230V 45W 4573lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

### Product code 17016 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 45W Maximum output 45W/1m Luminous flux 4573lumens Luminaire's efficiency Im79 102W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 110 Cri 90 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








### LED luminaire PROLUMEN Barrett 600 black 230V 17W 1500lm 75° IP20 930

### **Product code 16672**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 17W Maximum output 17W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminium Power supply OSRAM Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

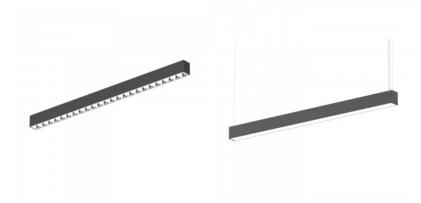






### LED luminaire PROLUMEN Barrett 600 white 230V 17W 1500lm 75° IP20 DALI 930

#### Product code 16971 DALI dimmable

**Brand PROLUMEN** 

Warranty 5 years

Supply voltage 230V Power factor 0.90 Dimmable DALI Output 17W Maximum output 17W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 88W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE

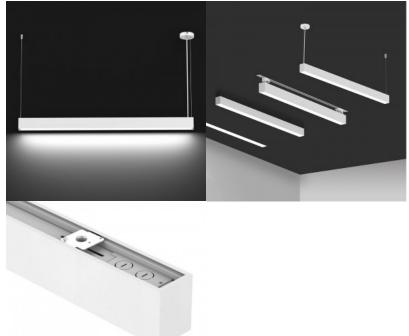





### LED luminaire PROLUMEN Barrett 600 white 230V 17W 1500lm 75° IP20 DALI 940

#### Product code 20464 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 17W Maximum output 17W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 88W Correlated colour temperature pure white 4000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








### LED luminaire PROLUMEN Barrett 600 white 230V 17W 1500lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

#### Product code 17017 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 17W Maximum output 17W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 88W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 110 Cri 90 Uar 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 76.0mm Width 57.0mm Length 602.0mm In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

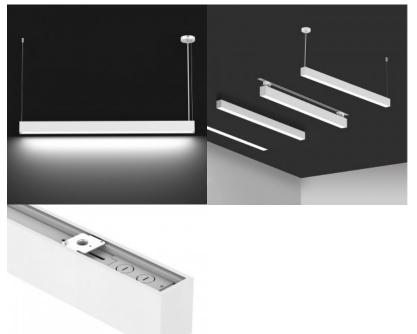







### LED luminaire PROLUMEN Barrett A 1200 white 230V 36W 3750lm 75° IP20 DALI 930

#### Product code 17368 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 3750lumens Luminaire's efficiency Im79 104W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1212.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

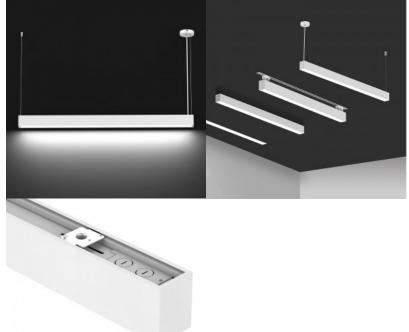






## LED luminaire PROLUMEN Barrett A 1200 white 230V 36W 3750lm 75° IP20 DALI 940

#### Product code 20462 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 3750lumens Luminaire's efficiency Im79 104W Correlated colour temperature pure white 4000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1212.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

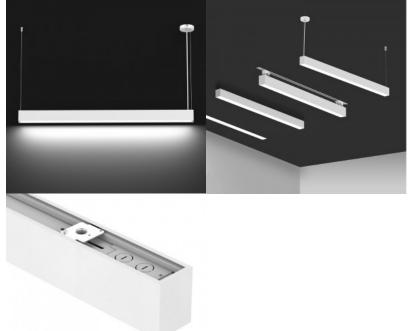



## LED luminaire PROLUMEN Barrett A 1200 white 230V 36W 3750lm 75° IP20 DALI 940

#### Product code 20463 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 3750lumens Luminaire's efficiency Im79 104W Correlated colour temperature pure white 4000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1212.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








# LED luminaire PROLUMEN Barrett A 1500 up-down black 230V 56W 6000lm CRI80 75° IP20 DALI 3000K, 4000K, 5700K 3CCT

#### Product code 19321 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 56W Maximum output 56W/1m Luminous flux 6000lumens Luminaire's efficiency Im79 107W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm In box 6pcs Casing colour black Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

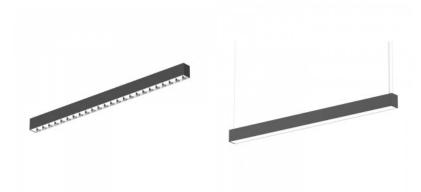





## LED luminaire PROLUMEN Barrett A 1500 white 230V 45W 3750lm 75° IP20 DALI 930

#### Product code 17369 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 45W Maximum output 45W/1m Luminous flux 3750lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 3000K Lens angle 75 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 1512.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour white Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








# LED luminaire PROLUMEN Barrett A 600 up-down black 230V 22W 1950lm CRI90 110° IP20 DALI 3000K, 4000K, 5700K 3CCT

#### Product code 17352 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 22W Maximum output 22W/1m Luminous flux 1950lumens Luminaire's efficiency Im79 89W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 110 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 76.0mm Width 57.0mm Length 602.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminium Impact resistance IK06 Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

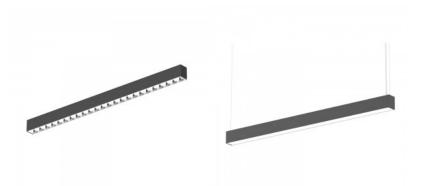





# LED luminaire PROLUMEN Bianca S1 1200 white 230V 39W 4742lm 120° IP44 840

#### **Product code 17442**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 39W Maximum output 39W/1m Luminous flux 4742lumens Luminaire's efficiency Im79 122W Correlated colour temperature pure white 4000K Lens angle 120 Source of light OSRAM LED Cri 80 Sdcm - macadam ellipses 5 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 52.0mm Width 152.0mm Length 1200.0mm Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° - +45°C Warranty 5 years

Bianca S1 linear light. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with the help of LED House professionals - check out our project portfolio here!







### LED luminaire PROLUMEN Bianca S1 1200 white 230V 39W 4742lm 120° IP44 DALI 840

#### Product code 17448 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 39W Maximum output 39W/1m Luminous flux 4742lumens Luminaire's efficiency Im79 122W Correlated colour temperature pure white 4000K Lens angle 120 Source of light OSRAM LED Cri 80 Sdcm - macadam ellipses 5 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 52.0mm Width 152.0mm Length 1200.0mm Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° - +45°C Warranty 5 years

Bianca S1 linear light. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Illuminate your world with the help of LED House professionals - check out our project portfolio here!



# LED luminaire PROLUMEN Bianca white 230V 17W 2349lm CRI80 120° IP44 DALI 3000K, 4000K, 5000K 3CCT





#### Product code 19066 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 17W Maximum output 17W/1m Luminous flux 2349lumens Luminaire's efficiency lm79 138W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 52.2mm Width 152.0mm Length 660.0mm Weight 1550g Package weight 1800g In package 1pc In box 4pcs Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° +40°C Certificates CE, D, F Warranty 5 years

High-quality, dimmable ceiling light. DALI Dim technology allows adjusting the light according to preference. 4000K LED lights provide clear and sharp illumination, perfect for lighting stores and other commercial spaces. The high color rendering index CRI90 ensures the accuracy of colors under the light beam. IP44 protection class means the luminaire can be used even in damp conditions. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!!







# Ceiling lamp PROLUMEN DB106B 1200 white 230V 20W 2200lm CRI90 120° IP44 DALI 3000K, 4000K, 5700K 3CCT

#### Product code 17353 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 20W Maximum output 20W/1m Luminous flux 2200lumens Luminaire's efficiency Im79 110W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Height 80.0mm Width 207.0mm Length 1200.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium Polishing matt Impact resistance IK08 Work environment indoor use Operation temperature -20 ~40°C Certificates CE Warranty 5 years

High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high coluor rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the PROLUMEN catalogue as well!





# Ceiling lamp PROLUMEN DB106B 1200 white 40W 4400lm CRI80 120° IP44 0-10V 3000K, 4000K, 5700K 3CCT

#### Product code 17351 0-10V dimmable

**Brand PROLUMEN** Power factor 0.90 Dimmable 0-10V Output 40W Maximum output 40W/1m Luminous flux 4400lumens Luminaire's efficiency Im79 110W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Height 80.0mm Width 208.0mm Length 1200.0mm In box 12pcs Casing colour white Casing material aluminium Polishing matt Impact resistance IK08 Work environment indoor use Certificates CE Warranty 5 years

High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high coluor rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the PROLUMEN catalogue as well!






# Ceiling lamp PROLUMEN DB106B 1500 white 58W 6500lm CRI90 120° IP44 3000K, 4000K, 5700K 3CCT

#### **Product code 18149**

**Brand PROLUMEN** Power factor 0.90 Output 58W Maximum output 58W/1m Luminous flux 6500lumens Luminaire's efficiency Im79 112W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 120 Cri 90 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Height 80.0mm Width 207.0mm Length 1500.0mm In box 12pcs Casing colour white Casing material aluminium Polishing matt Impact resistance IK08 Work environment indoor use Certificates CE Warranty 5 years

High-quality PROLUMEN ship light, possible to install both on the surface and hanging. The light temperature can be set by yourself. There are buttons on the light that allow you to choose between 3000K (warm white), 4000K (daylight), or 5700K cool white light. A high coluor rendering index CRI90 does not distort the true colours of objects under the light beam. Protection class IP44 means that the luminaire can also be used in damp conditions. If you haven't found the perfect light fixture from our product range yet, then browse through the PROLUMEN catalogue as well!





# LED luminaire PROLUMEN DB74 1500 Bianca white 230V 50W 4900lm 120° IP44 DALI 840

#### Product code 16988 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 50W Maximum output 50W/1m Luminous flux 4900lumens Luminaire's efficiency Im79 98W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP44 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 63.0mm Width 171.0mm Length 1495.0mm Weight 3520g Package weight 4150g In package 1pc In box 4pcs Casing colour white Casing material polycarbonate Polishing matt Power supply **BOKE** Work environment indoor use Operation temperature -20° +40°C Certificates CE, D, F

High-quality, dimmable ceiling light. DALI Dim technology allows adjusting the light according to preference. 4000K LED lights provide clear and sharp illumination, perfect for lighting stores and other commercial spaces. The high color rendering index CRI90 ensures the accuracy of colors under the light beam. IP44 protection class means the luminaire can be used even in damp conditions. Illuminate your world with the help of LED House professionals - check out our portfolio of projects here!!

Warranty 5 years





# Linear light PROLUMEN Delia UGR 600 black 230V 20W 2000lm CRI90 100° IP20 3000K, 4000K, 5700K 3CCT

#### **Product code 15206**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 20W Maximum output 20W/1m Luminous flux 2000lumens Luminaire's efficiency Im79 100W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 100 Cri 90 Ugr 18 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 70.0mm Width 60.0mm Length 604.0mm Weight 1150g Package weight 1650g In package 1pc In box 12pcs Casing colour black Casing material aluminium Work environment indoor use Certificates CE, RoHS Warranty 5 years

Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, the result is guaranteed to be good. Hanging cables (2 pcs) must be ordered separately. Illuminate your world with LED House professionals check out our project portfolio here!








### Linear light PROLUMEN Delia UGR19 1200 black 230V 40W 4500lm 100° IP40 DALI 840

#### Product code 15323 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 40W Maximum output 40W/1m Luminous flux 4500lumens Luminaire's efficiency Im79 113W Correlated colour temperature pure white 4000K Lens angle 100 Cri 80 Ugr 18 Lor 80 Sdcm - macadam ellipses 6 Protection class IP40 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 70.0mm Width 60.0mm Length 1204.0mm Weight 2200g Package weight 3000g In package 1pc In box 12pcs Casing colour black Casing material aluminium Work environment indoor use Certificates CE. RoHS Warranty 5 years

Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, the result is guaranteed to be good. Hanging cables (2 pcs) must be ordered separately. Illuminate your world with LED House professionals check out our project portfolio here!

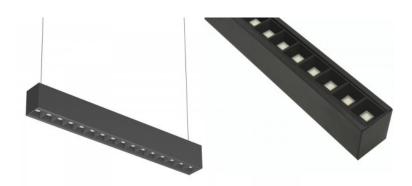





# Linear light PROLUMEN Delia UGR19 1200 black 230V 40W 4500lm CRI90 100° IP20 3000K, 4000K, 5700K 3CCT


#### Product code 15026

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 4500lumens Luminaire's efficiency lm79 113W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 100 Cri 90 Uar 18 Lor 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 70.0mm Width 60.0mm Length 1204.0mm Weight 2200g Package weight 3000g In package 1pc In box 12pcs Casing colour black Casing material aluminium Work environment indoor use Certificates CE, RoHS Warranty 5 years

Black body and square design. Elegant and functional, this minimalist pendant light is an excellent choice for those who appreciate simplicity and modernity in their home decor. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). This luminaire has an ideal color rendering index for workspaces and offices. On some models, the light color is changeable: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, the result is guaranteed to be good. Hanging cables (2 pcs) must be ordered separately. Illuminate your world with LED House professionals check out our project portfolio here!









# Linear light PROLUMEN Delia UGR19 1200 white 230V 40W 4500lm CRI80 100° IP20 3000K, 4000K, 5700K 3CCT

#### Product code 15535

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 4500lumens Luminaire's efficiency lm79 113W Correlated colour temperature 3CCT 3000K, 4000K, 5700K Lens angle 100 Cri 80 Uar 18 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L80B50 @25°C 50.000h Height 70.0mm Width 60.0mm Length 1204.0mm Weight 2200g Package weight 3000g In package 1pc In box 12pcs Casing colour white Casing material aluminium Work environment indoor use Certificates CE, RoHS

Warranty 5 years

White body and square design. Elegant and functional, this minimalist luminaire is an excellent choice for those who appreciate simplicity and modernity in their home decor. This luminaire can be installed as both a pendant light and surface-mounted. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Some models have adjustable light color: 3000K, 4000K, 6000K. The luminaire can be successfully installed both surfacemounted and suspended. In both cases, good results are guaranteed. Suspension cables (2 pcs) must be ordered separately. Illuminate your world with the help of LED House professionals - check out our project portfolio here!





8.12.2025



# LED luminaire PROLUMEN Delilah 0,6m white 230V 15W 1400lm $110^{\circ}$ IP20 940



#### Product code 17051

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 15W Maximum output 15W/1m Luminous flux 1400lumens Luminaire's efficiency Im79 93W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 615.0mm Installation opening diameter 607x54mm In box 12pcs Casing colour white Casing material aluminium Polishing matt Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







8.12.2025



# LED luminaire PROLUMEN Delilah 1,2m white 230V 30W 3100lm 110° IP20 940



#### Product code 17052

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 30W Maximum output 30W/1m Luminous flux 3100lumens Luminaire's efficiency Im79 103W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 1208.0mm Installation opening diameter 1201x54mm In box 6pcs Casing colour white Casing material aluminium Polishing matt Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years







8.12.2025



# LED luminaire PROLUMEN Delilah 1,5m white 230V 37W 3800lm 110° IP20 940



#### Product code 17053

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 37W Maximum output 37W/1m Luminous flux 3800lumens Luminaire's efficiency Im79 103W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 1505.0mm Installation opening diameter 1498x54mm In box 6pcs Casing colour white Casing material aluminium Polishing matt Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years









# LED luminaire PROLUMEN Delilah 2,4m white 230V 60W 6200lm $110^{\circ}$ IP20 940



#### Product code 16407

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Output 60W Maximum output 60W/1m Luminous flux 6200lumens Luminaire's efficiency Im79 103W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 2395.0mm Installation opening diameter 2388x54mm In box 6pcs Casing colour white Casing material aluminium Polishing matt Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE, RoHS Warranty 5 years









## LED luminaire PROLUMEN Delilah L-corner 150+150 white 230V 7.5W 650lm 110° IP20 940

#### Product code 17054

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 7.5W Maximum output 7.5W/1m Luminous flux 650lumens Luminaire's efficiency lm79 87W Correlated colour temperature pure white 4000K Lens angle 110 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 150.0mm Length 150.0mm In box 24pcs Casing colour white Casing material aluminium Polishing matt Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE. RoHS Warranty 5 years







## Ceiling lamp PROLUMEN Delilah white 230V 45W 4300lm 45° IP20 940

#### Product code 16793

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 45W Maximum output 45W/1m Luminous flux 4300lumens Luminaire's efficiency Im79 96W Correlated colour temperature pure white 4000K Lens angle 45 Cri 90 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 29.0mm Width 62.0mm Length 1802.0mm Package weight 2683g In package 1pc In box 6pcs Casing colour white Casing material aluminium Work environment indoor use Certificates CE. RoHS Warranty 5 years







## LED luminaire PROLUMEN Dennis 1200 white 230V 40W 4400lm 120° IP20 840

#### **Product code 15353**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 4400lumens Luminaire's efficiency Im79 110W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 64.0mm Width 71.0mm Length 1203.0mm In box 12pcs Casing colour white Impact resistance IK08 Work environment indoor use Certificates CE Warranty 5 years

A classic luminaire for offices, schools, hotels, corridors, etc. Its minimalist design blends seamlessly into various interiors, whether at home, in the office, or in a business environment. Illuminate your world with LED House professionals - check out our project portfolio here!







### LED luminaire PROLUMEN Dennis 1500 white 230V 58W 5850lm 120° IP20 840

#### Product code 15628

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 58W Maximum output 58W/1m Luminous flux 5850lumens Luminaire's efficiency Im79 101W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 64.0mm Width 71.0mm Length 1503.0mm In box 12pcs Casing colour white Impact resistance IK08 Work environment indoor use Certificates CE Warranty 5 years

A classic luminaire for offices, schools, hotels, corridors, etc. Its minimalist design blends seamlessly into various interiors, whether at home, in the office, or in a business environment. Illuminate your world with LED House professionals - check out our project portfolio here!



# LED luminaire PROLUMEN EMPIRIO B025S 1500 white 230V 75W 12000lm 90° IP40 840



#### **Product code 15018**

Brand **PROLUMEN** Supply voltage 230V Output 75W Maximum output 75W/1m Luminous flux 12000lumens Luminaire's efficiency Im79 160W Correlated colour temperature pure white 4000K Lens angle 90 Cri 80 Sdcm - macadam ellipses 3 Protection class IP40 Lifespan 50000h Llmf tm21 L80B10 @25°C 80.000h Height 72.0mm Width 65.0mm Length 1460.0mm Casing colour white Casing material aluminium Power supply OSRAM Work environment indoor use Operation temperature -20°C - +45°C Certificates CE, RoHS Warranty 5 years

A ceiling light fixture with uniform light distribution that can be installed either flush-mounted or suspended from the ceiling. An ideal light fixture for above desks! 4000K LED lights provide clear and sharp light, perfect for illuminating stores and other commercial spaces. Option to order linear lights with different lenses and power levels: 30°, 60°, 90°, 120°, 2 x 25°. Improve your everyday lighting quality and choose a top-notch lighting solution from the LED house product range! Illuminate your world with LED House professionals - check out our project portfolio here!









## Ceiling lamp PROLUMEN Lidya 1100 up-down white 230V 45W 4700lm CRI80 50° IP20 3000K-4000K 2CCT

#### **Product code 16791**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 45W Maximum output 45W/1m Luminous flux 4700lumens Luminaire's efficiency Im79 104W Correlated colour temperature 2CCT 3000K-4000K Lens angle 50 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 74.0mm Width 236.0mm Length 1172.0mm Package weight 4800g In package 1pc In box 2pcs Casing colour white Casing material aluminium Work environment indoor use Operation temperature -20° - +40°C Certificates CE, RoHS Warranty 5 years

Up-down light fixture, ideal for offices and other workspaces. Adjustable light color temperature: 3000K, 4000K. This fixture is suitable for indoor use only, with IP20 protection rating. The light fixture has an ideal color rendering index CRI90 for workspaces and offices. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED House product range!







## Ceiling lamp PROLUMEN Lidya 1500 up-down white 230V 60W 5400lm CRI90 50° IP20 3000K-4000K 2CCT

#### **Product code 16792**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 60W Maximum output 60W/1m Luminous flux 5400lumens Luminaire's efficiency Im79 90W Correlated colour temperature 2CCT 3000K-4000K Lens angle 50 Cri 90 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 74.0mm Width 236.0mm Length 1552.0mm Package weight 5900g In package 1pc In box 2pcs Casing colour white Casing material aluminium Work environment indoor use Certificates CE, RoHS Warranty 5 years

Up-down light fixture, ideal for offices and other workspaces. Adjustable light color temperature: 3000K, 4000K. This fixture is suitable for indoor use only, with IP20 protection rating. The light fixture has an ideal color rendering index CRI90 for workspaces and offices. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED House product range!








# Linear light PROLUMEN Linda 66D 1200 with downward light distribution black 230V 28W 3600lm 75° IP20 DALI 830

#### Product code 17751 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 28W Maximum output 28W/1m Luminous flux 3600lumens Luminaire's efficiency Im79 129W Correlated colour temperature warm white 3000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 2750g In box 6pcs Casing colour black Casing material aluminium Polishing matt Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







# Linear light PROLUMEN Linda 66D 1200 with downward light distribution black 230V 28W 3800lm 75° IP20 DALI 840

#### Product code 17750 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 28W Maximum output 28W/1m Luminous flux 3800lumens Luminaire's efficiency Im79 136W Correlated colour temperature pure white 4000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 2750g In box 6pcs Casing colour black Casing material aluminium Polishing matt Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







# Linear light PROLUMEN Linda 66D 1200 with light distribution up and down + suspension wires. black 230V 40W 5550lm 75° IP20 DALI / PUSH 840

#### Product code 17741 DALI / PUSH dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI / PUSH Output 40W Maximum output 40W/1m Luminous flux 5550lumens Luminaire's efficiency Im79 139W Correlated colour temperature pure white 4000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years








# Linear light PROLUMEN Linda 66D 1200 with light distribution upwards and downwards + suspension wires. black 230V 40W 5270lm 75° IP20 DALI 8

#### Product code 17752 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 40W Maximum output 40W/1m Luminous flux 5270lumens Luminaire's efficiency Im79 132W Correlated colour temperature warm white 3000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Height 75.0mm Width 56.0mm Length 1204.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







# Linear light PROLUMEN Linda 66D 1500 with downward light distribution black 230V 35W 4600lm 75° IP20 DALI 830

#### Product code 19315 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 35W Maximum output 35W/1m Luminous flux 4600lumens Luminaire's efficiency lm79 131W Correlated colour temperature warm white 3000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 6 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 75.0mm Width 56.0mm Length 1504.0mm In box 6pcs Casing colour black Casing material aluminium Polishing matt Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years







# Linear light PROLUMEN Linda 66D 1500 with light distribution upwards and downwards, UGR<19 + suspension wires. black 230V 49W 6500Im 75° IP2

#### Product code 18163 DALI dimmable

Brand **PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 49W Maximum output 49W/1m Luminous flux 6500lumens Luminaire's efficiency Im79 133W Correlated colour temperature pure white 4000K Lens angle 75 Cri 80 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 75.0mm Width 56.0mm Length 1504.0mm Weight 1700g Package weight 2133g In box 6pcs Casing colour black Casing material aluminium Power supply **BOKE** Impact resistance IK06 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K neutral and clear light 3000-6500K adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.







### Linear light PROLUMEN Linda C27 1200 with downward light distribution black 230V 30W 4200lm 100° IP20 DALI 840

#### Product code 17876 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.95 Dimmable DALI Output 30W Maximum output 30W/1m Luminous flux 4200lumens Luminaire's efficiency Im79 140W Correlated colour temperature pure white 4000K Lens angle 100 Cri 80 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 160000h Llmf tm21 L70B50 @25°C 160.000h Height 55.0mm Width 50.0mm Length 1120.0mm Weight 1940g In box 6pcs Casing colour black Casing material aluminium Polishing matt Power supply TRIDONIC Impact resistance IK08 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K neutral and clear light 3000-6500K adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.







### Linear light PROLUMEN Linda C27 1200 white 230V 30W 3900lm 100° IP20 830

#### Product code 17909

**Brand PROLUMEN** Supply voltage 230V Power factor 0.95 Output 30W Maximum output 30W/1m Luminous flux 3900lumens Luminaire's efficiency Im79 130W Correlated colour temperature warm white 3000K Lens angle 100 Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 160000h Llmf tm21 L70B50 @25°C 160.000h Height 55.0mm Width 50.0mm Length 1120.0mm Weight 1940g In box 6pcs Casing colour white Casing material aluminium Polishing matt Power supply **TRIDONIC** Impact resistance IK08 Work environment indoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years

Prolumen Linda is a compact linear luminaire with excellent light distribution, featuring a high-quality microprismatic PMMA plastic diffuser. This luminaire is designed to provide superior lighting in any environment, perfectly fitting into both modern and classic interiors. Light tone options: 3000K - warm and cozy light 4000K neutral and clear light 3000-6500K adjustable light that allows you to choose the right tone according to your mood and needs Prolumen Linda luminaires are designed to be interconnected, creating a seamless and long lighting line that highlights the best features of your space. Thanks to its excellent efficiency, Prolumen Linda is an energy-efficient and environmentally friendly choice, while still delivering powerful and uniform light output.







# LED luminaire PROLUMEN Meena 1200 white 230V 40W 5600lm CRI80 120° IP44 3000K, 4000K, 5000K 3CCT

#### **Product code 17711**

**Brand PROLUMEN** Supply voltage 230V Output 40W Maximum output 40W/1m Luminous flux 5600lumens Luminaire's efficiency Im79 140W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP44 Llmf tm21 L90B10 @25°C 50.000h Height 55.0mm Width 140.0mm Length 1198.0mm In package 1pc Casing colour white Casing material aluminium + plastic Power supply OSRAM Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

PROLUMEN Meena <u>linear luminaire</u> with adjustable power levels of 22W/30W/35W/40W. A high-quality linear light suitable for installation in parking garages, large closets, corridors, and warehouses. The Meena luminaire is designed to be very easy to install and maintain. The housing can be opened with a button press, and the suspension cables are adjustable during installation.





8.12.2025



# LED luminaire PROLUMEN Meena 1500 230V 60W 8400lm CRI80 120° IP44 3000K, 4000K, 5000K 3CCT

#### **Product code 17456**

**Brand PROLUMEN** Supply voltage 230V Output 60W Maximum output 60W/1m Luminous flux 8400lumens Luminaire's efficiency Im79 140W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP44 Lifespan 100000h Height 55.0mm Width 140.0mm Length 1500.0mm In package 1pc Casing material aluminium + plastic Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

PROLUMEN Meena <u>linear luminaire</u> with adjustable power levels of 22W/30W/35W/40W. A high-quality linear light suitable for installation in parking garages, large closets, corridors, and warehouses. The Meena luminaire is designed to be very easy to install and maintain. The housing can be opened with a button press, and the suspension cables are adjustable during installation.



LED luminaire PROLUMEN Miina 1200 white 230V 40W 6400lm CRI80 120° IP65 3000K, 4000K, 5000K 3CCT





#### Product code 17753

**Brand PROLUMEN** Supply voltage 230V Output 40W Maximum output 40W/1m Luminous flux 6400lumens Luminaire's efficiency Im79 160W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP65 Height 54.0mm Width 102.0mm Length 1219.0mm In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Power supply **BOKE** Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

PROLUMEN Miina linear light fixture with adjustable color temperature and power levels. A high-quality linear fixture suitable for installation in parking garages, large closets, corridors, and warehouses. The opal glass provides a very wide beam angle, evenly covering a larger area. The Miina fixture is designed for easy installation and maintenance. The color temperature and power are adjustable via a button on the fixture. A motion sensor can also be added to the Miina fixture. Adding the sensor is easy thanks to the openable end cap, where the sensor wires can be connected. With the motion sensor, LED lights become even more energyefficient and convenient, as the step of turning the light on and off with a switch is eliminated, and the fixture turns off automatically. Trust your lighting project to the experienced team of LED House - let's bring your vision to life!







## LED luminaire PROLUMEN RALTEX 1200 white 230V 50W 8000lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

#### Product code 18263 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 50W Maximum output 50W/1m Luminous flux 8000lumens Luminaire's efficiency Im79 160W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 100000h Llmf tm21 L80B10 @25°C 100.000h Height 69.0mm Width 74.0mm Length 1200.0mm Weight 1500g In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Power supply **BOKE** Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.









# LED luminaire PROLUMEN RALTEX 1500 white 230V 63W 10080lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT


#### Product code 18264 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 63W Maximum output 63W/1m Luminous flux 10080lumens Luminaire's efficiency Im79 160W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 100000h Llmf tm21 L80B10 @25°C 100.000h Height 69.0mm Width 74.0mm Length 1500.0mm Weight 1900g In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Power supply **BOKE** Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.









## LED luminaire PROLUMEN RALTEX 600 white 230V 30W 4800lm CRI80 120° IP66 DALI 3000K, 4000K, 5000K 3CCT

#### Product code 18262 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 30W Maximum output 30W/1m Luminous flux 4800lumens Luminaire's efficiency Im79 160W Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 100000h Llmf tm21 L80B10 @25°C 100.000h Height 69.0mm Width 74.0mm Length 600.0mm Weight 1130g In package 1pc In box 6pcs Casing colour white Casing material aluminium + plastic Power supply **BOKE** Operation temperature -20° - +45°C Certificates CE, RoHS Warranty 5 years

This durable industrial luminaire is designed for demanding environments where reliability and precise lighting control are essential. Equipped with DALI control, it integrates perfectly into smart lighting systems, allowing brightness adjustment, energy savings, and improved working conditions. With a sealed and rugged housing, the luminaire withstands dust, moisture, and heavy-duty use. It is ideal for production facilities, logistics centers, warehouses, and other industrial spaces where consistent and reliable illumination is required. Ceiling-mounted and suitable for continuous installation, it provides an efficient lighting solution with low maintenance and long service life — an excellent choice for professional applications.









### Linear light PROLUMEN Retro Force 1500 white 230V 75W 12480lm 120° IP54 840

#### **Product code 17675**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Output 75W Maximum output 75W/1m Luminous flux 12480lumens Luminaire's efficiency Im79 166W Correlated colour temperature pure white 4000K Lens angle 120 Source of light **SAMSUNG LED** Cri 80 Sdcm - macadam ellipses 3 Protection class IP54 Lifespan 100000h Llmf tm21 L80B10 @25°C 100.000h Height 64.8mm Width 107.0mm Length 1460.0mm In package 1pc Casing colour white Power supply **BOKE** Impact resistance IK10 Work environment indoor use Certificates CE, RoHS Warranty 5 years

PROLUMEN Retro Force industrial luminaire. These LED luminaires are equipped with high-quality components and provide excellent lighting for indoor use. The G-Force luminaire has adjustable power strength, allowing users to customize the brightness themselves. 38W/48W/58W/68W/75W Also available with DALI dimming technology, which allows users to adjust the brightness of the light according to their needs.







### Linear light PROLUMEN Retro Force 1500 white 230V 75W 12480lm 120° IP54 DALI 840

#### Product code 17443 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 75W Maximum output 75W/1m Luminous flux 12480lumens Luminaire's efficiency Im79 166W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP54 Lifespan 100000h Llmf tm21 L80B10 @25°C 100.000h Height 64.8mm Width 107.0mm Length 1460.0mm In package 1pc Casing colour white Power supply **BOKE** Impact resistance IK10 Work environment indoor use Certificates CE, RoHS Warranty 5 years

PROLUMEN Retro Force industrial luminaire. These LED luminaires are equipped with high-quality components and provide excellent lighting for indoor use. The G-Force luminaire has adjustable power strength, allowing users to customize the brightness themselves. 38W/48W/58W/68W/75W Also available with DALI dimming technology, which allows users to adjust the brightness of the light according to their needs.



### Linear light PROLUMEN RetroFit white 230V 30-76W 14000lm





### CRI80 90° IP20 3000K, 4000K, 5000K 3CCT

#### Product code 19950

**Brand PROLUMEN** Supply voltage 230V Power factor 0.95 Output 30-76W Maximum output 76W/1m Luminous flux 14000lumens Correlated colour temperature 3CCT 3000K, 4000K, 5000K Lens angle 90 Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 80000h Llmf tm21 L80B10 @25°C 80.000h Height 27.5mm Width 74.0mm Length 1458.0mm In package 1pc Casing colour white Power supply **LIFUD** Impact resistance IK06 Work environment indoor use Certificates CE, RoHS Warranty 5 years

The PROLUMEN RetroFit light is an innovative solution that allows for easy and efficient replacement of trunk lights, including models from well-known brands like Zombotel, Veko, Trilux, and Philips, without needing to replace the entire trunk. Easy Installation: The light is designed for simple installation into existing light fixtures, saving time and costs. Energy Efficiency: The PROLUMEN RetroFit light uses the latest LED technology, ensuring energy efficiency and a long service life, reducing ongoing maintenance costs. Customizability: You can choose from different color temperatures to suit the lighting in various spaces—from work environments to retail areas. Quality Guarantee: The light is made from high-quality materials, ensuring durability and reliable performance. Customized Lighting Solutions: The RetroFit light allows for the creation of various lighting solutions tailored to your specific needs and preferences. The PROLUMEN RetroFit light is an ideal choice for those seeking modern and efficient lighting that fits existing structures and provides quality illumination without additional costs.








# Ceiling lamp PROLUMEN SmartGlow Linear 1200 black 230V 36W 4000lm CRI90 100x50° IP20 DIMMABLE 3000-6500K WARM TO COLD

### Product code 17730 DIMMABLE dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DIMMABLE Output 36W Maximum output 36W/1m Luminous flux 4000lumens Luminaire's efficiency Im79 111W Correlated colour temperature WARM TO COLD 3000K-6500K Lens angle 100x50 Cri 90 Ugr 6 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 85.0mm Width 65.0mm Length 1200.0mm In package 1pc Casing colour black Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -10 - +30°C Certificates CE Warranty 5 years

Ergonomic office light with adjustable color temperature, featuring an aesthetic and compact design that fits into any modern office. SmartGlow illuminates both the desk and the room - the light beam shines both downwards and upwards. The upwarddirected light makes the room feel more spacious. The luminaire has an exceptionally good UGR value, meaning the light beam is not uncomfortable for the eyes and glare is minimal. If you want to make your space even more impressive, it is possible to order this luminaire in a connectable version, allowing the linear ceiling light to extend throughout the entire room. In addition to its good looks, SmartGlow is easy to install and control thanks to its patented lockable plug. It can be mounted suspended, surfacemounted, or recessed. As a bonus, it features HCL intelligent control with Casambi, presence, and daylight sensors. Contact our sales team, and we will plan a top-notch lighting solution for your spaces!









### Ceiling lamp PROLUMEN SmartGlow Linear 1500 black 230V 36W 4000lm CRI90 50° IP20 DALI 3000-6500K WARM TO COLD

#### Product code 17772 DALI dimmable

**Brand PROLUMEN** Supply voltage 230V Power factor 0.90 Dimmable DALI Output 36W Maximum output 36W/1m Luminous flux 4000lumens Luminaire's efficiency Im79 111W Correlated colour temperature WARM TO COLD 3000K-6500K Lens angle 50 Cri 90 Ugr 6 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 85.0mm Width 65.0mm Length 1550.0mm In package 1pc Casing colour black Casing material aluminium Power supply **BOKE** Work environment indoor use Operation temperature -10 - +30°C Certificates CE Warranty 5 years

Ergonomic office light with adjustable color temperature, featuring an aesthetic and compact design that fits into any modern office. SmartGlow illuminates both the desk and the room - the light beam shines both downwards and upwards. The upwarddirected light makes the room feel more spacious. The luminaire has an exceptionally good UGR value, meaning the light beam is not uncomfortable for the eyes and glare is minimal. If you want to make your space even more impressive, it is possible to order this luminaire in a connectable version, allowing the linear ceiling light to extend throughout the entire room. In addition to its good looks, SmartGlow is easy to install and control thanks to its patented lockable plug. It can be mounted suspended, surfacemounted, or recessed. As a bonus, it features HCL intelligent control with Casambi, presence, and daylight sensors. Contact our sales team, and we will plan a top-notch lighting solution for your spaces!









### LED luminaire PROLUMEN Zennor 1200 frame white 230V IP20

#### **Product code 17710**

**Brand PROLUMEN** Supply voltage 230V Power factor 0.95 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 54000h Llmf tm21 L90B50 @25°C 50.000h Height 80.0mm Width 46.0mm Length 1182.0mm In package 1pc Casing colour white Casing material aluminium Power supply **BOKE** Operation temperature -20° - +45°C Certificates TUV ENEC, CB, CE, VDE, **ROHS** Warranty 5 years

Zennor linear system allows customization of lighting according to specific requirements and room characteristics. The IP20 protection class ensures durability against dust and small amounts of liquid, making them suitable for various indoor spaces, such as offices, shopping malls, or homes. Illuminate your world with LED House professionals - check out our project portfolio here!







### LED luminaire PROLUMEN Zennor 1200 module black 50W 20° IP20 840

#### **Product code 17393**

**Brand PROLUMEN** Output 50W Maximum output 50W/1m Correlated colour temperature pure white 4000K Lens angle 20 Cri 80 Ugr 19 Sdcm - macadam ellipses 3 Protection class IP20 Llmf tm21 L80B10 @25°C 50.000h Length 1164.0mm Casing colour black No. of switches 50000pcs Impact resistance IK02 Work environment indoor use



Zennor is an LED modular light fixture, where different lengths can be used to achieve different power and light output. LED module requires a separate power supply unit or housing with built-in power supply. Illuminate your world with LED House professionals - check out our project portfolio here!

### Accessory Quick straight line splicing accessories silver

#### **Product code 20461**

En62471 1 In package 1pc Casing colour silver Casing material aluminium Warranty 3 years

