

## Signal amplifier 3x4A 12-24V 288W IP20

### Product code 12669

Supply voltage 12-24V  
Output 288W  
Maximum output 288W/1m  
Rated current 12000mA  
Protection class IP20  
Height 24.0mm  
Width 64.0mm  
Length 105.0mm  
Weight 100 g  
Casing material aluminium  
Work environment indoor use  
Certificates CE



## Receiver LTECH F4-3A 12A 5-24V

### Product code 14039

Brand LTECH  
Supply voltage 5-24V  
Maximum output 288W/1m  
Rated current 12000mA  
Height 20.0mm  
Width 33.0mm  
Length 125.0mm  
Weight 60 g  
Operation temperature -30°C~55°C  
Warranty 5 years



5V 60W 12V 144W 24V 288W

## Receiver LTECH F4-5A 20A 5-24V

### Product code 14038

---

Brand LTECH  
Supply voltage 5-24V  
Rated current 20000mA  
Height 30.0mm  
Width 44.0mm  
Length 175.0mm  
Weight 150 g  
Work environment indoor use  
Operation temperature -30°C~55°C  
Certificates CE, RoHS  
Warranty 3 years



5V 100W 12V 240W 24V 480W

## Receiver LTECH LT M4 4x5A 5-24V 480W

### Product code 13702

---

Brand LTECH  
Supply voltage 5-24V  
Output 480W  
Maximum output 480W/1m  
Rated current 20000mA  
Height 30.0mm  
Width 44.0mm  
Length 175.0mm  
Weight 125 g  
Operation temperature -30°C~55°C  
Certificates CE, RoHS  
Warranty 3 years



## Receiver SKYDANCE 12-24V DC 6CH CV0 Junction box 12-24V IP20

**Product code 17789**

Brand [SKYDANCE](#)

Supply voltage 12-24V

Output voltage 24V

Maximum output 60W/1m

Rated current 2500mA

Protection class IP20

Lifespan 50000h

Height 18.0mm

Width 55.5mm

Length 54.0mm

In package 1pc

Work environment indoor use

Operation temperature -30° - +45°C

Certificates CE, RoHS

Warranty 5 years



## Receiver SKYDANCE DA1DT6 1x15A 12-24V IP20 DALI

**Product code 16983 DALI dimmable**

Brand [SKYDANCE](#)

Supply voltage 12-24V

Dimmable DALI

Output voltage 12-24V

Maximum output 360W/1m

Rated current 15000mA

Protection class IP20

Height 27.0mm

Width 45.0mm

Length 175.0mm

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Receiver SKYDANCE DA4-M DT6/DT8 4x5A 12-24V IP20 DALI

**Product code 16401 DALI dimmable**

Brand [SKYDANCE](#)

Supply voltage 12-24V

Dimmable DALI

Output voltage 12-24V

Maximum output 480W/1m

Rated current 20000mA

Protection class IP20

Height 27.0mm

Width 45.0mm

Length 175.0mm

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Controller SKYDANCE DMX512 SPI Controller DS 5-24V IP20 RF

**Product code 15833 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 5-24V

Dimmable RF

Protection class IP20

Height 67.0mm

Width 48.0mm

Length 110.0mm

Weight 98 g

Package weight 129 g

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Controller SKYDANCE DMX512 SPI Controller DS-L 5-24V RF

**Product code 15830 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 5-24V

Dimmable RF

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -30~55°C

Battery CR2032

Certificates CE

Warranty 5 years



## Controller SKYDANCE Dual SPI Controller ES-D 5-24V IP20

**Product code 17748**

Brand [SKYDANCE](#)

Supply voltage 5-24V

Protection class IP20

Height 23.0mm

Width 50.0mm

Length 170.0mm

In package 1pc

Work environment indoor use

Operation temperature -30° - +55°C

Certificates CE

Warranty 5 years



## Controller SKYDANCE Dual SPI Controller ES-D(WT) 5-24V IP20

**Product code 18254**

Brand [SKYDANCE](#)

Supply voltage 5-24V

Protection class IP20

Height 23.0mm

Width 50.0mm

Length 170.0mm

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -30° - +55°C

Certificates CE

Warranty 5 years



## Receiver SKYDANCE S3 3x1A RGB 230V IP20 RF

**Product code 16647 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable RF

Output voltage 230V

Maximum output 720W/1m

Rated current 3000mA

Protection class IP20

Height 27.0mm

Width 45.0mm

Length 175.0mm

Weight 117 g

Package weight 136 g

Casing material plastic

Work environment indoor use

Operation temperature -30° - +55°C

Certificates CE

Warranty 5 years



## Receiver SKYDANCE S3(WT) 3x1A RGB RF/Wifi 230V IP20 RF / WIFI

**Product code 17781 RF / WIFI dimmable**

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable RF / WIFI

Output voltage 230V

Maximum output 720W/1m

Rated current 3200mA

Protection class IP20

Height 27.0mm

Width 45.0mm

Length 175.0mm

Work environment indoor use

Operation temperature -30° - +55°C

Certificates CE, RoHS, emc, LVD, RED

Warranty 5 years



## Receiver SKYDANCE V1 8A 5-36V IP20 PUSH / RF

**Product code 15762 PUSH / RF**  
dimnable

Brand [SKYDANCE](#)

Supply voltage 5-36V

Dimmable PUSH / RF

Output voltage 5-36V

Maximum output 288W/1m

Rated current 8000mA

Protection class IP20

Height 18.0mm

Width 33.0mm

Length 97.0mm


Casing material plastic

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years

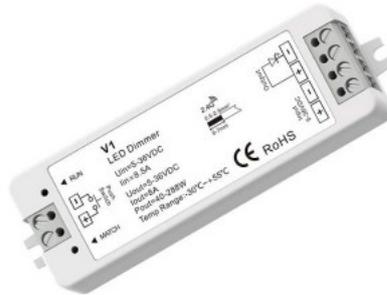

5-36VDC 8A\*1CH 5V-40W 12V-96W  
24V-192W 36V-288W

## Receiver SKYDANCE V1-WPM 5A 12-24V IP67 RF

**Product code 22979 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 12-24V

Dimmable RF

Output voltage 12-24V

Maximum output 120W/1m

Rated current 5000mA

Protection class IP67

Height 29.0mm

Width 35.0mm

Length 87.0mm

Casing material plastic

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Receiver SKYDANCE V2 10A CCT 12-24V IP20 RF

**Product code 16361 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 12-24V

Dimmable RF

Output voltage 12-24V

Maximum output 240W/1m

Rated current 10000mA

Protection class IP20

Height 18.0mm

Width 33.0mm

Length 97.0mm

Weight 38 g

Package weight 49 g

In package 1pc

Casing material plastic

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



## Receiver SKYDANCE V3 3x4A RGB 12-24V IP20 RF

**Product code 16646 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 12-24V

Dimmable RF

Output voltage 12-24V

Maximum output 288W/1m

Rated current 12000mA

Protection class IP20

Height 18.0mm

Width 33.0mm

Length 97.0mm

Weight 38 g

Package weight 49 g

Casing material plastic

Work environment indoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



RGB controller 12-24VDC 4A\*3CH

12V-144W 24V-288

## Receiver SKYDANCE V4-WPS 4x5A 12-36V IP67 RF

**Product code 16859 RF dimmable**

Brand [SKYDANCE](#)

Supply voltage 12-36V

Dimmable RF

Output voltage 12-36V

Maximum output 480W/1m

Rated current 20000mA

Protection class IP67

Height 34.0mm

Width 57.0mm

Length 153.0mm

Package weight 492 g

Casing material plastic

Work environment indoor / outdoor use

Operation temperature -30~55°C

Certificates CE

Warranty 5 years



RF controller for controlling various

LED strips, supports

DIM/RGB/RGBW/CCT remotes.

12-36VDC 5A\*4CH 12V-240W

24V-480W 36V-720W

## Controller SKYDANCE WiFi & RF Dimmer DA-ML(WT) 230V IP20 DALI

---

**Product code 18046 DALI dimmable**

---

Brand [SKYDANCE](#)

Supply voltage 230V

Dimmable DALI

Rated current 150mA

Protection class IP20

Height 25.0mm

Width 38.0mm

Length 140.0mm

Weight 85 g

Work environment indoor use

Operation temperature -20~55°C

Certificates CE

Warranty 5 years

This smart lighting control device allows you to control DALI lights via WiFi and RF. It can also be used as a DALI system power supply. The device connects to the Tuya Smart app, enabling you to turn lights on and off, change colors, adjust brightness and color temperature, set timers, and even sync lighting with music. It supports various lighting modes, including smooth and jump transitions, and is compatible with all DALI-standard products. Additionally, it can be controlled via an RF remote or a regular switch, allowing you to turn lights on/off and adjust brightness.



## Receiver SKYDANCE WT-SPI 8A for pixel LED 5-24V IP20 RF / WIFI

**Product code 17191 RF / WIFI**  
**dimnable**

Brand [SKYDANCE](#)  
Supply voltage 5-24V  
Dimmable RF / WIFI  
Output voltage 5-24V  
Maximum output 192W/1m  
Rated current 8000mA  
Protection class IP20  
Height 27.0mm  
Width 43.0mm  
Length 120.0mm  
Package weight 66 g  
Work environment indoor use  
Operation temperature -30~55°C  
Certificates CE  
Warranty 5 years



WIFI/RF LED digital strip controller.  
Compatible with the Tuya APP.

## Receiver SKYDANCE WT1 2x5A 12-24V IP20 RF / WIFI

**Product code 19690 RF / WIFI**  
**dimnable**

Brand [SKYDANCE](#)  
Supply voltage 12-24V  
Dimmable RF / WIFI  
Output voltage 12-24V  
Maximum output 360W/1m  
Rated current 10000mA  
Protection class IP20  
Height 20.0mm  
Width 38.0mm  
Length 114.0mm  
Casing material plastic  
Work environment indoor use  
Operation temperature -30~55°C  
Certificates CE  
Warranty 5 years



## Receiver SKYDANCE WT5 5x3A 12-24V IP20 RF / WIFI

**Product code 15794 RF / WIFI**  
**dimmable**

---

Brand [SKYDANCE](#)  
Supply voltage 12-24V  
Dimmable RF / WIFI  
Output voltage 12-24V  
Maximum output 360W/1m  
Rated current 15000mA  
Protection class IP20  
Height 20.0mm  
Width 38.0mm  
Length 114.0mm  
Casing material plastic  
Work environment indoor use  
Operation temperature -30~55°C  
Certificates CE  
Warranty 5 years



## Receiver SKYDANCE WZ5 5x3A ZigBee 12-24V IP20 RF

**Product code 16520 RF dimmable**

---

Brand [SKYDANCE](#)  
Supply voltage 12-24V  
Dimmable RF  
Output voltage 12-24V  
Maximum output 360W/1m  
Rated current 15000mA  
Protection class IP20  
Height 20.0mm  
Width 38.0mm  
Length 114.0mm  
Casing material plastic  
Work environment indoor use  
Operation temperature -30~55°C  
Certificates CE  
Warranty 5 years

